

Network Working Group  
Internet Draft  
Intended status: Informational  
Expires: August 2013

Y. Lee  
Huawei  
G. Bernstein  
Grotto Networking  
D. Li  
Huawei  
W. Imajuku  
NTT

February 6, 2013

## **Routing and Wavelength Assignment Information Model for Wavelength Switched Optical Networks**

[draft-ietf-ccamp-rwa-info-17.txt](#)

### Status of this Memo

This Internet-Draft is submitted to IETF in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>

This Internet-Draft will expire on August 6, 2013.

### Copyright Notice

Copyright (c) 2013 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Simplified BSD License.

## Abstract

This document provides a model of information needed by the routing and wavelength assignment (RWA) process in wavelength switched optical networks (WSONs). The purpose of the information described in this model is to facilitate constrained lightpath computation in WSONs. This model takes into account compatibility constraints between WSON signal attributes and network elements but does not include constraints due to optical impairments. Aspects of this information that may be of use to other technologies utilizing a GMPLS control plane are discussed.

## Table of Contents

<a href="#">1. Introduction.....</a>	<a href="#">3</a>
<a href="#">1.1. Revision History.....</a>	<a href="#">4</a>
<a href="#">1.1.1. Changes from 01.....</a>	<a href="#">4</a>
<a href="#">1.1.2. Changes from 02.....</a>	<a href="#">4</a>
<a href="#">1.1.3. Changes from 03.....</a>	<a href="#">5</a>
<a href="#">1.1.4. Changes from 04.....</a>	<a href="#">5</a>
<a href="#">1.1.5. Changes from 05.....</a>	<a href="#">5</a>
<a href="#">1.1.6. Changes from 06.....</a>	<a href="#">5</a>
<a href="#">1.1.7. Changes from 07.....</a>	<a href="#">5</a>
<a href="#">1.1.8. Changes from 08.....</a>	<a href="#">5</a>
<a href="#">1.1.9. Changes from 09.....</a>	<a href="#">6</a>
<a href="#">1.1.10. Changes from 10.....</a>	<a href="#">6</a>
<a href="#">1.1.11. Changes from 11.....</a>	<a href="#">6</a>
<a href="#">1.1.12. Changes from 12.....</a>	<a href="#">6</a>
<a href="#">1.1.13. Changes from 13.....</a>	<a href="#">6</a>
<a href="#">1.1.14. Changes from 14.....</a>	<a href="#">6</a>
<a href="#">1.1.15. Changes from 15.....</a>	<a href="#">7</a>
<a href="#">1.1.16. Changes from 16.....</a>	<a href="#">7</a>



<a href="#">2. Terminology.....</a>	<a href="#">7</a>
<a href="#">3. Routing and Wavelength Assignment Information Model.....</a>	<a href="#">7</a>
<a href="#">3.1. Dynamic and Relatively Static Information.....</a>	<a href="#">8</a>
<a href="#">4. Node Information (General).....</a>	<a href="#">8</a>
<a href="#">4.1. Connectivity Matrix.....</a>	<a href="#">9</a>
<a href="#">4.2. Shared Risk Node Group.....</a>	<a href="#">9</a>
<a href="#">5. Node Information (WSOIN specific).....</a>	<a href="#">10</a>
<a href="#">5.1. Resource Accessibility/Availability.....</a>	<a href="#">11</a>
<a href="#">5.2. Resource Signal Constraints and Processing Capabilities..</a>	<a href="#">15</a>
<a href="#">5.3. Compatibility and Capability Details.....</a>	<a href="#">16</a>
<a href="#">5.3.1. Shared Input or Output Indication.....</a>	<a href="#">16</a>
<a href="#">5.3.2. Optical Interface Class List.....</a>	<a href="#">16</a>
<a href="#">5.3.3. Acceptable Client Signal List.....</a>	<a href="#">16</a>
<a href="#">5.3.4. Processing Capability List.....</a>	<a href="#">16</a>
<a href="#">6. Link Information (General).....</a>	<a href="#">17</a>
<a href="#">6.1. Administrative Group.....</a>	<a href="#">17</a>
<a href="#">6.2. Interface Switching Capability Descriptor.....</a>	<a href="#">17</a>
<a href="#">6.3. Link Protection Type (for this link).....</a>	<a href="#">18</a>
<a href="#">6.4. Shared Risk Link Group Information.....</a>	<a href="#">18</a>
<a href="#">6.5. Traffic Engineering Metric.....</a>	<a href="#">18</a>
<a href="#">6.6. Port Label (Wavelength) Restrictions.....</a>	<a href="#">18</a>
<a href="#">6.6.1. Port-Wavelength Exclusivity Example.....</a>	<a href="#">20</a>
<a href="#">7. Dynamic Components of the Information Model.....</a>	<a href="#">21</a>
<a href="#">7.1. Dynamic Link Information (General).....</a>	<a href="#">22</a>
<a href="#">7.2. Dynamic Node Information (WSOIN Specific).....</a>	<a href="#">22</a>
<a href="#">8. Security Considerations.....</a>	<a href="#">22</a>
<a href="#">9. IANA Considerations.....</a>	<a href="#">23</a>
<a href="#">10. Acknowledgments.....</a>	<a href="#">23</a>
<a href="#">11. References.....</a>	<a href="#">24</a>
<a href="#">11.1. Normative References.....</a>	<a href="#">24</a>
<a href="#">11.2. Informative References.....</a>	<a href="#">25</a>
<a href="#">12. Contributors.....</a>	<a href="#">26</a>
Author's Addresses.....	<a href="#">27</a>
Intellectual Property Statement.....	<a href="#">27</a>
Disclaimer of Validity.....	<a href="#">28</a>

## [1. Introduction](#)

The purpose of the following information model for WSOINs is to facilitate constrained lightpath computation and as such is not a general purpose network management information model. This constraint is frequently referred to as the "wavelength continuity" constraint, and the corresponding constrained lightpath computation is known as the routing and wavelength assignment (RWA) problem. Hence the information model must provide sufficient topology and wavelength restriction and availability information to support this computation. More details on the RWA process and WSOIN subsystems and



their properties can be found in [[RFC6163](#)]. The model defined here includes constraints between WSON signal attributes and network elements, but does not include optical impairments.

In addition to presenting an information model suitable for path computation in WSON, this document also highlights model aspects that may have general applicability to other technologies utilizing a GMPLS control plane. The portion of the information model applicable to other technologies beyond WSON is referred to as "general" to distinguish it from the "WSN-specific" portion that is applicable only to WSON technology.

## 1.1. Revision History

### 1.1.1. Changes from 01

Added text on multiple fixed and switched connectivity matrices.

Added text on the relationship between SRNG and SRLG and encoding considerations.

Added clarifying text on the meaning and use of port/wavelength restrictions.

Added clarifying text on wavelength availability information and how to derive wavelengths currently in use.

### 1.1.2. Changes from 02

Integrated switched and fixed connectivity matrices into a single "connectivity matrix" model. Added numbering of matrices to allow for wavelength (time slot, label) dependence of the connectivity. Discussed general use of this node parameter beyond WSON.

Integrated switched and fixed port wavelength restrictions into a single port wavelength restriction of which there can be more than one and added a reference to the corresponding connectivity matrix if there is one. Also took into account port wavelength restrictions in the case of symmetric switches, developed a uniform model and specified how general label restrictions could be taken into account with this model.

Removed the Shared Risk Node Group parameter from the node info, but left explanation of how the same functionality can be achieved with existing GMPLS SRLG constructs.



Removed Maximum bandwidth per channel parameter from link information.

#### 1.1.3. Changes from 03

Removed signal related text from [section 3.2.4](#) as signal related information is deferred to a new signal compatibility draft.

Removed encoding specific text from [Section 3.3.1](#) of version 03.

#### 1.1.4. Changes from 04

Removed encoding specific text from [Section 4.1](#).

Removed encoding specific text from [Section 3.4](#).

#### 1.1.5. Changes from 05

Renumbered sections for clarity.

Updated abstract and introduction to encompass signal compatibility/generalization.

Generalized Section on wavelength converter pools to include electro optical subsystems in general. This is where signal compatibility modeling was added.

#### 1.1.6. Changes from 06

Simplified information model for WSON specifics, by combining similar fields and introducing simpler aggregate information elements.

#### 1.1.7. Changes from 07

Added shared fiber connectivity to resource pool modeling. This includes information for determining wavelength collision on an internal fiber providing access to resource blocks.

#### 1.1.8. Changes from 08

Added PORT\_WAVELENGTH\_EXCLUSIVITY in the RestrictionType parameter. Added [section 6.6.1](#) that has an example of the port wavelength exclusivity constraint.



#### 1.1.9. Changes from 09

[Section 5](#): clarified the way that the resource pool is modeled from blocks of identical resources.

[Section 5.1](#): grammar fixes. Removed reference to "academic" modeling pre-print. Clarified RBNF resource pool model details.

[Section 5.2](#): Formatting fixes.

#### 1.1.10. Changes from 10

Enhanced the explanation of shared fiber access to resources and updated Figure 2 to show a more general situation to be modeled.

Removed all 1st person idioms.

#### 1.1.11. Changes from 11

Replace all instances of "ingress" with "input" and all instances of "egress" with "output". Added clarifying text on relationship between resource block model and physical entities such as line cards.

#### 1.1.12. Changes from 12

[Section 5.2](#): Clarified RBNF optional elements for several definitions.

[Section 5.3.6](#): Clarified RBNF optional elements for <ProcessingCapabilities>.

Editorial changes for clarity.

Update the contributor list.

#### 1.1.13. Changes from 13

[Section 7.1](#): Clarified that this information model does not dictate placement of information elements in protocols. In particular, added a caveat that the available label information element may be placed within the ISCD information element in the case of OSPF.

#### 1.1.14. Changes from 14

OIC change requested by workgroup.

#### 1.1.15. Changes from 15

Edits of OIC related text per CCAMP list email.

#### 1.1.16. Changes from 16

Editorial changes only.

## **2. Terminology**

CWDM: Coarse Wavelength Division Multiplexing.

DWDM: Dense Wavelength Division Multiplexing.

FOADM: Fixed Optical Add/Drop Multiplexer.

ROADM: Reconfigurable Optical Add/Drop Multiplexer. A reduced port count wavelength selective switching element featuring input and output line side ports as well as add/drop side ports.

RWA: Routing and Wavelength Assignment.

Wavelength Conversion: The process of converting an information bearing optical signal centered at a given wavelength to one with "equivalent" content centered at a different wavelength. Wavelength conversion can be implemented via an optical-electronic-optical (OEO) process or via a strictly optical process.

WDM: Wavelength Division Multiplexing.

Wavelength Switched Optical Network (WSON): A WDM based optical network in which switching is performed selectively based on the center wavelength of an optical signal.

## **3. Routing and Wavelength Assignment Information Model**

The following WSON RWA information model is grouped into four categories regardless of whether they stem from a switching subsystem or from a line subsystem:

- o Node Information
- o Link Information
- o Dynamic Node Information

- o Dynamic Link Information

Note that this is roughly the categorization used in [G.7715] [section 7](#).

In the following, where applicable, the reduced Backus-Naur form (RBNF) syntax of [\[RBNF\]](#) is used to aid in defining the RWA information model.

### 3.1. Dynamic and Relatively Static Information

All the RWA information of concern in a WSON network is subject to change over time. Equipment can be upgraded; links may be placed in or out of service and the like. However, from the point of view of RWA computations there is a difference between information that can change with each successive connection establishment in the network and that information that is relatively static on the time scales of connection establishment. A key example of the former is link wavelength usage since this can change with connection setup/teardown and this information is a key input to the RWA process. Examples of relatively static information are the potential port connectivity of a WDM ROADM, and the channel spacing on a WDM link.

This document separates, where possible, dynamic and static information so that these can be kept separate in possible encodings and hence allowing for separate updates of these two types of information thereby reducing processing and traffic load caused by the timely distribution of the more dynamic RWA WSON information.

## **4. Node Information (General)**

The node information described here contains the relatively static information related to a WSON node. This includes connectivity constraints amongst ports and wavelengths since WSON switches can exhibit asymmetric switching properties. Additional information could include properties of wavelength converters in the node if any are present. In [\[Switch\]](#) it was shown that the wavelength connectivity constraints for a large class of practical WSON devices can be modeled via switched and fixed connectivity matrices along with corresponding switched and fixed port constraints. These connectivity matrices are included with the node information while the switched and fixed port wavelength constraints are included with the link information.

Formally,



`<Node_Information> ::= <Node_ID> [<ConnectivityMatrix>...]`

Where the Node\_ID would be an appropriate identifier for the node within the WSON RWA context.

Note that multiple connectivity matrices are allowed and hence can fully support the most general cases enumerated in [[Switch](#)].

#### 4.1. Connectivity Matrix

The connectivity matrix (ConnectivityMatrix) represents either the potential connectivity matrix for asymmetric switches (e.g. ROADMs and such) or fixed connectivity for an asymmetric device such as a multiplexer. Note that this matrix does not represent any particular internal blocking behavior but indicates which inputinput ports and wavelengths could possibly be connected to a particular output port. Representing internal state dependent blocking for a switch or ROADM is beyond the scope of this document and due to its highly implementation dependent nature would most likely not be subject to standardization in the future. The connectivity matrix is a conceptual M by N matrix representing the potential switched or fixed connectivity, where M represents the number of inputinput ports and N the number of outputoutput ports. This is a "conceptual" matrix since the matrix tends to exhibit structure that allows for very compact representations that are useful for both transmission and path computation [[Encode](#)].

Note that the connectivity matrix information element can be useful in any technology context where asymmetric switches are utilized.

`ConnectivityMatrix ::= <MatrixID> <ConnType> <Matrix>`

Where

`<MatrixID>` is a unique identifier for the matrix.

`<ConnType>` can be either 0 or 1 depending upon whether the connectivity is either fixed or potentially switched.

`<Matrix>` represents the fixed or switched connectivity in that  $\text{Matrix}(i, j) = 0$  or 1 depending on whether inputinput port  $i$  can connect to outputoutput port  $j$  for one or more wavelengths.

#### 4.2. Shared Risk Node Group

SRNG: Shared risk group for nodes. The concept of a shared risk link group was defined in [[RFC4202](#)]. This can be used to achieve a



desired "amount" of link diversity. It is also desirable to have a similar capability to achieve various degrees of node diversity. This is explained in [G.7715]. Typical risk groupings for nodes can include those nodes in the same building, within the same city, or geographic region.

Since the failure of a node implies the failure of all links associated with that node a sufficiently general shared risk link group (SRLG) encoding, such as that used in GMPLS routing extensions can explicitly incorporate SRNG information.

## **5. Node Information (WSON specific)**

As discussed in [[RFC6163](#)] a WSON node may contain electro-optical subsystems such as regenerators, wavelength converters or entire switching subsystems. The model present here can be used in characterizing the accessibility and availability of limited resources such as regenerators or wavelength converters as well as WSON signal attribute constraints of electro-optical subsystems. As such this information element is fairly specific to WSON technologies.

A WSON node may include regenerators or wavelength converters arranged in a shared pool. As discussed in [[RFC6163](#)] this can include OEO based WDM switches as well. There are a number of different approaches used in the design of WDM switches containing regenerator or converter pools. However, from the point of view of path computation the following need to be known:

1. The nodes that support regeneration or wavelength conversion.
2. The accessibility and availability of a wavelength converter to convert from a given inputinput wavelength on a particular inputinput port to a desired outputoutput wavelength on a particular outputoutput port.
3. Limitations on the types of signals that can be converted and the conversions that can be performed.

Since resources tend to be packaged together in blocks of similar devices, e.g., on line cards or other types of modules, the fundamental unit of identifiable resource in this document is the "resource block". A resource block may contain one or more resources. As resources are the smallest identifiable unit of processing resource, one can group together resources into blocks if they have similar characteristics relevant to the optical system being modeled, e.g., processing properties, accessibility, etc.





This leads to the following formal high level model:

```
<Node_Information> ::= <Node_ID> [<ConnectivityMatrix>...]  
[<ResourcePool>]
```

Where

```
<ResourcePool> ::= <ResourceBlockInfo>...  
[<ResourceAccessibility>...] [<ResourceWaveConstraints>...]  
[<RBPoolState>]
```

First the accessibility of resource blocks is addressed then their properties are discussed.

### 5.1. Resource Accessibility/Availability

A similar technique as used to model ROADMs and optical switches can be used to model regenerator/converter accessibility. This technique was generally discussed in [\[RFC6163\]](#) and consisted of a matrix to indicate possible connectivity along with wavelength constraints for links/ports. Since regenerators or wavelength converters may be considered a scarce resource it is desirable that the model include, if desired, the usage state (availability) of individual regenerators or converters in the pool. Models that incorporate more state to further reveal blocking conditions on input or output to particular converters are for further study and not included here.

The three stage model is shown schematically in Figure 1 and Figure 2. The difference between the two figures is that Figure 1 assumes that each signal that can get to a resource block may do so, while in Figure 2 the access to sets of resource blocks is via a shared fiber which imposes its own wavelength collision constraint. The representation of Figure 1 can have more than one input to each resource block since each input represents a single wavelength signal, while in Figure 2 shows a single multiplexed WDM input or output, e.g., a fiber, to/from each set of block.

This model assumes N input ports (fibers), P resource blocks containing one or more identical resources (e.g. wavelength converters), and M output ports (fibers). Since not all input ports can necessarily reach each resource block, the model starts with a resource pool input matrix  $RI(i,p) = \{0,1\}$  whether input port i can reach potentially reach resource block p.

Since not all wavelengths can necessarily reach all the resources or the resources may have limited input wavelength range the model has a set of relatively static input port constraints for each resource.



In addition, if the access to a set of resource blocks is via a shared fiber (Figure 2) this would impose a dynamic wavelength availability constraint on that shared fiber. The resource block input port constraint is modeled via a static wavelength set mechanism and the case of shared access to a set of blocks is modeled via a dynamic wavelength set mechanism.

Next a state vector  $RA(j) = \{0, \dots, k\}$  is used to track the number of resources in resource block  $j$  in use. This is the only state kept in the resource pool model. This state is not necessary for modeling "fixed" transponder system or full OEO switches with WDM interfaces, i.e., systems where there is no sharing.

After that, a set of static resource output wavelength constraints and possibly dynamic shared output fiber constraints maybe used. The static constraints indicate what wavelengths a particular resource block can generate or are restricted to generating e.g., a fixed regenerator would be limited to a single  $\lambda$ . The dynamic constraints would be used in the case where a single shared fiber is used to output the resource block (Figure 2).

Finally, to complete the model, a resource pool output matrix  $RE(p,k) = \{0,1\}$  depending on whether the output from resource block  $p$  can reach output port  $k$ , may be used.

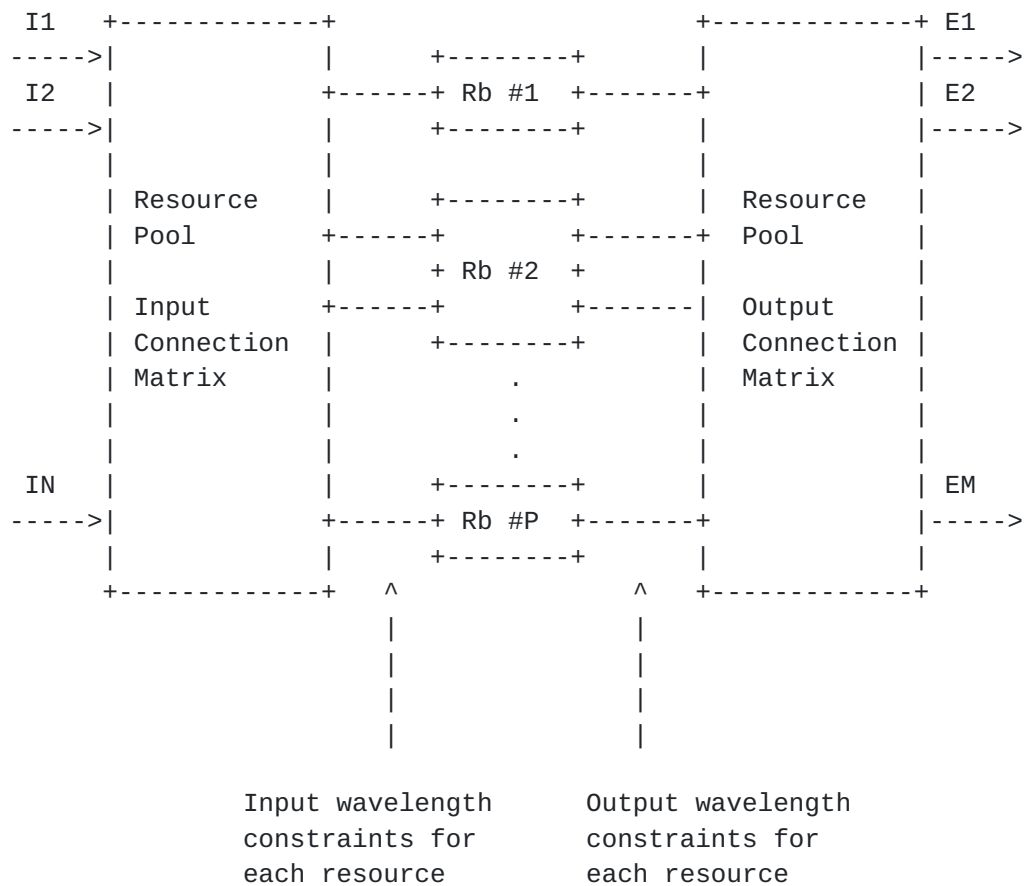


Figure 1 Schematic diagram of resource pool model.

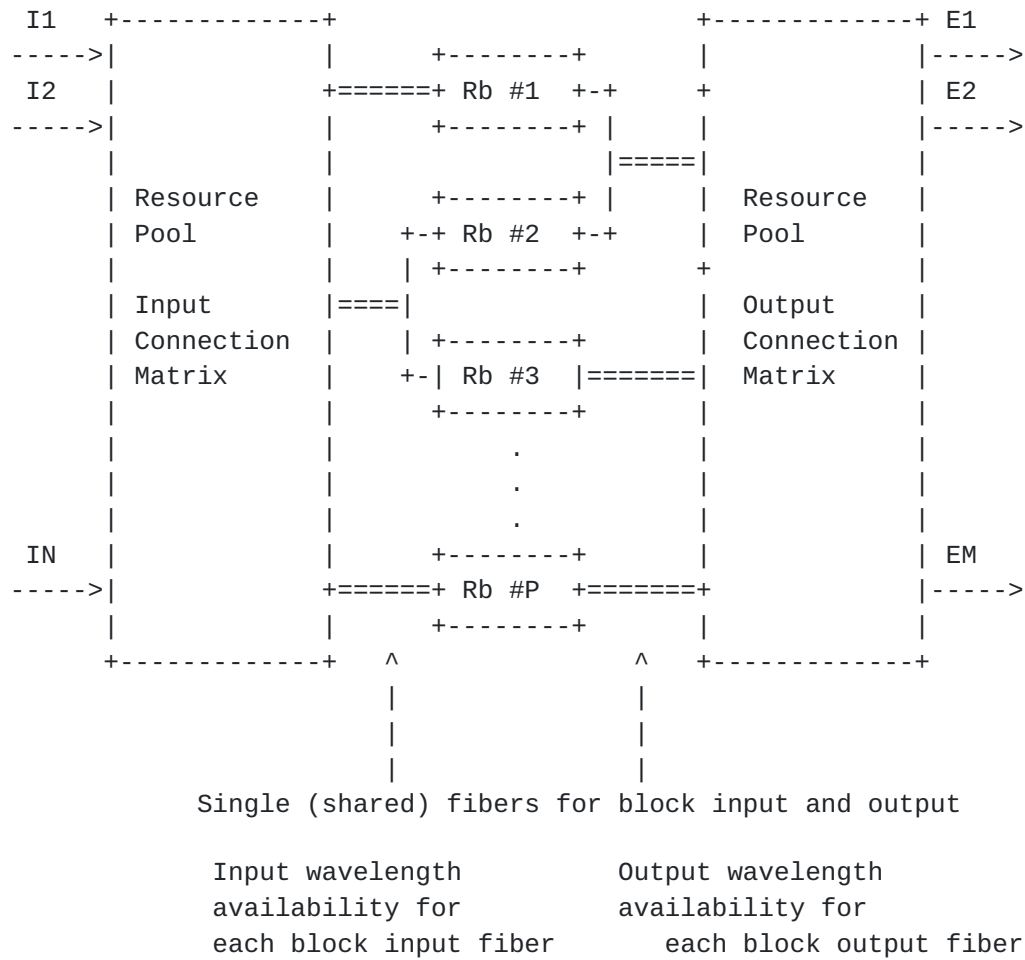


Figure 2 Schematic diagram of resource pool model with shared block accessibility.

Formally the model can be specified as:

<ResourceAccessibility ::= <PoolInputMatrix> <PoolOutputMatrix>

<ResourceWaveConstraints> ::= <InputWaveConstraints>

<OutputOutputWaveConstraints>

<RBPoolState>

::=(<ResourceBlockID><NumResourcesInUse><InAvailableWavelengths><OutAvailableWavelengths>)...



Note that except for <ResourcePoolState> all the other components of <ResourcePool> are relatively static. Also the <InAvailableWavelengths> and <OutAvailableWavelengths> are only used in the cases of shared input or output access to the particular block. See the resource block information in the next section to see how this is specified.

## 5.2. Resource Signal Constraints and Processing Capabilities

The wavelength conversion abilities of a resource (e.g. regenerator, wavelength converter) were modeled in the <OutputWaveConstraints> previously discussed. As discussed in [\[RFC6163\]](#) the constraints on an electro-optical resource can be modeled in terms of input constraints, processing capabilities, and output constraints:

```
<ResourceBlockInfo> ::= ([<ResourceSet>] <InputConstraints>
[<ProcessingCapabilities>] <OutputConstraints>)*
```

Where <ResourceSet> is a list of resource block identifiers with the same characteristics. If this set is missing the constraints are applied to the entire network element.

The <InputConstraints> are signal compatibility based constraints and/or shared access constraint indication. The details of these constraints are defined in [section 5.3](#).

```
<InputConstraints> ::= <SharedInput> [<OpticalInterfaceClassList>]
[<ClientSignalList>]
```

The <ProcessingCapabilities> are important operations that the resource (or network element) can perform on the signal. The details of these capabilities are defined in [section 5.3](#).

```
<ProcessingCapabilities> ::= [<NumResources>]
[<RegenerationCapabilities>] [<FaultPerfMon>] [<VendorSpecific>]
```

The <OutputConstraints> are either restrictions on the properties of the signal leaving the block, options concerning the signal properties when leaving the resource or shared fiber output constraint indication.

```
<OutputConstraints> := <SharedOutput> [<OpticalInterfaceClassList>]
```





### 5.3. Compatibility and Capability Details

#### 5.3.1. Shared Input or Output Indication

As discussed in the previous section and shown in Figure 2 the input or output access to a resource block may be via a shared fiber. The <SharedInput> and <SharedOutput> elements are indicators for this condition with respect to the block being described.

#### 5.3.2. Optical Interface Class List

<OpticalInterfaceClassList> ::= <OpticalInterfaceClass> ...

The Optical Interface Class is a unique number that identifies all information related to optical characteristics of a physical interface. The class may include other optical parameters related to other interface properties. A class always includes signal compatibility information.

The content of each class is out of the scope of this draft and can be defined by other entities (e.g. ITU, optical equipment vendors, etc.).

Since even current implementation of physical interfaces may support different optical characteristics, a single interface may support multiple interface classes. Which optical interface class is used among all the ones available for an interface is out of the scope of this draft but is an output of the RWA process.

#### 5.3.3. Acceptable Client Signal List

The list is simply:

<client-signal-list> ::= [<GPID>] ...

Where the Generalized Protocol Identifiers (GPID) object represents one of the IETF standardized GPID values as defined in [\[RFC3471\]](#) and [\[RFC4328\]](#).

#### 5.3.4. Processing Capability List

The ProcessingCapabilities were defined in [Section 5.2](#) as follows:

<ProcessingCapabilities> ::= [<NumResources>]  
[<RegenerationCapabilities>] [<FaultPerfMon>] [<VendorSpecific>]



The processing capability list sub-TLV is a list of processing functions that the WSON network element (NE) can perform on the signal including:

1. Number of Resources within the block
2. Regeneration capability
3. Fault and performance monitoring
4. Vendor Specific capability

Note that the code points for Fault and performance monitoring and vendor specific capability are subject to further study.

## 6. Link Information (General)

MPLS-TE routing protocol extensions for OSPF and IS-IS [[RFC3630](#)], [[RFC5305](#)] along with GMPLS routing protocol extensions for OSPF and IS-IS [RFC4203, [RFC5307](#)] provide the bulk of the relatively static link information needed by the RWA process. However, WSON networks bring in additional link related constraints. These stem from WDM line system characterization, laser transmitter tuning restrictions, and switching subsystem port wavelength constraints, e.g., colored ROADM drop ports.

In the following summarize both information from existing GMPLS route protocols and new information that maybe needed by the RWA process.

```
<LinkInfo> ::= <LinkID> [<AdministrativeGroup>]
[<InterfaceCapDesc>] [<Protection>] [<SRLG>]...
[<TrafficEngineeringMetric>] [<PortLabelRestriction>]
```

### 6.1. Administrative Group

AdministrativeGroup: Defined in [[RFC3630](#)]. Each set bit corresponds to one administrative group assigned to the interface. A link may belong to multiple groups. This is a configured quantity and can be used to influence routing decisions.

### 6.2. Interface Switching Capability Descriptor

InterfaceSwCapDesc: Defined in [[RFC4202](#)], lets us know the different switching capabilities on this GMPLS interface. In both [[RFC4203](#)]



and [\[RFC5307\]](#) this information gets combined with the maximum LSP bandwidth that can be used on this link at eight different priority levels.

### 6.3. Link Protection Type (for this link)

Protection: Defined in [\[RFC4202\]](#) and implemented in [\[RFC4203, RFC5307\]](#). Used to indicate what protection, if any, is guarding this link.

### 6.4. Shared Risk Link Group Information

SRLG: Defined in [\[RFC4202\]](#) and implemented in [\[RFC4203, RFC5307\]](#). This allows for the grouping of links into shared risk groups, i.e., those links that are likely, for some reason, to fail at the same time.

### 6.5. Traffic Engineering Metric

TrafficEngineeringMetric: Defined in [\[RFC3630\]](#). This allows for the definition of one additional link metric value for traffic engineering separate from the IP link state routing protocols link metric. Note that multiple "link metric values" could find use in optical networks, however it would be more useful to the RWA process to assign these specific meanings such as link mile metric, or probability of failure metric, etc...

### 6.6. Port Label (Wavelength) Restrictions

Port label (wavelength) restrictions (PortLabelRestriction) model the label (wavelength) restrictions that the link and various optical devices such as OXCs, ROADMs, and waveband multiplexers may impose on a port. These restrictions tell us what wavelength may or may not be used on a link and are relatively static. This plays an important role in fully characterizing a WSOON switching device [\[Switch\]](#). Port wavelength restrictions are specified relative to the port in general or to a specific connectivity matrix ([section 4.1](#)). Reference [\[Switch\]](#) gives an example where both switch and fixed connectivity matrices are used and both types of constraints occur on the same port. Such restrictions could be applied generally to other label types in GMPLS by adding new kinds of restrictions.

```
<PortLabelRestriction> ::= [<GeneralPortRestrictions>...]  
[<MatrixSpecificRestrictions>...]
```

```
<GeneralPortRestrictions> ::= <RestrictionType>  
[<RestrictionParameters>]
```



```
<MatrixSpecificRestriction> ::= <MatrixID> <RestrictionType>
[<RestrictionParameters>]

<RestrictionParameters> ::= [<LabelSet>...] [<MaxNumChannels>]
[<MaxWaveBandWidth>]
```

Where

MatrixID is the ID of the corresponding connectivity matrix ([section 4.1](#)).

The RestrictionType parameter is used to specify general port restrictions and matrix specific restrictions. It can take the following values and meanings:

SIMPLE\_WAVELENGTH: Simple wavelength set restriction; The wavelength set parameter is required.

CHANNEL\_COUNT: The number of channels is restricted to be less than or equal to the Max number of channels parameter (which is required).

PORT\_WAVELENGTH\_EXCLUSIVITY: A wavelength can be used at most once among a given set of ports. The set of ports is specified as a parameter to this constraint.

WAVEBAND1: Waveband device with a tunable center frequency and passband. This constraint is characterized by the MaxWaveBandWidth parameters which indicates the maximum width of the waveband in terms of channels. Note that an additional wavelength set can be used to indicate the overall tuning range. Specific center frequency tuning information can be obtained from dynamic channel in use information. It is assumed that both center frequency and bandwidth (Q) tuning can be done without causing faults in existing signals.

Restriction specific parameters are used with one or more of the previously listed restriction types. The currently defined parameters are:

LabelSet is a conceptual set of labels (wavelengths).

MaxNumChannels is the maximum number of channels that can be simultaneously used (relative to either a port or a matrix).





MaxWaveBandWidth is the maximum width of a tunable waveband switching device.

PortSet is a conceptual set of ports.

For example, if the port is a "colored" drop port of a ROADM then there are two restrictions: (a) CHANNEL\_COUNT, with MaxNumChannels = 1, and (b) SIMPLE\_WAVELENGTH, with the wavelength set consisting of a single member corresponding to the frequency of the permitted wavelength. See [[Switch](#)] for a complete waveband example.

This information model for port wavelength (label) restrictions is fairly general in that it can be applied to ports that have label restrictions only or to ports that are part of an asymmetric switch and have label restrictions. In addition, the types of label restrictions that can be supported are extensible.

#### 6.6.1. Port-Wavelength Exclusivity Example

Although there can be many different ROADM or switch architectures that can lead to the constraint where a lambda (label) maybe used at most once on a set of ports Figure 3 shows a ROADM architecture based on components known as a Wavelength Selective Switch (WSS)[[OFC08](#)]. This ROADM is composed of splitters, combiners, and WSSes. This ROADM has 11 output ports, which are numbered in the diagram. Output ports 1-8 are known as drop ports and are intended to support a single wavelength. Drop ports 1-4 output from WSS #2, which is fed from WSS #1 via a single fiber. Due to this internal structure a constraint is placed on the output ports 1-4 that a lambda can be only used once over the group of ports (assuming uni-cast and not multi-cast operation). Similarly the output ports 5-8 have a similar constraint due to the internal structure.

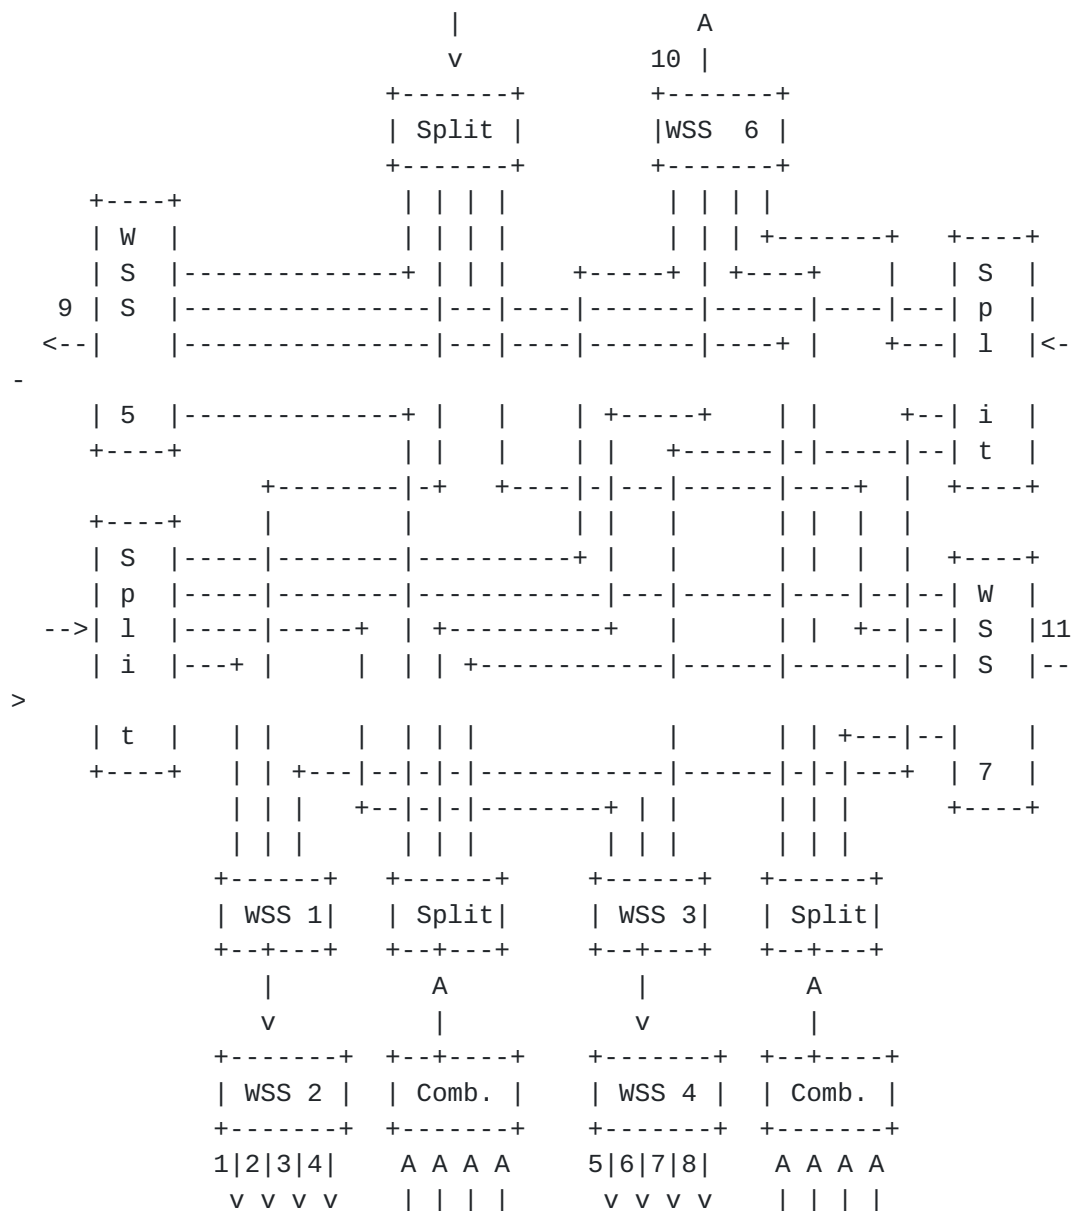


Figure 3 A ROADM composed from splitter, combiners, and WSSs.

## 7. Dynamic Components of the Information Model

In the previously presented information model there are a limited number of information elements that are dynamic, i.e., subject to change with subsequent establishment and teardown of connections. Depending on the protocol used to convey this overall information model it may be possible to send this dynamic information separate from the relatively larger amount of static information needed to characterize WSON's and their network elements.



### 7.1. Dynamic Link Information (General)

For WSON links wavelength availability and wavelengths in use for shared backup purposes can be considered dynamic information and hence are grouped with the dynamic information in the following set:

```
<DynamicLinkInfo> ::= <LinkID> <AvailableLabels>  
[<SharedBackupLabels>]
```

AvailableLabels is a set of labels (wavelengths) currently available on the link. Given this information and the port wavelength restrictions one can also determine which wavelengths are currently in use. This parameter could potential be used with other technologies that GMPLS currently covers or may cover in the future.

SharedBackupLabels is a set of labels (wavelengths) currently used for shared backup protection on the link. An example usage of this information in a WSON setting is given in [[Shared](#)]. This parameter could potential be used with other technologies that GMPLS currently covers or may cover in the future.

Note that the above does not dictate a particular encoding or placement for available label information. In some routing protocols it may be advantageous or required to place this information within another information element such as the interface switching capability descriptor (ISCD). Consult routing protocol specific extensions for details of placement of information elements.

### 7.2. Dynamic Node Information (WSON Specific)

Currently the only node information that can be considered dynamic is the resource pool state and can be isolated into a dynamic node information element as follows:

```
<DynamicNodeInfo> ::= <NodeID> [<ResourcePoolState>]
```

## 8. Security Considerations

This document discussed an information model for RWA computation in WSONs. Such a model is very similar from a security standpoint of the information that can be currently conveyed via GMPLS routing protocols. Such information includes network topology, link state and current utilization, and well as the capabilities of switches and routers within the network. As such this information should be protected from disclosure to unintended recipients. In addition,



the intentional modification of this information can significantly affect network operations, particularly due to the large capacity of the optical infrastructure to be controlled.

## **9. IANA Considerations**

This informational document does not make any requests for IANA action.

## **10. Acknowledgments**

This document was prepared using 2-Word-v2.0.template.dot.

## **11. References**

### 11.1. Normative References

- [Encode] G. Bernstein, Y. Lee, D. Li, W. Imajuku, "Routing and Wavelength Assignment Information Encoding for Wavelength Switched Optical Networks", work in progress: [draft-ietf-ccamp-rwa-wson-encode](#).
- [G.707] ITU-T Recommendation G.707, Network node interface for the synchronous digital hierarchy (SDH), January 2007.
- [G.709] ITU-T Recommendation G.709, Interfaces for the Optical Transport Network(OTN), March 2003.
- [G.975.1] ITU-T Recommendation G.975.1, Forward error correction for high bit-rate DWDM submarine systems, February 2004.
- [RBNF] A. Farrel, "Reduced Backus-Naur Form (RBNF) A Syntax Used in Various Protocol Specifications", [RFC 5511](#), April 2009.
- [RFC3471] Berger, L., Ed., "Generalized Multi-Protocol Label Switching (GMPLS) Signaling Functional Description", [RFC 3471](#), January 2003.
- [RFC3630] Katz, D., Kompella, K., and D. Yeung, "Traffic Engineering (TE) Extensions to OSPF Version 2", [RFC 3630](#), September 2003.
- [RFC4202] Kompella, K., Ed., and Y. Rekhter, Ed., "Routing Extensions in Support of Generalized Multi-Protocol Label Switching (GMPLS)", [RFC 4202](#), October 2005
- [RFC4203] Kompella, K., Ed., and Y. Rekhter, Ed., "OSPF Extensions in Support of Generalized Multi-Protocol Label Switching (GMPLS)", [RFC 4203](#), October 2005.
- [RFC4328] Papadimitriou, D., Ed., "Generalized Multi-Protocol Label Switching (GMPLS) Signaling Extensions for G.709 Optical Transport Networks Control", [RFC 4328](#), January 2006.
- [RFC5305] Li, T. and H. Smit, "IS-IS Extensions for Traffic Engineering", [RFC 5305](#), October 2008.





- [RFC5307] Kompella, K., Ed., and Y. Rekhter, Ed., "IS-IS Extensions in Support of Generalized Multi-Protocol Label Switching (GMPLS)", [RFC 5307](#), October 2008.

#### 11.2. Informative References

- [OFC08] P. Roorda and B. Collings, "Evolution to Colorless and Directionless ROADMs Architectures," Optical Fiber communication/National Fiber Optic Engineers Conference, 2008. OFC/NFOEC 2008. Conference on, 2008, pp. 1-3.
- [Shared] G. Bernstein, Y. Lee, "Shared Backup Mesh Protection in PCE-based WSON Networks", iPOP 2008, [http://www.grotto-networking.com/wson/iPOP2008\\_WSON-shared-mesh-poster.pdf](http://www.grotto-networking.com/wson/iPOP2008_WSON-shared-mesh-poster.pdf) .
- [Switch] G. Bernstein, Y. Lee, A. Gavler, J. Martensson, " Modeling WDM Wavelength Switching Systems for Use in GMPLS and Automated Path Computation", Journal of Optical Communications and Networking, vol. 1, June, 2009, pp. 187-195.
- [G.Sup39] ITU-T Series G Supplement 39, Optical system design and engineering considerations, February 2006.
- [RFC6163] Y. Lee, G. Bernstein, W. Imajuku, "Framework for GMPLS and PCE Control of Wavelength Switched Optical Networks", [RFC 6163](#), April 2011.

## **12. Contributors**

Diego Caviglia  
Ericsson  
Via A. Negrone 1/A 16153  
Genoa Italy

Phone: +39 010 600 3736  
Email: [diego.caviglia@marconi.com](mailto:diego.caviglia@marconi.com), [ericsson.com](mailto:ericsson.com))

Anders Gavler  
Acreo AB  
Electrum 236  
SE - 164 40 Kista Sweden

Email: [Anders.Gavler@acreo.se](mailto:Anders.Gavler@acreo.se)

Jonas Martensson  
Acreo AB  
Electrum 236  
SE - 164 40 Kista, Sweden

Email: [Jonas.Martensson@acreo.se](mailto:Jonas.Martensson@acreo.se)

Itaru Nishioka  
NEC Corp.  
1753 Simonumabe, Nakahara-ku, Kawasaki, Kanagawa 211-8666  
Japan

Phone: +81 44 396 3287  
Email: [i-nishioka@cb.jp.nec.com](mailto:i-nishioka@cb.jp.nec.com)

Lyndon Ong  
Ciena  
Email: [lyong@ciena.com](mailto:lyong@ciena.com)

Cyril Margaria  
Nokia Siemens Networks  
St Martin Strasse 76  
Munich, 81541  
Germany  
Phone: +49 89 5159 16934  
Email: [cyril.margaria@nsn.com](mailto:cyril.margaria@nsn.com)



## Author's Addresses

Greg M. Bernstein (ed.)  
Grotto Networking  
Fremont California, USA

Phone: (510) 573-2237  
Email: gregb@grotto-networking.com

Young Lee (ed.)  
Huawei Technologies  
5369 Legacy Drive, Building 3  
Plano, TX 75023  
USA

Phone: (469) 277-5838  
Email: leeyoung@huawei.com

Dan Li  
Huawei Technologies Co., Ltd.  
F3-5-B R&D Center, Huawei Base,  
Bantian, Longgang District  
Shenzhen 518129 P.R.China

Phone: +86-755-28973237  
Email: danli@huawei.com

Wataru Imajuku  
NTT Network Innovation Labs  
1-1 Hikari-no-oka, Yokosuka, Kanagawa  
Japan

Phone: +81-(46) 859-4315  
Email: imajuku.wataru@lab.ntt.co.jp

## Intellectual Property Statement

The IETF Trust takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in any IETF Document or the extent to which any license under such rights might or might not be available; nor does it



represent that it has made any independent effort to identify any such rights.

Copies of Intellectual Property disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement any standard or specification contained in an IETF Document. Please address the information to the IETF at [ietf-ipr@ietf.org](mailto:ietf-ipr@ietf.org).

#### Disclaimer of Validity

All IETF Documents and the information contained therein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY, THE IETF TRUST AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION THEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

#### Acknowledgment

Funding for the RFC Editor function is currently provided by the Internet Society.