

Network Working Group
Internet-Draft
Intended status: Standards Track
Expires: May 23, 2020

O. Finkelman
Qwilt
S. Mishra
Verizon
November 20, 2019

CDNI Request Routing Extensions
draft-ietf-cdni-request-routing-extensions-08

Abstract

Open Caching architecture is a use case of Content Delivery Networks Interconnection (CDNI) in which the commercial Content Delivery Network (CDN) is the upstream CDN (uCDN) and the ISP caching layer serves as the downstream CDN (dCDN). The extensions specified in this document to the CDNI Metadata Interface (MI) and the Footprint and Capabilities Interface (FCI) are derived from requirements raised by Open Caching but are also applicable to CDNI use cases in general.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on May 23, 2020.

Copyright Notice

Copyright (c) 2019 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must

include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	2
1.1.	Terminology	3
1.2.	Requirements Language	3
2.	Redirect Target Capability	4
2.1.	DNS Redirect Target	5
2.2.	HTTP Redirect Target	5
2.3.	Properties of Redirect Target Capability Object	5
2.4.	DnsTarget Object	7
2.4.1.	DNS Target Example	7
2.5.	HttpTarget Object	8
2.5.1.	HTTP Target Example	9
2.6.	Usage Example	10
3.	Fallback Target Address Metadata	11
3.1.	Properties of Fallback Target Address Metadata Object	12
3.2.	Usage Example	13
3.3.	uCDN addressing considerations	15
4.	IANA Considerations	16
4.1.	CDNI Payload Types	16
4.1.1.	CDNI FCI RedirectTarget Payload Type	16
4.1.2.	CDNI MI FallbackTarget Payload Type	16
5.	Security Considerations	17
5.1.	Confidentiality and Privacy	17
6.	Acknowledgements	17
7.	References	17
7.1.	Normative References	17
7.2.	Informative References	18
	Authors' Addresses	19

[1.](#) Introduction

The Streaming Video Alliance [[SVA](#)] is a global association that works to solve streaming video challenges in an effort to improve end-user experience and adoption. The Open Caching Working Group [[OCWG](#)] of the Streaming Video Alliance [[SVA](#)] is focused on the delegation of video delivery requests from commercial CDNs to a caching layer at the Internet Service Provider's (ISP) network. Open Caching architecture is a specific use case of CDNI where the commercial CDN

is the upstream CDN (uCDN) and the ISP caching layer is the downstream CDN (dCDN). The Open Caching Request Routing Specification [[OC-RR](#)] defines the Request Routing process and the interfaces that are required for its provisioning. This document defines and registers CDNI metadata object [[RFC8006](#)] and CDNI

Footprint and Capabilities object [[RFC8008](#)] that are required for Open Caching Request Routing. For consistency with other CDNI documents this document follows the CDNI convention of uCDN (upstream CDN) and dCDN (downstream CDN) to represent the commercial CDN and ISP caching layer respectively.

This document also registers CDNI Payload Types [[RFC7736](#)] for the defined objects:

- o Redirect Target Capability (for dCDN advertising redirect target address)
- o Fallback Target Metadata (for uCDN configuring fallback target address)

[1.1](#). Terminology

The following terms are used throughout this document:

- o FQDN - Fully Qualified Domain Name
- o CDN - Content Delivery Network

Additionally, this document reuses the terminology defined in [[RFC6707](#)], [[RFC7336](#)], [[RFC8006](#)], [[RFC8007](#)], and [[RFC8008](#)]. Specifically, we use the following CDNI acronyms:

- o FCI - Footprint and Capability Interface (see [[RFC8008](#)])
- o MI - Metadata Interface (see [[RFC8006](#)])
- o uCDN, dCDN - Upstream CDN and Downstream CDN respectively (see [[RFC7336](#)])
- o RT - Redirection Target. Endpoint for redirection from uCDN to dCDN.

- o RR - Request Router. An element responsible for routing user requests, typically using HTTP redirect or DNS CNAME, depending on the use case.

1.2. Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#) [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

2. Redirect Target Capability

Iterative request redirection is defined in [Section 1.1 of \[RFC7336\]](#) and elaborated by examples in Sections [3.2](#) and [3.4](#) of [[RFC7336](#)]. A Redirection Target (RT) is defined in [Section 2 of \[RFC7975\]](#) for Recursive Request Redirection as:

"The endpoint to which the User Agent is redirected. In CDNI, a RT may point to a number of different components, some examples include a surrogate in the same CDN as the request router, a request router in a dCDN, or a surrogate in a dCDN".

In this document we adopt the same definition of the RT for the Iterative Request Redirect use case. This use case requires the provisioning of the RT address to be used by the uCDN in order to redirect to the dCDN. RT addresses can vary between different footprints, for example, between different regions, and they may also change over time, for example as a result of network problems. Given this variable and dynamic nature of the redirect target address, it may not be suitable to advertise it during bootstrap. A more dynamic and footprint oriented interface is required. [Section 4.3 of \[RFC7336\]](#) suggests that it could be one of the roles of the FCI [[RFC8008](#)]. Following this suggestion, we have therefore, chosen to use the CDNI Footprint and Capabilities interface for redirect target address advertisement.

Use cases

- o Footprint: The dCDN may want to have a different target per

footprint. Note that a dCDN may spread across multiple geographies. This makes it easier to route client requests to a nearby request router. Though this can be achieved using a single canonical name and "Geo DNS", such that in different geographies the same hostname is resolved to different IP address, that approach has limitations; for example a client may be using a third party DNS resolver, making it impossible for the redirector to detect where the client is located, or Geo DNS granularity may be too rough for the requirement of the application.

- o **Scaling:** The dCDN may choose to scale its request routing service by deploying more request routers in new locations and advertise them via an updatable interface like the FCI.

The Redirect Target capability object is used to indicate the target address the uCDN should use in order to redirect a client to the dCDN. A target may be attached to a specific uCDN host, a list of uCDN hosts, or used globally for all the hosts of the uCDN.

When a dCDN is attaching the redirect target to a specific uCDN host or a list of uCDN hosts, the dCDN **MUST** advertise the hosts within the Redirect Target capability object as "redirecting-hosts". In this case, the uCDN can redirect to that dCDN address, only if the User Agent request was to one of these uCDN hosts.

If the redirect target capability object does not contain a target or the target is empty, the uCDN **MUST** interpret it as "no target available for these uCDN hosts for the specified footprint". In case such a target was already advertised in a previous FCI object, the uCDN **MUST** interpret it as an update that deletes the previous redirect target.

2.1. DNS Redirect Target

A redirect target for DNS redirection is a FQDN used as an alias in a CNAME record response (see [\[RFC1034\]](#)) of the uCDN DNS router. Note that DNS routers make routing decisions based on either the DNS resolver's IP address or the client IP subnet when EDNS0 client-subnet (ECS) is used (see [\[RFC7871\]](#)). The dCDN may choose to advertise redirect targets and footprints to cover both cases, such that the uCDN resolution would route the DNS query to a different

dCDN CNAMEs according client subnet or dCDN resolver IP address. This method further allows the dCDN DNS to optimize the resolution by localizing the target CNAMEs. A uCDN implementation SHOULD prefer routing based on client IP subnet when ECS option is present. A dCDN implementation using the ECS option MUST be aware of the privacy drawbacks listed in [Section 2 of \[RFC7871\]](#) and SHOULD follow the guidelines provided in [Section 11.1 of \[RFC7871\]](#).

[2.2.](#) HTTP Redirect Target

A redirect target for HTTP redirection is the URI to be used as the value for the Location header of a HTTP redirect 3xx response, typically a 302 (Found) (see [Section 7.1.2 of \[RFC7231\]](#) and [section 6.4 of \[RFC7231\]](#)).

[2.3.](#) Properties of Redirect Target Capability Object

The Redirect Target capability object consists of the following properties:

Property: redirecting-hosts

Description: One or more uCDN hosts to which this redirect target is attached. A redirecting host SHOULD be a host that was published in a HostMatch object by the uCDN as defined in [Section 4.1.2 of \[RFC8006\]](#).

Type: A list of Endpoint objects (see [Section 4.3.3 of \[RFC8006\]](#))

Mandatory-to-Specify: No. If not present, or empty, the redirect target applies to all hosts of the redirecting uCDN.

Property: dns-target

Description: Target CNAME record for DNS redirection.

Type: DnsTarget object (see [Section 2.4](#))

Mandatory-to-Specify: No. If the dns-target is not present or empty the uCDN MUST interpret it as "no dns-target available".

Property: http-target

Description: Target URI for a HTTP redirect.

Type: HttpTarget object (see [Section 2.5](#))

Mandatory-to-Specify: No. If the http-target is not present or empty the uCDN MUST interpret it as "no http-target available".

The following is an example of a Redirect Target capability object serialization that advertises a dCDN target address that is attached to a specific list of uCDN "redirecting-hosts". A uCDN host that is included in that list can redirect to the advertised dCDN redirect target. The capabilities object is serialized as a JSON object as defined in [Section 5.1 of \[RFC8008\]](#)

```
{
  "capabilities": [
    {
      "capability-type": "FCI.RedirectTarget",
      "capability-value": {
        "redirecting-hosts": [
          "a.service123.ucdn.example.com",
          "b.service123.ucdn.example.com"
        ]
      }
    }
  ]
}
```

```

    ],
    "dns-target": {
        "host": "service123.ucdn.dcdn.example.com"
    },
    "http-target": {
        "host": "us-east1.dcdn.example.com",
        "path-prefix": "/cache/1/",
        "include-redirecting-host": true
    }
},
"footprints": [
    <Footprint objects>
]
}
]
}

```

2.4. DnsTarget Object

The DnsTarget object gives the target address for the DNS response to delegate from the uCDN to the dCDN.

Property: host

Description: The host property is a hostname or an IP address, without a port number.

Type: Endpoint object as defined in [Section 4.3.3 of \[RFC8006\]](#) with the limitation that it SHOULD NOT include a port number and, in case a port number is present, the uCDN MUST ignore it.

Mandatory-to-Specify: Yes.

2.4.1. DNS Target Example

The following is an example of DnsTarget object:

```

{
    "host": "service123.ucdn.dcdn.example.com"
}

```

The following is an example of a DNS query for uCDN address

"a.service123.ucdn.example.com" and the corresponding CNAME redirection response:

Query:

a.service123.ucdn.example.com:
type A, class IN

Response:

NAME: a.service123.ucdn.example.com, TYPE: CNAME, CLASS: IN,
TTL: 120, RDATA: service123.ucdn.dcdn.example.com

[2.5.](#) HttpTarget Object

The HttpTarget object gives the necessary information to construct the target Location URI for HTTP redirection.

Property: host

Description: Hostname or IP address and an optional port, i.e., the host and port of the authority component of the URI as described in [Section 3.2 of \[RFC3986\]](#).

Type: Endpoint object as defined in [Section 4.3.3 of \[RFC8006\]](#).

Mandatory-to-Specify: Yes.

Property: scheme

Description: A URI scheme to be used in the redirect response location construction. When present, the uCDN MUST use the provided scheme in for HTTP redirection to the dCDN.

Type: A URI scheme as defined in [Section 3.1 of \[RFC3986\]](#) represented as a JSON string. The scheme MUST be either "http" or "https".

Mandatory-to-Specify: No. If this property is absent or empty the uCDN request router MUST use the same scheme as was used in the original request before redirection.

Property: path-prefix

Description: A path prefix for the HTTP redirect Location header. The original path is appended after this prefix.

Type: A prefix of a path-absolute as defined in [Section 3.3 of \[RFC3986\]](#). The prefix MUST end with a trailing slash, to indicate the end of the last path segment in the prefix.

Mandatory-to-Specify: No. If this property is absent or empty, the uCDN MUST NOT prepend a path prefix to the original content path, i.e., the original path MUST appear in the location URI right after the authority component.

Property: include-redirecting-host

Description: A flag indicating whether or not to include the redirecting host as the first path segment after the path-prefix. If set to true and a "path-prefix" is used, the uCDN redirecting host MUST be added as a separate path segment after the path-prefix and before the original URL path. If set to true and there is no path-prefix, the uCDN redirecting host MUST be prepended as the first path segment in the redirect URL.

Type: Boolean.

Mandatory-to-Specify: No. Default value is False.

[2.5.1.](#) HTTP Target Example

Example of HttpTarget object with a "scheme", a "path-prefix", and "include-redirecting-host" properties:

```
{
  "host": "us-east1.dcdn.example.com",
  "scheme": "https",
  "path-prefix": "/cache/1/",
  "include-redirecting-host": true
}
```

Example of a HTTP request for content at uCDN host "a.service123.ucdn.example.com" and the corresponding HTTP response with a Location header, used for redirecting the client to the dCDN, constructed according to the HttpTarget object from the above example:

Request:

GET /vod/1/movie.mp4 HTTP/1.1

Host: a.service123.ucdn.example.com

Response:

HTTP/1.1 302 Found

Location: <https://us-east1.dcdn.example.com/cache/1/a.service123.ucdn.example.com/vod/1/movie.mp4>

2.6. Usage Example

Before requests can be routed from the uCDN to the dCDN the CDNs must exchange service configurations between them. Using the MI, the uCDN advertises out-of-band its hosts to the dCDN, each host is designated by a hostname and has its own specific metadata (see [Section 4.1.2 of \[RFC8006\]](#)). The dCDN, using the FCI, advertises, also out-of-band, the redirect target address object defined in [Section 2.3](#) for the relevant uCDN hosts. The following is a generalized example of the message flow between an upstream CDN and a downstream dCDN. For simplicity, we focus on the sequence of messages between the uCDN and dCDN and not on how they are passed.

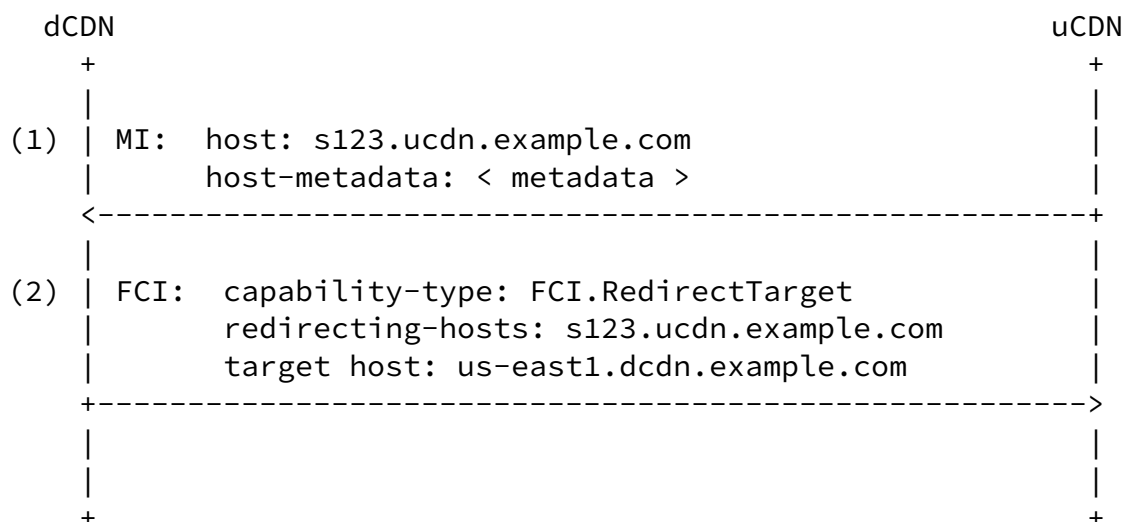


Figure 1: Redirect target address advertisement

1. The uCDN advertises a host (s123.ucdn.example.com) with the host metadata.
2. The dCDN advertises its FCI objects to the uCDN including a FCI.RedirectTarget object that contains the redirect target address (us-east1.dcdn.example.com) specified for that uCDN host.

Once the redirect target has been set, the uCDN can start redirecting user requests to the dCDN. The following is a generic sequence of

redirection using the host and redirect target that were advertised in Figure 1 above.

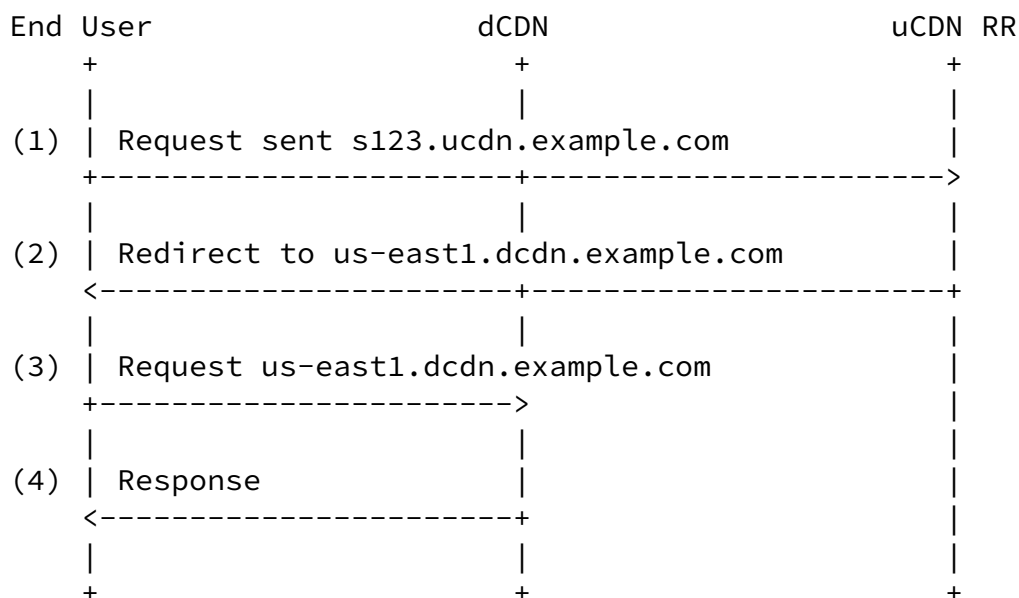


Figure 2: Generic requests redirection sequence

1. The End User sends a request (DNS or HTTP) to the uCDN Request Router (RR).
2. Using the previously advertised Redirect Target, the uCDN redirects the request to the dCDN.
3. The End User sends a request to the dCDN.
4. The dCDN either sends a response or reroutes it, for example, to a dCDN surrogate.

[3.](#) Fallback Target Address Metadata

Open Caching requires that the uCDN provides a fallback target server to the dCDN, to be used in cases where the dCDN cannot properly handle the request. To avoid redirect loops, the fallback target server's address at the uCDN MUST be different from the original uCDN address from which the client was redirected to the dCDN. The uCDN MUST avoid further redirection when receiving the client request at the fallback target. The fallback target is defined as a generic metadata object (see [Section 3.2 of \[RFC8006\]](#))

Use cases

- o Failover: A dCDN request router receives a request but has no caches to which it can route the request. This can happen in the case of failures or temporary network overload.
- o No coverage: A dCDN request router receives a request from a client located in an area inside the footprint but not covered by the dCDN caches or outside the dCDN footprint coverage. In such cases, the router may choose to redirect the request back to the uCDN fallback address.
- o Error: A cache may receive a request that it cannot properly serve, for example, some of the metadata objects for that service were not properly acquired. In this case, the cache's "default action" may be to "redirect back to uCDN".

The Fallback target metadata object is used to indicate the target address the dCDN should redirect a client to when falling back to the uCDN. Fallback target address is represented as an endpoint object as defined in [Section 4.3.3 of \[RFC8006\]](#).

In DNS redirection a CNAME record is used as the fallback target address.

In HTTP redirection a hostname is used as the fallback target address.

When using HTTP redirect to route a client request back to the uCDN, it is the dCDN's responsibility to use the original URL path as the client would have used for the original uCDN request, stripping, if needed, the dCDN path-prefix and/or the uCDN hostname from the redirect URL that may have been used to request the content from the dCDN.

[3.1.](#) Properties of Fallback Target Address Metadata Object

The MI.FallbackTarget Metadata object consists of the following single property:

Property: host

Description: Target address to which the dCDN can redirect the client.

Type: Endpoint object as defined in [Section 4.3.3 of \[RFC8006\]](#) with the limitation that in case of DNS delegation it SHOULD NOT include a port number and, in case a port number is present, the dCDN MUST ignore it.

Mandatory-to-Specify: Yes.

Property: scheme

Description: A URI scheme to be used in the redirect response location construction. When present, the dCDN MUST use this scheme in case of HTTP redirection to the uCDN fallback address.

Type: A URI scheme as defined in [Section 3.1 of \[RFC3986\]](#) represented as a JSON string. The scheme MUST be either "http" or "https".


Mandatory-to-Specify: No. In case of HTTP redirection to fallback, if this property is absent or empty, the dCDN redirecting entity MUST use the same scheme as in the request received by the dCDN.

Example of a MI.FallbackTarget Metadata object that designates the host address the dCDN should use as fallback address to redirect back to the uCDN.

```
{
  "generic-metadata-type": "MI.FallbackTarget",
  "generic-metadata-value":
  {
    "host": "fallback-a.service123.ucdn.example",
    "scheme": "https"
  }
}
```

[3.2.](#) Usage Example

The uCDN advertises out-of-band the fallback target address to the dCDN, so that the dCDN may redirect a request back to the uCDN in case the dCDN cannot serve it. Using the MI the uCDN advertises its hosts to the dCDN, along with their specific host metadata (see [Section 4.1.2 of \[RFC8006\]](#)). The Fallback Target generic metadata object is encapsulated within the "host-metadata" property of each host. The following is an example of a message flow between an upstream CDN and a downstream dCDN. For simplicity, we focus on the sequence of messages between the uCDN and dCDN, not on how they are passed.

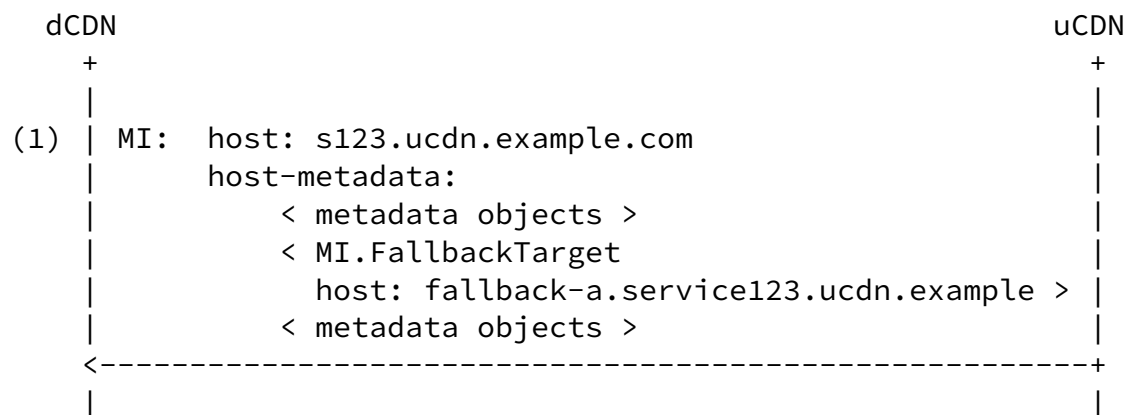

```

(2) | FCI:  capability-type: FCI.RedirectTarget          |
    |      redirecting-hosts: s123.ucdn.example.com    |
    |      target host: us-east1.dcdn.example.com      |
    +----->
    |
    |
    +
  
```

Figure 3: Advertisement of host metadata with Fallback Target

1. The uCDN advertises a host (s123.ucdn.example.com) with the host metadata. The host-metadata property contains a MI.FallbackTarget object.
2. The dCDN advertises its FCI objects to the uCDN including a FCI.RedirectTarget object that contains the redirect target address (us-east1.dcdn.example.com) specified for that uCDN host.

The following is a generic sequence of redirection using the configurations that were advertised in Figure 3 above. In this case the dCDN redirects back to the uCDN fallback target address.

End User	dCDN	uCDN fallback	uCDN RR
+	+	+	+
(1) Request sent	s123.ucdn.example.com		

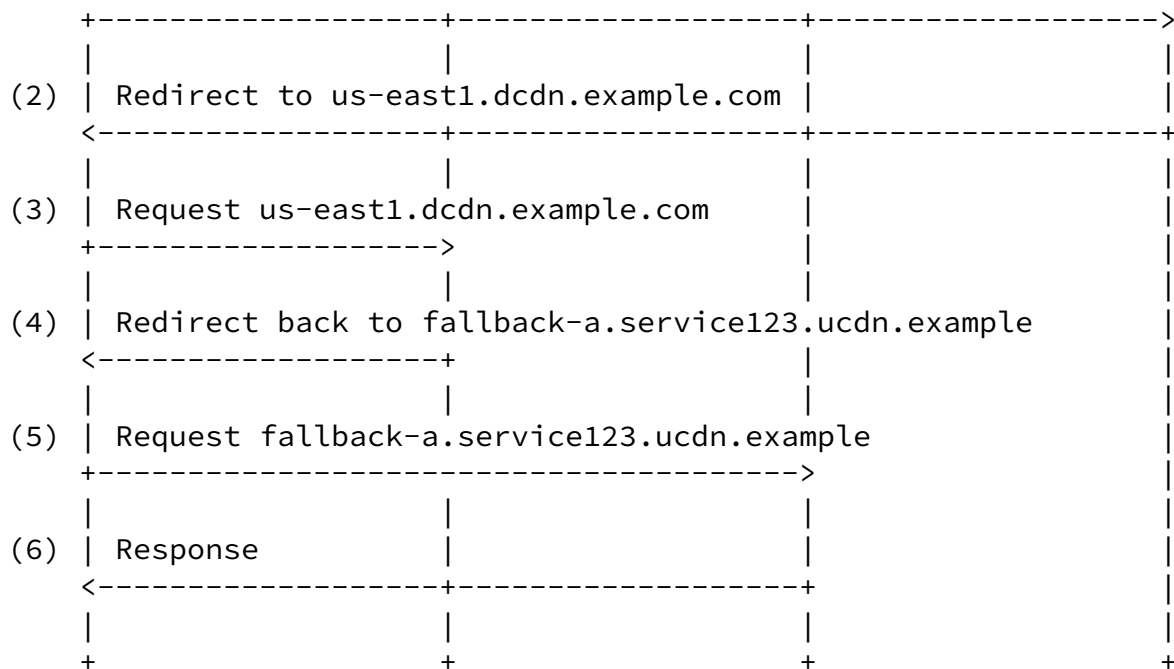


Figure 4: Redirection to Fallback Target

1. The End User sends a request (DNS or HTTP) to the uCDN Request Router (RR).
2. Using the previously advertised Redirect Target, the uCDN redirects the request to the dCDN.
3. The End User sends a request to the dCDN.
4. The dCDN cannot handle the request and, therefore, redirects it back to the uCDN fallback target address.
5. The End User sends the request to the uCDN fallback target address.
6. The uCDN either sends a response or reroutes it, for example, to a uCDN surrogate.

[3.3.](#) uCDN addressing considerations

When advertising fallback addresses to the dCDN the uCDN SHOULD consider the failure use cases that may lead the dCDN to route requests to uCDN fallback. In extreme dCDN network failures or under denial-of-service (DoS) attacks, requests coming from a large segment

or multiple segments of the dCDN may be routed back to the uCDN. The uCDN SHOULD therefore design its fallback addressing scheme and its available resources accordingly. A favorable approach would be for the uCDN to use different fallback target address for each uCDN host, enabling it to load balance the requests using the same methods as it would for its original hosts. See Sections [4.1.2](#) and [4.1.3](#) of [\[RFC8006\]](#) for a detailed description of how to use GenericMetadata objects within the HostMatch object advertised in the HostIndex of the uCDN.

[4.](#) IANA Considerations

[4.1.](#) CDNI Payload Types

This document requests the registration of the following CDNI Payload Types under the IANA "CDNI Payload Types" registry defined in [\[RFC7736\]](#):

+-----+-----+	
Payload Type	Specification
+-----+-----+	
FCI.RedirectTarget	RFCthis
MI.FallbackTarget	RFCthis
+-----+-----+	

[RFC Editor: Please replace RFCthis with the published RFC number for this document.]

[4.1.1.](#) CDNI FCI RedirectTarget Payload Type

Purpose: The purpose of this payload type is to distinguish RedirectTarget FCI objects

Interface: FCI

Encoding: see [Section 2.3](#)

[4.1.2.](#) CDNI MI FallbackTarget Payload Type

Purpose: The purpose of this payload type is to distinguish FallbackTarget MI objects (and any associated capability advertisement)

Interface: MI/FCI

Encoding: see [Section 3.1](#)

[5.](#) Security Considerations

This specification is in accordance with the CDNI Metadata Interface and the CDNI Request Routing: Footprint and Capabilities Semantics. As such, it is subject to the security and privacy considerations as defined in [Section 8 of \[RFC8006\]](#) and in [Section 7 of \[RFC8008\]](#) respectively.

[5.1.](#) Confidentiality and Privacy

The Redirect Target FCI object potentially reveals information about the internal structure of the dCDN network. A third party could intercept the FCI transactions and use the information to attack the dCDN. The same is also true for the Fallback Target Metadata object as it may reveal information about the internal structure of the uCDN, exposing it to external exploits. Implementations of the FCI and MI MUST therefore use strong authentication and encryption and strictly follow the directions for securing the interface as defined for the Metadata Interface in [Section 8.3 of \[RFC8006\]](#).

[6.](#) Acknowledgements

The authors thank Nir B. Sopher for reality checks against production use cases, his contribution is significant to this document. The authors also thank Ben Niven-Jenkins for his review and feedback and Kevin J. Ma for his guidance throughout the development of this document including his regular reviews.

[7.](#) References

[7.1.](#) Normative References

- [RFC1034] Mockapetris, P., "Domain names - concepts and facilities", STD 13, [RFC 1034](#), DOI 10.17487/RFC1034, November 1987, <<https://www.rfc-editor.org/info/rfc1034>>.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.

- [RFC3986] Berners-Lee, T., Fielding, R., and L. Masinter, "Uniform Resource Identifier (URI): Generic Syntax", STD 66, [RFC 3986](#), DOI 10.17487/RFC3986, January 2005, <<https://www.rfc-editor.org/info/rfc3986>>.

- [RFC6707] Niven-Jenkins, B., Le Faucheur, F., and N. Bitar, "Content Distribution Network Interconnection (CDNI) Problem Statement", [RFC 6707](#), DOI 10.17487/RFC6707, September 2012, <<https://www.rfc-editor.org/info/rfc6707>>.
- [RFC7231] Fielding, R., Ed. and J. Reschke, Ed., "Hypertext Transfer Protocol (HTTP/1.1): Semantics and Content", [RFC 7231](#), DOI 10.17487/RFC7231, June 2014, <<https://www.rfc-editor.org/info/rfc7231>>.
- [RFC7336] Peterson, L., Davie, B., and R. van Brandenburg, Ed., "Framework for Content Distribution Network Interconnection (CDNI)", [RFC 7336](#), DOI 10.17487/RFC7336, August 2014, <<https://www.rfc-editor.org/info/rfc7336>>.
- [RFC7975] Niven-Jenkins, B., Ed. and R. van Brandenburg, Ed., "Request Routing Redirection Interface for Content Delivery Network (CDN) Interconnection", [RFC 7975](#), DOI 10.17487/RFC7975, October 2016, <<https://www.rfc-editor.org/info/rfc7975>>.
- [RFC8006] Niven-Jenkins, B., Murray, R., Caulfield, M., and K. Ma, "Content Delivery Network Interconnection (CDNI) Metadata", [RFC 8006](#), DOI 10.17487/RFC8006, December 2016, <<https://www.rfc-editor.org/info/rfc8006>>.
- [RFC8007] Murray, R. and B. Niven-Jenkins, "Content Delivery Network Interconnection (CDNI) Control Interface / Triggers", [RFC 8007](#), DOI 10.17487/RFC8007, December 2016, <<https://www.rfc-editor.org/info/rfc8007>>.
- [RFC8008] Seedorf, J., Peterson, J., Previdi, S., van Brandenburg, R., and K. Ma, "Content Delivery Network Interconnection

(CDNI) Request Routing: Footprint and Capabilities Semantics", [RFC 8008](#), DOI 10.17487/RFC8008, December 2016, <<https://www.rfc-editor.org/info/rfc8008>>.

[RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.

7.2. Informative References

[OC-RR] Finkelman, O., Ed., Hofmann, J., Klein, E., Mishra, S., Ma, K., Sahar, D., and B. Zurat, "Open Caching – Request Routing Functional Specification", Version 1.1, October 2019, <<https://www.streamingvideoalliance.org/books/open-cache-request-routing-functional-specification/>>.

Finkelman & Mishra

Expires May 23, 2020

[Page 18]

Internet-Draft

CDNI Request Routing Extensions

November 2019

[OCWG] "Open Caching Home Page",
<<https://www.streamingvideoalliance.org/technical-groups/open-caching/>>.

[RFC7736] Ma, K., "Content Delivery Network Interconnection (CDNI) Media Type Registration", [RFC 7736](#), DOI 10.17487/RFC7736, December 2015, <<https://www.rfc-editor.org/info/rfc7736>>.

[RFC7871] Contavalli, C., van der Gaast, W., Lawrence, D., and W. Kumari, "Client Subnet in DNS Queries", [RFC 7871](#), DOI 10.17487/RFC7871, May 2016, <<https://www.rfc-editor.org/info/rfc7871>>.

[SVA] "Streaming Video Alliance Home Page",
<<https://www.streamingvideoalliance.org>>.

Authors' Addresses

Ori Finkelman
Qwilt
6, Ha'harash
Hod HaSharon 4524079
Israel

Email: ori.finkelman.ietf@gmail.com

Sanjay Mishra
Verizon
13100 Columbia Pike
Silver Spring, MD 20904
USA

Email: sanjay.mishra@verizon.com