

DetNet  
Internet-Draft  
Intended status: Informational  
Expires: August 23, 2021

B. Varga, Ed.  
J. Farkas  
Ericsson  
A. Malis  
Malis Consulting  
S. Bryant  
Futurewei Technologies  
February 19, 2021

DetNet Data Plane: MPLS over IEEE 802.1 Time-Sensitive Networking (TSN)  
[draft-ietf-detnet-mpls-over-tsn-07](#)

## Abstract

This document specifies the Deterministic Networking MPLS data plane when operating over an IEEE 802.1 Time-Sensitive Networking (TSN) sub-network. This document does not define new procedures or processes. Whenever this document makes statements or recommendations, these are taken from normative text in the referenced RFCs.

## Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on August 23, 2021.

## Copyright Notice

Copyright (c) 2021 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents

carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	<a href="#">Introduction</a>	<a href="#">2</a>
<a href="#">2.</a>	<a href="#">Terminology</a>	<a href="#">3</a>
<a href="#">2.1.</a>	<a href="#">Terms Used in This Document</a>	<a href="#">3</a>
<a href="#">2.2.</a>	<a href="#">Abbreviations</a>	<a href="#">3</a>
<a href="#">3.</a>	<a href="#">DetNet MPLS Data Plane Overview</a>	<a href="#">3</a>
<a href="#">4.</a>	<a href="#">DetNet MPLS Operation Over IEEE 802.1 TSN Sub-Networks</a>	<a href="#">4</a>
<a href="#">4.1.</a>	<a href="#">Functions for DetNet Flow to TSN Stream Mapping</a>	<a href="#">6</a>
<a href="#">4.2.</a>	<a href="#">TSN requirements of MPLS DetNet nodes</a>	<a href="#">6</a>
<a href="#">4.3.</a>	<a href="#">Service protection within the TSN sub-network</a>	<a href="#">8</a>
<a href="#">4.4.</a>	<a href="#">Aggregation during DetNet flow to TSN Stream mapping</a>	<a href="#">8</a>
<a href="#">5.</a>	<a href="#">Management and Control Implications</a>	<a href="#">8</a>
<a href="#">6.</a>	<a href="#">Security Considerations</a>	<a href="#">10</a>
<a href="#">7.</a>	<a href="#">IANA Considerations</a>	<a href="#">11</a>
<a href="#">8.</a>	<a href="#">Acknowledgements</a>	<a href="#">11</a>
<a href="#">9.</a>	<a href="#">References</a>	<a href="#">11</a>
<a href="#">9.1.</a>	<a href="#">Normative References</a>	<a href="#">11</a>
<a href="#">9.2.</a>	<a href="#">Informative References</a>	<a href="#">11</a>
	<a href="#">Authors' Addresses</a>	<a href="#">12</a>

## [1.](#) Introduction

Deterministic Networking (DetNet) is a service that can be offered by a network to DetNet flows. DetNet provides these flows with low packet loss rate and assured maximum end-to-end delivery latency. General background and concepts of DetNet can be found in [[RFC8655](#)].

The DetNet Architecture decomposes the DetNet related data plane functions into two sub-layers: a service sub-layer and a forwarding sub-layer. The service sub-layer is used to provide DetNet service protection and reordering. The forwarding sub-layer is used to provide congestion protection (low loss, assured latency, and limited reordering) leveraging MPLS Traffic Engineering mechanisms.

[[RFC8964](#)] specifies the DetNet data plane operation for MPLS-based Packet Switched Network (PSN). MPLS encapsulated DetNet flows can be carried over network technologies that can provide the DetNet required level of service. This document focuses on the scenario where MPLS (DetNet) nodes are interconnected by a IEEE 802.1 TSN sub-network. There is close cooperation between the IETF DetNet WG and the IEEE 802.1 TSN TG.



## **2. Terminology**

### **2.1. Terms Used in This Document**

This document uses the terminology established in the DetNet architecture [[RFC8655](#)] and [[RFC8964](#)]. TSN specific terms are defined in the TSN TG of IEEE 802.1 Working Group. The reader is assumed to be familiar with these documents and their terminology.

### **2.2. Abbreviations**

The following abbreviations are used in this document:

A-Label	Aggregation label, a special case of an S-Label.
d-CW	DetNet Control Word.
DetNet	Deterministic Networking.
F-Label	Forwarding label that identifies the LSP used by a DetNet flow.
FRER	Frame Replication and Elimination for Redundancy (TSN function).
L2	Layer 2.
L3	Layer 3.
MPLS	Multiprotocol Label Switching.
PREOF	Packet Replication, Elimination and Ordering Functions.
PSN	Packet Switched Network.
PW	PseudoWire.
RSVP-TE	Resource Reservation Protocol - Traffic Engineering.
S-Label	Service label.
TSN	Time-Sensitive Network.

## **3. DetNet MPLS Data Plane Overview**

The basic approach defined in [[RFC8964](#)] supports the DetNet service sub-layer based on existing pseudowire (PW) encapsulations and



mechanisms, and supports the DetNet forwarding sub-layer based on existing MPLS Traffic Engineering encapsulations and mechanisms.

A node operating on a DetNet flow in the DetNet service sub-layer, i.e. a node processing a DetNet packet which has the S-Label as top of stack uses the local context associated with that service label (S-Label), for example a received forwarding label (F-Label), to determine what local DetNet operation(s) are applied to that packet. An S-Label may be unique when taken from the platform label space [[RFC3031](#)], which would enable correct DetNet flow identification regardless of which input interface or LSP the packet arrives on. The service sub-layer functions (i.e., PREOF) use a DetNet control word (d-CW).

The DetNet MPLS data plane builds on MPLS Traffic Engineering encapsulations and mechanisms to provide a forwarding sub-layer that is responsible for providing resource allocation and explicit routes. The forwarding sub-layer is supported by one or more F-Labels.

DetNet edge/relay nodes are DetNet service sub-layer aware, understand the particular needs of DetNet flows and provide both DetNet service and forwarding sub-layer functions. They add, remove and process d-CWs, S-Labels and F-labels as needed. MPLS DetNet nodes and transit nodes include DetNet forwarding sub-layer functions, notably support for explicit routes, and resources allocation to eliminate (or reduce) congestion loss and jitter. Unlike other DetNet node types, transit nodes provide no service sub-layer processing.

MPLS (DetNet) nodes and transit nodes interconnected by a TSN sub-network are the primary focus of this document. The mapping of DetNet MPLS flows to TSN streams and TSN protection mechanisms are covered in [Section 4](#).

#### **[4. DetNet MPLS Operation Over IEEE 802.1 TSN Sub-Networks](#)**

The DetNet WG collaborates with IEEE 802.1 TSN in order to define a common architecture for both Layer 2 and Layer 3, that maintains consistency across diverse networks. Both DetNet MPLS and TSN use the same techniques to provide their deterministic service:


- o Service protection.
- o Resource allocation.
- o Explicit routes.



As described in the DetNet architecture [[RFC8655](#)] a sub-network provides from MPLS perspective a single hop connection between MPLS (DetNet) nodes. Functions used for resource allocation and explicit routes are treated as domain internal functions and do not require function interworking across the DetNet MPLS network and the TSN sub-network.

In the case of the service protection function due to the similarities of the DetNet PREOF and TSN FRER functions some level of interworking is possible. However, such interworking is out-of-scope in this document and left for further study.

Figure 1 illustrates a scenario, where two MPLS (DetNet) nodes are interconnected by a TSN sub-network. Node-1 is single homed and Node-2 is dual-homed to the TSN sub-network.

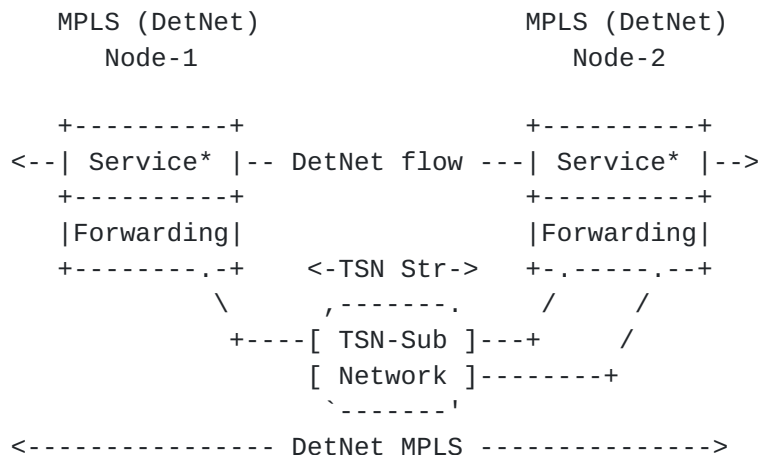

Note: \* no service sub-layer required for transit nodes

Figure 1: DetNet Enabled MPLS Network Over a TSN Sub-Network

At the time of this writing, the Time-Sensitive Networking (TSN) Task Group of the IEEE 802.1 Working Group have defined (and are defining) a number of amendments to [[IEEE8021Q](#)] that provide zero congestion loss and bounded latency in bridged networks. Furthermore [[IEEE8021CB](#)] defines frame replication and elimination functions for reliability that should prove both compatible with and useful to, DetNet networks. All these functions have to identify flows those require TSN treatment (i.e., applying TSN functions during forwarding).

TSN capabilities of the TSN sub-network are made available for MPLS (DetNet) flows via the protocol interworking function defined in Annex C.5 of [[IEEE8021CB](#)]. For example, applied on the TSN edge port it can convert an ingress unicast MPLS (DetNet) flow to use a





specific Layer-2 multicast destination MAC address and a VLAN, in order to direct the packet through a specific path inside the bridged network. A similar interworking function pair at the other end of the TSN sub-network would restore the packet to its original Layer-2 destination MAC address and VLAN.

Placement of TSN functions depends on the TSN capabilities of the nodes along the path. MPLS (DetNet) Nodes may or may not support TSN functions. For a given TSN Stream (i.e., DetNet flow) an MPLS (DetNet) node is treated as a Talker or a Listener inside the TSN sub-network.

#### **4.1. Functions for DetNet Flow to TSN Stream Mapping**

Mapping of a DetNet MPLS flow to a TSN Stream is provided via the combination of a passive and an active stream identification function that operate at the frame level. The passive stream identification function is used to catch the MPLS label(s) of a DetNet MPLS flow and the active stream identification function is used to modify the Ethernet header according to the ID of the mapped TSN Stream.

Clause 6.8 of [[IEEEP8021CBdb](#)] defines a Mask-and-Match Stream identification function that can be used as a passive function for MPLS DetNet flows.

Clause 6.6 of [[IEEE8021CB](#)] defines an Active Destination MAC and VLAN Stream identification function, what can replace some Ethernet header fields namely (1) the destination MAC-address, (2) the VLAN-ID and (3) priority parameters with alternate values. Replacement is provided for the frame passed down the stack from the upper layers or up the stack from the lower layers.

Active Destination MAC and VLAN Stream identification can be used within a Talker to set flow identity or a Listener to recover the original addressing information. It can be used also in a TSN bridge that is providing translation as a proxy service for an End System.

#### **4.2. TSN requirements of MPLS DetNet nodes**


This section covers required behavior of a TSN-aware MPLS (DetNet) node using a TSN sub-network. The implementation of TSN packet processing functions must be compliant with the relevant IEEE 802.1 standards.

From the TSN sub-network perspective MPLS (DetNet) nodes are treated as Talker or Listener, that may be (1) TSN-unaware or (2) TSN-aware.



In cases of TSN-unaware MPLS DetNet nodes the TSN relay nodes within the TSN sub-network must modify the Ethernet encapsulation of the DetNet MPLS flow (e.g., MAC translation, VLAN-ID setting, Sequence number addition, etc.) to allow proper TSN specific handling inside the sub-network. There are no requirements defined for TSN-unaware MPLS DetNet nodes in this document.

MPLS (DetNet) nodes being TSN-aware can be treated as a combination of a TSN-unaware Talker/Listener and a TSN-Relay, as shown in Figure 2. In such cases the MPLS (DetNet) node must provide the TSN sub-network specific Ethernet encapsulation over the link(s) towards the sub-network.

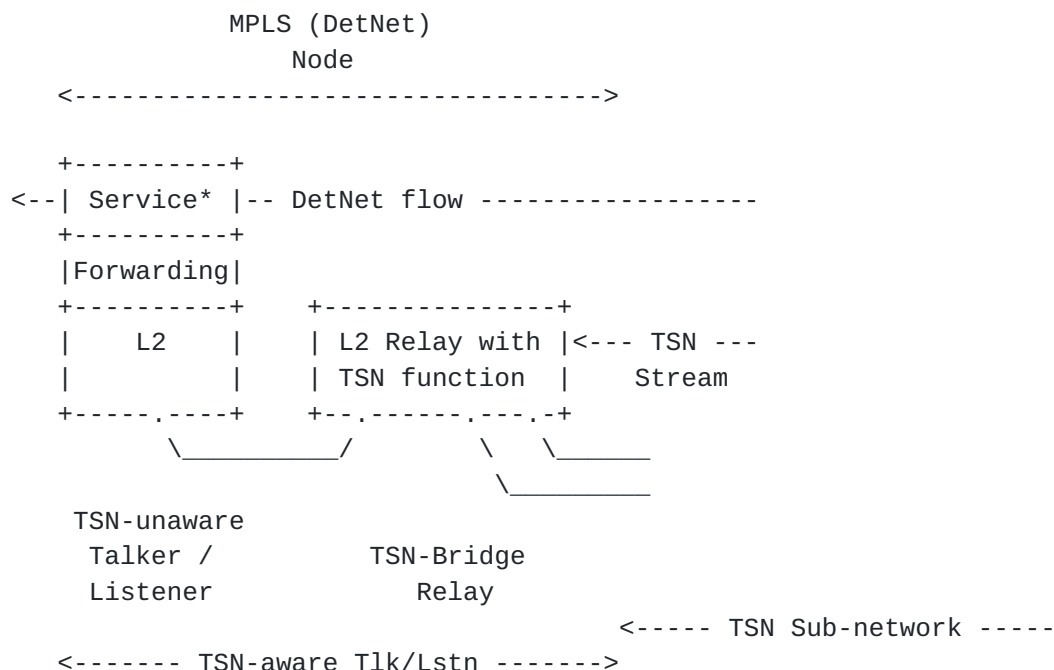

Note: \* no service sub-layer required for transit nodes

Figure 2: MPLS (DetNet) Node with TSN Functions

A TSN-aware MPLS (DetNet) node implementation must support the Stream Identification TSN component for recognizing flows.

A Stream identification component must be able to instantiate the following functions (1) Active Destination MAC and VLAN Stream identification function, (2) Mask-and-Match Stream identification function and (3) the related managed objects in Clause 9 of [\[IEEE8021CB\]](#) and [\[IEEEP8021CBdb\]](#).

A TSN-aware MPLS (DetNet) node implementation must support the Sequencing function and the Sequence encode/decode function as



defined in Clause 7.4 and 7.6 of [IEEE8021CB] in order for FRER to be used inside the TSN sub-network.

The Sequence encode/decode function must support the Redundancy tag (R-TAG) format as per Clause 7.8 of [IEEE8021CB].

A TSN-aware MPLS (DetNet) node implementation must support the Stream splitting function and the Individual recovery function as defined in Clause 7.7 and 7.5 of [IEEE8021CB] in order for that node to be a replication or elimination point for FRER.

#### **4.3. Service protection within the TSN sub-network**

TSN Streams supporting DetNet flows may use Frame Replication and Elimination for Redundancy (FRER) as defined in Clause 8. of [IEEE8021CB] based on the loss service requirements of the TSN Stream, which is derived from the DetNet service requirements of the DetNet mapped flow. The specific operation of FRER is not modified by the use of DetNet and follows [IEEE8021CB].

FRER function and the provided service recovery is available only within the TSN sub-network as the TSN Stream-ID and the TSN sequence number are not valid outside the sub-network. An MPLS (DetNet) node represents a L3 border and as such it terminates all related information elements encoded in the L2 frames.

As the Stream-ID and the TSN sequence number are paired with the similar MPLS flow parameters, FRER can be combined with PREOF functions. Such service protection interworking scenarios may require to move sequence number fields among TSN (L2) and PW (MPLS) encapsulations and they are left for further study.

#### **4.4. Aggregation during DetNet flow to TSN Stream mapping**

Implementation of this document shall use management and control information to map a DetNet flow to a TSN Stream. N:1 mapping (aggregating DetNet flows in a single TSN Stream) shall be supported. The management or control function that provisions flow mapping shall ensure that adequate resources are allocated and configured to provide proper service requirements of the mapped flows.

### **5. Management and Control Implications**

DetNet flow and TSN Stream mapping related information are required only for TSN-aware MPLS (DetNet) nodes. From the Data Plane perspective there is no practical difference based on the origin of flow mapping related information (management plane or control plane).



The following summarizes the set of information that is needed to configure DetNet MPLS over TSN:

- o DetNet MPLS related configuration information according to the DetNet role of the DetNet MPLS node, as per [[RFC8964](#)].
- o TSN related configuration information according to the TSN role of the DetNet MPLS node, as per [[IEEE8021Q](#)], [[IEEE8021CB](#)] and [[IEEEP8021CBdb](#)].
- o Mapping between DetNet MPLS flow(s) (label information: A-labels, S-labels and F-labels as defined in [[RFC8964](#)]) and TSN Stream(s) (as stream identification information defined in [[IEEEP8021CBdb](#)]). Note, that managed objects for TSN Stream identification can be found in [[IEEEP8021CBcv](#)].

This information must be provisioned per DetNet flow.

Mappings between DetNet and TSN management and control planes are out of scope of the document. Some of the challenges are highlighted below.

TSN-aware MPLS DetNet nodes are members of both the DetNet domain and the TSN sub-network. Within the TSN sub-network the TSN-aware MPLS (DetNet) node has a TSN-aware Talker/Listener role, so TSN specific management and control plane functionalities must be implemented. There are many similarities in the management plane techniques used in DetNet and TSN, but that is not the case for the control plane protocols. For example, RSVP-TE and MSRP (Multiple Stream Registration Protocol) behaves differently. Therefore management and control plane design is an important aspect of scenarios, where mapping between DetNet and TSN is required.

In order to use a TSN sub-network between DetNet nodes, DetNet specific information must be converted to TSN sub-network specific ones. DetNet flow ID and flow related parameters/requirements must be converted to a TSN Stream ID and stream related parameters/requirements. Note that, as the TSN sub-network is just a portion of the end-2-end DetNet path (i.e., a single hop from MPLS perspective), some parameters (e.g., delay) may differ significantly. Other parameters (like bandwidth) also may have to be tuned due to the L2 encapsulation used within the TSN sub-network.

In some cases it may be challenging to determine some TSN Stream related information. For example, on a TSN-aware MPLS (DetNet) node that acts as a Talker, it is quite obvious which DetNet node is the Listener of the mapped TSN stream (i.e., the MPLS Next-Hop). However it may be not trivial to locate the point/interface where that





Listener is connected to the TSN sub-network. Such attributes may require interaction between control and management plane functions and between DetNet and TSN domains.

Mapping between DetNet flow identifiers and TSN Stream identifiers, if not provided explicitly, can be done by a TSN-aware MPLS (DetNet) node locally based on information provided for configuration of the TSN Stream identification functions (Mask-and-match Stream identification and Active Stream identification function).

Triggering the setup/modification of a TSN Stream in the TSN sub-network is an example where management and/or control plane interactions are required between the DetNet and TSN sub-network. TSN-unaware MPLS (DetNet) nodes make such a triggering even more complicated as they are fully unaware of the sub-network and run independently.

Configuration of TSN specific functions (e.g., FRER) inside the TSN sub-network is a TSN domain specific decision and may not be visible in the DetNet domain. Service protection interworking scenarios are left for further study.

## **6. Security Considerations**

Security considerations for DetNet are described in detail in [[I-D.ietf-detnet-security](#)]. General security considerations are described in [[RFC8655](#)]. DetNet MPLS data plane specific considerations are summarized in [[RFC8964](#)]. This section considers exclusively security considerations which are specific to the DetNet MPLS over TSN sub-network scenario.

The sub-network between DetNet nodes needs to be subject to appropriate confidentiality. Additionally, knowledge of what DetNet/TSN services are provided by a sub-network may supply information that can be used in a variety of security attacks. The ability to modify information exchanges between connected DetNet nodes may result in bogus operations. Therefore, it is important that the interface between DetNet nodes and TSN sub-network are subject to authorization, authentication, and encryption.

The TSN sub-network operates at Layer-2 so various security mechanisms defined by IEEE can be used to secure the connection between the DetNet nodes (e.g., encryption may be provided using MACSec [[IEEE802.1AE-2018](#)]).



## **7. IANA Considerations**

This document makes no IANA requests.

## **8. Acknowledgements**

The authors wish to thank Norman Finn, Lou Berger, Craig Gunther, Christophe Mangin and Jouni Korhonen for their various contributions to this work.

## **9. References**

### **9.1. Normative References**

[IEEE8021CB]

IEEE 802.1, "Standard for Local and metropolitan area networks - Frame Replication and Elimination for Reliability (IEEE Std 802.1CB-2017)", 2017, <<http://standards.ieee.org/about/get/>>.

[IEEEP8021CBdb]

Mangin, C., "Extended Stream identification functions", IEEE P802.1CBdb /D1.0 P802.1CBdb, September 2020, <<http://www.ieee802.org/1/files/private/db-drafts/d1/802-1CBdb-d1-0.pdf>>.

[RFC3031] Rosen, E., Viswanathan, A., and R. Callon, "Multiprotocol Label Switching Architecture", [RFC 3031](#), DOI 10.17487/RFC3031, January 2001, <<https://www.rfc-editor.org/info/rfc3031>>.

[RFC8655] Finn, N., Thubert, P., Varga, B., and J. Farkas, "Deterministic Networking Architecture", [RFC 8655](#), DOI 10.17487/RFC8655, October 2019, <<https://www.rfc-editor.org/info/rfc8655>>.

[RFC8964] Varga, B., Ed., Farkas, J., Berger, L., Malis, A., Bryant, S., and J. Korhonen, "Deterministic Networking (DetNet) Data Plane: MPLS", [RFC 8964](#), DOI 10.17487/RFC8964, January 2021, <<https://www.rfc-editor.org/info/rfc8964>>.

### **9.2. Informative References**

[I-D.ietf-detnet-security]

Grossman, E., Mizrahi, T., and A. Hacker, "Deterministic Networking (DetNet) Security Considerations", [draft-ietf-detnet-security-13](#) (work in progress), December 2020.



[IEEE802.1AE-2018]

IEEE Standards Association, "IEEE Std 802.1AE-2018 MAC Security (MACsec)", 2018,  
<<https://ieeexplore.ieee.org/document/8585421>>.

[IEEE8021Q]

IEEE 802.1, "Standard for Local and metropolitan area networks--Bridges and Bridged Networks (IEEE Std 802.1Q-2018)", 2018, <<http://standards.ieee.org/about/get/>>.

[IEEEP8021CBcv]

Kehrer, S., "FRER YANG Data Model and Management Information Base Module", IEEE P802.1CBcv /D0.4 P802.1CBcv, August 2020,  
<<https://www.ieee802.org/1/files/private/cv-drafts/d0/802-1CBcv-d0-4.pdf>>.

#### Authors' Addresses

Balazs Varga (editor)  
Ericsson  
Magyar Tudosok krt. 11.  
Budapest 1117  
Hungary

Email: [balazs.a.varga@ericsson.com](mailto:balazs.a.varga@ericsson.com)

Janos Farkas  
Ericsson  
Magyar Tudosok krt. 11.  
Budapest 1117  
Hungary

Email: [janos.farkas@ericsson.com](mailto:janos.farkas@ericsson.com)

Andrew G. Malis  
Malis Consulting

Email: [agmalis@gmail.com](mailto:agmalis@gmail.com)

Stewart Bryant  
Futurewei Technologies

Email: [stewart.bryant@gmail.com](mailto:stewart.bryant@gmail.com)

