

Network Working Group
Internet-Draft
Expires: November 17, 2005

K. Chowdhury
Starent Networks
P. Yegani
Cisco Systems
L. Madour
Ericsson
May 16, 2005

DHCP Options for Broadcast and Multicast Control Servers
draft-ietf-dhc-bcmc-options-01.txt

Status of this Memo

By submitting this Internet-Draft, each author represents that any applicable patent or other IPR claims of which he or she is aware have been or will be disclosed, and any of which he or she becomes aware will be disclosed, in accordance with [Section 6 of BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/lid-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on November 17, 2005.

Copyright Notice

Copyright (C) The Internet Society (2005).

Abstract

This document defines new options for Broadcast and Multicast Service controller discovery in an IP network. Broadcast service is being developed for 3rd generation (3G) cellular telephone networks. Users of the service interact with a controller in the network via the Mobile Node (MN) to derive information required to receive broadcast

Internet-Draft

May 2005

service. Dynamic Host Configuration Protocol can be used to configure the MN to access a particular controller. This document defines the related options and option codes.

Table of Contents

1.	Motivation	3
2.	Overview of the 3GPP2 BCMCS Network	4
3.	Terminology	5
4.	Broadcast Service Controller Options	6
4.1	Broadcast Service Controller Domain Name list	6
4.2	Broadcast Service Controller Domain Name List Option for DHCPv6	7
4.3	Broadcast Service Controller IPv4 address option	8
4.4	Broadcast Service Controller IPv6 Address Option	8
4.5	Consideration for Client Operation	9
4.6	Consideration for Server Operation	9
5.	Security Considerations	10
6.	IANA Considerations	11
7.	Acknowledgements	12
8.	Normative References	12
	Authors' Addresses	12
	Intellectual Property and Copyright Statements	14

Internet-Draft

May 2005

1. Motivation

Dynamic Host Configuration Protocol [[RFC2131](#)] and [[RFC3315](#)] can be used to configure various non-IP address type of parameters. These parameters are required for normal operation of various services that are offered over an IP network.

Broadcast and multicast service (BCMCS) is one such service that is currently being standardized in various mobile wireless standard bodies such as 3GPP, 3GPP2 and OMA. A description of the BCMCS, for example, in 3GPP2 can be found in [[BCMCS](#)].

While DHCP offers necessary mechanisms for device configuration, it lacks the information elements required to configure a mobile device to support BCMCS. This memo defines the extensions needed for DHCP to provide necessary configuration information to a mobile device in a BCMCS network.

DHCP is being used in 3GPP2, for example, to assist with the discovery of the BCMCS Controller in a mobile operator's IP network. The BCMCS includes a controller component that is responsible for managing the service via interaction with the MN and other network entities.

An overview of the 3GPP2 BCMCS architecture is given in the next section. It provides enough information to understand the basics of the 3GPP2 BCMCS operation. Readers are encouraged to find a more detailed description in [[BCMCS](#)].


As described in [[BCMCS](#)], the MNs are required to know the IPv4 or the IPv6 address of the controller entity so that they can download all the necessary information about a desired broadcast program. In a roaming environment static configuration of the controller's IP address becomes unrealistic. Therefore, DHCP is considered to be a method to dynamically configure the MNs with the IP address or the fully qualified domain name of the controller in the 3G cellular

telephone networks.

In order to allow the MNs to discover the broadcast controllers, the DHCP clients request for appropriate option codes from the DHCP server using Parameter Request List option. The DHCP servers need to return the corresponding configuration options that carry either broadcast and multicast service controller's IP address or fully qualified domain name based on configuration. This document defines the necessary options and option codes.

2. Overview of the 3GPP2 BCMCS Network

The Broadcast and Multicast Service architecture in a 3G cellular telephone network such as 3GPP2 has the following model:

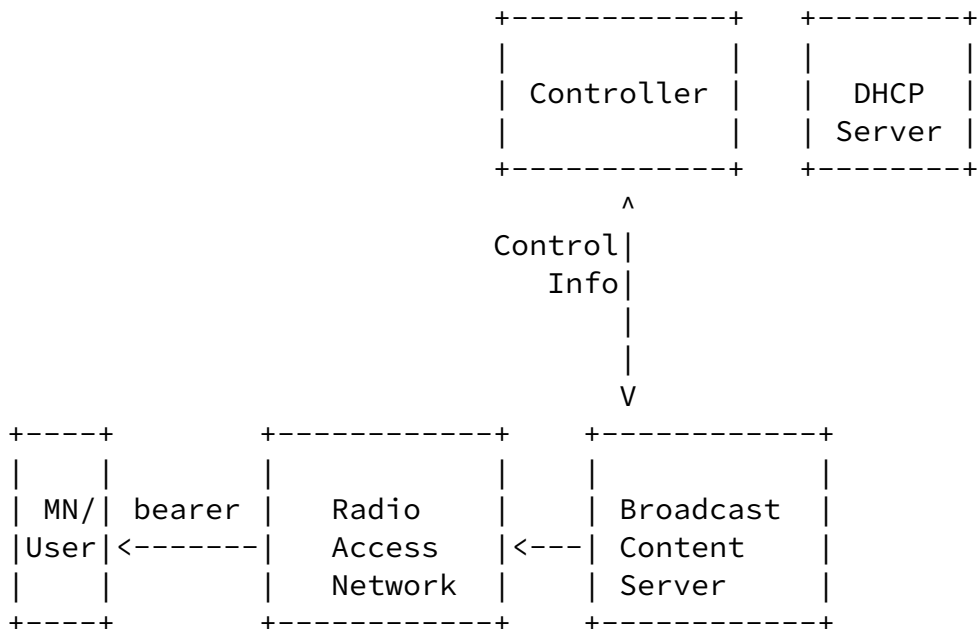

Note that this figure is shown here for broad understanding of how Broadcast and Multicast service works in a 3G cellular telephone network. The network elements except MN/user and the DHCP server are

not relevant to the text in this document.

The MN interacts with the Controller to request broadcast/multicast program information from the network (e.g., scheduled time, multicast IP address, port numbers). The MN may also be authenticated by the Controller while downloading the relevant program security related information (such as encryption key). These interactions may happen via HTTP and XML. There may be more than one controller in the network. The MN should discover the appropriate controller to request the relevant program information. For details of Broadcast and Multicast Service operation in 3GPP2, see [[BCMCS](#)]

[3.](#) Terminology

The keywords "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#).

[4.](#) Broadcast Service Controller Options

This section defines the configuration option for the controller of the broadcast service.

[4.1](#) Broadcast Service Controller Domain Name list

If the 'enc' byte has a value of 0, the encoding byte is followed by a sequence of labels, encoded according to [Section 3.1 of RFC 1035](#) [[RFC1035](#)].

The option MAY contain multiple domain names, but these domain names SHOULD be used to construct SRV lookups as specified in [[BCMCS](#)], rather than querying for different A records. The client MUST try the records in the order listed, applying the mechanism described in

+---+---+---+---+---+---+---+---+

4.2 Broadcast Service Controller Domain Name List Option for DHCPv6


The option length is followed by a sequence of labels, encoded according to [Section 3.1 of RFC 1035](#).

The option MAY contain multiple domain names, but these domain names SHOULD be used to construct SRV lookups as specified in [\[BCMCS\]](#), rather than querying for different A records. The client MUST try the records in the order listed, applying the mechanism described in [\[BCMCS\]](#) for each entry. The client only resolves the subsequent domain names if attempts to contact the first one failed or yielded no common transport protocols between the client and the controller or denote a domain administratively prohibited by client's policy. Use of multiple domain names is not meant to replace the SRV records, but rather to allow a single DHCPv6 server to indicate the broadcast controllers in the access provider's network.

The DHCPv6 option for Broadcast Service Controller Domain Names has the format shown below.


option-code: OPTION_BCMCS_SERVER_D (TBD).

option-length: Length of the 'Broadcast Control Server Domain Name List' field in octets; variable.

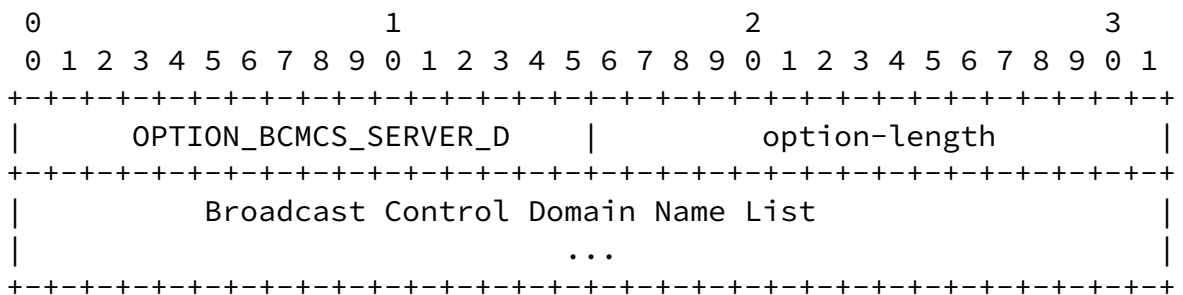

4.3 Broadcast Service Controller IPv4 address option

The encoding byte (enc) is followed by a list of IPv4 addresses indicating broadcast controller IPv4 addresses. The controllers MUST be listed in order of preference. Its minimum length is 5, and the length MUST be a multiple of 4 plus one. The DHCP option for this encoding has the following format:

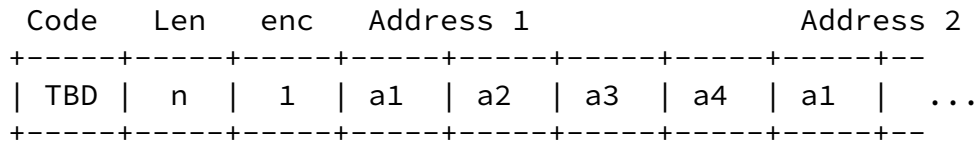


4.4 Broadcast Service Controller IPv6 Address Option

This DHCPv6 option MUST carry one or more 128-bit IPv6 address(es) of the Broadcast Service Controller in a operators network.

option-code: OPTION_BCMCS_SERVER_A (TBD).

option-length: Length of the 'Broadcast Control Server IPv6 address' field in octets; variable.

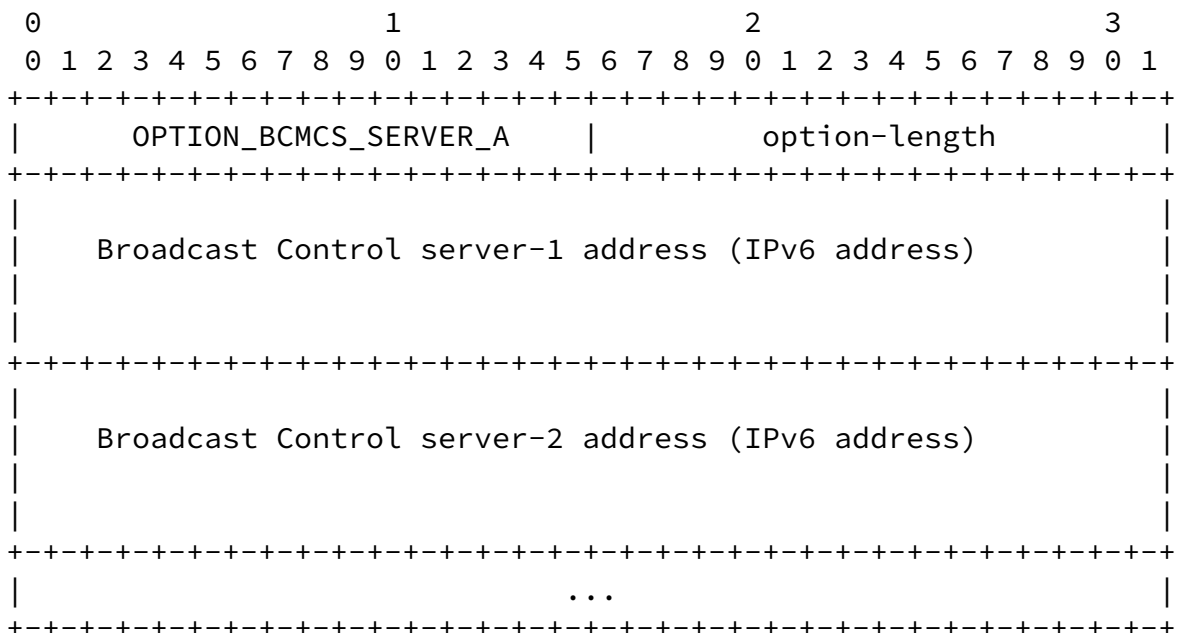

[4.5](#) Consideration for Client Operation

For DHCPv6, a client MAY request either or both of the Broadcast Service Controller Domain Name List and the IPv6 Address options in the Options Request Option (ORO) as described in [[RFC3315](#)].

If a client receives both the Broadcast Service Controller Domain Name List and IPv6 Address options, it SHOULD use the Domain Name List option. In this case, the client MAY use the Broadcast Service Controller IPv6 Address option only if the servers in the Broadcast Service Controller Domain Name List can not be resolved or reached.

[4.6](#) Consideration for Server Operation

A server MAY send a client either the Broadcast Service Controller Domain Name List Option or the Broadcast Service Controller IPv6 Address/IPv4 Address options if the server is configured to do so.

In case of DHCPv6, If a client requests both options and the server is configured with both types of information, the server MAY send the client only one of these options if it is configured to do so. In this case the server SHOULD send the Broadcast Service Controller Domain Name List option.

A server configured with the Broadcast Service Controller IPv6 Address information MUST send a client the Broadcast Service Controller IPv6 Address option if that client requested only the Broadcast Service Controller IPv6 address option and not the Broadcast Service Controller Domain Name List option in the ORO [[RFC3315](#)].

If a client requests for the Broadcast Service Controller IPv6 option and the Server is configured only with the Domain Names, the Server MUST return the Domain Names List and vice versa.

The following table summarizes the server's response for DHCPv6:

Client sends in ORO	Domain Name List	IPv6 Address List
Neither option	SHOULD	MAY
Domain Name List	MUST	MAY
IPv6 Address	MAY	MUST
Both options	SHOULD	MAY

Internet-Draft

May 2005

5. Security Considerations

The security considerations in the base DHCP spec [[RFC2131](#)] applies. An attacker may change information of the Broadcast Service Controller in packets that are in-transit from DHCP server to the MN, if integrity protection is not in place. In that event, the user of the Broadcast service may be diverted to a rogue broadcast service controller. In the absence of a mutual authentication procedure between MN and the Broadcast controller, the MN may receive wrong or fraudulent information about Broadcast Service.

Internet-Draft

May 2005

6. IANA Considerations

The following option codes for Broadcast Service Controller option must be assigned by IANA:

1. Broadcast Service Controller Domain Name list ([section 4.1](#))
2. OPTION_BCMCS_SERVER_D ([section 4.2](#))
3. Broadcast Service Controller IPv4 address option ([section 4.3](#))
4. OPTION_BCMCS_SERVER_A ([section 4.4](#))

The DHCP options should be registered in <http://www.iana.org/assignments/bootp-dhcp-extensions>

The DHCPv6 options should be registered in <http://www.iana.org/assignments/dhcpv6-parameters>

Internet-Draft

May 2005

7. Acknowledgements

Thanks to the following individuals for their review and constructive comments during the development of this document:

AC Mahendran, Jun Wang, Raymond Hsu, Jayshree Bharatia, Ralph Droms, Ted Lemon, and Margaret Wasserman.

8. Normative References

- [BCMCS] 3GPP2, www.3gpp2.org,
<ftp://ftp.3gpp2.org/TSGX/Projects/X.P0022> 2ndV&V.zip,
"X.S0022, Broadcast and Multicast Service in cdma2000
Wireless IP Network. (work in progress)", December 2004.
- [RFC1035] Mockapetris, P., "Domain names - implementation and
specification", STD 13, [RFC 1035](https://www.rfc-editor.org/rfc/rfc1035), November 1987.
- [RFC2131] Droms, R., "Dynamic Host Configuration Protocol",
[RFC 2131](https://www.rfc-editor.org/rfc/rfc2131), March 1997.
- [RFC3315] Droms, R., Bound, J., Volz, B., Lemon, T., Perkins, C.,
and M. Carney, "Dynamic Host Configuration Protocol for
IPv6 (DHCPv6)", [RFC 3315](https://www.rfc-editor.org/rfc/rfc3315), July 2003.

[RFC3396] Lemon, T. and S. Cheshire, "Encoding Long Options in the Dynamic Host Configuration Protocol (DHCPv4)", [RFC 3396](#), November 2002.

Authors' Addresses

Kuntal Chowdhury
Starent Networks
30 International Place
Tewksbury, MA 01876
US

Phone: +1 214-550-1416
Email: kchowdhury@starentnetworks.com

Chowdhury, et al.

Expires November 17, 2005

[Page 12]

Internet-Draft

May 2005

Parviz Yegani
Cisco Systems
3625 Cisco Way
San Jose, CA 95134
US

Phone: +1 408-832-5729
Email: pyegani@cisco.com

Lila Madour
Ericsson
8400, Decarie Blvd
Town of Mount Royal, Quebec H4P 2N2
CANADA

Phone: +1 514-345-7900
Email: Lila.Madour@ericsson.com

Intellectual Property Statement

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at ietf-ipr@ietf.org.

Disclaimer of Validity

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Copyright Statement

Copyright (C) The Internet Society (2005). This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

Acknowledgment

Funding for the RFC Editor function is currently provided by the Internet Society.