

Internet Engineering Task Force
INTERNET DRAFT
DHC Working Group
Obsoletes: [draft-ietf-dhc-dhcpv6-23.txt](#)

J. Bound
Compaq
M. Carney
Sun Microsystems, Inc
C. Perkins
Nokia Research Center
Ted Lemon
Nominum
Bernie Volz
Ericsson
R. Droms(ed.)
Cisco Systems
22 Apr 2002

Dynamic Host Configuration Protocol for IPv6 (DHCPv6)
draft-ietf-dhc-dhcpv6-24.txt

Status of This Memo

This document is a submission by the Dynamic Host Configuration Working Group of the Internet Engineering Task Force (IETF). Comments should be submitted to the dhcwg@ietf.org mailing list.

Distribution of this memo is unlimited.

This document is an Internet-Draft and is in full conformance with all provisions of [Section 10 of RFC2026](#). Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at:

<http://www.ietf.org/ietf/1id-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at:

<http://www.ietf.org/shadow.html>.

Abstract

The Dynamic Host Configuration Protocol for IPv6 (DHCP) enables DHCP servers to pass configuration parameters such as IPv6 network addresses to IPv6 nodes. It offers the capability of automatic allocation of reusable network addresses and additional configuration flexibility. This protocol is a stateful counterpart to "IPv6

Stateless Address Autoconfiguration" ([RFC2462](#)), and can be used

separately or concurrently with the latter to obtain configuration parameters.

Contents

Status of This Memo	i
Abstract	i
1. Introduction and Overview	1
1.1. Protocols and addressing	2
1.2. Protocol implementation	2
1.3. Client-server exchanges involving two messages	3
1.4. Client-server exchanges involving four messages	3
2. Requirements	4
3. Background	4
4. Terminology	5
4.1. IPv6 Terminology	5
4.2. DHCP Terminology	6
5. DHCP Constants	8
5.1. Multicast Addresses	8
5.2. Anycast address	8
5.3. UDP ports	8
5.4. DHCP message types	9
5.5. Status Codes	10
5.6. Configuration Parameters	11
6. Message Formats	11
7. Relay agent messages	12
7.1. Relay-forward message	13
7.2. Relay-reply message	14
8. Representation and use of domain names	14
9. DHCP unique identifier (DUID)	14
9.1. DUID contents	15
9.2. DUID based on link-layer address plus time	15
9.3. Vendor-assigned unique ID based on Domain Name (VUID-DN)	16
9.4. Vendor-assigned unique ID based on Enterprise Number (VUID-EN)	17
9.5. Link-layer address	18
10. Identity association	19

<u>11.</u> Selecting addresses for assignment to an IA	20
<u>12.</u> Management of temporary addresses	21

13. Transmission of messages by a client	21
14. Reliability of Client Initiated Message Exchanges	21
15. Message validation	23
15.1. Use of Transaction-ID field	23
15.2. Solicit message	23
15.3. Advertise message	24
15.4. Request message	24
15.5. Confirm message	24
15.6. Renew message	24
15.7. Rebind message	25
15.8. Decline messages	25
15.9. Release message	25
15.10. Reply message	25
15.11. Reconfigure message	26
15.12. Information-request message	26
15.13. Relay-forward message	26
15.14. Relay-reply message	26
16. Client Source Address and Interface Selection	26
17. DHCP Server Solicitation	27
17.1. Client Behavior	27
17.1.1. Creation of Solicit messages	27
17.1.2. Transmission of Solicit Messages	28
17.1.3. Receipt of Advertise messages	29
17.1.4. Receipt of Reply message	30
17.2. Server Behavior	30
17.2.1. Receipt of Solicit messages	30
17.2.2. Creation and transmission of Advertise messages .	30
17.2.3. Creation and Transmission of Reply messages . .	31
18. DHCP Client-Initiated Configuration Exchange	32
18.1. Client Behavior	32
18.1.1. Creation and transmission of Request messages . .	32
18.1.2. Creation and transmission of Confirm messages . .	34
18.1.3. Creation and transmission of Renew messages . . .	35
18.1.4. Creation and transmission of Rebind messages . .	36
18.1.5. Creation and Transmission of Information-request messages	37
18.1.6. Receipt of Reply message in response to a Request, Confirm, Renew, Rebind or Information-request message	38
18.1.7. Creation and transmission of Release messages . .	39
18.1.8. Receipt of Reply message in response to a Release message	40
18.1.9. Creation and transmission of Decline messages . .	40

18.1.10. Receipt of Reply message in response to a Decline message	41
18.2. Server Behavior	41
18.2.1. Receipt of Request messages	41
18.2.2. Receipt of Confirm messages	42

18.2.3	Receipt of Renew messages	43
18.2.4	Receipt of Rebind messages	44
18.2.5	Receipt of Information-request messages	44
18.2.6	Receipt of Release messages	45
18.2.7	Receipt of Decline messages	45
18.2.8	Transmission of Reply messages	46
19	DHCP Server-Initiated Configuration Exchange	46
19.1	Server Behavior	46
19.1.1	Creation and transmission of Reconfigure messages	46
19.1.2	Time out and retransmission of Reconfigure messages	47
19.1.3	Receipt of Renew messages	47
19.2	Receipt of Information-request messages	48
19.3	Client Behavior	48
19.3.1	Receipt of Reconfigure messages	48
19.3.2	Creation and transmission of Renew messages . . .	49
19.3.3	Creation and transmission of Information-request messages	49
19.3.4	Time out and retransmission of Renew or Information-request messages	49
19.3.5	Receipt of Reply messages	49
20	Relay Agent Behavior	50
20.1	Relaying of client messages	50
20.2	Relaying of server messages	50
21	Authentication of DHCP messages	51
21.1	DHCP threat model	51
21.2	Security of messages sent between servers and relay agents	52
21.3	Summary of DHCP authentication	52
21.4	Replay detection	52
21.5	Delayed authentication protocol	53
21.5.1	Management issues in the delayed authentication protocol	53
21.5.2	Use of the Authentication option in the delayed authentication protocol	53
21.5.3	Message validation	54
21.5.4	Key utilization	54
21.5.5	Client considerations for delayed authentication protocol	55
21.5.6	Server considerations for delayed authentication protocol	57
22	DHCP options	57
22.1	Format of DHCP options	58
22.2	Client Identifier option	58
22.3	Server Identifier option	59

22.4.	Identity Association option	59
22.5.	Identity Association for Temporary Addresses option . . .	61
22.6.	IA Address option	63
22.7.	Option Request option	64
22.8.	Preference option	64

22.9	Elapsed Time	65
22.10	Client message option	66
22.11	Server message option	66
22.12	Authentication option	67
22.13	Server unicast option	68
22.14	Status Code Option	68
22.15	Rapid Commit option	69
22.16	User Class Option	69
22.17	Vendor Class Option	70
22.18	Vendor-specific Information option	71
22.19	Interface-Id Option	72
22.20	Reconfigure Message option	73
23	Security Considerations	73
24	Year 2000 considerations	73
25	IANA Considerations	73
25.1	Multicast addresses	74
25.2	Anycast addresses	74
25.3	DHCPv6 message types	74
25.4	DUID	75
25.5	DHCPv6 options	75
25.6	Status codes	76
25.7	Authentication option	76
26	Acknowledgments	77
	References	77
	Chair's Address	79
	Authors' Addresses	79
	A. Appearance of Options in Message Types	81
	B. Appearance of Options in the Options Field of DHCP Options	81
	C. Full Copyright Statement	82

[1](#). Introduction and Overview

This document describes DHCP for IPv6 (DHCP), a client/server protocol that provides managed configuration of devices.

DHCP can provide a device with addresses assigned by a DHCP server and other configuration information. The addresses and additional configuration are carried in options. DHCP can be extended through

the definition of new options to carry configuration information not specified in this document.

DHCP is the "stateful address autoconfiguration protocol" and the "stateful autoconfiguration protocol" referred to in [RFC2462](#), "IPv6 Stateless Address Autoconfiguration".

The remainder of this introduction summarizes DHCP, explaining the message exchange mechanisms and example message flows. The message flows in sections [1.3](#) and [1.4](#) are intended as illustrations of DHCP operation rather than an exhaustive list of all possible client-server interactions. Sections [17](#), [18](#) and [19](#) explain client and server operation in detail.

[1.1. Protocols and addressing](#)

Clients and servers exchange DHCP messages using UDP [[17](#)]. The client uses its link-local address determined through stateless autoconfiguration for transmitting and receiving DHCP messages.

DHCP servers receive messages from clients using a reserved, link-scoped multicast address. A DHCP client transmits most messages to this reserved multicast address, so that the client need not be configured with the address or addresses of DHCP servers.

To allow a DHCP client to send a message to a DHCP server that is not attached to the same link, a DHCP relay agent on the client's link will forward messages between the client and server. The operation of the relay agent is transparent to the client and the discussion of message exchanges in the remainder of this section will omit the description of message forwarding by relay agents.

Once the client has determined the address of a server, it may under some circumstances send messages directly to the server using unicast.

[1.2. Protocol implementation](#)

This specification for DHCP includes messages and descriptions of client and server behavior for several different functions. Some clients and servers will be deployed in situations in which not all of the functions will be required. For example, a client that uses stateless autoconfiguration to determine its IPv6 addresses would use only the Information-request and Reply messages to obtain other configuration information.

Clients and servers that do not use all of the functions of DHCP need not implement processing for those DHCP messages that will not be used. A client or server that receives a message that it is not prepared to process may simply discard that message. For example, a DHCP server that only provides configuration information and does not

do IPv6 address assignment can respond to only Information-request messages and discard other messages such as Solicit or Request messages.

1.3. Client-server exchanges involving two messages

A DHCP client can obtain configuration information such as a list of available DNS servers or NTP servers through a single message and reply exchanged with a DHCP server. To obtain configuration information the client first sends an Information-Request message to the All_DHCP_Relay_Agents_and_Servers multicast address. The server responds with a Reply message containing the configuration information for the client.

This message exchange assumes that the client requires only configuration information and does not require the assignment of any IPv6 addresses. Because the server need not keep any dynamic state information about individual clients to support this two message exchange, a server that provides just configuration information can be realized with a relatively simple and small implementation.

When a server has IPv6 addresses and other configuration information committed to a client, the client and server may be able to complete the exchange using only two messages, instead of four messages as described in the next section. In this case, the client sends a Solicit message to the All_DHCP_Relay_Agents_and_Servers requesting the assignment of addresses and other configuration information. This message includes an indication that the client is willing to accept an immediate Reply message from the server. The server that is willing to commit the assignment of addresses to the client immediately responds with a Reply message. The configuration information and the addresses in the Reply message are then immediately available for use by the client.

Each address assigned to the client has associated preferred and valid lifetimes specified by the server. To request an extension of the lifetimes assigned to an address, the client sends a Renew message to the server. The server sends a Reply message to the client with the new lifetimes, allowing the client to continue to use the address without interruption.

1.4. Client-server exchanges involving four messages

To request the assignment of one or more IPv6 addresses, a client first locates a DHCP server and then requests the assignment of addresses and other configuration information from the server. The client sends a Solicit message to the All_DHCP_Relay_Agents_and_Servers address to find available DHCP servers. Any server that can meet the client's requirements responds with an Advertise message. The client then chooses one of the servers and sends a Request message to the server asking

for confirmed assignment of addresses and other configuration information. The server responds with a Reply message that contains the confirmed addresses and configuration.

As described in the previous section, the client sends a Renew messages to the server to extend the lifetimes associated with its addresses, allowing the client to continue to use those addresses without interruption.

2. Requirements

The keywords MUST, MUST NOT, REQUIRED, SHALL, SHALL NOT, SHOULD, SHOULD NOT, RECOMMENDED, MAY, and OPTIONAL, when they appear in this document, are to be interpreted as described in [2].

This document also makes use of internal conceptual variables to describe protocol behavior and external variables that an implementation must allow system administrators to change. The specific variable names, how their values change, and how their settings influence protocol behavior are provided to demonstrate protocol behavior. An implementation is not required to have them in the exact form described here, so long as its external behavior is consistent with that described in this document.

3. Background

The IPv6 Specification provides the base architecture and design of IPv6. Related work in IPv6 that would best serve an implementor to study includes the IPv6 Specification [3], the IPv6 Addressing Architecture [7], IPv6 Stateless Address Autoconfiguration [19], IPv6 Neighbor Discovery Processing [15], and Dynamic Updates to DNS [20]. These specifications enable DHCP to build upon the IPv6 work to provide both robust stateful autoconfiguration and autoregistration of DNS Host Names.

The IPv6 Addressing Architecture specification [7] defines the address scope that can be used in an IPv6 implementation, and the various configuration architecture guidelines for network designers of the IPv6 address space. Two advantages of IPv6 are that support for multicast is required, and nodes can create link-local addresses during initialization. This means that a client can immediately use its link-local address and a well-known multicast address to begin communications to discover neighbors on the link. For instance, a client can send a Solicit message and locate a server or relay agent.

IPv6 Stateless Address Autoconfiguration [19] specifies procedures by which a node may autoconfigure addresses based on router advertisements [15], and the use of a valid lifetime to support renumbering of addresses on the Internet. In addition the protocol interaction by which a node begins stateless or stateful autoconfiguration is specified. DHCP is one vehicle to perform

stateful autoconfiguration. Compatibility with stateless address autoconfiguration is a design requirement of DHCP.

IPv6 Neighbor Discovery [[15](#)] is the node discovery protocol in IPv6 which replaces and enhances functions of ARP [[16](#)]. To understand IPv6 and stateless address autoconfiguration it is strongly recommended that implementors understand IPv6 Neighbor Discovery.

Dynamic Updates to DNS [[20](#)] is a specification that supports the dynamic update of DNS records for both IPv4 and IPv6. DHCP can use the dynamic updates to DNS to integrate addresses and name space to not only support autoconfiguration, but also autoregistration in IPv6.

[4. Terminology](#)

This sections defines terminology specific to IPv6 and DHCP used in this document.

[4.1. IPv6 Terminology](#)

IPv6 terminology relevant to this specification from the IPv6 Protocol [[3](#)], IPv6 Addressing Architecture [[7](#)], and IPv6 Stateless Address Autoconfiguration [[19](#)] is included below.

address	An IP layer identifier for an interface or a set of interfaces.
anycast address	An anycast address identifies a group of nodes; message sent to an anycast address is delivered to one node out of the group of nodes associated with the address
host	Any node that is not a router.
IP	Internet Protocol Version 6 (IPv6). The terms IPv4 and IPv6 are used only in contexts where it is necessary to avoid ambiguity.
interface	A node's attachment to a link.
link	A communication facility or medium over which nodes can communicate at the link layer, i.e., the layer immediately below IP. Examples are Ethernet (simple or bridged); Token Ring; PPP links, X.25, Frame Relay, or ATM networks; and

Internet (or higher) layer "tunnels",
such as tunnels over IPv4 or IPv6
itself.

link-layer identifier	A link-layer identifier for an interface. Examples include IEEE 802 addresses for Ethernet or Token Ring network interfaces, and E.164 addresses for ISDN links.
link-local address	An IPv6 address having link-only scope, indicated by having the prefix (FE80::0000/64), that can be used to reach neighboring nodes attached to the same link. Every interface has a link-local address.
multicast address	An identifier for a set of interfaces (typically belonging to different nodes). A packet sent to a multicast address is delivered to all interfaces identified by that address.
neighbor	A node attached to the same link.
node	A device that implements IP.
packet	An IP header plus payload.
prefix	The initial bits of an address, or a set of IP address that share the same initial bits.
prefix length	The number of bits in a prefix.
router	A node that forwards IP packets not explicitly addressed to itself.
unicast address	An identifier for a single interface. A packet sent to a unicast address is delivered to the interface identified by that address.

[4.2.](#) DHCP Terminology

Terminology specific to DHCP can be found below.

binding	A binding (or, client binding) is a group of server data records containing the information the server has about the addresses in an IA and any other
---------	---

configuration information assigned to the client. A binding is indexed by the tuple <DUID, IA-type, IAID> (where

	IA-type is the type of address in the IA; for example, temporary)
configuration parameter	An element of the configuration information set on the server and delivered to the client using DHCP. Such parameters may be used to carry information to be used by a node to configure its network subsystem and enable communication on a link or internetwork, for example.
DHCP	Dynamic Host Configuration Protocol for IPv6. The terms DHCPv4 and DHCPv6 are used only in contexts where it is necessary to avoid ambiguity.
DHCP client (or client)	A node that initiates requests on a link to obtain configuration parameters from one or more DHCP servers.
DHCP domain	A set of links managed by DHCP and operated by a single administrative entity.
DHCP relay agent (or relay agent)	A node that acts as an intermediary to deliver DHCP messages between clients and servers, and is on the same link as the client.
DHCP server (or server)	A server is a node that responds to requests from clients, and may or may not be on the same link as the client(s).
DUID	A DHCP Unique Identifier for a DHCP participant; each DHCP client and server has exactly one DUID. See section 9 for details of the ways in which a DUID may be constructed.
Identity association (IA)	A collection of addresses assigned to a client. Each IA has an associated IAID. A client may have more than one IA assigned to it; for example, one for each of its interfaces.
Identity association identifier (IAID)	An identifier for an IA, chosen by the client. Each IA has an

IAID, which is chosen to be unique among all IAIDs for IAs belonging to that client.

message	A unit of data carried in a packet, exchanged among DHCP servers, relay agents and clients.
transaction-ID	An unsigned integer to match responses with replies initiated either by a client or server.

5. DHCP Constants

This section describes various program and networking constants used by DHCP.

5.1. Multicast Addresses

DHCP makes use of the following multicast addresses:

All_DHCP_Relay_Agents_and_Servers (FF02::1:2) A link-scoped multicast address used by a client to communicate with neighboring (i.e., on-link) relay agents and servers. All servers and relay agents are members of this multicast group.

All_DHCP_Servers (FF05::1:3) A site-scoped multicast address used by a client or relay agent to communicate with servers, either because the client or relay agent wants to send messages to all servers or because it does not know the unicast addresses of the servers. Note that in order for a client or relay agent to use this address, it must have an address of sufficient scope to be reachable by the servers. All servers within the site are members of this multicast group.

5.2. Anycast address

DHCP proposes to use the following reserved anycast address:

DHCP_Anycast (FEC0:0:0:0:FFFF::4) This document proposes the assignment of the DHCP_Anycast address for use by clients attached to links that do not support multicast.

5.3. UDP ports

Clients listen for DHCP messages on UDP port 546. Servers and relay

agents listen for DHCP messages on UDP port 547.

5.4. DHCP message types

DHCP defines the following message types. More detail on these message types can be found in [Section 6](#). Message types not listed here are reserved for future use. The message code for each message type is shown with the message name.

SOLICIT (1)	A client sends a Solicit message to locate servers.
ADVERTISE (2)	A server sends an Advertise message to indicate that it is available for DHCP service, in response to a Solicit message received from a client.
REQUEST (3)	A client sends a Request message to request configuration parameters from a server.
CONFIRM (4)	A client sends a Confirm message to servers to request that the server validate and confirm that the addresses and current configuration parameters assigned by the server to the client are still valid.
RENEW (5)	A client sends a Renew message to the server that originally provided the client's addresses and configuration addresses to update the addresses assigned to the client and the lifetimes for those addresses, as well as the current configuration parameters assigned by the server to the client.
REBIND (6)	A client sends a Rebind message to update the addresses assigned to the client and the lifetimes for those addresses, as well as the current configuration parameters assigned by the server to the client; this message is sent after a client receives no response to a Renew message.
REPLY (7)	A server sends a Reply message containing assigned addresses and configuration parameters in response to a Solicit, Request, Renew, Rebind or Information-request message received from a client. A server sends a Reply message confirming or denying the validity of the client's addresses and configuration parameters in response to a Confirm message. A server sends a Reply message to acknowledge receipt of

a Release or Decline message.

RELEASE (8)

A client sends a Release message to the server that assigned addresses to the client to

indicate that the client will no longer use one or more of the assigned addresses.

DECLINE (9) A client sends a Decline message to a server to indicate that the client has determined that one or more addresses assigned by the server are already in use on the link to which the client is connected.

RECONFIGURE (10) A server sends a Reconfigure message to a client to inform the client that the server has new or updated configuration parameters, and that the client is to initiate a Renew/Reply or Information-request/Reply transaction with the server in order to receive the updated information.

INFORMATION-REQUEST (11) A client sends an Information-request message to a server to request configuration parameters without the assignment of any IP addresses to the client.

RELAY-FORW (12) A relay agent sends a Relay-forward message to forward client messages to servers. The client message is encapsulated in an option in the Relay-forward message.

RELAY-REPL (13) A server sends a Relay-reply message to a relay agent to send messages to clients through the relay agent. The server encapsulates the client message as an option in the Relay-reply message, which the relay agent extracts and forwards to the client.

5.5. Status Codes

DHCPv6 uses status codes to communicate the success or failure of operations requested in messages from clients and servers, and to provide additional information about the specific cause of the failure of a message. The specific status codes are defined in [section 25.6](#).

5.6. Configuration Parameters

This section presents a table of configuration parameters used to describe the message transmission behavior of clients and servers.

Parameter	Default	Description


MIN_SOL_DELAY	1 sec	Min delay of first Solicit
MAX_SOL_DELAY	5 secs	Max delay of first Solicit
SOL_TIMEOUT	500 msecs	Initial Solicit timeout
SOL_MAX_RT	30 secs	Max Solicit timeout value
REQ_TIMEOUT	250 msecs	Initial Request timeout
REQ_MAX_RT	30 secs	Max Request timeout value
REQ_MAX_RC	10	Max Request retry attempts
CNF_TIMEOUT	250 msecs	Initial Confirm timeout
CNF_MAX_RT	1 sec	Max Confirm timeout
CNF_MAX_RD	10 secs	Max Confirm duration
REN_TIMEOUT	10 sec	Initial Renew timeout
REN_MAX_RT	600 secs	Max Renew timeout value
REB_TIMEOUT	10 secs	Initial Rebind timeout
REB_MAX_RT	600 secs	Max Rebind timeout value
INF_TIMEOUT	500 ms	Initial Information-request timeout
INF_MAX_RT	30 secs	Max Information-request timeout value
REL_TIMEOUT	250 msecs	Initial Release timeout
REL_MAX_RT	1 sec	Max Release timeout
REL_MAX_RC	5	MAX Release attempts
DEC_TIMEOUT	250 msecs	Initial Decline timeout
DEC_MAX_RT	1 sec	Max Decline timeout
DEC_MAX_RC	5	Max Decline attempts

6. Message Formats

All DHCP messages sent between clients and servers share an identical fixed format header and a variable format area for options.

All values in the message header and in options are in network order.

The following diagram illustrates the format of DHCP messages sent between clients and servers:

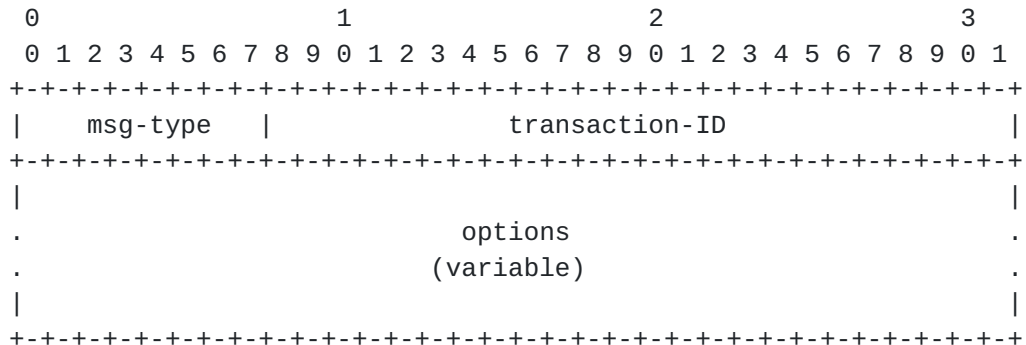

msg-type	Identifies the DHCP message type; the available message types are listed in section 5.4 .
transaction-id	An unsigned integer used by a client or server to match a response message to a request message.
options	Options carried in this message; options are described in section 22 .

7. Relay agent messages

Relay agents exchange messages with servers to forward messages between clients and servers that are not connected to the same link.

7.2. Relay-reply message

The following table defines the use of message fields in a Relay-reply message.

msg-type	RELAY-REPL
link-address	The link-address copied from the Relay-forward message
client-address	The client's address, copied from the relay-forward message
options	MUST include a "Server message option"; see section 22.11 ; MAY include other options

8. Representation and use of domain names

So that domain names may be encoded uniformly and compactly, a domain name or a list of domain names is encoded using the technique described in sections [3.1](#) and [4.1.4](#) of [RFC1035](#) [[12](#)]. [Section 4.1.4 of RFC1035](#) describes how more than one domain name can be represented in a list of domain names. For use in this specification, in a list of domain names, the compression pointer (see [section 4.1.4 of RFC1035](#)) refers to the offset within the list.

9. DHCP unique identifier (DUID)

Each DHCP client and server has a DUID. DHCP servers use DUIDs to identify clients for the selection of configuration parameters and in the association of IAs with clients. DHCP clients use DUIDs to identify a server in messages where a server needs to be identified. See sections [22.2](#) and [22.3](#) for the representation of a DUID in a DHCP message.

Clients and servers MUST treat DUIDs as opaque values and MUST only compare DUIDs for equality. Clients and servers MUST NOT in any other way interpret DUIDs. Clients and servers MUST NOT restrict DUIDs to the types defined in this document as additional DUID types may be defined in the future.

The DUID is carried in an option because it may be variable length and because it is not required in all DHCP messages. The DUID is designed to be unique across all DHCP clients and servers, and consistent for any specific client or server - that is, the DUID

used by a client or server SHOULD NOT change over time; for example, a device's DUID should not change as a result of a change in the device's network hardware.

The motivation for having more than one type of DUID is that the DUID must be globally unique, and must also be easy to generate. The sort of globally-unique identifier that is easy to generate for any given device can differ quite widely. Also, some devices may not contain any persistent storage. Retaining a generated DUID in such a device is not possible, so the DUID scheme must accommodate such devices.

9.1. DUID contents

A DUID consists of a two octet type code represented in network order, followed by a variable number of octets that make up the actual identifier. A DUID can be no more than 256 octets long. The following types are currently defined:


- 1 Link-layer address plus time
- 2 Vendor-assigned unique ID based on domain name
- 3 Vendor-assigned unique ID based on Enterprise Number
- 4 Link-layer address

Formats for the variable field of the DUID for each of the above types are shown below.

9.2. DUID based on link-layer address plus time

This type of DUID consists of a two octet type field containing the value 1, a two octet hardware type code, four octets containing a time value, followed by link-layer address of any one network interface that is connected to the DHCP device at the time that the DUID is generated. The time value is the time that the DUID is generated represented in seconds since midnight (UTC), January 1, 2000, modulo 2^{32} . The hardware type MUST be a valid hardware type assigned by the IANA as described in the section on ARP in [RFC 826](#). Both the time and the hardware type are stored in network order.

The following diagram illustrates the format of a DUID based on link-layer address plus time:

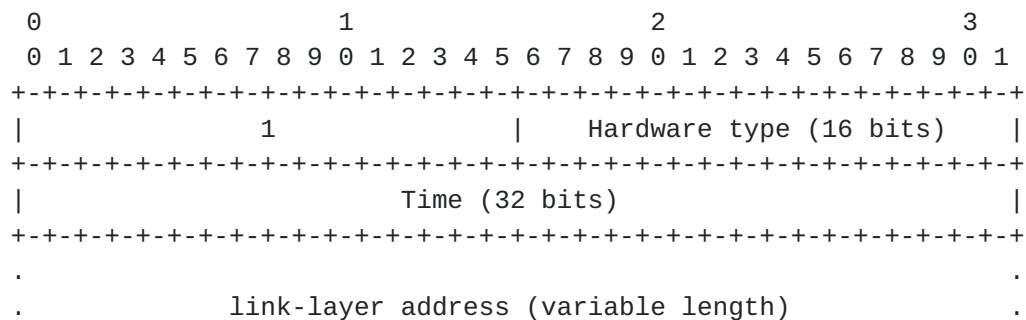

[Page 15]

The choice of network interface can be completely arbitrary, as long as that interface provides a unique link-layer address, and the same DUID should be used in configuring all network interfaces connected to the device, regardless of which interface's link-layer address was used to generate the DUID.

Clients and servers using this type of DUID **MUST** store the DUID in stable storage, and **MUST** continue to use this DUID even if the network interface used to generate the DUID is removed. Clients and servers that do not have any stable storage **MUST NOT** use this type of DUID.

Clients and servers that use this DUID **SHOULD** attempt to configure the time prior to generating the DUID, if that is possible, and **MUST** use some sort of time source (for example, a real-time clock) in generating the DUID, even if that time source could not be configured prior to generating the DUID. The use of a time source makes it unlikely that two identical DUIDs will be generated if the network interface is removed from the client and another client then uses the same network interface to generate a DUID. A DUID collision is very unlikely even if the clocks haven't been configured prior to generating the DUID.


This method of DUID generation is recommended for all general purpose computing devices such as desktop computers and laptop computers, and also for devices such as printers, routers, and so on, that contain some form of writable non-volatile storage.

Despite our best efforts, it is possible that this algorithm for generating a DUID could result in a client identifier collision. A DHCP client that generates a DUID using this mechanism **MUST** provide an administrative interface that replaces the existing DUID with a newly-generated DUID of this type.

9.3. Vendor-assigned unique ID based on Domain Name (VUID-DN)

The vendor-assigned unique ID based on the domain name consists of a two-octet value giving the length of the identifier, the value of the identifier and the vendor's registered domain name.

The following diagram summarizes the structure of a VUID-DN:

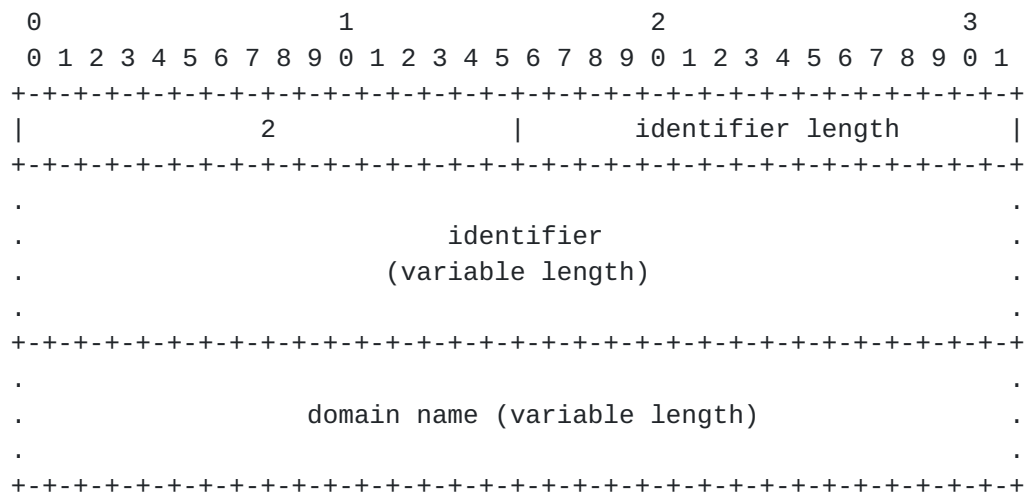

The source of the identifier is left up to the vendor defining it, but each identifier part of each VUID-DN **MUST** be unique to the device that is using it, and **MUST** be assigned to the device at the time of manufacture and stored in some form of non-volatile storage. The VUID-DN **SHOULD** be recorded in non-erasable storage. The domain name is simply any domain name that has been legally registered by the vendor in the domain name system [11], stored in the form described in [section 8](#).

If a domain name is being used by a vendor as a vendor identifier, then the vendor **MUST** ensure that the domain name has not previously been used by a different vendor.

An example DUID of this type might look like this:

```

+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| 0 | 2 | 0 | 8 | 12|192|132|221|
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| 3 | 0 | 9 | 18|101|120| 97|109|
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|112|108|101| 46| 99|111|109|
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+


```

This example includes the two-octet type of 2, the two-octet length of 8, eight octets of identifier data, followed by "example.com" represented in ASCII.

[9.4](#). Vendor-assigned unique ID based on Enterprise Number (VUID-EN)

The vendor-assigned unique ID based on Enterprise Number consists of the vendor's registered Enterprise Number as maintained by IANA followed by the value of the identifier.

The following diagram summarizes the structure of a VUID-EN:

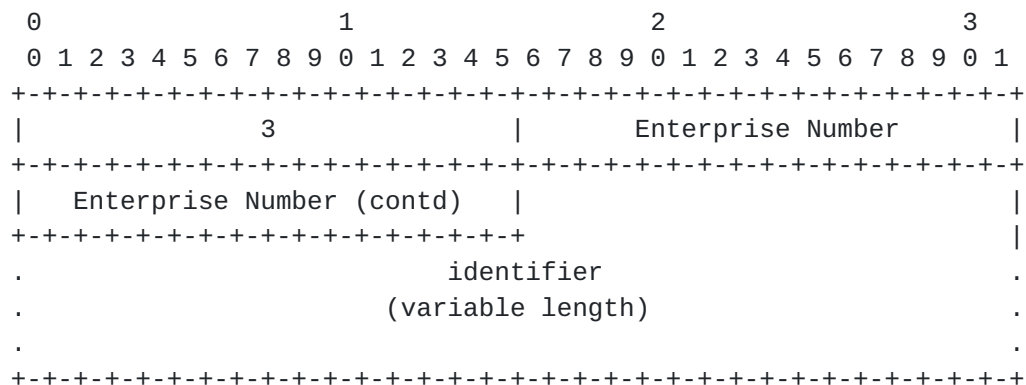

The source of the identifier is left up to the vendor defining it, but each identifier part of each VUID-EN MUST be unique to the device that is using it, and MUST be assigned to the device at the time of manufacture and stored in some form of non-volatile storage. The VUID SHOULD be recorded in non-erasable storage. The Enterprise Number is the vendor's Enterprise code from the list "SMI Network Management Private Enterprise Codes", as maintained by IANA in file <ftp://ftp.isi.edu/in-notes/iana/assignments/enterprise-numbers>. The Enterprise Number is stored as an unsigned 32 bit number.

An example DUID of this type might look like this:

```

+---+---+---+---+---+---+---+---+---+---+
| 0 | 3 | 0 | 0 | 0 | 9 | 12 | 192 |
+---+---+---+---+---+---+---+---+---+---+
| 132 | 221 | 3 | 0 | 9 | 18 |
+---+---+---+---+---+---+---+---+---+---+


```

This example includes the two-octet type of 3, the Enterprise Number (9), followed by eight octets of identifier data.

9.5. Link-layer address

This type of DUID consists of two octets containing the DUID type 4, a two octet network hardware type code, followed by the link-layer address of any one network interface that is permanently connected to the client or server device. For example, this DUID could be used by a host that has a network interface implemented in a chip that is unlikely to be removed and used elsewhere. The hardware type MUST be a valid hardware type assigned by the IANA as described in the section on ARP in [RFC 826](#). The hardware type is stored in network order.

The following diagram illustrates the format of a DUID based on link-layer address:

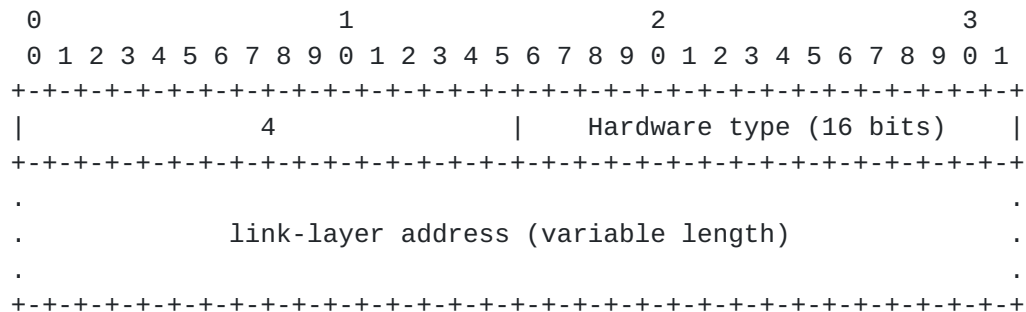

The choice of network interface can be completely arbitrary, as long as that interface provides a unique link-layer address and is permanently attached to the device on which the DUID is being generated. The same DUID should be used in configuring all network interfaces connected to the device, regardless of which interface's link-layer address was used to generate the DUID.

This type of DUID is recommended for devices that have a permanently-connected network interface with a link-layer address and do not have nonvolatile, writable stable storage. This type of DUID MUST NOT be used by DHCP clients or servers that cannot tell whether or not a network interface is permanently attached to the device on which the DHCP client is running.

10. Identity association

An "identity-association" (IA) is a construct through which a server and a client can identify, group and manage IPv6 addresses. Each IA consists of an IAID and associated configuration information.

A client must associate at least one distinct IA with each of its network interfaces and uses that IA to obtain configuration information from a server for that interface. Each IA must be associated with exactly one interface.

The IAID uniquely identifies the IA and must be chosen to be unique among the IAIDs on the client. The IAID is chosen by the client. For any given use of an IA by the client, the IAID for that IA MUST be consistent across restarts of the DHCP client. The client may maintain consistency either by storing the IAID in non-volatile storage or by using an algorithm that will consistently produce the same IAID as long as the configuration of the client has not changed. There may be no way for a client to maintain consistency of the IAIDs if it does not have non-volatile storage and the client's hardware

configuration changes.

The configuration information in an IA consists of one or more IPv6 addresses and other parameters. The parameters are specified as DHCP

options within the IA, and are associated with the addresses in the IA and the interface to which the IA belongs. Other parameters that are not associated with a particular interface may be specified in the options section of a DHCP message, outside the scope of any IA.

Each address in an IA has a preferred lifetime and a valid lifetime, as defined in [RFC2462](#) [19]. The lifetimes are transmitted from the DHCP server to the client in the IA option. The lifetimes apply to the use of IPv6 addresses as described in [section 5.5.4 of RFC2462](#).

See [section 22.4](#) for the representation of an IA in a DHCP message.

11. Selecting addresses for assignment to an IA

A server selects addresses to be assigned to an IA according to the address assignment policies determined by the server administrator and the specific information the server determines about the client from some combination of the following sources:

- The link to which the client is attached. The server determines the link as follows:
 - * If the server receives the message directly from the client and the source address in the IP datagram in which the message was received is a link-local address, then the client is on the same link to which the interface over which the message was received is attached
 - * If the server receives the message from a forwarding relay agent, then the client is on the same link as the one to which the interface identified by the link-address field in the message from the relay agent is attached
 - * If the server receives the message directly from the client and the source address in the IP datagram in which the message was received is not a link-local address, then the client is on the link identified by the source address in the IP datagram (note that this situation can occur only if the server has enabled the use of unicast message delivery by the client and the client has sent a message for which unicast delivery is allowed)
- The DUID supplied by the client
- Other information in options supplied by the client
- Other information in options supplied by the relay agent

A server MUST generate link identifiers for unicast addresses with the "u" (universal/local) and "g" (individual/group) bits of the EUI-64 identifier set to 0 (see [RFC 2373](#)).

A server MUST NOT assign an address that is otherwise reserved by IANA.

12. Management of temporary addresses

A client may be assigned temporary addresses (temporary addresses are defined in [RFC 3041](#) [14]). Clients and servers simply identify addresses as "temporary". DHCPv6 handling of address assignment is no different for temporary addresses. DHCPv6 says nothing about details of temporary addresses like lifetimes, how clients use temporary addresses, rules for generating successive temporary addresses, etc.

Clients ask for temporary addresses and servers assign them. Temporary addresses are carried in the Identity Association for Temporary Addresses (IA_TA) option (see [section 22.5](#)). Each IA_TA option contains at most one temporary address for each of the prefixes on the link to which the client is attached.

Unless otherwise stated, an IA_TA option is used in the same way in as an IA option. In the protocol specification, unless otherwise stated, a reference to an IA should be read as either an IA or an IA_TA.

The IAID number space for the IA_TA option IAID number space is separate from the IA option IAID number space.

The server MAY update the DNS for a temporary address as described in [section 4 of RFC3041](#), and MUST NOT update the DNS in any other way for a temporary address.

13. Transmission of messages by a client

Unless otherwise specified, a client sends DHCP messages to the All_DHCP_Relay_Agents_and_Servers or the DHCP_Anycast address.

If the client is attached to a link that supports multicast transmission, the client sends DHCP messages to the All_DHCP_Relay_Agents_and_Servers address. If the client is attached to a link that does not support multicast transmission, the client uses the DHCP_Anycast address.

A client may send some messages directly to a server using unicast, as described in [section 22.13](#).

14. Reliability of Client Initiated Message Exchanges

DHCP clients are responsible for reliable delivery of messages in the client-initiated message exchanges described in sections [17](#) and [18](#).
If a DHCP client fails to receive an expected response from a server,

the client must retransmit its message. This section describes the retransmission strategy to be used by clients in client-initiated message exchanges.

Note that the procedure described in this section is slightly modified for use with the Solicit message ([section 17.1.2](#)).

The client begins the message exchange by transmitting a message to the server. The message exchange terminates when either the client successfully receives the appropriate response or responses from a server or servers, or when the message exchange is considered to have failed according to the retransmission mechanism described below.

The client retransmission behavior is controlled and described by the following variables:

RT	Retransmission timeout
IRT	Initial retransmission time
MRC	Maximum retransmission count
MRT	Maximum retransmission time
MRD	Maximum retransmission duration
RAND	Randomization factor

With each message transmission or retransmission, the client sets RT according to the rules given below. If RT expires before the message exchange terminates, the client recomputes RT and retransmits the message.

Each of the computations of a new RT include a randomization factor (RAND), which is a random number chosen with a uniform distribution between -0.1 and +0.1. The randomization factor is included to minimize synchronization of messages transmitted by DHCP clients. The algorithm for choosing a random number does not need to be cryptographically sound. The algorithm SHOULD produce a different sequence of numbers from each invocation of the DHCP client.

RT for the first message transmission is based on IRT:

$$RT = 2 * IRT + RAND * IRT$$

RT for each subsequent message transmission is based on the previous value of RT:

$$RT = 2*RT_{prev} + RAND*RT_{prev}$$

MRT specifies an upper bound on the value of RT. If MRT has a value of 0, there is no upper limit on the value of RT. Otherwise:

```
if (RT > MRT)
    RT = MRT + RAND*MRT
```

MRC specifies an upper bound on the number of times a client may retransmit a message. If MRC has a value of 0, the client MUST continue to retransmit the original message until a response is received. Otherwise, the message exchange fails once the client has transmitted the message MRC times.

MRD specifies an upper bound on the length of time a client may retransmit a message. If MRD has a value of 0, the client MUST continue to retransmit the original message until a response is received. Otherwise, the message exchange fails once the client has transmitted the message MRD seconds.

If both MRC and MRD are non-zero, the message exchange fails whenever either of the conditions specified in the previous two paragraphs are met.

15. Message validation

Servers MUST discard any received messages that include authentication information and fail the authentication check by the server.

Clients MUST discard any received messages that include authentication information and fail the authentication check by the client, except as noted in [section 21.5.5.2](#).

15.1. Use of Transaction-ID field

The "transaction-ID" field holds a value used by clients and servers to synchronize server responses to client messages. A client SHOULD choose a different transaction-ID for each new message it sends. A client MUST leave the transaction-ID unchanged in retransmissions of a message.

15.2. Solicit message

Clients MUST discard any received Solicit messages.

Servers MUST discard any Solicit messages that do not include a

Client Identifier option.

Droms (ed.), et al.

Expires 22 Oct 2002

[Page 23]

15.3. Advertise message

Clients MUST discard any received Advertise messages that meet any of the following conditions:

- the message does not include a Server Identifier option
- the message does not include a Client Identifier option
- the contents of the Client Identifier option does not match the client's DUID
- the "Transaction-ID" field value does not match the value the client used in its Solicit message

Servers and relay agents MUST discard any received Advertise messages.

15.4. Request message

Clients MUST discard any received Request messages.

Servers MUST discard any received Request message that meet any of the following conditions:

- the message does not include a Server Identifier option
- the contents of the Server Identifier option do not match the server's identifier
- the message does not include a Client Identifier option

15.5. Confirm message

Clients MUST discard any received Confirm messages.

Servers MUST discard any Confirm messages received that do not include a Client Identifier option.

15.6. Renew message

Clients MUST discard any received Renew messages.

Servers MUST discard any received Renew message that meets any of the following conditions:

- the message does not include a Server Identifier option

- the contents of the Server Identifier option do not match the server's identifier

- the message does not include a Client Identifier option

15.7. Rebind message

Clients MUST discard any received Rebind messages.

Servers MUST discard any received Rebind message that does not include a Client Identifier option.

15.8. Decline messages

Clients MUST discard any received Decline messages.

Servers MUST discard any received Decline message that meets any of the following conditions:

- the message does not include a Server Identifier option
- the contents of the Server Identifier option do not match the server's identifier
- the message does not include a Client Identifier option

15.9. Release message

Clients MUST discard any received Release messages.

Servers MUST discard any received Decline message that meets any of the following conditions:

- the message does not include a Server Identifier option
- the contents of the Server Identifier option do not match the server's identifier
- the message does not include a Client Identifier option

15.10. Reply message

Clients MUST discard any received Reply messages that meet any of the following conditions:

- the message does not include a Server Identifier option
- the "transaction-ID" field in the message does not match the value used in the original message

- the message does not include a Client Identifier option and the original message from the client contained a Client Identifier option
- the message includes a Client Identifier option and the contents of the Client Identifier option does not match the DUID of the client

Servers and relay agents MUST discard any received Reply messages.

15.11. Reconfigure message

Servers and relay agents MUST discard any received Reconfigure messages.

Clients MUST discard any Reconfigure messages that meet any of the following conditions:

- the message does not include a Server Identifier option
- the message does not contain an authentication option
- the message fails the authentication validation performed by the client

15.12. Information-request message

Clients MUST discard any received Information-request messages.

Servers MAY discard any received Information-request messages that do not include a Client Identifier option.

Servers MUST discard any received Information-request message that includes a Server Identifier option and the DUID in the option does not match the server's DUID.

15.13. Relay-forward message

Clients MUST discard any received Relay-forward messages.

15.14. Relay-reply message

Clients and servers MUST discard any received Relay-reply messages.

16. Client Source Address and Interface Selection

When a client sends a DHCP message to the
All_DHCP_Relay_Agents_and_Servers multicast address, it MUST

use the IPv6 link-local address assigned to the interface for which the client is interested in obtaining configuration as the source address in the header of the IP datagram.

When a client sends a DHCP message to the DHCP_Anycast address, it MUST use an address assigned to the interface for which the client is interested in obtaining configuration, which is suitable for use by the server in responding to the client, as the source address in the header of the IP datagram. See "Default Address Selection for IPv6" [\[4\]](#) for more details.

When a client sends a DHCP message directly to a server using unicast (after receiving the Server Unicast option from that server), it MUST use an address assigned to the interface for which the client is interested in obtaining configuration, which is suitable for use by the server in responding to the client, as the source address in the header of the IP datagram.

The client MUST transmit the message on the link that the interface for which configuration information is being obtained is attached to. The client SHOULD send the message through that interface. The client MAY send the message through another interface attached to the same link if and only if the client is certain the two interface are attached to the same link.

[17. DHCP Server Solicitation](#)

This section describes how a client locates servers that will assign addresses to IAs belonging to the client.

The client is responsible for creating IAs and requesting that a server assign configuration information, including IPv6 addresses, to the IA. The client first creates an IA and assigns it an IAID. The client then transmits a Solicit message containing an IA option describing the IA. Servers that can assign configuration information to the IA respond to the client with an Advertise message. The client then initiates a configuration exchange as described in [section 18](#).

[17.1. Client Behavior](#)

A client uses the Solicit message to discover DHCP servers configured to serve addresses on the link to which the client is attached.

[17.1.1. Creation of Solicit messages](#)

The client sets the "msg-type" field to SOLICIT. The client generates a transaction ID and inserts this value in the "transaction-ID" field.

The client MUST include a Client Identifier option to identify itself to the server. The client MUST include one or more IA options for any IAs to which it wants the server to assign addresses. The client MAY include addresses in the IAs as a hint to the server about addresses for which the client has a preference. The client MUST NOT include any other options except those specifically allowed as defined by specific options.

The client may send just IA options for the assignment of non-temporary addresses, just IA_TA options for the assignment of only temporary options, or a mix of both IA and IA_TA options.

The client MAY request specific options from the server by including an Option Request option (see [section 22.7](#)) indicating the options the client is interested in receiving. The client MAY include options with data values as hints to the server about parameter values the client would like to have returned.

If the client will accept a Reply message with committed address assignments and other resources in response to the Solicit message, the client includes a Rapid Commit option (see [section 22.15](#)) in the Solicit message.

17.1.2. Transmission of Solicit Messages

The first Solicit message from the client on the interface MUST be delayed by a random amount of time between MIN_SOL_DELAY and MAX_SOL_DELAY. In the case of a Solicit message transmitted when DHCP is initiated by IPv6 Neighbor Discovery, the delay gives the amount of time to wait after the ManagedFlag changes from FALSE to TRUE (see [section 5.5.3 of RFC2462](#)). This random delay desynchronizes clients which start at the same time (for example, after a power outage).

The client transmits the message according to [section 14](#), using the following parameters:

IRT SOL_TIMEOUT

MRT SOL_MAX_RT

MRC 0

MRD 0

If the client has included a Rapid Commit option and is waiting for a Reply message, the client terminates the retransmission process as soon as a Reply message is received.

If the client is waiting for an Advertise message, the mechanism in [section 14](#) is modified as follows for use in the transmission of Solicit messages. The message exchange is not terminated by the receipt of an Advertise before IRT has elapsed. Rather, the client

collects Advertise messages until IRT has elapsed. Also, the first RT MUST be selected to be strictly greater than IRT by choosing RAND to be strictly greater than 0.

A client MUST collect Advertise messages for IRT seconds, unless it receives an Advertise message with a preference value of 255. The preference value is carried in the Preference option ([section 22.8](#)). Any Solicit that does not include a Preference option is considered to have a preference value of 0. If the client receives an Advertise message with a preference value of 255, then the client SHOULD act immediately on that Advertise message without waiting for any additional Advertise messages.

If the client does not receive any Advertise messages before IRT has elapsed, it begins the retransmission mechanism described in [section 14](#). The client terminates the retransmission process as soon as it receives any Advertise message, and the client acts on the received Advertise message without waiting for any additional Advertise messages.

A DHCP client SHOULD choose MRC and MRD to be 0. If the DHCP client is configured with either MRC or MRD set to a value other than 0, it MUST stop trying to configure the interface if the message exchange fails. After the DHCP client stops trying to configure the interface, it SHOULD choose to restart the reconfiguration process after some external event, such as user input, system restart, or when the client is attached to a new link.

[17.1.3](#). Receipt of Advertise messages

The client MUST ignore any Advertise message that includes a Status Code option containing the value AddrUnavail, with the exception that the client MAY display the associated status message to the user.

Upon receipt of one or more valid Advertise messages, the client selects one or more Advertise messages based upon the following criteria.

- Those Advertise messages with the highest server preference value are preferred over all other Advertise messages.
- Within a group of Advertise messages with the same server preference value, a client MAY select those servers whose Advertise messages advertise information of interest to the client. For example, the client may choose a server that returned an advertisement with configuration options of interest to the client.

- The client MAY choose a less-preferred server if that server has a better set of advertised parameters, such as the available addresses advertised in IAs.

Once a client has selected Advertise message(s), the client will typically store information about each server, such as server preference value, addresses advertised, when the advertisement was received, and so on.

If the client needs to select an alternate server in the case that a chosen server does not respond, the client chooses the next server according to the criteria given above.

17.1.4. Receipt of Reply message

If the client includes a Rapid Commit option in the Solicit message, it will expect a Reply message that includes a Rapid Commit option in response. If the client receives a Reply message, it processes the message as described in [section 18.1.6](#). If the client does not receive a Reply message, the client restarts the server solicitation process by sending a Solicit message that does not include a Rapid Commit option.

17.2. Server Behavior

A server sends an Advertise message in response to Solicit messages it receives to announce the availability of the server to the client.

17.2.1. Receipt of Solicit messages

The server determines the information about the client and its location as described in [section 11](#) and checks its administrative policy about responding to the client. If the server is not permitted to respond to the client, the server discards the Solicit message.

If the client has included a Rapid Commit option in the Solicit message and the server has been configured to respond with committed address assignments and other resources, the server responds to the Solicit with a Reply message as described in [section 17.2.3](#).

Otherwise, the server generates and sends an Advertise message to the client.

17.2.2. Creation and transmission of Advertise messages

The server sets the "msg-type" field to ADVERTISE and copies the contents of the transaction-ID field from the Solicit message received from the client to the Advertise message. The server

includes its server identifier in a Server Identifier option.

The server MAY add a Preference option to carry the preference value for the Advertise message. The server implementation SHOULD allow

the setting of a server preference value by the administrator. The server preference value MUST default to zero unless otherwise configured by the server administrator.

The server MUST include IA options in the Advertise message containing any addresses that would be assigned to IAs contained in the Solicit message from the client.

If the server will not assign any addresses to IAs in a subsequent Request from the client, the server MUST send an Advertise message to the client that includes only a status code option with the status code set to AddrUnavail and a status message for the user.

The server MAY include other options the server will return to the client in a subsequent Reply message. The information in these options will be used by the client in the selection of a server if the client receives more than one Advertise message. The server SHOULD include options specifying values for options requested by the client in an Option Request Option included in the Solicit message.

If the Solicit message was received directly by the server, the server unicasts the Advertise message directly to the client using the address in the source address field from the IP datagram in which the Solicit message was received. The Advertise message MUST be unicast through the interface on which the Solicit message was received.

If the Solicit message was received in a Relay-forward message, the server constructs a Relay-reply message with the Advertise message in the payload of a "server-message" option. The server unicasts the Relay-reply message directly to the relay agent using the address in the source address field from the IP datagram in which the Relay-forward message was received.

17.2.3. Creation and Transmission of Reply messages

The server MUST commit the assignment of any addresses or other configuration information message before sending a Reply message to a client in response to a Solicit message.

DISCUSSION:

When using the Solicit-Advertise message exchange, a server need not commit the assignment of configuration information to the client or otherwise keep state about the client before the server sends the Advertise message to the client. The client will choose one of the responding servers and send a Request message to obtain configuration information.

The other servers can make any addresses they might have offered to the client available for assignment to other clients.

When using the Solicit-Reply message exchange, the server commits the assignment of any addresses before sending the Reply message. The client can assume it has been assigned the addresses in the Reply message and does not need to send a Request message for those addresses.

Typically, servers that are configured to use the Solicit-Reply message exchange will be deployed so that only one server will respond to a Solicit message. If more than one server responds, the client will only use the addresses from one of the servers and the addresses from the other servers will be committed to the client but not used by the client.

The server includes a Rapid Commit option in the Reply message to indicate that the Reply is in response to a Solicit message.

The server produces the Reply message as though it had received a Request message, as described in [section 18.2.1](#). The server transmits the Reply message as described in [section 18.2.8](#).

[18. DHCP Client-Initiated Configuration Exchange](#)

A client initiates a message exchange with a server or servers to acquire or update configuration information of interest. The client may initiate the configuration exchange as part of the operating system configuration process, when requested to do so by the application layer, when required by Stateless Address Autoconfiguration or as required to extend the lifetime of an address (Rebind and Renew messages).

[18.1. Client Behavior](#)

A client will use Request, Confirm, Renew, Rebind and Information-request messages to acquire and confirm the validity of configuration information. The client uses the server identifier information and information about IAs from previous Advertise messages for use in constructing Request messages.

[18.1.1. Creation and transmission of Request messages](#)

The client uses a Request message to populate IAs with addresses and obtain other configuration information. The client includes one or more IA options in the Request message, with addresses and information about the IAs that were obtained from the server in a previous Advertise message. The server then returns addresses and

other information about the IAs to the client in IA options in a Reply message.

The client generates a transaction ID and inserts this value in the "transaction-ID" field.

The client places the identifier of the destination server in a Server Identifier option.

The client MUST include a Client Identifier option to identify itself to the server. The client adds any other appropriate options, including one or more IA options (if the client is requesting that the server assign it some network addresses).

If the client chooses to request specific options from the server, it does so by including an Option Request option (see [section 22.7](#)), which MUST include all of the options the client is requesting. The client MAY include options with data values as hints to the server about parameter values the client would like to have returned.

If the client has a source address of sufficient scope that can be used by the server as a return address and the client has received a Server Unicast option ([section 22.13](#)) from the server, the client SHOULD unicast the Request message to the server.

DISCUSSION:

Use of multicast or anycast on a link and relay agents enables the inclusion of relay agent options in all messages sent by the client. The server should enable the use of unicast only when relay agent options will not be used.

The client transmits the message according to [section 14](#), using the following parameters:

```
IRT    REQ_TIMEOUT
MRT    REQ_MAX_RT
MRC    REQ_MAX_RC
MRD    0
```

If the message exchange fails, the client MAY choose one of the following actions:

- Select another server from a list of servers known to the client; for example, servers that responded with an Advertise message
- Initiate the server discovery process described in [section 17](#)
- Terminate the configuration process and report failure

18.1.2. Creation and transmission of Confirm messages

Whenever a client may have moved to a new link, its IPv6 addresses and other configuration information may no longer be valid. Examples of times when a client may have moved to a new link include:

- o The client reboots
- o The client is physically disconnected from a wired connection
- o The client returns from sleep mode
- o The client using a wireless technology changes access points

In any situation when a client may have moved to a new link, the client **MUST** initiate a Confirm/Reply message exchange. The client includes any IAs, along with the addresses associated with those IAs, in its Confirm message. Any responding servers will indicate the acceptability of the addresses with the status in the Reply message it returns to the client.

The client sets the "msg-type" field to CONFIRM. The client generates a transaction ID and inserts this value in the "transaction-ID" field.

The client **MUST** include a Client Identifier option to identify itself to the server. The client adds any appropriate options, including one or more IA options. The client **MUST** include the addresses the client currently has associated with those IAs.

If the client chooses to request specific options from the server, it does so by including an Option Request option (see [section 22.7](#), which **MUST** include all of the options the client is requesting. The client **MAY** include options with data values as hints to the server about parameter values the client would like to have returned.

When the client sends the Confirm message, it **MUST** use an IPv6 address that the client has confirmed to be valid on the link to which it is currently attached and that is assigned to the interface for which the client is interested in obtaining configuration information as the source address in the IP header of the datagram carrying the Confirm message.

The client transmits the message according to [section 14](#), using the following parameters:

IRT CNF_TIMEOUT

MRT CNF_MAX_RT

MRC 0

MRD CNF_MAX_RD

Droms (ed.), et al.

Expires 22 Oct 2002

[Page 34]

If the client receives no responses before the message transmission process as described in [section 14](#) terminates, the client SHOULD continue to use any IP addresses, using the last known lifetimes for those addresses, and SHOULD continue to use any other previously obtained configuration parameters.

[18.1.3](#). Creation and transmission of Renew messages

To extend the valid and preferred lifetimes associated with addresses, the client sends a Renew message to the server containing an IA option for the IA and its associated addresses. The server determines new lifetimes for the addresses in the IA according to the administrative configuration of the server. The server may also add new addresses to the IA. The server may remove addresses from the IA by setting the preferred and valid lifetimes of those addresses to zero.

The server controls the time at which the client contacts the server to extend the lifetimes on assigned addresses through the T1 and T2 parameters assigned to an IA.

If T1 or T2 is set to 0 by the server, the client does not send a Renew or Rebind message, respectively, for the IA.

At time T1 for an IA, the client initiates a Renew/Reply message exchange to extend the lifetimes on any addresses in the IA. The client includes an IA option with all addresses currently assigned to the IA in its Renew message.

The client sets the "msg-type" field to RENEW. The client generates a transaction ID and inserts this value in the "transaction-ID" field.

The client places the identifier of the destination server in a Server Identifier option.

The client MUST include a Client Identifier option to identify itself to the server. The client adds any appropriate options, including one or more IA options. The client MUST include the list of addresses the client currently has associated with the IAs in the Renew message.

If the client chooses to request specific options from the server, it does so by including an Option Request option (see [section 22.7](#)), which MUST include all of the options the client is requesting. The client MAY include options with data values as hints to the server about parameter values the client would like to have returned.

If the client has a source address of sufficient scope that can be

used by the server as a return address and the client has received a Server Unicast option (see [section 22.13](#)) from the server, the client SHOULD unicast the Renew message to the server.

DISCUSSION:

Use of multicast or anycast on a link and relay agents enables the inclusion of relay agent options in all messages sent by the client. The server MUST NOT enable the use of unicast for a client when relay agent options are required for that client.

The client transmits the message according to [section 14](#), using the following parameters:

IRT REN_TIMEOUT

MRT REP_MAX_RT

MRC 0

MRD 0

The mechanism in [section 14](#) is modified as follows for use in the transmission of Renew messages. The message exchange is terminated when time T2 is reached (see [section 18.1.4](#)), at which time the client begins a Rebind message exchange.

[18.1.4](#). Creation and transmission of Rebind messages

At time T2 for an IA (which will only be reached if the server to which the Renew message was sent at time T1 has not responded), the client initiates a Rebind/Reply message exchange. The client includes an IA option with all addresses currently assigned to the IA in its Rebind message.

The client sets the "msg-type" field to REBIND. The client generates a transaction ID and inserts this value in the "transaction-ID" field.

The client MUST include a Client Identifier option to identify itself to the server. The client adds any appropriate options, including one or more IA options. The client MUST include the list of addresses the client currently has associated with the IAs in the Rebind message.

If the client chooses to request specific options from the server, it does so by including an Option Request option (see [section 22.7](#)), which MUST include all of the options the client is requesting. The client MAY include options with data values as hints to the server about parameter values the client would like to have returned.

The client transmits the message according to [section 14](#), using the following parameters:

IRT REB_TIMEOUT

MRT REB_MAX_RT

MRC 0

MRD 0

The mechanism in [section 14](#) is modified as follows for use in the transmission of Rebind messages. The message exchange is terminated when the lifetimes of all of the addresses assigned to the IA expire (see [section 10](#)), at which time the client has several alternative actions to choose from:

- The client may choose to use a Solicit message to locate a new DHCP server and send a Request for the expired IA to the new server
- The client may have other addresses in other IAs, so the client may choose to discard the expired IA and use the addresses in the other IAs

[18.1.5](#). Creation and Transmission of Information-request messages

The client uses an Information-request message to obtain configuration information without having addresses assigned to it.

The client sets the "msg-type" field to INFORMATION-REQUEST. The client generates a transaction ID and inserts this value in the "transaction-ID" field.

The client SHOULD include a Client Identifier option to identify itself to the server. If the client does not include a Client Identifier option, the server will not be able to return any client-specific options to the client, or the server may choose not to respond to the message at all.

If the client chooses to request specific options from the server, it does so by including an Option Request option (see [section 22.7](#)), which MUST include all of the options the client is requesting. The client MAY include options with data values as hints to the server about parameter values the client would like to have returned. The client MUST NOT include any IA options.

If the client has an IPv6 address of sufficient scope, the client MAY choose to send the Information-request message to the All_DHCP_Servers multicast address.

The client transmits the message according to [section 14](#), using the following parameters:

IRT INF_TIMEOUT

MRT INF_MAX_RT

Droms (ed.), et al.

Expires 22 Oct 2002

[Page 37]

MRC 0

MRD 0

18.1.6. Receipt of Reply message in response to a Request, Confirm, Renew, Rebind or Information-request message

Upon the receipt of a valid Reply message in response to a Request, Confirm, Renew, Rebind or Information-request message, the client extracts the configuration information contained in the Reply. The client MAY choose to report any status code or message from the status code option in the Reply message.

The client SHOULD perform duplicate address detection [[19](#)] on each of the addresses in any IAs it receives in the Reply message before using that address for traffic. If any of the addresses are found to be in use on the link, the client sends a Decline message to the server as described in [section 18.1.9](#).

The client records the T1 and T2 times for each IA in the Reply message. The client records any addresses included with IAs in the Reply message. The client updates the preferred and valid lifetimes for the addresses in the IA from the lifetime information in the IA option. The client leaves any addresses that the client has associated with the IA that are not included in the IA option unchanged.

If the Reply was received in response to a Renew or Rebind message, the client must update the information in any IA option contained in the Reply message. The client adds any new addresses from the IA option to the IA, updates lifetimes for existing addresses in the IA from the IA option and discards any addresses with a lifetime of zero in the IA option.

Management of the specific configuration information is detailed in the definition of each option, in [section 22](#).

When the client receives a NotOnLink status in an IA from the server in response to a Confirm message, the client can assume it needs to send a Request to the server to obtain appropriate addresses for the IA. If the client receives any Reply messages that do not indicate a NotOnLink status, the client can use the addresses in the IA and ignore any messages that do indicate a NotOnLink status.

When the client receives an AddrUnavail status in an IA from the server for a Request message the client will have to find a new server to create an IA.

When the client receives a NoBinding status in an IA from the server for a Renew message the client can assume it needs to send a Request to reestablish an IA with the server.

When the client receives an AddrUnavail status in an IA from the server for a Renew message the client can assume it needs to send a Request to reestablish an IA with the server.

When the client receives a NoBinding status in an IA from the server for a Rebind message the client can assume it needs to send a Request to reestablish an IA with the server or try another server.

When the client receives an AddrUnavail status in an IA from the server for a Rebind message the client can assume it needs to send a Request to reestablish an IA with the server or try another server.

18.1.7. Creation and transmission of Release messages

To release one or more addresses, a client sends a Release message to the server.

The client sets the "msg-type" field to RELEASE. The client generates a transaction ID and places this value in the "transaction-ID" field.

The client places the identifier of the server that allocated the address(es) in a Server Identifier option.

The client MUST include a Client Identifier option to identify itself to the server. The client includes options containing the IAs for the addresses it is releasing in the "options" field. The addresses to be released MUST be included in the IAs. Any addresses for the IAs the client wishes to continue to use should not be included to the IAs.

The client MUST NOT use any of the addresses it is releasing as the source address in the Release message or in any subsequently transmitted message.

If the client has a source address of sufficient scope that can be used by the server as a return address and the client has received a Server Unicast option ([section 22.13](#)) from the server, the client SHOULD unicast the Release message to the server.

DISCUSSION:

Use of multicast or anycast on a link and relay agents enables the inclusion of relay agent options in all messages sent by the client. The server MUST NOT enable the use of

unicast for a client when relay agent options are required
for that client.

The client SHOULD choose to guarantee the delivery of the Release message using the retransmission strategy in [section 14](#). An example of a situation in which a client would not guarantee delivery would be when the client is powering down or restarting because of some error condition.

The client transmits the message according to [section 14](#), using the following parameters:

IRT REL_TIMEOUT

MRT 0

MRC REL_MAX_MRC

MRD 0

The client MUST abandon the attempt to release addresses if the Release message exchange fails.

The client MUST stop using all of the addresses being released as soon as the client begins the Release message exchange process. If addresses are released but the Reply from a DHCP server is lost, the client will retransmit the Release message, and the server may respond with a Reply indicating a status of "Nobinding". Therefore, the client does not treat a Reply message with a status of "Nobinding" in a Release message exchange as if it indicates an error.

Note that if the client fails to release the addresses, the addresses assigned to the IA will be reclaimed by the server when the lifetime of the address expires.

[18.1.8](#). Receipt of Reply message in response to a Release message

Upon receipt of a valid Reply message, the client can consider the Release event successful.

[18.1.9](#). Creation and transmission of Decline messages

The client sets the "msg-type" field to DECLINE. The client generates a transaction ID and places this value in the "transaction-ID" field.

The client places the identifier of the server that allocated the address(es) in a Server Identifier option.

The client MUST include a Client Identifier option to identify itself

to the server. The client includes options containing the IAs for the addresses it is declining in the "options" field. The addresses to be declined MUST be included in the IAs. Any addresses for the IAs the client wishes to continue to use should not be in added to the IAs.

The client MUST NOT use any of the addresses it is declining as the source address in the Decline message or in any subsequently transmitted message.

If the client has a source address of sufficient scope that can be used by the server as a return address and the client has received a Server Unicast option ([section 22.13](#)) from the server, the client SHOULD unicast the Decline message to the server.

DISCUSSION:

Use of multicast or anycast on a link and relay agents enables the inclusion of relay agent options in all messages sent by the client. The server MUST NOT enable the use of unicast for a client when relay agent options are required for that client.

The client transmits the message according to [section 14](#), using the following parameters:

IRT	DEC_TIMEOUT
MRT	DEC_MAX_RT
MRC	DEC_MAX_RC
MRD	0

The client MUST abandon the attempt to decline addresses if the Decline message exchange fails.

[18.1.10](#). Receipt of Reply message in response to a Decline message

Upon receipt of a valid Reply message, the client can consider the Decline event successful.

[18.2](#). Server Behavior

For this discussion, the Server is assumed to have been configured in an implementation specific manner with configuration of interest to clients.

[18.2.1](#). Receipt of Request messages

When the server receives a Request message via unicast from a client to which the server has not sent a unicast option, the server

discards the Request message and responds with a Reply message containing a status code option with value UseMulticast and no other options.

When the server receives a Request the client is requesting the configuration of IAs by the server. The server creates the bindings for that client according to the server's policy and configuration information and records the IAs and other information about the client.

The server constructs a Reply message by setting the "msg-type" field to REPLY, copying the transaction ID from the Request message into the transaction-ID field.

The server MUST include a Server Identifier option containing the server's DUID and the Client Identifier option from the Request message in the Reply message.

If the server finds that the prefix on one or more IP addresses in any IA in the message from the client is not a valid prefix for the link to which the client is connected, the server MUST return the IA to the client with the status field set to NotOnLink.

If the server cannot assign any addresses to any of the IAs in the message from the client, the server MUST include the IAs in the Reply message with the status field set to AddrUnavail and no addresses in the IA.

For any IAs to which the server can assign addresses, the server includes the IA with addresses and other configuration parameters and records the IA as a new client binding.

The server adds options to the Reply message for any other configuration information to be assigned to the client. If the Request message contained an Option Request option, the server MUST include options in the Reply message for any options in the Option Request option the server is configured to return to the client. The server MAY choose to return other options not specified in the Option Request option.

18.2.2. Receipt of Confirm messages

When the server receives a Confirm message, the client is requesting confirmation that the configuration information it will use is valid. The server locates the binding for that client and compares the information in the Confirm message from the client to the information associated with that client.

If the server finds that the information for the client does not match what is in the binding for that client or the configuration information is not valid, the server sends a Reply message containing a Status Code option with the value ConfNoMatch.

If the server finds that the information for the client does match
the information in the binding for that client, and the configuration

information is still valid, the server sends a Reply message containing a Status Code option with the value Success.

If the server cannot determine if the information in the Confirm message is valid or invalid, the server MUST NOT send a reply to the client. For example, if the server does not have a binding for the client, but the configuration information in the Confirm message appears valid, the server does not reply.

The server constructs a Reply message by setting the "msg-type" field to REPLY, copying the transaction ID from the Confirm message into the transaction-ID field.

The server MUST include a Server Identifier option containing the server's DUID and the Client Identifier option from the Confirm message in the Reply message.

The Reply message from the server MUST include a Status Code option.

18.2.3. Receipt of Renew messages

When the server receives a Renew message via unicast from a client to which the server has not sent a unicast option, the server discards the Renew message and responds with a Reply message containing a status code option with value UseMulticast and no other options.

When the server receives a Renew and IA option from a client it locates the client's binding and verifies that the information in the IA from the client matches the information stored for that client.

If the server cannot find a client entry for the IA the server returns the IA containing no addresses with status set to NoBinding in the Renew message.

If the server finds that any of the addresses are no longer valid for the client, the server returns the address to the client with lifetimes of 0.

If the server finds the addresses in the IA for the client then the server sends back the IA to the client with new lifetimes and T1/T2 times, and includes a Status Code option with value Success. The server may choose to change the list of addresses and the lifetimes of addresses in IAs that are returned to the client.

The server constructs a Reply message by setting the "msg-type" field to REPLY, copying the transaction ID from the Renew message into the transaction-ID field.

The server MUST include a Server Identifier option containing the server's DUID and the Client Identifier option from the Renew message in the Reply message.

18.2.4. Receipt of Rebind messages

When the server receives a Rebind and IA option from a client it locates the client's binding and verifies that the information in the IA from the client matches the information stored for that client.

If the server cannot find a client entry for the IA the server returns the IA containing no addresses with status set to NoBinding in the Rebind message.

If the server finds that the any of the addresses are no longer valid for the client, the server returns the address to the client with lifetimes of 0.

If the server finds the addresses in the IA for the client then the server SHOULD send back the IA to the client with new lifetimes and T1/T2 times if the default is not being used.

The server constructs a Reply message by setting the "msg-type" field to REPLY, copying the transaction ID from the Rebind message into the transaction-ID field.

The server MUST include a Server Identifier option containing the server's DUID and the Client Identifier option from the Rebind message in the Reply message.

The server adds options to the Reply message for any other configuration information to be assigned to the client. If the Rebind message contained an Option Request option, the server MUST include options in the Reply message for any options in the Option Request option the server is configured to return to the client. The server MAY choose to return other options not specified in the Option Request option.

18.2.5. Receipt of Information-request messages

When the server receives an Information-request message, the client is requesting configuration information that does not include the assignment of any addresses. The server determines all configuration parameters appropriate to the client, based on the server configuration policies known to the server.

The server constructs a Reply message by setting the "msg-type" field to REPLY, copying the transaction ID from the Rebind message into the transaction-ID field.

The server MUST include a Server Identifier option containing the server's DUID and the Client Identifier option from the Rebind

message in the Reply message.

The server adds options to the Reply message for all of the configuration parameters to be returned to the client. If the

Information-request message contained an Option Request option, the server MUST include options in the Reply message for any options in the Option Request option the server is configured to return to the client. The server MAY choose to return other options not specified in the Option Request option.

If the Information-request message received from the client did not include a Client Identifier option, the server SHOULD respond with a Reply message containing any configuration parameters that are not determined by the client's identity. If the server chooses not to respond, the client may continue to retransmit the Information-request message indefinitely.

18.2.6. Receipt of Release messages

When the server receives a Release message via unicast from a client to which the server has not sent a unicast option, the server discards the Release message and responds with a Reply message containing a status code option with value UseMulticast and no other options.

Upon the receipt of a valid Release message, the server examines the IAs and the addresses in the IAs for validity. If the IAs in the message are in a binding for the client and the addresses in the IAs have been assigned by the server to those IAs, the server deletes the addresses from the IAs and makes the addresses available for assignment to other clients. The server ignores invalid addresses (though it may choose to log an error if it finds an invalid address).

After all the addresses have been processed, the server generates a Reply message and includes a Status Code option with value Success and a Server Identifier option with the server's DUID. The server MUST NOT include any other options in the Reply message.

If the server cannot find a binding for the client, the server sends a Reply message that includes a Status Code option with value NoBinding.

A server may choose to retain a record of assigned addresses and IAs after the lifetimes on the addresses have expired to allow the server to reassign the previously assigned addresses to a client.

18.2.7. Receipt of Decline messages

When the server receives a Decline message via unicast from a client to which the server has not sent a unicast option, the server

discards the Decline message and responds with a Reply message containing a status code option with value UseMulticast and no other options.

Upon the receipt of a valid Decline message, the server examines the IAs and the addresses in the IAs for validity. If the IAs in the message are in a binding for the client and the addresses in the IAs have been assigned by the server to those IA, the server deletes the addresses from the IAs. The server SHOULD mark the addresses declined by the client so that those addresses are not assigned to other clients, and MAY choose to make a notification that addresses were declined. The server ignores invalid addresses (though it may choose to log an error if it finds an invalid address).

After all the address have been processed, the server generates a Reply message and includes a Status Code option with value Success and a Server Identifier option with the server's DUID. The server MUST NOT include any other options in the Reply message.

18.2.8. Transmission of Reply messages

If the Request, Confirm, Renew, Rebind, Release, Decline or Information-request message from the client was originally received in a Relay-forward message from a relay, the server places the Reply message in the options field of a Relay-response message and copies the link-address and client-address fields from the Relay-forward message into the Relay-response message.

The server then unicasts the Reply or Relay-reply to the source address from the IP datagram in which the original message was received.

19. DHCP Server-Initiated Configuration Exchange

A server initiates a configuration exchange to cause DHCP clients to obtain new addresses and other configuration information. For example, an administrator may use a server-initiated configuration exchange when links in the DHCP domain are to be renumbered. Other examples include changes in the location of directory servers, addition of new services such as printing, and availability of new software.

19.1. Server Behavior

A server sends a Reconfigure message to cause a client to initiate immediately a Renew/Reply or Information-request/Reply message exchange with the server.

19.1.1. Creation and transmission of Reconfigure messages

The server sets the "msg-type" field to RECONFIGURE. The server sets the transaction-id field to 0. The server places its identifier in a Server Identifier option.

The server MAY include an Option Request option to inform the client of what information has been changed or new information that has been added. In particular, the server specifies the IA option in the Option Request option if the server wants the client to obtain new address information.

The server MUST include an authentication option in the Reconfigure message. The server MUST include a Reconfigure Message option (defined in [section 22.20](#)) to select whether the client responds with a Renew message or an Information-Request message.

The server MUST NOT include any other options in the Reconfigure except as specifically allowed in the definition of individual options.

A server sends each Reconfigure message to a single DHCP client, using an IPv6 unicast address of sufficient scope belonging to the DHCP client. The server may obtain the address of the client through the information that the server has about clients that have been in contact with the server, or the server may be configured with the address of the client through some external agent.

To reconfigure more than one client, the server unicasts a separate message to each client. The server may initiate the reconfiguration of multiple clients concurrently; for example, a server may send a Reconfigure message to additional clients while previous reconfiguration message exchanges are still in progress.

The Reconfigure message causes the client to initiate a Renew/Reply or Information-request/Reply message exchange with the server. The server interprets the receipt of a Renew or Information-request message from the client as satisfying the Reconfigure message request.

19.1.2. Time out and retransmission of Reconfigure messages

If the server does not receive a Renew or Information-request message from the client in RECREP_MSG_TIMEOUT milliseconds, the server retransmits the Reconfigure message, doubles the RECREP_MSG_TIMEOUT value and waits again. The server continues this process until REC_MSG_ATTEMPTS unsuccessful attempts have been made, at which point the server SHOULD abort the reconfigure process for that client.

Default and initial values for RECREP_MSG_TIMEOUT and REC_MSG_ATTEMPTS are documented in [section 5.6](#).

19.1.3. Receipt of Renew messages

The server generates and sends Reply message(s) to the client as described in sections [18.2.3](#) and [18.2.8](#), including options for configuration parameters.

The server MAY choose to send a Reply with the IAs and other parameters to be reconfigured, even if those IAs and parameters were not requested in the Renew message from the client.

19.2. Receipt of Information-request messages

The server generates and sends Reply message(s) to the client as described in sections [18.2.5](#) and [18.2.8](#), including options for configuration parameters.

The server MAY choose to send a Reply with the other parameters to be reconfigured, even if those parameters were not specified in the Information-request message from the client.

19.3. Client Behavior

A client MUST accept Reconfigure messages sent to UDP port 546 on interfaces for which it has acquired configuration information through DHCP. These messages may be sent at any time. Since the results of a reconfiguration event may affect application layer programs, the client SHOULD log these events, and MAY notify these programs of the change through an implementation-specific interface.

19.3.1. Receipt of Reconfigure messages

Upon receipt of a valid Reconfigure message, the client initiates a transaction with the server by sending a Reply or Information-request message. While the transaction is in progress, the client silently discards any Reconfigure messages it receives.

The client responds with either a Renew message or an Information-request message as indicated by the Reconfigure Message option (as defined in [section 22.20](#)).

DISCUSSION:

The Reconfigure message acts as a trigger that signals the client to complete a successful message exchange. Once the client has received a Reconfigure, the client proceeds with the message exchange (retransmitting the Renew or Information-request message if necessary); the client ignores any additional Reconfigure messages (regardless of the transaction ID in the Reconfigure message) until the exchange is complete. Subsequent Reconfigure messages (again independent of the transaction ID) cause the client to initiate a new exchange.

How does this mechanism work in the face of duplicated or retransmitted Reconfigure messages? Duplicate messages will be ignored because the client will begin the exchange

after the receipt of the first Reconfigure. Retransmitted messages will either trigger the exchange (if the first Reconfigure was not received by the client) or will be ignored. The server can discontinue retransmission of Reconfigure messages to the client once the server receives the Renew or Information-request message from the client.

It might be possible for a duplicate or retransmitted Reconfigure to be sufficiently delayed (and delivered out of order) to arrive at the client after the exchange (initiated by the original Reconfigure) has been completed. In this case, the client would initiate a redundant exchange. The likelihood of delayed and out of order delivery is small enough to be ignored. The consequence of the redundant exchange is inefficiency rather than incorrect operation.

19.3.2. Creation and transmission of Renew messages

When responding to a Reconfigure, the client creates and sends the Renew message in exactly the same manner as outlined in [section 18.1.3](#), with the exception: if the server included an Option Request option specifying the IA option, the client MUST include IA options containing the addresses the client currently has assigned to ALL IAs for the interface through which the Reconfigure message was received.

19.3.3. Creation and transmission of Information-request messages

When responding to a Reconfigure, the client creates and sends the Information-request message in exactly the same manner as outlined in [section 18.1.5](#), with the exception that the client includes a Server Identifier option with the identifier from the Reconfigure message to which the client is responding.

19.3.4. Time out and retransmission of Renew or Information-request messages

The client uses the same variables and retransmission algorithm as it does with Renew or Information-request messages generated as part of a client-initiated configuration exchange. See sections [18.1.3](#) and [18.1.5](#) for details.

19.3.5. Receipt of Reply messages

Upon the receipt of a valid Reply message, the client extracts the

contents of the "options" field, and sets (or resets) configuration parameters appropriately. The client records and updates the lifetimes for any addresses specified in IAs in the Reply message.

20. Relay Agent Behavior

For this discussion, the relay agent MAY be configured to use a list of server destination addresses, which MAY include unicast addresses, the All_DHCP_Servers multicast address, or other multicast addresses selected by the network administrator. If the relay agent has not been explicitly configured, it MUST use the All_DHCP_Servers multicast address as the default.

20.1. Relaying of client messages

When a relay agent receives a valid client message, it constructs a Relay-forward message. The relay agent places a global or site-scoped address with a prefix assigned to the link on which the client should be assigned an address in the link-address field. This address will be used by the server to determine the link from which the client should be assigned an address and other configuration information.

If the relay agent cannot use the address in the link-address field to identify the interface through which the response to the client will be forwarded, the relay agent MUST include an Interface-id option (see [section 22.19](#)) in the Relay-forward message. The server will include the Interface-id option in its Relay-reply message. The relay agent puts the client's address in the link-address field regardless of whether the relay agent includes an Interface-id option in the Relay-forward message.

The relay agent copies the source address from the IP datagram in which the message was received from the client into the client-address field in the Relay-forward message.

The relay agent constructs a Client Message option (see [section 22.10](#)) that contains the entire message from the client in the data field of the option. The relay agent places the Client Message option along with any "relay agent-specific" options in the options field of the Relay-forward message. The relay agent sends the Relay-forward message to the list of server destination addresses with which it has been configured or to the All_DHCP_Servers address if it has not been explicitly configured with server destination addresses.

20.2. Relaying of server messages

The relay agent processes any other options included in the Relay-reply message as appropriate to those options. The relay agents then discards those options.

If the Relay-reply message includes a Interface-id option, the relay agent forwards the message from the server to the client on the link identified by the Interface-id option. Otherwise, the relay agent

forwards the message on the link identified by the link-address field.

In either case, the relay agent extracts the server message from the Server Message option (see [section 22.11](#)) and forwards the message to the address in the client-address field in the Relay-reply message.

21. Authentication of DHCP messages

Some network administrators may wish to provide authentication of the source and contents of DHCP messages. For example, clients may be subject to denial of service attacks through the use of bogus DHCP servers, or may simply be misconfigured due to unintentionally instantiated DHCP servers. Network administrators may wish to constrain the allocation of addresses to authorized hosts to avoid denial of service attacks in "hostile" environments where the network medium is not physically secured, such as wireless networks or college residence halls.

Because of the risk of denial of service attacks against DHCP clients, the use of authentication is mandated in Reconfigure messages. A DHCP server **MUST** include an authentication option in Reconfigure messages sent to clients.

The DHCP authentication mechanism is based on the design of authentication for DHCP for IPv4 [\[6\]](#).

21.1. DHCP threat model

The threat to DHCP is inherently an insider threat (assuming a properly configured network where DHCPv6 ports are blocked on the perimeter gateways of the enterprise). Regardless of the gateway configuration, however, the potential attacks by insiders and outsiders are the same.

The attack specific to a DHCP client is the possibility of the establishment of a "rogue" server with the intent of providing incorrect configuration information to the client. The motivation for doing so may be to establish a "man in the middle" attack or it may be for a "denial of service" attack.

There is another threat to DHCP clients from mistakenly or accidentally configured DHCP servers that answer DHCP client requests with unintentionally incorrect configuration parameters.

The threat specific to a DHCP server is an invalid client masquerading as a valid client. The motivation for this may be for

"theft of service", or to circumvent auditing for any number of nefarious purposes.

The threat common to both the client and the server is the resource "denial of service" (DoS) attack. These attacks typically involve the exhaustion of valid addresses, or the exhaustion of CPU or network bandwidth, and are present anytime there is a shared resource.

21.2. Security of messages sent between servers and relay agents

Relay agents and servers that choose to exchange messages securely use the IPsec mechanisms for IPv6 [8]. The way in which IPsec is employed by relay agents and servers is not specified in this document.

21.3. Summary of DHCP authentication

Authentication of DHCP messages is accomplished through the use of the Authentication option (see [section 22.12](#)). The authentication information carried in the Authentication option can be used to reliably identify the source of a DHCP message and to confirm that the contents of the DHCP message have not been tampered with.

The Authentication option provides a framework for multiple authentication protocols. One such protocols is defined here. Other protocols defined in the future will be specified in separate documents.

The protocol field in the Authentication option identifies the specific protocol used to generate the authentication information carried in the option. The algorithm field identifies a specific algorithm within the authentication protocol; for example, the algorithm field specifies the hash algorithm used to generate the message authentication code (MAC) in the authentication option. The replay detection method (RDM) field specifies the type of replay detection used in the replay detection field.

21.4. Replay detection

The Replay Detection Method (RDM) field determines the type of replay detection used in the Replay Detection field.

If the RDM field contains 0x00, the replay detection field MUST be set to the value of a monotonically increasing counter. Using a counter value such as the current time of day (for example, an NTP-format timestamp [10]) can reduce the danger of replay attacks. This method MUST be supported by all protocols.

21.5. Delayed authentication protocol

If the protocol field is 1, the message is using the "delayed authentication" mechanism. In delayed authentication, the client requests authentication in its Solicit message and the server replies with an Advertise message that includes authentication information. This authentication information contains a nonce value generated by the source as a message authentication code (MAC) to provide message authentication and entity authentication.

The use of a particular technique based on the HMAC protocol [9] using the MD5 hash [18] is defined here.

21.5.1. Management issues in the delayed authentication protocol

The "delayed authentication" protocol does not attempt to address situations where a client may roam from one administrative domain to another, i.e. interdomain roaming. This protocol is focused on solving the intradomain problem where the out-of-band exchange of a shared key is feasible.

21.5.2. Use of the Authentication option in the delayed authentication protocol

In a Solicit message, the Authentication option carries the Protocol, Algorithm, RDM and Replay detection fields, but no Authentication information.

In an Advertise, Request, Renew, Rebind, Confirm, Decline, Release or Information-request message, the Authentication option carries the Protocol, Algorithm, RDM and Replay detection fields and Authentication information.

A DHCP message MUST NOT contain more than one Authentication option when using the delayed authentication protocol. The Authentication option should appear as close to the beginning of the options area in the DHCP message to facilitate processing of the authentication information. The format of the Authentication information is:

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Key ID                               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               HMAC-MD5                             |
|                               |                                     |

```

[Page 53]

The following definitions will be used in the description of the authentication information for delayed authentication, algorithm 1:

Replay Detection	- as defined by the RDM field
K	- a key (secret value) shared between the source and destination of the message; each key has a unique identifier (key ID)
key ID	- the unique identifier for the key value used to generate the MAC for this message
HMAC-MD5	- the MAC generating function.

The sender computes the MAC using the HMAC generation algorithm [9] and the MD5 hash function [18]. The entire DHCP message (except the MAC field of the authentication option itself), including the DHCP message header and the options field, is used as input to the HMAC-MD5 computation function. The 'key ID' field MUST be set to the identifier of the key used to generate the MAC.

DISCUSSION:

Algorithm 1 specifies the use of HMAC-MD5. Use of a different technique, such as HMAC-SHA, will be specified as a separate protocol.

Delayed authentication requires a shared secret key for each client on each DHCP server with which that client may wish to use the DHCP protocol. Each key has a unique identifier that can be used by a receiver to determine which key was used to generate the MAC in the DHCP message. Therefore, delayed authentication may not scale well in an architecture in which a DHCP client connects to multiple administrative domains.

21.5.3. Message validation

To validate an incoming message, the receiver first checks that the value in the replay detection field is acceptable according to the replay detection method specified by the RDM field. Next, the receiver computes the MAC as described in [9]. The entire DHCP message (except the MAC field of the authentication option itself), is used as input to the HMAC-MDS computation function. If the MAC computed by the receiver does not match the MAC contained in the authentication option, the receiver MUST discard the DHCP message.

21.5.4. Key utilization

Each DHCP client has a key, K . The client uses its key to encode any messages it sends to the server and to authenticate and verify

any messages it receives from the server. The client's key SHOULD be initially distributed to the client through some out-of-band mechanism, and SHOULD be stored locally on the client for use in all authenticated DHCP messages. Once the client has been given its key, it SHOULD use that key for all transactions even if the client's configuration changes; for example, if the client is assigned a new network address.

Each DHCP server MUST know, or be able to obtain in a secure manner, the keys for all authorized clients. If all clients use the same key, clients can perform both entity and message authentication for all messages received from servers. However, the sharing of keys is strongly discouraged as it allows for unauthorized clients to masquerade as authorized clients by obtaining a copy of the shared key and allows for trivial spoofing of an authenticated DHCP server. To authenticate the identity of individual clients, each client must be configured with a unique key.

21.5.5. Client considerations for delayed authentication protocol

21.5.5.1. Sending Solicit messages

When the client sends a Solicit message and wishes to use authentication, it includes an Authentication option with the desired protocol, algorithm, RDM and replay detection field as described in [section 21.5](#). The client does not include any authentication information in the Authentication option.

21.5.5.2. Receiving Advertise messages

The client validates any Advertise messages containing an Authentication option specifying the delayed authentication protocol using the validation test described in [section 21.5.3](#).

Client behavior if no Advertise messages include authentication information or pass the validation test is controlled by local policy on the client. According to client policy, the client MAY choose to respond to a Advertise message that has not been authenticated.

The decision to set local policy to accept unauthenticated messages should be made with care. Accepting an unauthenticated Advertise message can make the client vulnerable to spoofing and other attacks. If local users are not explicitly informed that the client has accepted an unauthenticated Advertise message, the users may incorrectly assume that the client has received an authenticated address and is not subject to DHCP attacks through unauthenticated messages.

A client MUST be configurable to discard unauthenticated messages,
and SHOULD be configured by default to discard unauthenticated
messages if the client has been configured with an authentication

key or other authentication information. A client MAY choose to differentiate between Advertise messages with no authentication information and Advertise messages that do not pass the validation test; for example, a client might accept the former and discard the latter. If a client does accept an unauthenticated message, the client SHOULD inform any local users and SHOULD log the event.

21.5.5.3. Sending Request, Confirm, Renew, Rebind, Decline or Release messages

If the client authenticated the Advertise message through which the client selected the server, the client MUST generate authentication information for subsequent Request, Confirm, Renew, Rebind or Release messages sent to the server as described in [section 21.5](#). When the client sends a subsequent message, it MUST use the same key used by the server to generate the authentication information.

21.5.5.4. Sending Information-request messages

If the server has selected a key for the client in a previous message exchange (see [section 21.5.6.1](#), the client MUST use the same key to generate the authentication information. If the client has not previously been given a key with the server, the client MUST use a key that has been selected for the client through some external mechanism.

21.5.5.5. Receiving Reply messages

If the client authenticated the Advertise it accepted, the client MUST validate the associated Reply message from the server. The client MUST discard the Reply if the message fails to pass validation and MAY log the validation failure. If the Reply fails to pass validation, the client MUST restart the DHCP configuration process by sending a Solicit message. The client MAY choose to remember which server replied with a Reply message that failed to pass validation and discard subsequent messages from that server.

If the client accepted an Advertise message that did not include authentication information or did not pass the validation test, the client MAY accept an unauthenticated Reply message from the server.

21.5.5.6. Receiving Reconfigure messages

The client MUST discard the Reconfigure if the message fails to pass validation and MAY log the validation failure.

21.5.6. Server considerations for delayed authentication protocol

21.5.6.1. Receiving Solicit messages and Sending Advertise messages

The server selects a key for the client and includes authentication information in the Advertise message returned to the client as specified in [section 21.5](#). The server MUST record the identifier of the key selected for the client and use that same key for validating subsequent messages with the client.

21.5.6.2. Receiving Request, Confirm, Renew, Rebind or Release messages and Sending Reply messages

The server uses the key identified in the message and validates the message as specified in [section 21.5.3](#). If the message fails to pass validation or the server does not know the key identified by the 'key ID' field, the server MUST discard the message and MAY choose to log the validation failure.

If the message passes the validation procedure, the server responds to the specific message as described in [section 18.2](#). The server MUST include authentication information generated using the key identified in the received message as specified in [section 21.5](#).

21.5.6.3. Sending Reconfigure messages

The server MUST include an Authentication option in a Reconfigure message, generated as specified in [section 21.5](#) using the key the server initially selected for the client to which the Reconfigure message is to be sent.


If the server has not previously selected a key for the client, the server MUST use a key that has been selected for the client through some external mechanism.

22. DHCP options

Options are used to carry additional information and parameters in DHCP messages. Every option shares a common base format, as described in [section 22.1](#). All values in options are represented in network order.

This document describes the DHCP options defined as part of the base DHCP specification. Other options may be defined in the future in separate documents.

Unless otherwise noted, each option may appear only in the options area of a DHCP message and may appear only once. If an option does appear multiple times, each instance is considered separate and the

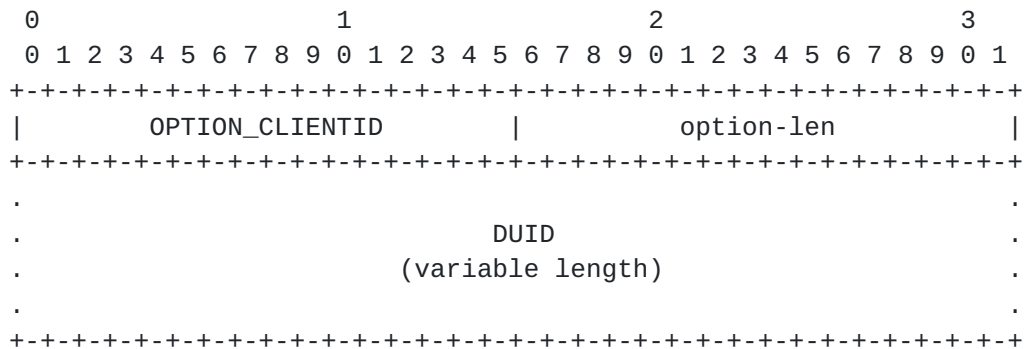


option-code OPTION_CLIENTID (1)

option-len Length of DUID in octets

DUID The DUID for the client

[22.3. Server Identifier option](#)

The Server Identifier option is used to carry a DUID identifying a server between a client and a server. The format of the Server Identifier option is:

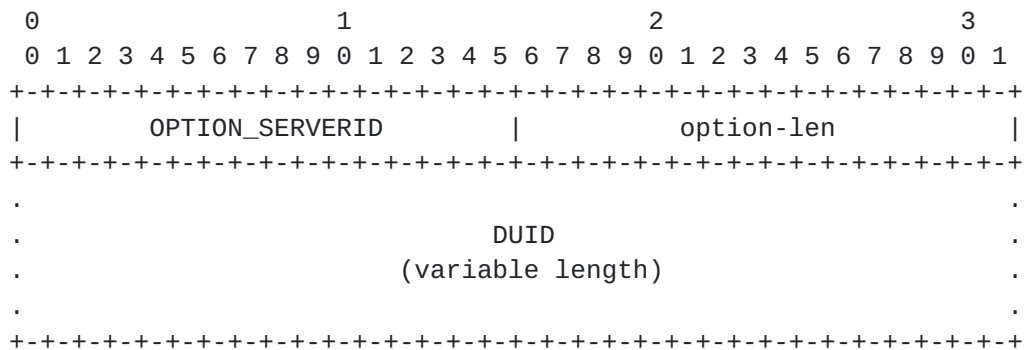

option-code OPTION_SERVERID (2)

option-len Length of DUID in octets


DUID The DUID for the server

[22.4. Identity Association option](#)

The Identity Association option (IA option) is used to carry an identity association, the parameters associated with the IA and the addresses associated with the IA.

Addresses appearing in an IA option are not temporary addresses (see [section 22.5](#)).

The format of the IA option is:

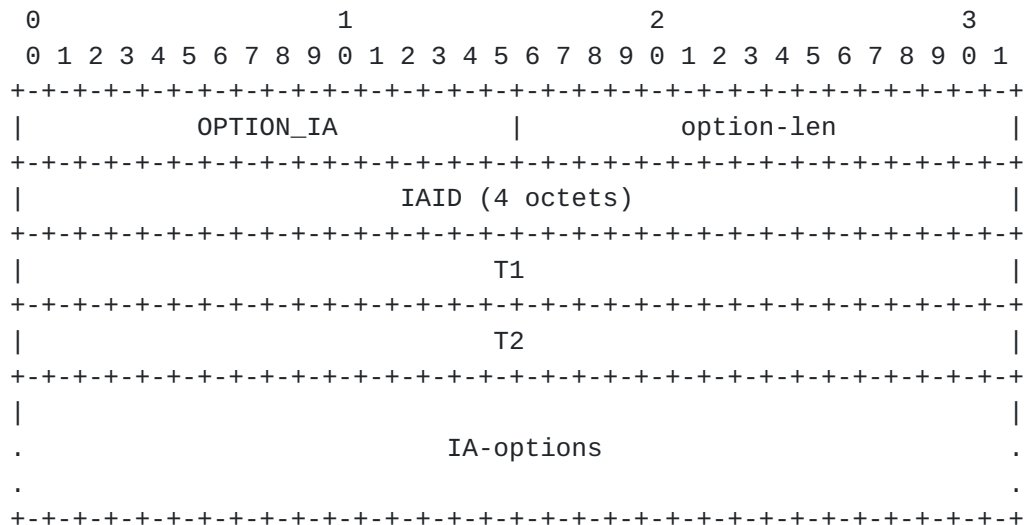

option-code	OPTION_IA (3)
option-len	12 + length of IA-options field
IAID	The unique identifier for this IA; the IAID must be unique among the identifiers for all of this client's IAs. The number space for IA IAIDs is separate from the number space for IA_TA IAIDs.
T1	The time at which the client contacts the server from which the addresses in the IA were obtained to extend the lifetimes of the addresses assigned to the IA; T1 is a time duration relative to the current time expressed in units of seconds
T2	The time at which the client contacts any available server to extend the lifetimes of the addresses assigned to the IA; T2 is a time duration relative to the current time expressed in units of seconds
IA-options	Options associated with this IA.

The IA-options field encapsulates those options that are specific

to this IA. For example, all of the IA Address Options carrying the addresses associated with this IA are in the IA-options field.

An IA option may only appear in the options area of a DHCP message. A DHCP message may contain multiple IA options.

The status of any operations involving this IA is indicated in a Status Code option in the IA-options field.

Note that an IA has no explicit "lifetime" or "lease length" of its own. When the lifetimes of all of the addresses in an IA have expired, the IA can be considered as having expired. T1 and T2 are included to give servers explicit control over when a client recontacts the server about a specific IA.

In a message sent by a client to a server, values in the T1 and T2 fields indicate the client's preference for those parameters. The client may send 0 if it has no preference for T1 and T2. In a message sent by a server to a client, the client MUST use the values in the T1 and T2 fields for the T1 and T2 parameters. The values in the T1 and T2 fields are the number of seconds until T1 and T2.

The server selects the T1 and T2 times to allow the client to extend the lifetimes of any addresses in the IA before the lifetimes expire, even if the server is unavailable for some short period of time. Recommended values for T1 and T2 are .5 and .8 times the shortest preferred lifetime of the addresses in the IA, respectively. If the server does not intend for a client to extend the lifetimes of the addresses in an IA, the server sets T1 and T2 to 0.

T1 is the time at which the client begins the lifetime extension process by sending a Renew message to the server that originally assigned the addresses to the IA. T2 is the time at which the client starts sending a Rebind message to any server.

T1 and T2 are specified as unsigned integers that specify the time in seconds relative to the time at which the messages containing the option is received.

22.5. Identity Association for Temporary Addresses option

The Identity Association for Temporary Addresses (IA_TA) option is used to carry an IA, the parameters associated with the IA and the addresses associated with the IA. All of the addresses in this option are used by the client as temporary addresses, as defined in [RFC 3041](#).

The format of the IA_TA option is:

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
```

```


+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|          OPTION_IA_TA          |          option-len          |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                                IAID (4 octets)                                |

```


22.6. IA Address option

The IA Address option is used to specify IPv6 addresses associated with an IA. The IA Address option must be encapsulated in the Options field of an Identity Association option. The Options field encapsulates those options that are specific to this address.

The format of the IA Address option is:

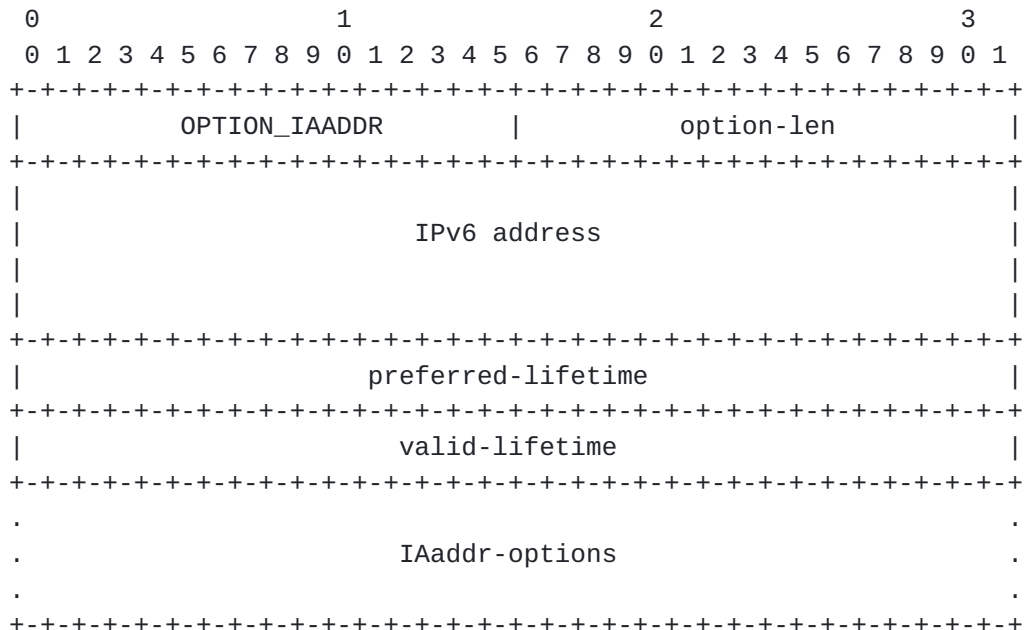

```
option-code    OPTION_IADDR (5)
```

option-len	24 + length of IAaddr-options field
------------	-------------------------------------

IPv6 address An IPv6 address

preferred-lifetime The preferred lifetime for the IPv6 address in the option, expressed in units of seconds

valid-lifetime The valid lifetime for the IPv6 address in the option, expressed in units of seconds

IAaddr-options Options associated with this address

In a message sent by a client to a server, values in the preferred and valid lifetime fields indicate the client's preference for those parameters. The client may send 0 if it has no preference for the preferred and valid lifetimes. In a message sent by a server to a

client, the client MUST use the values in the preferred and valid lifetime fields for the preferred and valid lifetimes. The values in the preferred and valid lifetimes are the number of seconds remaining in each lifetime.

An IA Address option may appear only in an IA option or an IA_TA option. More than one IA Address Options can appear in an IA option or an IA_TA option.

The status of any operations involving this IA Address is indicated in a Status Code option in the IAAddr-options field.

22.7. Option Request option

The Option Request option is used to identify a list of options in a message between a client and a server.

The format of the Option Request option is:

```

0          1          2          3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|          OPTION_ORO          |          option-len          |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|  requested-option-code-1  |  requested-option-code-2  |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|          ...          |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

```
option-code    OPTION_OR0 (6)
```

```
option-len      2 * number of requested options
```

```
requested-option-code-n The option code for an option requested by
                        the client.
```

A client MAY include an Option Request option in a Solicit, Request, Renew, Rebind, Confirm or Information-request message to inform the server about options the client wants the server to send to the client.

22.8. Preference option

[illegible]

option-code OPTION_PREFERENCE (7)

Droms (ed.), et al.

Expires 22 Oct 2002


[Page 64]

option-len 1.

pref-value The preference value for the server in this message.

A server MAY include a Preference option in an Advertise message to control the selection of a server by the client. See [section 17.1.3](#) for the use of the Preference option by the client and the interpretation of Preference option data value.

22.9. Elapsed Time

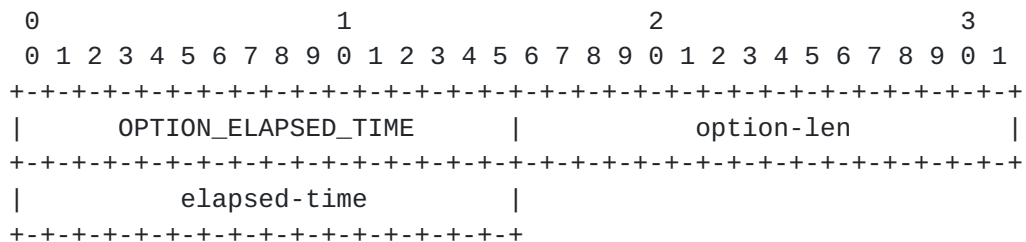

option-code OPTION_ELAPSED_TIME (8)

option-len 2.

elapsed-time The amount of time since the client began its current DHCP transaction. This time is expressed in hundredths of a second (10^{-2} seconds).


A client SHOULD include an Elapsed Time option in messages to indicate how long the client has been trying to complete a DHCP transaction. Servers and Relay Agents use the data value in this option as input to policy controlling how a server responds to a client message. For example, the elapsed time option allows a secondary DHCP server to respond to a request when a primary server hasn't answered in a reasonable time.

A server sends a DHCP message to be forwarded to a client by a relay agent as the contents of a Server Message option in a Relay-reply message.

22.12. Authentication option

The Authentication option carries authentication information to authenticate the identity and contents of DHCP messages. The use of the Authentication option is described in [section 21](#). If the Authentication option appears in a DHCP message, it should be included as close to the beginning of the options field as possible for improved efficiency of authentication processing.

The format of the Authentication option is:

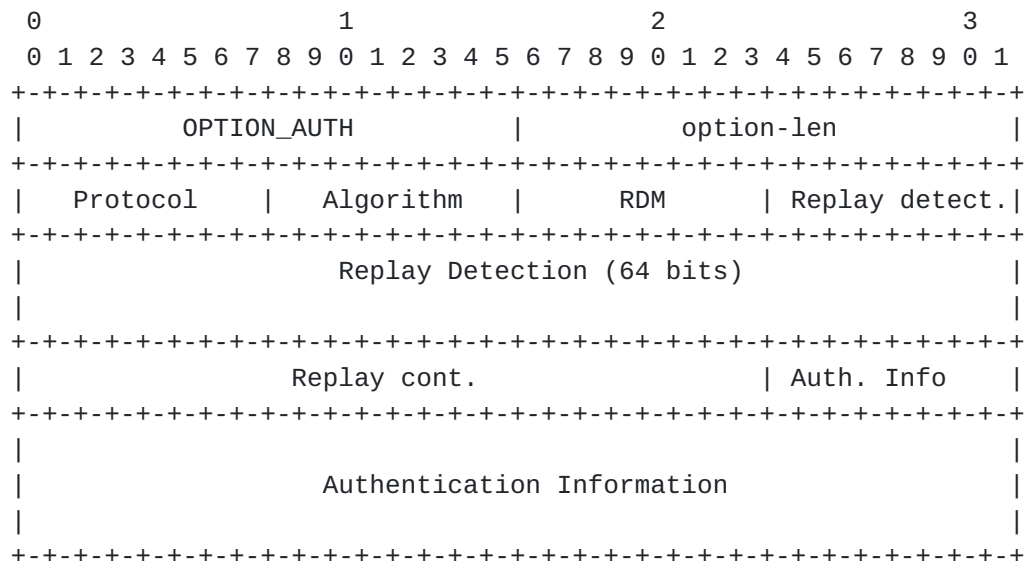

option-code	OPTION_AUTH (11)
option-len	12 + length of Authentication Information field
protocol	The authentication protocol used in this authentication option
algorithm	The algorithm used in the authentication protocol
RDM	The replay detection method used in this authentication option
Replay detection	The replay detection information for the RDM
Authentication information	The authentication information, as specified by the protocol and algorithm used in this authentication

option

Droms (ed.), et al.


Expires 22 Oct 2002

[Page 67]

22.13. Server unicast option

The server sends this option to a client to indicate to the client that it is allowed to unicast messages to the server. The server specifies the IPv6 address to which the client is to send unicast messages in the server-address field. When a client receives this option, where permissible and appropriate, the client sends messages directly to the server using the IPv6 address specified in the server-address field of the option.

Details about when the client may send messages to the server using unicast are in [section 18](#).

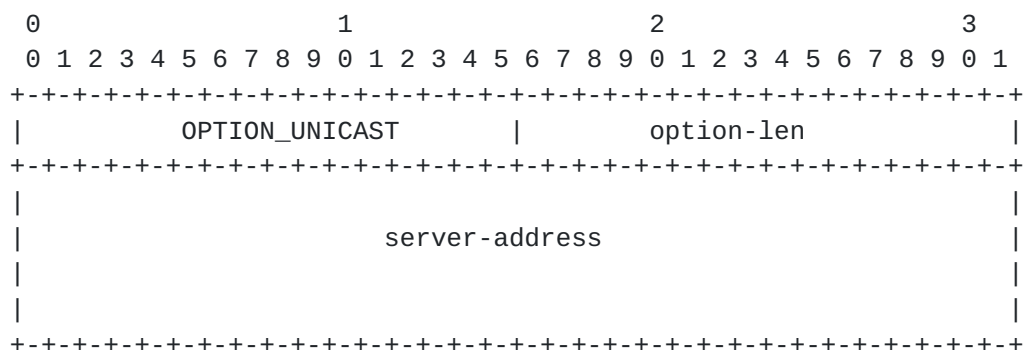


option-code OPTION_UNICAST (12)

option-len 16

server-address The IP address to which the client should send
 messages delivered using unicast

22.14. Status Code Option

This option returns a status indication related to the DHCP message or option in which it appears.

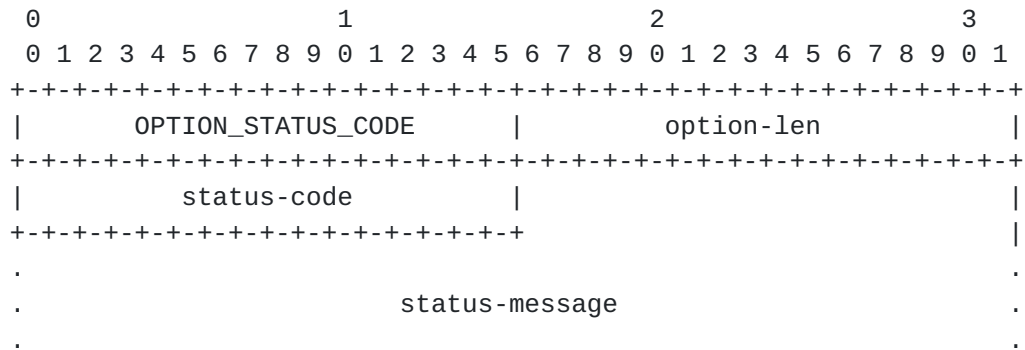

option-code	OPTION_STATUS_CODE (13)
-------------	-------------------------

[Page 68]

option-len	2 + length of status-message
status-code	The numeric code for the status encoded in this option. The status codes are defined in section 5.5 .
status-message	A UTF-8 encoded text string, which MUST NOT be null-terminated.

A Status Code option may appear in a DHCP message option, or in the options area of another option.

[22.15](#). Rapid Commit option

A client MAY include this option in a Solicit message if the client is prepared to perform the Solicit-Reply message exchange described in [section 17.1.1](#).

A server MUST include this option in a Reply message sent in response to a Solicit message when completing the Solicit-Reply message exchange.

```

0             1             2             3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      OPTION_RAPID_COMMIT      |      0      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

option-code OPTION_RAPID_COMMIT (14)

option-len 0

[22.16](#). User Class Option

This option is used by a client to identify the type or category of user or applications it represents. The information contained in the data area of this option is contained in one or more opaque fields that represent the user class or classes of which the client is a member. The user class information carried in this option MUST be configurable on the client.

```

0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      OPTION_USER_CLASS      |      option-len      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```


option-code	OPTION_USER_CLASS (15)
option-len	Length of user class data field
user-class-data	The user classes carried by the client.

The data area of the user class option MUST contain one or more instances of user class data. Each instance of the user class data is formatted as follows:

```

+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      user-class-len      |      opaque-data      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

The user-class-len is two octets long and specifies the length of the opaque user class data in network order.

Servers can interpret the meanings of multiple class specifications in an implementation dependent or configuration dependent manner, and so the use of multiple classes by a DHCP client should be based on the specific server implementation and configuration which will be used to process that User class option.

[22.17. Vendor Class Option](#)

This option is used by a client to identify the vendor that manufactured the hardware on which the client is running. The information contained in the data area of this option is contained in one or more opaque fields that identify details of the hardware configuration.

```

0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      OPTION_VENDOR_CLASS      |      option-len      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      enterprise-number      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
.
.      vendor-class-data      .
.      .      .      .      .
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

option-code	OPTION_VENDOR_CLASS (16)
-------------	--------------------------

option-len	4 + length of vendor class data field
enterprise-number	The vendor's registered Enterprise Number as registered with IANA.

sequence of code/length/value fields of identical format to the DHCP options field. The option codes are defined by the vendor identified in the enterprise-number field and are not managed by IANA. Each of the encapsulated options is formatted as follows.

```

  0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|          opt-code          |          option-len          |
+-+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
.
.              option-data              .
.
+-+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+

```

opt-code The code for the encapsulated option

option-len An unsigned integer giving the length of the
option-data field in this encapsulated option
in octets.

option-data The data area for the encapsulated option

Multiple instances of the Vendor-specific Information option may appear in a DHCP message. Each instance of the option is interpreted according to the option codes defined by the vendor identified by the Enterprise Number in that option. A DHCP message **MUST NOT** contain more than one Vendor-specific Information option with the same Enterprise Number.

22.19. Interface-Id Option

The relay agent **MAY** send the Interface-id option to identify the interface on which the client message was received. If a relay agent receives a Relay-reply message with an Interface-id option, the relay agent forwards the message to the client through the interface identified by the option.

```

  0                               1                               2                               3
  0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|      OPTION_INTERFACE_ID      |      option-len      |
+-+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
.
.              interface-id              .
.
+-+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+

```

option-code **OPTION_INTERFACE_ID (18)**

option-len Length of interface-id field

interface-id	An opaque value of arbitrary length generated by the relay agent to identify one of the relay agent's interfaces
--------------	--

This document defines several new name spaces associated with DHCPv6 and DHCPv6 options. IANA is requested to manage the allocation of values from these name spaces, which are described in the remainder

of this section. These name spaces are all to be managed separately from the name spaces defined for DHCPv4 [[5](#), [1](#)].

New values in each of these name spaces should be approved by the process of IETF consensus [[13](#)].

[25.1](#). Multicast addresses

[Section 5.1](#) defines the following multicast addresses, which have been assigned by IANA for use by DHCPv6:

All_DHCP_Relay_Agents_and_Servers address: FF02::1:2

All_DHCP_Servers address: FF05::1:3

IANA is requested to manage definition of additional multicast addresses in the future.

[25.2](#). Anycast addresses

[Section 5.2](#) defines the following anycast address, which is requested for assignment to DHCP by IANA:

DHCP_Anycast: FEC0:0:0:0:FFFF::4

IANA is requested to manage definition of additional anycast addresses in the future.

[25.3](#). DHCPv6 message types

IANA is requested to record the following message types (defined in [section 5.4](#)). IANA is requested to manage definition of additional message types in the future.

SOLICIT	1
ADVERTISE	2
REQUEST	3
CONFIRM	4
RENEW	5
REBIND	6
REPLY	7

RELEASE

8

Droms (ed.), et al.

Expires 22 Oct 2002

[Page 74]

DECLINE	9
RECONFIGURE	10
INFORMATION-REQUEST	11
RELAY-FORW	12
RELAY-REPL	13

25.4. DUID

IANA is requested to record the following DUID types (as defined in [section 9.1](#)). IANA is requested to manage definition of additional DUID types in the future.

Link-layer address plus time	1
VUID-DN	2
VUID-EN	3
Link-layer address	4

25.5. DHCPv6 options

IANA is requested to record the following option-codes (as defined in [section 22](#)). IANA is requested to manage the definition of additional DHCPv6 option-codes in the future.

OPTION_CLIENTID	1
OPTION_SERVERID	2
OPTION_IA	3
OPTION_IA_TMP	4
OPTION_IADDR	5
OPTION_ORO	6
OPTION_PREFERENCE	7
OPTION_ELAPSED_TIME	8
OPTION_CLIENT_MSG	9

OPTION_SERVER_MSG 10

OPTION_AUTH 11

Droms (ed.), et al.

Expires 22 Oct 2002

[Page 75]

OPTION_UNICAST	12
OPTION_STATUS_CODE	13
OPTION_RAPID_COMMIT	14
OPTION_USER_CLASS	15
OPTION_VENDOR_CLASS	16
OPTION_VENDOR_OPTS	17
OPTION_INTERFACE_ID	18
OPTION_RECONF_MSG	19

25.6. Status codes

IANA is requested to record the status codes defined in the following table. IANA is requested to manage the definition of additional status codes in the future.

Name	Code	Description
-----	----	-----
Success	0	Success
UnspecFail	1	Failure, reason unspecified; this status code is sent by either a client or a server to indicate a failure not explicitly specified in this document
AuthFailed	2	Authentication failed or nonexistent
AddrUnavail	3	Addresses unavailable
NoBinding	4	Client record (binding) unavailable
ConfNoMatch	5	Client record Confirm doesn't match IA
NotOnLink	6	One or more prefixes of the addresses in the IA is not valid for the link from which the client message was received
UseMulticast	7	Sent by a server to a client to force the client to send messages to the server using the All_DHCP_Relay_Agents_and_Servers address

25.7. Authentication option

[Section 21](#) defines three new name spaces associated with the Authentication Option ([section 22.12](#)), which are to be created and

maintained by IANA: Protocol, Algorithm and RDM.

Droms (ed.), et al.

Expires 22 Oct 2002

[Page 76]

Initial values assigned from the Protocol name space are 0 (reserved) and 1 (for the delayed authentication Protocol in [section 21.5](#)). Additional protocols may be defined in the future.

The Algorithm name space is specific to individual Protocols. That is, each Protocol has its own Algorithm name space. The guidelines for assigning Algorithm name space values for a particular protocol should be specified along with the definition of a new Protocol.

For the delayed authentication Protocol, the Algorithm value 1 is assigned to the HMAC-MD5 generating function as defined in [section 21.5](#). Additional algorithms for the delayed authentication protocol may be defined in the future.

The initial value of 0 from the RDM name space is assigned to the use of a monotonically increasing value as defined in [section 21.4](#). Additional replay detection methods may be defined in the future.

[26. Acknowledgments](#)

Thanks to the DHC Working Group for their time and input into the specification. In particular, thanks also for the consistent input, ideas, and review by (in alphabetical order) Thirumalesh Bhat, Vijayabhaskar, Brian Carpenter, Matt Crawford, Francis Dupont, Tony Lindstrom, Josh Littlefield, Gerald Maguire, Jack McCann, Thomas Narten, Erik Nordmark, Yakov Rekhter, Mark Stapp, Matt Thomas, Sue Thomson, and Phil Wells.

Thanks to Steve Deering and Bob Hinden, who have consistently taken the time to discuss the more complex parts of the IPv6 specifications.

Bill Arbaugh reviewed the authentication mechanism described in [section 21](#).

And, thanks to Steve Deering for pointing out at IETF 51 in London that the DHCPv6 specification has the highest revision number of any Internet Draft.

References

- [1] S. Alexander and R. Droms. DHCP Options and BOOTP Vendor Extensions, March 1997. [RFC 2132](#).
- [2] S. Bradner. Key words for use in RFCs to Indicate Requirement Levels, March 1997. [RFC 2119](#).

- [3] S. Deering and R. Hinden. Internet Protocol, Version 6 (IPv6) Specification, December 1998. [RFC 2460](#).

- [4] R. Draves. Default Address Selection for IPv6, September 2001. work in progress.
- [5] R. Droms. Dynamic Host Configuration Protocol, March 1997. [RFC 2131](#).
- [6] R. Droms, Editor, W. Arbaugh, and Editor. Authentication for DHCP Messages, June 2001. [RFC 3118](#).
- [7] R. Hinden and S. Deering. IP Version 6 Addressing Architecture, July 1998. [RFC 2373](#).
- [8] S. Kent and R. Atkinson. Security Architecture for the Internet Protocol, November 1998. [RFC 2401](#).
- [9] H. Krawczyk, M. Bellare, and R. Canetti. HMAC: Keyed-Hashing for Message Authentication, February 1997. [RFC 2104](#).
- [10] David L. Mills. Network Time Protocol (Version 3) Specification, Implementation, March 1992. [RFC 1305](#).
- [11] P.V. Mockapetris. Domain names - concepts and facilities, November 1987. [RFC 1034](#).
- [12] P.V. Mockapetris. Domain names - implementation and specification, November 1987. [RFC 1035](#).
- [13] T. Narten and H. Alvestrand. Guidelines for Writing an IANA Considerations Section in RFCs, October 1998. [RFC 2434](#).
- [14] T. Narten and R. Draves. Privacy Extensions for Stateless Address Autoconfiguration in IPv6, January 2001. [RFC 3041](#).
- [15] T. Narten, E. Nordmark, and W. Simpson. Neighbor Discovery for IP Version 6 (IPv6), December 1998. [RFC 2461](#).
- [16] D.C. Plummer. Ethernet Address Resolution Protocol: Or converting network protocol addresses to 48.bit Ethernet address for transmission on Ethernet hardware, November 1982. [RFC 826](#).
- [17] J. Postel. User Datagram Protocol, August 1980. [RFC 768](#).
- [18] R. Rivest. The MD5 Message-Digest Algorithm, April 1992. [RFC 1321](#).
- [19] S. Thomson and T. Narten. IPv6 Stateless Address Autoconfiguration, December 1998. [RFC 2462](#).
- [20] P. Vixie, Ed., S. Thomson, Y. Rekhter, and J. Bound. Dynamic

Updates in the Domain Name System (DNS UPDATE), April 1997. [RFC 2136](#).

Droms (ed.), et al.

Expires 22 Oct 2002

[Page 78]

Chair's Address

The working group can be contacted via the current chair:

Ralph Droms
Cisco Systems
300 Apollo Drive
Chelmsford, MA 01824

Phone: (978) 244-4733
E-mail: rdroms@cisco.com

Authors' Addresses

Questions about this memo can be directed to:

Jim Bound
Compaq Computer Corporation
ZK3-3/W20
110 Spit Brook Road
Nashua, NH 03062-2698
USA
Voice: +1 603 884 0062
E-mail: Jim.Bound@compaq.com

Mike Carney
Sun Microsystems, Inc
Mail Stop: UMPK17-202
901 San Antonio Road
Palo Alto, CA 94303-4900
USA
Voice: +1-650-786-4171
E-mail: mwc@eng.sun.com

Charles E. Perkins
Communications Systems Lab
Nokia Research Center
313 Fairchild Drive
Mountain View, California 94043
USA
Voice: +1-650 625-2986
E-mail: charliep@iprg.nokia.com
Fax: +1 650 625-2502

Ted Lemon
Nominum, Inc.
950 Charter Street
Redwood City, CA 94043
E-mail: Ted.Lemon@nominum.com

Bernie Volz
Ericsson
959 Concord St
Framingham, MA 01701
Voice: +1-508-875-3162
Fax: +1-508-875-3018
E-mail: bernie.volz@ericsson.com

Ralph Droms
Cisco Systems
300 Apollo Drive
Chelmsford, MA 01824
USA

Voice: +1 978 479 4733
E-mail: rdroms@cisco.com

A. Appearance of Options in Message Types

The following table indicates with a "*" the options are allowed in each DHCP message type:

	Client ID	Server ID	IA/ IA_TA	Option Request	Pref	Time	Client Msg.	Server Msg.
Solicit	*		*	*		*		
Advert.	*	*	*		*	*		
Request	*	*	*	*		*		
Confirm	*		*	*		*		
Renew	*	*	*	*		*		
Rebind	*		*	*		*		
Decline	*	*	*	*		*		
Release	*	*	*	*		*		
Reply	*	*	*		*	*		
Reconf.	*	*		*				
Inform.	*	(see note)		*		*		
R-forw.							*	
R-repl.								*

NOTE:

Only included in Information-Request messages that are sent in response to a Reconfigure (see [section 19.3.3](#)).

	Auth	Server Unica.	Status Code	Rap. Comm.	User Class	Vendor Class	Vendor Spec.	Inter. ID	Recon. Msg.
Solicit	*			*	*	*	*		
Advert.	*		*		*	*	*		
Request	*				*	*	*		
Confirm	*				*	*	*		
Renew	*				*	*	*		
Rebind	*				*	*	*		
Decline	*		*		*	*	*		
Release	*		*		*	*	*		
Reply	*	*	*		*	*	*		
Reconf.	*								*
Inform.	*				*	*	*		
R-forw.	*				*	*	*	*	
R-repl.	*				*	*	*	*	

B. Appearance of Options in the Options Field of DHCP Options

The following table indicates with a "*" where options can appear in the options field of other options:

	Option Field	IA/ IA_TA	IAADDR	Client Msg.	Server Msg.
Client ID	*				
Server ID	*				
IA/IA_TA	*				
IAADDR		*			
ORO	*				
Pref	*				
Time	*				
Authentic.	*				
Server Uni.	*				
Status Code	*	*	*	*	*
Rapid Comm.	*				
User Class	*				
Vendor Class	*				
Vendor Info.	*				
Interf. ID				*	*
Reconf. msg.	*				

C. Full Copyright Statement

Copyright (C) The Internet Society (2001). All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this paragraph are included on all such copies and derivative works. However, this document itself may not be modified in any way, such as by removing the copyright notice or references to the Internet Society or other Internet organizations, except as needed for the purpose of developing Internet standards in which case the procedures for copyrights defined in the Internet Standards process must be followed, or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by the Internet Society or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION

HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF
MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Droms (ed.), et al.

Expires 22 Oct 2002

[Page 82]