

DHC	M. Stapp	
Internet-Draft	Cisco Systems, Inc.	
Intended status: Standards Track	October 16, 2008	
Expires: April 19, 2009		

[TOC](#)

## **DHCPv6 Bulk Leasequery draft-ietf-dhc-dhcpv6-bulk-leasequery-04.txt**

### **Status of this Memo**

By submitting this Internet-Draft, each author represents that any applicable patent or other IPR claims of which he or she is aware have been or will be disclosed, and any of which he or she becomes aware will be disclosed, in accordance with Section 6 of BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on April 19, 2009.

### **Abstract**

The Dynamic Host Configuration Protocol for IPv6 (DHCPv6) has been extended with a Leasequery capability that allows a client to request information about DHCPv6 bindings. That mechanism is limited to queries for individual bindings. In some situations individual binding queries may not be efficient, or even possible. This document expands on the Leasequery protocol, adding new query types and allowing for bulk transfer of DHCPv6 binding data via TCP.

---

### **Table of Contents**

- [1.](#) Introduction
- [2.](#) Terminology
- [3.](#) Protocol Overview

<a href="#">4.</a>	<a href="#">Interaction Between UDP Leasequery and Bulk Leasequery</a>
<a href="#">5.</a>	<a href="#">Message and Option Definitions</a>
<a href="#">5.1.</a>	<a href="#">Message Framing for TCP</a>
<a href="#">5.2.</a>	<a href="#">Messages</a>
<a href="#">5.2.1.</a>	<a href="#">LEASEQUERY-DATA</a>
<a href="#">5.2.2.</a>	<a href="#">LEASEQUERY-DONE</a>
<a href="#">5.3.</a>	<a href="#">Query Types</a>
<a href="#">5.3.1.</a>	<a href="#">QUERY_BY_RELAY_ID</a>
<a href="#">5.3.2.</a>	<a href="#">QUERY_BY_LINK_ADDRESS</a>
<a href="#">5.3.3.</a>	<a href="#">QUERY_BY_REMOTE_ID</a>
<a href="#">5.4.</a>	<a href="#">Options</a>
<a href="#">5.4.1.</a>	<a href="#">Relay-ID Option</a>
<a href="#">5.5.</a>	<a href="#">Status Codes</a>
<a href="#">5.6.</a>	<a href="#">Connection and Transmission Parameters</a>
<a href="#">6.</a>	<a href="#">Requestor Behavior</a>
<a href="#">6.1.</a>	<a href="#">Connecting</a>
<a href="#">6.2.</a>	<a href="#">Forming Queries</a>
<a href="#">6.3.</a>	<a href="#">Processing Replies</a>
<a href="#">6.3.1.</a>	<a href="#">Reply Completion</a>
<a href="#">6.4.</a>	<a href="#">Querying Multiple Servers</a>
<a href="#">6.5.</a>	<a href="#">Multiple Queries to a Single Server</a>
<a href="#">6.5.1.</a>	<a href="#">Example</a>
<a href="#">6.6.</a>	<a href="#">Closing Connections</a>
<a href="#">7.</a>	<a href="#">Server Behavior</a>
<a href="#">7.1.</a>	<a href="#">Accepting Connections</a>
<a href="#">7.2.</a>	<a href="#">Forming Replies</a>
<a href="#">7.3.</a>	<a href="#">Multiple or Parallel Queries</a>
<a href="#">7.4.</a>	<a href="#">Closing Connections</a>
<a href="#">8.</a>	<a href="#">Security Considerations</a>
<a href="#">9.</a>	<a href="#">IANA Considerations</a>
<a href="#">10.</a>	<a href="#">Acknowledgements</a>
<a href="#">11.</a>	<a href="#">Modification History</a>
<a href="#">12.</a>	<a href="#">References</a>
<a href="#">12.1.</a>	<a href="#">Normative References</a>
<a href="#">12.2.</a>	<a href="#">Informative References</a>
<a href="#">§</a>	<a href="#">Author's Address</a>
<a href="#">§</a>	<a href="#">Intellectual Property and Copyright Statements</a>

---

## 1. Introduction

[TOC](#)

The DHCPv6 [\[RFC3315\]](#) (Droms, R., Bound, J., Volz, B., Lemon, T., Perkins, C., and M. Carney, "Dynamic Host Configuration Protocol for IPv6 (DHCPv6)," July 2003.) protocol specifies a mechanism for the assignment of IPv6 address and configuration information to IPv6 nodes. IPv6 Prefix Delegation for DHCPv6 (PD) [\[RFC3633\]](#) (Troan, O. and R.

[Droms, "IPv6 Prefix Options for Dynamic Host Configuration Protocol \(DHCP\) version 6," December 2003.](#)) specifies a mechanism for DHCPv6 delegation of IPv6 prefixes and related data. DHCPv6 servers maintain authoritative information including binding information for delegated IPv6 prefixes.

The client of a PD binding is typically a router, which then advertises the delegated prefix to locally-connected hosts. The delegated IPv6 prefix must be routeable in order to be useful. The actual DHCPv6 PD client may not be permitted to inject routes into the delegating network. In service-provider (SP) networks, for example, an edge router typically acts as a DHCPv6 relay agent, and this edge router often has the responsibility to maintain routes within the service-provider network for clients' PD bindings.

A DHCPv6 relay with this responsibility requires a means to recover binding information from the authoritative DHCPv6 server(s) in the event of replacement or reboot, in order to restore routeability to delegated prefixes. The relay may be a network device without adequate local storage to maintain the necessary binding-to-route data. A DHCPv6 Leasequery protocol [\[RFC5007\] \(Brzozowski, J., Kinnear, K., Volz, B., and S. Zeng, "DHCPv6 Leasequery," September 2007.\)](#) has been developed that allows queries for individual bindings from the authoritative DHCPv6 Server(s). The individual query mechanism is only useable when the target binding is known to the requestor, such as upon receipt of traffic. In the case of DHCPv6 Prefix Delegation, the PD binding data may need to be known before any traffic arrives from the client router. The DHCPv6 relay router may not be able to form individual queries in such cases.

This document extends the DHCPv6 Leasequery protocol to add support for queries that address these requirements. At the SP edge there may be many thousands of delegated prefixes per relay, so we specify the use of TCP [\[RFC4614\] \(Duke, M., Braden, R., Eddy, W., and E. Blanton, "A Roadmap for Transmission Control Protocol \(TCP\) Specification Documents," September 2006.\)](#) for efficiency of data transfer. We specify a new DHCPv6 option, the Relay Identifier option, to support efficient recovery of all data associated with a specific relay agent; we also add a query-type for this purpose. We add query-types by network segment and by Remote-ID option value, to assist a relay that needs to recover a subset of its clients' bindings.

---

## 2. Terminology

[TOC](#)

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [\[RFC2119\] \(Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels," March 1997.\)](#).

DHCPv6 terminology is defined in [\[RFC3315\]](#) (Droms, R., Bound, J., Volz, B., Lemon, T., Perkins, C., and M. Carney, "Dynamic Host Configuration Protocol for IPv6 (DHCPv6)," July 2003.). DHCPv6 Leasequery terminology is defined in [\[RFC5007\]](#) (Brzozowski, J., Kinnear, K., Volz, B., and S. Zeng, "DHCPv6 Leasequery," September 2007.).

---

### 3. Protocol Overview

[TOC](#)

The Bulk Leasequery mechanism is modeled on the existing individual Leasequery protocol in [\[RFC5007\]](#) (Brzozowski, J., Kinnear, K., Volz, B., and S. Zeng, "DHCPv6 Leasequery," September 2007.); most differences arise from the use of TCP. A Bulk Leasequery client opens a TCP connection to a DHCPv6 Server, using the DHCPv6 port 547. Note that this implies that the Leasequery client has server IP address(es) available via configuration or some other means, and that it has unicast IP reachability to the server. No relaying for bulk leasequery is specified.

After establishing a connection, the client sends a LEASEQUERY message containing a query-type and data about bindings it is interested in. The server uses the query-type and the data to identify any relevant bindings. In order to support some query-types, servers may have to maintain additional data structures or be able to locate bindings based on specific option data. The server replies with a LEASEQUERY-REPLY message, indicating the success or failure of the query. If the query was successful, the server includes the first client's binding data in the LEASEQUERY-REPLY message also. If more than one client's bindings are being returned, the server then transmits the additional client bindings in a series of LEASEQUERY-DATA messages. If the server has sent at least one client's bindings, it sends a LEASEQUERY-DONE message when it has finished sending its replies. The client may reuse the connection to send additional queries. Each end of the TCP connection can be closed after all data has been sent.

This specification includes a new DHCPv6 option, the Relay-ID option. The option contains a DUID identifying a DHCPv6 relay agent. Relay agents can include this option in Relay-Forward messages they send. Servers can retain the Relay-ID and associate it with bindings made on behalf of the relay's clients. A relay can then recover binding information about downstream clients by using the Relay-ID in a LEASEQUERY message. The Relay-ID option is defined in [Section 5.4.1 \(Relay-ID Option\)](#).

Bulk Leasequery supports the queries by IPv6 address and by Client DUID as specified in [RFC5007](#) (Brzozowski, J., Kinnear, K., Volz, B., and S. Zeng, "DHCPv6 Leasequery," September 2007.) [RFC5007]. The Bulk Leasequery protocol also adds several new queries. The new queries introduced here cannot be used effectively with the UDP Leasequery protocol. Requestors MUST NOT send these new query-types in [RFC5007](#)

(Brzozowski, J., Kinnear, K., Volz, B., and S. Zeng, "DHCPv6 Leasequery," September 2007.) [RFC5007] query messages.

**Query by Relay Identifier** - This query asks a server for the bindings associated with a specific relay; the relay is identified by a DUID carried in a Relay-ID option.

**Query by Link Address** - This query asks a server for the bindings on a particular network segment; the link is specified in the query's link-address field.

**Query by Remote ID** - This query asks a server for the bindings associated with a Relay Agent Remote-ID option [RFC4649] (Volz, B., "Dynamic Host Configuration Protocol for IPv6 (DHCPv6) Relay Agent Remote-ID Option," August 2006.) value.

---

#### 4. Interaction Between UDP Leasequery and Bulk Leasequery

[TOC](#)

Bulk Leasequery can be seen as an extension of the existing UDP Leasequery protocol [RFC5007] (Brzozowski, J., Kinnear, K., Volz, B., and S. Zeng, "DHCPv6 Leasequery," September 2007.). This section tries to clarify the relationship between the two protocols.

The query-types introduced in the UDP Leasequery protocol can be used in the Bulk Leasequery protocol. One change in behavior is permitted when Bulk Leasequery is used. RFC5007 (Brzozowski, J., Kinnear, K., Volz, B., and S. Zeng, "DHCPv6 Leasequery," September 2007.) [RFC5007], in sections 4.1.2.5 and 4.3.3, specifies the use of a Client Link option in LEASEQUERY-REPLY messages in cases where multiple bindings were found. When Bulk Leasequery is used, this mechanism is not necessary: a server returning multiple bindings simply does so directly as specified in this document. The Client Link option MUST NOT appear in Bulk Leasequery replies.

Only LEASEQUERY, LEASEQUERY-REPLY, LEASEQUERY-DATA, and LEASEQUERY-DONE messages are allowed over the Bulk Leasequery connection. No other DHCPv6 messages are supported. The Bulk Leasequery connection is not an alternative DHCPv6 communication option for clients seeking DHCPv6 service.


The new queries introduced in this specification cannot be used with the UDP Leasequery protocol. Servers that implement this specification and also permit UDP queries MUST NOT accept Bulk Leasequery query-types in UDP Leasequery messages. Such servers MUST respond with an error status code of [NotAllowed](#) (Brzozowski, J., Kinnear, K., Volz, B., and S. Zeng, "DHCPv6 Leasequery," September 2007.) [RFC5007].

---

## TOC

## TOC

DHCPv6 message framed for TCP:



TOC

The LEASEQUERY and LEASEQUERY-REPLY messages are defined in [RFC5007 \(Brzozowski, J., Kinnear, K., Volz, B., and S. Zeng, "DHCPv6 Leasequery," September 2007.\)](#) [RFC5007]. In a Bulk Leasequery exchange, a single LEASEQUERY-REPLY message is used to indicate the success or

failure of a query, and to carry data that do not change in the context of a single query and answer, such as the Server-ID and Client-ID options. If a query is successful, only a single LEASEQUERY-REPLY message MUST appear. If the server is returning binding data, the LEASEQUERY-REPLY also contains the first client's binding data in an OPTION\_CLIENT\_DATA option.

---

#### 5.2.1. LEASEQUERY-DATA

[TOC](#)

The LEASEQUERY-DATA message (message type TBD) carries data about a single DHCPv6 client's leases and/or PD bindings on a single link. The purpose of the message is to reduce redundant data when there are multiple bindings to be sent. The LEASEQUERY-DATA message MUST be preceded by a LEASEQUERY-REPLY message. The LEASEQUERY-REPLY conveys the query's status, carries the Leasequery's Client-ID and Server-ID options, and carries the first client's binding data if the query was successful.

LEASEQUERY-DATA MUST ONLY be sent in response to a successful LEASEQUERY, and only if more than one client's data is to be sent. The LEASEQUERY-DATA message's transaction-id field MUST match the transaction-id of the LEASEQUERY request message. The Server-ID, Client-ID, and OPTION\_STATUS\_CODE options SHOULD NOT be included: that data should be constant for any one Bulk Leasequery reply, and should have been conveyed in the LEASEQUERY-REPLY message.

---

#### 5.2.2. LEASEQUERY-DONE

[TOC](#)

The LEASEQUERY-DONE message (message type TBD) indicates the end of a group of related Leasequery replies. The LEASEQUERY-DONE message's transaction-id field MUST match the transaction-id of the LEASEQUERY request message. The presence of the message itself signals the end of a stream of reply messages. A single LEASEQUERY-DONE MUST BE sent after all replies (a successful LEASEQUERY-REPLY and zero or more LEASEQUERY-DATA messages) to a successful Bulk Leasequery request that returned at least one binding.

A server may encounter an error condition after it has sent the initial LEASEQUERY-REPLY. In that case, it SHOULD attempt to send a LEASEQUERY-DONE with an OPTION\_STATUS\_CODE option indicating the error condition to the requestor. Other DHCPv6 options SHOULD NOT be included in the LEASEQUERY-DONE message.

---

[TOC](#)

### 5.3. Query Types

The `OPTION_LQ_QUERY` option is defined in [\[RFC5007\] \(Brzozowski, J., Kinnear, K., Volz, B., and S. Zeng, "DHCPv6 Leasequery," September 2007.\)](#). We introduce the following new query-types: `QUERY_BY_RELAY_ID`, `QUERY_BY_LINK_ADDRESS`, `QUERY_BY_REMOTE_ID`. These queries are designed to assist relay agents in recovering binding data in circumstances where some or all of the relay's binding data has been lost.

---

#### 5.3.1. `QUERY_BY_RELAY_ID`

[TOC](#)

This query asks the server to return bindings associated with the specified relay DUID.

**`QUERY_BY_RELAY_ID (3)`** - The query-options MUST contain an `OPTION_RELAY_ID` option. If the link-address field is `0::0`, the query asks for all bindings associated with the specified relay DUID. If the link-address is specified, the query asks for bindings on that link.

---

#### 5.3.2. `QUERY_BY_LINK_ADDRESS`

[TOC](#)

The `QUERY_BY_LINK_ADDRESS` asks the server to return bindings on a network segment identified by an link-address value from a relay's Relay-Forward message.

**`QUERY_BY_LINK_ADDRESS (4)`** - The query's link-address contains an address a relay may have used in the link-address of a Relay-Forward message. The Server attempts to locate bindings on the same network segment as the link-address.

---

#### 5.3.3. `QUERY_BY_REMOTE_ID`

[TOC](#)

The `QUERY_BY_REMOTE_ID` asks the server to return bindings associated with a Remote-ID option value from a relay's Relay-Forward message. The query-options MUST include a [Relay Agent Remote-ID option \(Volz, B., "Dynamic Host Configuration Protocol for IPv6 \(DHCPv6\) Relay Agent Remote-ID Option," August 2006.\)](#) [RFC4649].



In order to support this query, a server needs to record the most-recent Remote-ID option value seen in a Relay-Forward message along with its other binding data.

**QUERY\_BY\_REMOTE\_ID (5)** - The query-options MUST include a [Relay Agent Remote-ID option \(Volz, B., "Dynamic Host Configuration Protocol for IPv6 \(DHCPv6\) Relay Agent Remote-ID Option," August 2006.\)](#) [RFC4649]. If the Server has recorded Remote-ID values with its bindings, it uses the option's value to identify bindings to return.

---

## 5.4. Options

[TOC](#)

---


### 5.4.1. Relay-ID Option

[TOC](#)

The Relay-ID option carries a [DUID \(Droms, R., Bound, J., Volz, B., Lemon, T., Perkins, C., and M. Carney, "Dynamic Host Configuration Protocol for IPv6 \(DHCPv6\)," July 2003.\)](#) [RFC3315]. A relay agent MAY include the option in Relay-Forward messages it sends. Obviously, it will not be possible for a server to respond to QUERY\_BY\_RELAY\_ID queries unless the relay agent has included this option. A relay SHOULD be able to generate a DUID for this purpose, and capture the result in stable storage. A relay SHOULD also allow the DUID value to be configurable: doing so allows an administrator to replace a relay agent while retaining the association between the relay and existing DHCPv6 bindings.

A DHCPv6 Server MAY associate Relay-ID options from Relay-Forward messages it processes with PD and/or lease bindings that result. Doing so allows it to respond to QUERY\_BY\_RELAY\_ID Leasequeries.

The format of the Relay-ID option is shown below:

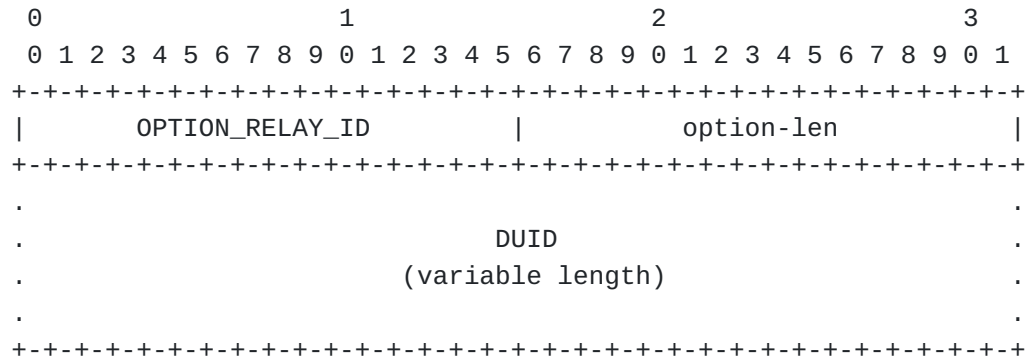

option-code    OPTION\_RELAY\_ID (TBD).

option-len    Length of DUID in octets.

DUID            The DUID for the relay agent.

## 5.5. Status Codes

[TOC](#)

QueryTerminated (TBD) - Indicates that the server is unable to perform a query or has prematurely terminated the query for some reason (which should be communicated in the text message). This may be because the server is short of resources or is being shut down. The requestor may retry the query at a later time. The requestor should wait at least a short interval before retrying. Note that while a server may simply prematurely close its end of the connection, it is preferable for the server to send a LEASEQUERY-REPLY or LEASEQUERY-DONE with this status-code to notify the requestor of the condition.

## 5.6. Connection and Transmission Parameters

[TOC](#)

DHCPv6 Servers that support Bulk Leasequery SHOULD listen for incoming TCP connections on the DHCPv6 server port 547. Implementations MAY offer to make the incoming port configurable, but port 547 MUST be the default. Client implementations SHOULD make TCP connections to port 547, and MAY offer to make the destination server port configurable. This section presents a table of values used to control Bulk Leasequery behavior, including recommended defaults. Implementations MAY make these values configurable.

Parameter	Default	Description
-----		
BULK_LQ_CONN_TIMEOUT	30 secs	Bulk Leasequery connection timeout
BULK_LQ_DATA_TIMEOUT	30 secs	Bulk Leasequery data timeout
BULK_LQ_MAX_RETRY	60 secs	Max Bulk Leasequery retry timeout
BULK_LQ_MAX_CONNS	10	Max Bulk Leasequery TCP connections

---

## 6. Requestor Behavior

[TOC](#)

---

### 6.1. Connecting

[TOC](#)

A Requestor attempts to establish a TCP connection to a DHCPv6 Server in order to initiate a Leasequery exchange. The Requestor SHOULD be prepared to abandon the connection attempt after BULK\_LQ\_CONN\_TIMEOUT. If the attempt fails, the Requestor MAY retry. Retries MUST use an exponential backoff timer, increasing the interval between attempts up to BULK\_LQ\_MAX\_RETRY.

---

### 6.2. Forming Queries

[TOC](#)

After a connection is established, the Requestor constructs a Leasequery message, as specified in [\[RFC5007\] \(Brzozowski, J., Kinnear, K., Volz, B., and S. Zeng, "DHCPv6 Leasequery," September 2007.\)](#). The query may have any of the defined query-types, and includes the options and data required by the query-type chosen. The Requestor sends the message size then sends the actual DHCPv6 message, as described in [Section 5.1 \(Message Framing for TCP\)](#).

If the TCP connection becomes blocked while the Requestor is sending its query, the Requestor SHOULD be prepared to terminate the connection after BULK\_LQ\_DATA\_TIMEOUT. We make this recommendation to allow Requestors to control the period of time they are willing to wait before abandoning a connection, independent of notifications from the TCP implementations they may be using.

---

[TOC](#)

### 6.3. Processing Replies

The Requestor attempts to read a LEASEQUERY-REPLY message from the TCP connection. If the stream of replies becomes blocked, the Requestor SHOULD be prepared to terminate the connection after BULK\_LQ\_DATA\_TIMEOUT, and MAY begin retry processing if configured to do so.

The Requestor examines the LEASEQUERY-REPLY message, and determines how to proceed. Message validation rules are specified in DHCPv6 Leasequery [\[RFC5007\] \(Brzozowski, J., Kinnear, K., Volz, B., and S. Zeng, "DHCPv6 Leasequery," September 2007.\)](#). If the reply contains an error status code (carried in an OPTION\_STATUS\_CODE option), the Requestor follows the recommendations in [\[RFC5007\] \(Brzozowski, J., Kinnear, K., Volz, B., and S. Zeng, "DHCPv6 Leasequery," September 2007.\)](#). A successful reply that does not include an OPTION\_CLIENT\_DATA option indicates that the target server had no bindings matching the query.

Note: The Leasequery protocol uses the OPTION\_CLIENT\_LINK option as an indicator that multiple bindings were present in response to a single query. For Bulk Leasequery, the OPTION\_CLIENT\_LINK option is not used, and MUST NOT be present in replies.

A successful LEASEQUERY-REPLY that is returning binding data includes an OPTION\_CLIENT\_DATA option and possibly additional options. If there are additional bindings to be returned, they will be carried in LEASEQUERY-DATA messages. Each LEASEQUERY-DATA message contains an OPTION\_CLIENT\_DATA option, and possibly other options. A LEASEQUERY-DATA message that does not contain an OPTION\_CLIENT\_DATA MUST BE discarded.

A single bulk query can result in a large number of replies. For example, a single relay agent might be responsible for routes for thousands of clients' delegated prefixes. The Requestor MUST be prepared to receive more than one LEASEQUERY-DATA with transaction-ids matching a single LEASEQUERY message.

The LEASEQUERY-DONE message ends a successful Bulk Leasequery request that returned at least one binding. A LEASEQUERY-REPLY without any bindings MUST NOT be followed by a LEASEQUERY-DONE message for the same transaction-id. After receiving LEASEQUERY-DONE from a server, the Requestor MAY close the TCP connection to that server. If the transaction-id in the LEASEQUERY-DONE does not match an outstanding LEASEQUERY message, the client MUST close the TCP connection.

---

#### 6.3.1. Reply Completion

[TOC](#)

The reply to a Bulk Leasequery request is complete (i.e., no further messages for that request xid will be received) when one of these conditions is met:

1. if the LEASEQUERY-REPLY message had no OPTION\_CLIENT\_DATA option, when the LEASEQUERY-REPLY is received,
2. else if the LEASEQUERY-REPLY did have an OPTION\_CLIENT\_DATA, when the corresponding LEASEQUERY-DONE message is received,
3. else when the connection is closed.

---

#### 6.4. Querying Multiple Servers

[TOC](#)

A Bulk Leasequery client MAY be configured to attempt to connect to and query from multiple DHCPv6 servers in parallel. The DHCPv6 Leasequery specification [\[RFC5007\] \(Brzozowski, J., Kinnear, K., Volz, B., and S. Zeng, "DHCPv6 Leasequery," September 2007.\)](#) includes a discussion about reconciling binding data received from multiple DHCPv6 servers.

---

#### 6.5. Multiple Queries to a Single Server

[TOC](#)

Bulk Leasequery clients may need to make multiple queries in order to recover binding information. A Requestor MAY use a single connection to issue multiple queries. Each query MUST have a unique transaction id. A server MAY process more than one query at a time. A server that is willing to do so MAY interleave replies to the multiple queries within the stream of reply messages it sends. Clients need to be aware that replies for multiple queries may be interleaved within the stream of reply messages. Clients that are not able to process interleaved replies (based on transaction id) MUST NOT send more than one query at a time. Requestors should be aware that servers are not required to process queries in parallel, and that servers are likely to limit the rate at which they process queries from any one Requestor.

---

##### 6.5.1. Example

[TOC](#)

This example illustrates what a series of queries and responses might look like. This is only an example - there is no requirement that this sequence must be followed, or that clients or servers must support parallel queries.

In the example session, the client sends four queries after establishing a connection. Query 1 results in a failure; query 2 succeeds and the stream of replies concludes before the client issues any new query. Query 3 and query 4 overlap, and the server interleaves its replies to those two queries.

Client		Server
-----		-----
LEASEQUERY xid 1 ----->		
	<-----	LEASEQUERY-REPLY xid 1 (w/error)
LEASEQUERY xid 2 ----->		
	<-----	LEASEQUERY-REPLY xid 2
	<-----	LEASEQUERY-DATA xid 2
	<-----	LEASEQUERY-DATA xid 2
	<-----	LEASEQUERY-DONE xid 2
LEASEQUERY xid 3 ----->		
LEASEQUERY xid 4 ----->		
	<-----	LEASEQUERY-REPLY xid 4
	<-----	LEASEQUERY-DATA xid 4
	<-----	LEASEQUERY-REPLY xid 3
	<-----	LEASEQUERY-DATA xid 4
	<-----	LEASEQUERY-DATA xid 3
	<-----	LEASEQUERY-DONE xid 3
	<-----	LEASEQUERY-DATA xid 4
	<-----	LEASEQUERY-DONE xid 4

---

## 6.6. Closing Connections

[TOC](#)

The Requestor MAY close its end of the TCP connection after sending a LEASEQUERY message to the server. The Requestor MAY choose to retain the connection if it intends to issue additional queries. Note that this client behavior does not guarantee that the connection will be available for additional queries: the server might decide to close the connection based on its own configuration.

---

## 7. Server Behavior

[TOC](#)

---

[TOC](#)

## 7.1. Accepting Connections

Servers that implement DHCPv6 Bulk Leasequery listen for incoming TCP connections. Port numbers are discussed in [Section 5.6 \(Connection and Transmission Parameters\)](#). Servers MUST be able to limit the number of currently accepted and active connections. The value BULK\_LQ\_MAX\_CONNS MUST be the default; implementations MAY permit the value to be configurable.

Servers MAY restrict Bulk Leasequery connections and LEASEQUERY messages to certain clients. Connections not from permitted clients SHOULD BE closed immediately, to avoid server connection resource exhaustion. Servers MAY restrict some clients to certain query types. Servers MAY reply to queries that are not permitted with the NotAllowed status code [\[RFC5007\] \(Brzozowski, J., Kinnear, K., Volz, B., and S. Zeng, "DHCPv6 Leasequery," September 2007.\)](#), or MAY close the connection.

If the TCP connection becomes blocked while the server is accepting a connection or reading a query, it SHOULD be prepared to terminate the connection after BULK\_LQ\_DATA\_TIMEOUT. We make this recommendation to allow Servers to control the period of time they are willing to wait before abandoning an inactive connection, independent of the TCP implementations they may be using.

---

## 7.2. Forming Replies

[TOC](#)

The DHCPv6 Leasequery [\[RFC5007\] \(Brzozowski, J., Kinnear, K., Volz, B., and S. Zeng, "DHCPv6 Leasequery," September 2007.\)](#) specification describes the initial construction of LEASEQUERY-REPLY messages and the processing of QUERY\_BY\_ADDRESS and QUERY\_BY\_CLIENTID. Use of the LEASEQUERY-REPLY and LEASEQUERY-DONE messages to carry multiple bindings are described in [Section 5.2 \(Messages\)](#). Message transmission and framing for TCP is described in [Section 5.1 \(Message Framing for TCP\)](#). If the connection becomes blocked while the server is attempting to send reply messages, the server SHOULD be prepared to terminate the TCP connection after BULK\_LQ\_DATA\_TIMEOUT.

If the server encounters an error during initial query processing, before any reply has been sent, it SHOULD send a LEASEQUERY-REPLY containing an error code in an OPTION\_STATUS\_CODE option. This signals to the requestor that no data will be returned. If the server encounters an error while processing a query that has already resulted in one or more reply messages, the server SHOULD send a LEASEQUERY-DONE message with an error status. The server SHOULD close its end of the connection as an indication that it was not able to complete query processing.

If the server does not find any bindings satisfying a query, it SHOULD send a LEASEQUERY-REPLY without an OPTION\_STATUS\_CODE option and

without any `OPTION_CLIENT_DATA` option. Otherwise, the server sends each binding's data in a reply message. The first reply message is a `LEASEQUERY-REPLY`. The binding data is carried in an `OPTION_CLIENT_DATA` option, as specified in [\[RFC5007\] \(Brzozowski, J., Kinnear, K., Volz, B., and S. Zeng, "DHCPv6 Leasequery," September 2007.\)](#) and extended below. The server returns subsequent bindings in `LEASEQUERY-DATA` messages, which can avoid redundant data (such as the requestor's `Client-ID`).

For `QUERY_BY_RELAY_ID`, the server locates each binding associated with the query's `Relay-ID` option value. In order to give a meaningful reply to a `QUERY_BY_RELAY_ID`, the server has to be able to maintain this association in its DHCPv6 binding data. If the query's link-address is not set to `0::0`, the server only returns bindings on links that could contain that address. If the link-address is not `0::0` and the server cannot find any matching links, the server **SHOULD** return the `NotConfigured` status in a `LEASEQUERY-REPLY`.

For `QUERY_BY_LINK_ADDRESS`, the server locates each binding associated with the link identified by the query's link-address value.

For `QUERY_BY_REMOTE_ID`, the server locates each binding associated with the query's `Relay Remote-ID` option value. In order to be able to give meaningful replies to this query, the server has to be able to maintain this association in its binding database. If the query message's link-address is not set to `0::0`, the server only returns bindings on links that could contain that address. If the link-address is not `0::0` and the server cannot find any matching links, the server **SHOULD** return the `NotConfigured` status in a `LEASEQUERY-REPLY`.

The server sends the `LEASEQUERY-DONE` message as specified in [Section 5.2 \(Messages\)](#).

---

### 7.3. Multiple or Parallel Queries

[TOC](#)

As discussed in [Section 6.5 \(Multiple Queries to a Single Server\)](#), Requestors may want to leverage an existing connection if they need to make multiple queries. Servers **MAY** support reading and processing multiple queries from a single connection. A server **MUST NOT** read more query messages from a connection than it is prepared to process simultaneously.

This **MAY** be a feature that is administratively controlled. Servers that are able to process queries in parallel **SHOULD** offer configuration that limits the number of simultaneous queries permitted from any one Requestor, in order to control resource use if there are multiple Requestors seeking service.

---

[TOC](#)



## 7.4. Closing Connections

The server MAY close its end of the TCP connection after sending its last message (a LEASEQUERY-REPLY or a LEASEQUERY-DONE) in response to a query. Alternatively, the server MAY retain the connection and wait for additional queries from the client. The server SHOULD be prepared to limit the number of connections it maintains, and SHOULD be prepared to close idle connections to enforce the limit.

The server MUST close its end of the TCP connection if it encounters an error sending data on the connection. The server MUST close its end of the TCP connection if it finds that it has to abort an in-process request. A server aborting an in-process request MAY attempt to signal that to its clients by using the [QueryTerminated \(Status Codes\)](#) status code. If the server detects that the client end has been closed, the server MUST close its end of the connection after it has finished processing any outstanding requests from the client.

---

## 8. Security Considerations

[TOC](#)

The "Security Considerations" section of [\[RFC3315\] \(Droms, R., Bound, J., Volz, B., Lemon, T., Perkins, C., and M. Carney, "Dynamic Host Configuration Protocol for IPv6 \(DHCPv6\)," July 2003.\)](#) details the general threats to DHCPv6. The DHCPv6 Leasequery specification [\[RFC5007\] \(Brzozowski, J., Kinnear, K., Volz, B., and S. Zeng, "DHCPv6 Leasequery," September 2007.\)](#) describes recommendations for the Leasequery protocol, especially with regard to relayed LEASEQUERY messages, mitigation of packet-flooding DOS attacks, restriction to trusted clients, and use of IPsec [\[RFC4301\] \(Kent, S. and K. Seo, "Security Architecture for the Internet Protocol," December 2005.\)](#).

The use of TCP introduces some additional concerns. Attacks that attempt to exhaust the DHCPv6 server's available TCP connection resources, such as SYN flooding attacks, can compromise the ability of legitimate clients to receive service. Malicious clients who succeed in establishing connections, but who then send invalid queries, partial queries, or no queries at all also can exhaust a server's pool of available connections. We recommend that servers offer configuration to limit the sources of incoming connections, that they limit the number of accepted connections and the number of in-process queries from any one connection, and that they limit the period of time during which an idle connection will be left open.

---

[TOC](#)

## 9. IANA Considerations

IANA is requested to assign a new DHCPv6 Option Code in the registry maintained in <http://www.iana.org/assignments/dhcpv6-parameters>:

OPTION\_RELAY\_ID

IANA is requested to assign a new value in the registry of DHCPv6 Status Codes maintained in <http://www.iana.org/assignments/dhcpv6-parameters>:

QueryTerminated

IANA is requested to assign values for the following new DHCPv6 Message types in the registry maintained in <http://www.iana.org/assignments/dhcpv6-parameters>:

LEASEQUERY-DONE

LEASEQUERY-DATA

IANA is requested to assign the following new values in the registry of query-types for the DHCPv6 OPTION\_LQ\_QUERY option:

QUERY\_BY\_RELAY\_ID

QUERY\_BY\_LINK\_ADDRESS

QUERY\_BY\_REMOTE\_ID

---

## 10. Acknowledgements

[TOC](#)

Many of the ideas in this document were originally proposed by Kim Kinnear, Richard Johnson, Hemant Singh, Ole Troan, and Bernie Volz. Further suggestions and improvements were made by participants in the DHC working group, including John Brzozowski, Marcus Goller, Ted Lemon, and Bud Millwood.

---

## 11. Modification History

[TOC](#)

---

[TOC](#)

## 12. References

### 12.1. Normative References

[TOC](#)

[RFC3315]	Droms, R., Bound, J., Volz, B., Lemon, T., Perkins, C., and M. Carney, " <a href="#">Dynamic Host Configuration Protocol for IPv6 (DHCPv6)</a> ," RFC 3315, July 2003 ( <a href="#">TXT</a> ).
[RFC3633]	Troan, O. and R. Droms, " <a href="#">IPv6 Prefix Options for Dynamic Host Configuration Protocol (DHCP) version 6</a> ," RFC 3633, December 2003 ( <a href="#">TXT</a> ).
[RFC2119]	<a href="#">Bradner, S.</a> , " <a href="#">Key words for use in RFCs to Indicate Requirement Levels</a> ," BCP 14, RFC 2119, March 1997 ( <a href="#">TXT</a> , <a href="#">HTML</a> , <a href="#">XML</a> ).
[RFC4649]	Volz, B., " <a href="#">Dynamic Host Configuration Protocol for IPv6 (DHCPv6) Relay Agent Remote-ID Option</a> ," RFC 4649, August 2006 ( <a href="#">TXT</a> ).
[RFC5007]	Brzozowski, J., Kinnear, K., Volz, B., and S. Zeng, " <a href="#">DHCPv6 Leasequery</a> ," RFC 5007, September 2007 ( <a href="#">TXT</a> ).

### 12.2. Informative References

[TOC](#)

[RFC4301]	Kent, S. and K. Seo, " <a href="#">Security Architecture for the Internet Protocol</a> ," RFC 4301, December 2005 ( <a href="#">TXT</a> ).
[RFC4614]	Duke, M., Braden, R., Eddy, W., and E. Blanton, " <a href="#">A Roadmap for Transmission Control Protocol (TCP) Specification Documents</a> ," RFC 4614, September 2006 ( <a href="#">TXT</a> ).

### Author's Address

[TOC](#)

	Mark Stapp
	Cisco Systems, Inc.
	1414 Massachusetts Ave.
	Boxborough, MA 01719
	USA
Phone:	+1 978 936 0000
Email:	<a href="mailto:mjs@cisco.com">mjs@cisco.com</a>

### Full Copyright Statement

[TOC](#)

Copyright © The IETF Trust (2008).

This document is subject to the rights, licenses and restrictions contained in BCP 78, and except as set forth therein, the authors retain all their rights.

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY, THE IETF TRUST AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

## **Intellectual Property**

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be found in BCP 78 and BCP 79.

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at [ietf-ipr@ietf.org](mailto:ietf-ipr@ietf.org).