

DHC
Internet-Draft
Expires: October 9, 2005

B. Volz
Cisco Systems, Inc.
April 07, 2005

DHCPv6 Relay Agent Subscriber-ID Option
draft-ietf-dhc-dhcpv6-subid-00.txt

Status of this Memo

By submitting this Internet-Draft, each author represents that any applicable patent or other IPR claims of which he or she is aware have been or will be disclosed, and any of which he or she becomes aware will be disclosed, in accordance with [Section 6 of BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/lid-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on October 9, 2005.

Copyright Notice

Copyright (C) The Internet Society (2005).

Abstract

This memo defines a new Relay Agent Subscriber-ID option for the Dynamic Host Configuration Protocol for IPv6 (DHCPv6). The option allows a DHCPv6 relay agent to associate a stable "Subscriber-ID" with DHCPv6 client messages in a way that is independent of the client and of the underlying physical network infrastructure.

Internet-Draft

Relay Agent Subscriber-ID

April 2005

Table of Contents

- [1.](#) Introduction [3](#)
- [2.](#) Requirements Terminology [3](#)
- [3.](#) The Relay Agent Subscriber-ID Option [3](#)
- [4.](#) DHCPv6 Relay Agent Behavior [4](#)
- [5.](#) DHCPv6 Server Behavior [4](#)
- [6.](#) Security Considerations [4](#)
- [7.](#) IANA Considerations [5](#)
- [8.](#) Acknowledgements [5](#)
- [9.](#) References [5](#)
 - [9.1](#) Normative References [5](#)
 - [9.2](#) Informative References [5](#)
- Author's Address [5](#)
- Intellectual Property and Copyright Statements [6](#)

1. Introduction

DHCPv6 [[1](#)] provides IP addresses and configuration information for IPv6 clients. It includes a relay agent capability, in which processes within the network infrastructure receive multicast messages from clients and relay them to DHCPv6 servers. In some network environments, it will be useful for the relay agent to add information to the DHCPv6 message before relaying it.

The information that relay agents supply can also be used in the server's decision making about the addresses, delegated prefixes [[3](#)], and configuration parameters that the client is to receive.

In many service provider environments, it is believed to be desirable to associate some provider-specific information with clients' DHCPv6 messages that is independent of the physical network configuration and which the relay agent has learned through some means which is outside the scope of this memo.

2. Requirements Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[2](#)].

3. The Relay Agent Subscriber-ID Option


In complex service provider environments, there is a need to connect a customer's DHCPv6 configuration with the customer's administrative information. The Relay Agent Subscriber-ID option carries a value that can be independent of the physical network configuration through which the subscriber is connected. This value complements, and might well be used in addition to, the network-based information. The "subscriber-id" assigned by the provider is intended to be stable as customers connect through different paths, and as network changes occur.

The subscriber-id information allows the service provider to assign/activate subscriber-specific actions, e.g. assignment of specific IP addresses, prefixes, DNS configuration, trigger accounting, etc. This option is de-coupled from the access network's physical structure, so subscriber moves from one access-point to another, for example, would not require reconfiguration at the service provider's DHCPv6 servers.

The subscriber-id is an NVT ASCII [4] string. The semantic contents of the subscriber-id field are of course provider-specific. This specification does not establish any semantic requirements on the

data in the string.

The format of the DHCPv6 Relay Agent Subscriber-ID option is shown below:

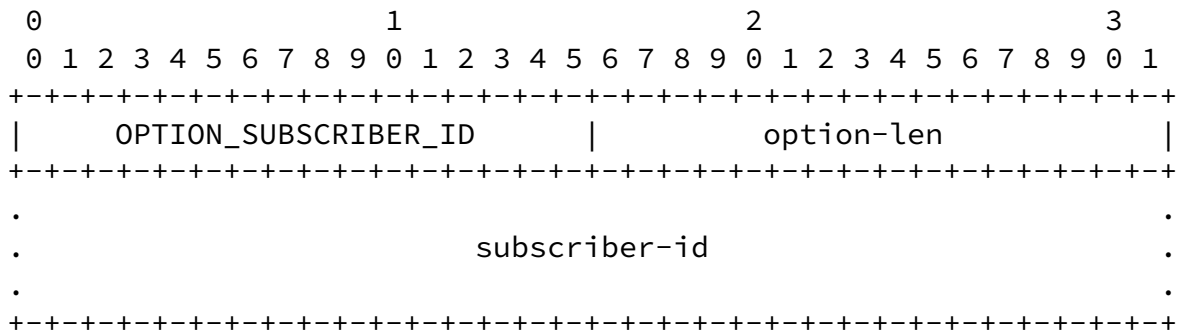

option-code	OPTION_SUBSCRIBER_ID (TBD)
option-len	length, in octets, of the subscriber-id field. The minimum length is 1 octet.
subscriber-id	A NVT ASCII string. It MUST NOT be null terminated.

4. DHCPv6 Relay Agent Behavior

DHCPv6 relay agents MAY be configured to include a Subscriber-ID option in relayed (RELAY-FORW) DHCPv6 messages. The subscriber-id strings themselves are assigned and configured through mechanisms

that are outside the scope of this memo.

5. DHCPv6 Server Behavior

This option provides additional information to the DHCPv6 server. The DHCPv6 server, if it is configured to support this option, MAY use this information in addition to other relay agent option data, other options included in the DHCPv6 client messages, and physical network topology information in order to assign IP addresses, delegate prefixes, and/or other configuration parameters to the client. There is no special additional processing for this option.

There is no requirement that a server return this option and its data in a RELAY-REPLY message.

6. Security Considerations

See [1] [section 21.1](#), on securing DHCPv6 messages sent between servers and relay agents, and [section 23](#), on general DHCPv6 security

Volz

Expires October 9, 2005

[Page 4]

Internet-Draft

Relay Agent Subscriber-ID

April 2005

considerations.

7. IANA Considerations

IANA is requested to assign a DHCPv6 option code for the Relay Agent Subscriber-ID Option.

8. Acknowledgements

Thanks to Richard Johnson, Theyn Palaniappan, and Mark Stapp as this document is essentially an edited version of their memo [5].

9. References

9.1 Normative References

- [1] Droms, R., Bound, J., Volz, B., Lemon, T., Perkins, C., and M. Carney, "Dynamic Host Configuration Protocol for IPv6 (DHCPv6)", [RFC 3315](#), July 2003.
- [2] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.

9.2 Informative References

- [3] Troan, O. and R. Droms, "IPv6 Prefix Options for Dynamic Host Configuration Protocol (DHCP) version 6", [RFC 3633](#), December 2003.
- [4] Postel, J. and J. Reynolds, "Telnet Protocol Specification", STD 8, [RFC 854](#), May 1983.
- [5] Johnson, R., Palaniappan, T., and M. Stapp, "Subscriber-ID Suboption for the Dynamic Host Configuration Protocol (DHCP) Relay Agent Option", [RFC 3993](#), March 2005.

Author's Address

Bernard Volz
Cisco Systems, Inc.
1414 Massachusetts Ave.
Boxborough, MA 01719
USA

Phone: +1 978 936 0382
Email: volz@cisco.com

Volz

Expires October 9, 2005

[Page 5]

Internet-Draft

Relay Agent Subscriber-ID

April 2005

Intellectual Property Statement

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this

specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at ietf-ipr@ietf.org.

Disclaimer of Validity

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Copyright Statement

Copyright (C) The Internet Society (2005). This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

Acknowledgment

Funding for the RFC Editor function is currently provided by the Internet Society.