

Network Working Group
Internet-Draft
Updates: [2132](#) (if approved)
Expires: December 8, 2006

E. Lear
Cisco Systems GmbH
P. Eggert
UCLA
June 6, 2006

A Timezone Option for DHCP
draft-ietf-dhc-timezone-option-01.txt

Status of this Memo

By submitting this Internet-Draft, each author represents that any applicable patent or other IPR claims of which he or she is aware have been or will be disclosed, and any of which he or she becomes aware will be disclosed, in accordance with [Section 6 of BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/lid-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on December 8, 2006.

Copyright Notice

Copyright (C) The Internet Society (2006).

Abstract

DHCP defines an option for a server to deliver to a client offset from UTC. This information in and of itself is not sufficient for devices to portray local time both accurately and consistently. This memo specifies new options for both DHCPv4 and DHCPv6 to do so.

1. Introduction

Dynamic Host Configuration Protocol (DHCP) [2] provides a means for hosts to receive configuration information relating to their current location within an IP version 4 network. [4] similarly does so for IP version 6 networks. RFC2132 [3] specifies an option to provide a client timezone information in the form of an offset in seconds from UTC. The information provided in that option is insufficient for the client to determine whether it is in daylight saving time and when to change into and out of daylight saving time (DST). In order for the client to properly represent local wall clock time in a consistent and accurate fashion the DHCP server would have to time lease expirations of affected clients to the beginning or end of DST, thus effecting a self stress test (to say the least) at the appointed hour.

In addition, an offset is not sufficient to determine the actual timezone in which a client resides, and thus there is no means to derive a human readable display string such as "EST" or "EDT".

This memo specifies a means to provide hosts with more accurate timezone information than was previously available. There are currently three well known means to configure timezones:

- o POSIX TZ strings
- o Reference to the TZ Database
- o Microsoft's timezone.xml

POSIX [1] provides a standard for how to express timezone information in a character string. Use of such a string can provide accuracy for at least one transition into and out of daylight saving time, and possibly for more transitions if the transitions are regular enough (e.g., "second Sunday in March at 02:00 local time"). However, for accuracy over longer periods, that involve daylight-saving rule changes or other irregular changes, a more detailed mechanism is necessary.

The so-called "TZ Database" [6] that is used in many operating systems provides backwards consistency and accuracy for almost all real-world locations since 1970. The TZ database also attempts to provide a stable set of human readable timezone identifiers. In addition, many systems already make use of the TZ database, and so the names used are a defacto standard.

The Microsoft TimeZone element conveys information similar to the POSIX string, but with an additional (presumably localized) display string.

[1.1.](#) What about VTIMEZONE elements from iCalendar?

VTIMEZONE elements are defined in the iCalendar specification. [8] Fully specified they provide a level of accuracy similar to the TZ database. However, because there is currently no global registry of VTIMEZONE TZIDs (although one has been proposed; see [9]), complete accuracy requires that a full entry must be specified. To achieve the same information would range from 300 octets upwards with no particular bound. Furthermore, at the time of this writing the author is aware of no operating system that natively takes advantage of VTIMEZONE entries. It might be possible to include an option for a TZURL. However, in a cold start environment, it will be bad enough that devices are stressing the DHCP server, and perhaps unwise to similarly afflict other components.

[2.](#) New Timezone Options for DHCPv4

The following three options are defined for DHCPv4:

```

    PCode  Len   TZ-POSIX String
+-----+-----+-----+
| TBD |  N | IEEE 1003.1 String |
+-----+-----+-----+
```

```

    TCode  Len   TZ-Database String
+-----+-----+-----+
| TBD |  N | Reference to the TZ Database |
+-----+-----+-----+
```

```

    MCode  Len   TZ-Microsoft Index
+-----+-----+-----+
| TBD |  N | Microsoft TZID |
+-----+-----+-----+
```

PCode, TCode, and MCode are TBD and will be allocated by IANA according to [RFC-2939](#) [5].


Len is the two-octet value of the length of the succeeding string for each option.

The string values that follow Len are described below. Note that they are NOT terminated by an ASCII NULL.

[3.](#) New Timezone Option for DHCPv6

The semantics and content of the DHCPv6 encoding of this option are exactly the same as the encoding described for DHCPv4, other than necessary differences between the way options are encoded in DHCPv4 and DHCPv6.


Specifically, the DHCPv6 new timezone options are described below:

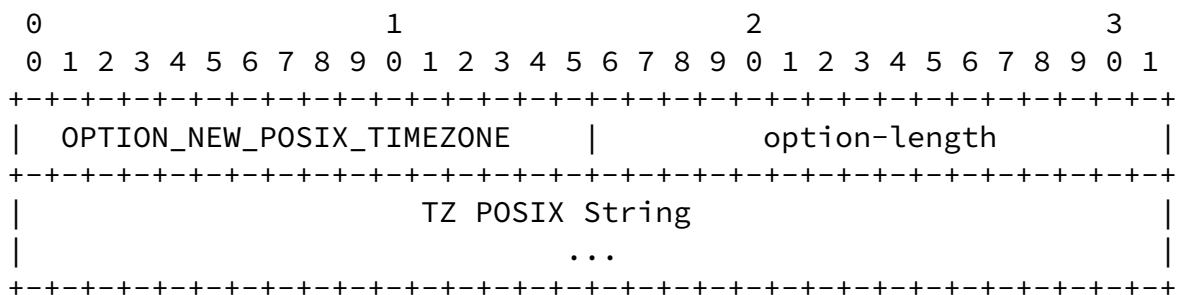

option-code: OPTION_NEW_POSIX_TIMEZONE(TBD)


option-length: length of the TZ POSIX String described below.

option-length: the number of octets of the TZ POSIX String Index described below.

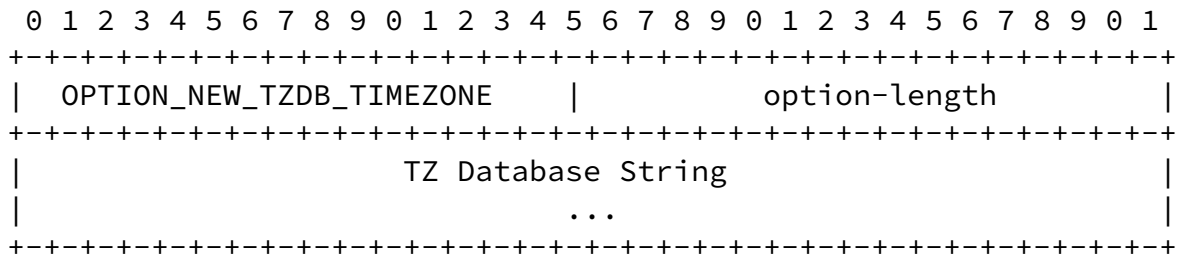

option-code: OPTION_NEW_TZDB_TIMEZONE(TBD)

option-length: the number of octets of the TZ Database String Index described below.

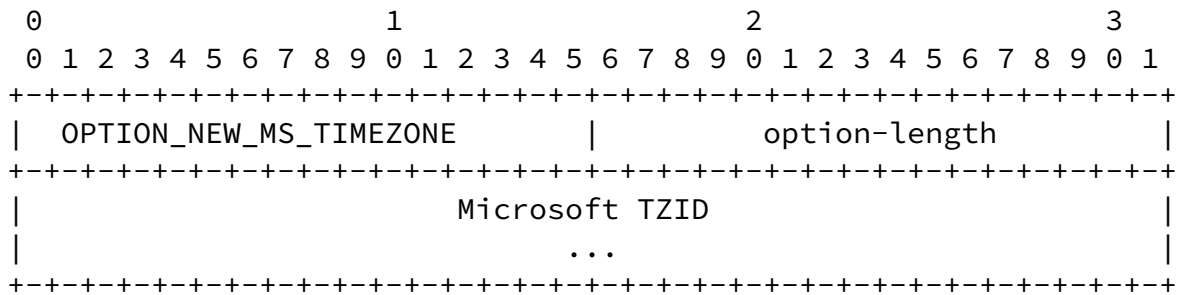

option-code: OPTION_NEW_MS_TIMEZONE(TBD)

option-length: the number of octets of the Microsoft TZ ID described below.

4. The TZ POSIX String

POSIX string is a string suitable for the TZ variable as specified by [1] in [Section 8.3](#), with the exception that a string may not begin with a colon (":"). This string is NOT terminated by an ASCII NULL. An example might be as follows:

"EST5EDT4,M3.2.0/02:00,M11.1.0/02:00"

In this case, the string is interpreted as a timezone that is normally five hours behind UTC, and four hours behind UTC during DST, which runs from the second Sunday in March at 02:00 local time through the first Sunday in November at 02:00 local time. Normally the timezone is abbreviated "EST" but during DST it is abbreviated "EDT".

Clients and servers implementing other timezone options MUST support this suboption for basic compatability.

5. The TZ Database String

TZ Name is the name of a Zone entry in the database commonly referred to as the TZ database. In order for this option to be useful, the client must already have a copy of the database. This string is NOT terminated with an ASCII NULL.

An example string would be "Europe/Zurich".

A client that supports this option SHOULD prefer this option to POSIX string if it recognizes the TZ Name that was returned. If it doesn't recognize the TZ Name the client MUST ignore this option.

6. The Microsoft TZ ID

TZ ID is a four-octet integer in network byte order that references the timezone ID as defined in the TimeZone element, as specified by Microsoft [\[7\]](#).

A client that supports this option SHOULD prefer this option to the POSIX string if it recognizes the TZ ID that was returned by the server. If it doesn't recognize the TZ ID the client MUST ignore this option.

7. Use of the timezone string(s) returned from the server

This specification presumes the DHCP server has some means of

identifying which timezone the client is in. One obvious approach would be to associate a subnet or group of subnets with a timezone, and respond with this option accordingly.

As a matter of practicality the client will use this information at its discretion to configure the current timezone in which it resides.

It will periodically be necessary for a DHCP server to update the timezone string, based on administrative changes made by local jurisdictions (say, for instance, counties in Indiana). While the authors do not expect this to be a lower bound on a lease time in the vast majority of cases, there may be times when anticipation of a change dictates prudence, as certain governments give little if any notification.

[8.](#) The New Timezone Option and Lease times

When a lease has expired and new information is not forthcoming, the client MAY continue to use timezone information returned by the server. This follows the principle of least astonishment.

[8.1.](#) Deprecation of Time Offset Option

Because this option provides a superset of functionality to the previous IPv4 time offset option (tag 2), and in order to maintain consistency between IPv4 and IPv6 implementation, the older option is deprecated. Implementations of the time offset IPv4 option SHOULD implement this option as well. Others SHOULD instead implement this option.

[9.](#) Security Considerations

An attacker could provide erroneous information to a client. It is possible that someone might miss a meeting or otherwise show up early. If clients have job processing tools such as cron that operate on wall clock time it is possible that certain jobs could be triggered either earlier or later, or even repeated or skipped entirely if scheduled during a DST transition. In such cases, the

client operating system might do well to confirm timezone changes with a human.

Clients using the POSIX option should beware of any time zone setting specifying unusual characters (e.g., control characters) in the standard or daylight-saving abbreviations, as this might well trigger security-relevant bugs in applications.

Clients using the POSIX option should also be suspicious of any time zone setting whose UTC offset exceeds 25 hours (the POSIX limit, if the default daylight-saving offset is used). As of this writing, the maximum UTC offset is 14 hours in practice, but governments may extend this somewhat in the future.

10. IANA Considerations

The IANA is requested to allocate DHCPv4 and DHCPv6 option codes for this purpose and reference this document in those allocations for both DHCPv4 and DHCPv6.

The IANA is requested to annotate the time offset IPv4 option (tag 2) as deprecated, with a reference to this memo.

11. Acknowledgments

This document specifies a means to exchange timezone information. The hard part is actually collecting changes to the various databases from scattered sources around the world. The many volunteers on the mailing list tz@elsie.nci.nih.gov have done this nearly thankless task for many years. Thanks also go to Ralph Droms, Bernie Volz, Ted Lemon, Lisa Dusseault, and Simon Vaillancourt for their attempts to improve this work.

12. References

12.1. Normative References

- [1] "Standard for Information Technology - Portable Operating System Interface (POSIX) - Base Definitions", IEEE Std 1003.1-2004, December 2004.
- [2] Droms, R., "Dynamic Host Configuration Protocol", [RFC 2131](#), March 1997.
- [3] Alexander, S. and R. Droms, "DHCP Options and BOOTP Vendor Extensions", [RFC 2132](#), March 1997.
- [4] Droms, R., Bound, J., Volz, B., Lemon, T., Perkins, C., and M. Carney, "Dynamic Host Configuration Protocol for IPv6 (DHCPv6)", [RFC 3315](#), July 2003.
- [5] Droms, R., "Procedures and IANA Guidelines for Definition of New DHCP Options and Message Types", [BCP 43](#), [RFC 2939](#), September 2000.
- [6] Eggert, P. and A. Olson, "Sources for Time Zone and Daylight Saving Time Data", <<http://www.twinsun.com/tz/tz-link.htm>>.
- [7] "The Microsoft TimeZone Element", <<http://msdn.microsoft.com/library/>>.

[12.2.](#) Informational References

- [8] Dawson, F. and Stenerson, D., "Internet Calendaring and Scheduling Core Object Specification (iCalendar)", [RFC 2445](#), November 1998.
- [9] Royer, D., "Time Zone Registry", [draft-royer-timezone-registry-03](#) (work in progress), August 2005.

[Appendix A.](#) Changes

- [The RFC Editor is requested to remove this section at publication.]
- o -01: change from suboptions to options
 - o -00 (WG submission): add length field to Microsoft suboption, clarifying text about when to prefer which suboption, indicate that the POSIX string is NOT null terminated; add additional justification; add deprecation text; remove extraneous text that says that this document will not prescribe client behavior regarding multiple options (we just did).

- o -02: fix references to the TZ database; add additional security considerations; clarify POSIX example; reference Doug Royer registry draft; add Paul Eggert as co-author(who did all the above)
- o -01: clarify uses of each suboption; reset suboption sizes; add explanation for not using VTIMEZONES; add acknowledgments.
- o initial revision

Authors' Addresses

Eliot Lear
Cisco Systems GmbH
Glatt-com
Glattzentrum, ZH CH-8301
Switzerland

Phone: +41 1 878 9200
Email: lear@cisco.com

Paul Eggert
UCLA
Computer Science Department
4532J Boelter Hall
Los Angeles, CA 90095
USA

Phone: +1 310 825 3886
Email: eggert@cs.ucla.edu

Intellectual Property Statement

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at ietf-ipr@ietf.org.

Disclaimer of Validity

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE

INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED
WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Copyright Statement

Copyright (C) The Internet Society (2006). This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

Acknowledgment

Funding for the RFC Editor function is currently provided by the Internet Society.