

DHC Working Group
Internet-Draft
Expires: November 17, 2004

J. Littlefield
Cisco Systems, Inc.
May 17, 2004

Vendor-Identifying Vendor Options for DHCPv4
draft-ietf-dhc-vendor-02.txt

Status of this Memo

By submitting this Internet-Draft, I certify that any applicable patent or other IPR claims of which I am aware have been disclosed, and any of which I become aware will be disclosed, in accordance with [RFC 3668](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/lid-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on November 17, 2004.

Copyright Notice

Copyright (C) The Internet Society (2004). All Rights Reserved.

Abstract

The DHCP options for Vendor Class and Vendor-Specific Information can be limiting or ambiguous when a DHCP client represents multiple vendors. This document defines two new options, modeled on the IPv6 options for vendor class and vendor-specific information, which contain Enterprise Numbers to remove ambiguity.

Conventions used in this document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this

Internet-Draft

Vendor-Identifying Vendor Options

May 2004

document are to be interpreted as described in [RFC 2119](#) [1].

Table of Contents

1.	Introduction	3
2.	Supporting Multiple Vendor Instances	3
3.	Vendor-Identifying Vendor Class Option	4
4.	Vendor-Identifying Vendor-Specific Information Option	5
5.	IANA Considerations	7
6.	Security Considerations	7
7.	References	8
7.1	Normative References	8
7.2	Informative References	8
	Author's Address	8
	Intellectual Property and Copyright Statements	9

1. Introduction

The DHCP protocol for IPv4, [RFC 2131](#) [2], defines options that allow a client to indicate its vendor type (option 60), and to allow the DHCP client and server to exchange vendor-specific information (option 43) [5]. While there is no prohibition against passing multiple copies of these options in a single packet, doing so would introduce ambiguity of interpretation, particularly if conveying vendor-specific information for multiple vendors. The vendor identified by option 60 defines the interpretation of option 43, which itself carries no vendor identifier. Furthermore, the concatenation of multiple instances of the same option, required by [RFC 2131](#) and specified by [RFC 3396](#) [4], means that multiple copies of options 60 or 43 would not remain independent.

There are circumstances where an implementation may need to support multiple, independently defined forms of vendor-specific information. For example, implementations that must conform to an industry-standard use of DHCPv4, to allow interoperability in a particular technology space, may be required to support the vendor-specific options of that industry group. But the same implementation may also require support for vendor-specific options defined by the manufacturer. In particular, this is an issue for vendors of devices supporting CableLabs [9] standards, such as DOCSIS, CableHome, and PacketCable, since those standards define an industry-specific use for options 60 and 43.

This document defines two new options, modeled on the IPv6 options for vendor class and vendor-specific information defined in [RFC 3315](#) [6], which contain Enterprise Numbers to remove ambiguity about the interpretation of their contents. If desired, these new options can be used in addition to the current vendor class and vendor information options, whose definition is unaffected by this document.

2. Supporting Multiple Vendor Instances

The options defined in this document may each contain data corresponding to more than one vendor. The data portion of each option defined here contains an enterprise number, followed by an internal data length, followed by vendor-specific data. This sequence may be repeated multiple times within each option. Because of the possibility that the aggregate of the vendor-specific data for either option will exceed 255 octets, these options are hereby declared to be "concatenation-requiring", as defined by [RFC 3396](#) [4]. As such, the aggregate of all instances of vendor-specific data is to be considered one long option, for each of the two options defined here. These long options can be divided into smaller options for packet encoding in conformance with [RFC 3396](#), on whatever octet


boundaries are convenient to the implementation. Dividing on the boundaries between vendor instances is not required, but may be convenient for encoding or packet tracing.

3. Vendor-Identifying Vendor Class Option

A DHCP client may use this option to unambiguously identify the vendor that manufactured the hardware on which the client is running, the software in use, or an industry consortium to which the vendor belongs. The information contained in the per-vendor data area of this option is contained in one or more opaque fields that may identify details of the hardware configuration.

This option may be used wherever Vendor Class Identifier (option 60) may be used, as described in [RFC 2131](#) [2], except for DHCPNAK messages, where other options are not permitted. It is most meaningful in messages from DHCP client to DHCP server (DHCPDISCOVER, DHCPREQUEST, DHCPINFORM).

The format of the V-I Vendor Class option is:

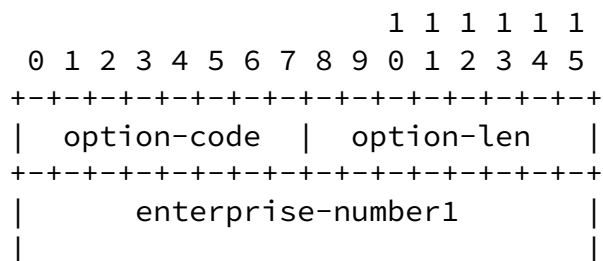

```

+---+---+---+---+---+---+---+---+---+---+
|  data-len1  |                               |
+---+---+---+---+---+---+---+---+---+---+
/      vendor-class-data1      /
+---+---+---+---+---+---+---+---+---+---+  ----
|      enterprise-number2      |             ^
|                               |             |
+---+---+---+---+---+---+---+---+---+---+  |
|  data-len2  |                               | optional
+---+---+---+---+---+---+---+---+---+---+  |
/      vendor-class-data2      /             |
+---+---+---+---+---+---+---+---+---+---+  |
~                ...                ~       V
+---+---+---+---+---+---+---+---+---+---+  ----

```

option-code OPTION_V-I_VENDOR_CLASS (to be assigned by IANA)

option-len 5 + length of vendor class data field

enterprise-numberN The vendor's 32-bit Enterprise Number as registered with IANA [3]

data-lenN Length of vendor-class-data field

vendor-class-dataN Details of the hardware configuration of the host on which the client is running, or of industry consortium compliance

This option contains information corresponding to one or more Enterprise Numbers. Multiple instances of this option may be present, and MUST be concatenated in accordance with [RFC 3396](#) [4]. An Enterprise Number SHOULD only occur once among all instances of this option. Behavior is undefined if an Enterprise Number occurs multiple times. The information for each Enterprise Number is treated independently, regardless of whether it occurs in an option with other Enterprise Numbers, or in a separate option.

The vendor-class-data is composed of a series of separate items, each

of which describes some characteristic of the client's hardware configuration or capabilities. Examples of vendor-class-data instances might include the version of the operating system the client is running or the amount of memory installed on the client.

Each instance of the vendor-class-data is formatted as follows:

```

                1 1 1 1 1 1
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5
+---+---+---+---+---+---+---+---+---+---+
|  data-len   |                               |
+---+---+---+---+---+---+ opaque-data |
/                                                     /
+---+---+---+---+---+---+---+---+---+---+

```

The data-len is one octet long and specifies the length of the opaque vendor class data in network byte order.

4. Vendor-Identifying Vendor-Specific Information Option

DHCP clients and servers may use this option to exchange vendor-specific information. Either party may send this option, as needed. While a typical case might be for a client to send the Vendor-Identifying Vendor Class option, to elicit a useful Vendor-Identifying Vendor-Specific Information Option, there is no requirement for such a flow.


This option may be used in any packets where "other" options are allowed by [RFC2131](#) [2], specifically DHCPDISCOVER, DHCPPOFFER, DHCPREQUEST, DHCPACK and DHCPINFORM.

The format of the V-I Vendor-specific Information option is:

```

                1 1 1 1 1 1
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5
+---+---+---+---+---+---+---+---+---+---+
| option-code | option-len |
+---+---+---+---+---+---+---+---+---+---+
|   enterprise-number1   |
|                         |
+---+---+---+---+---+---+---+---+---+---+

```

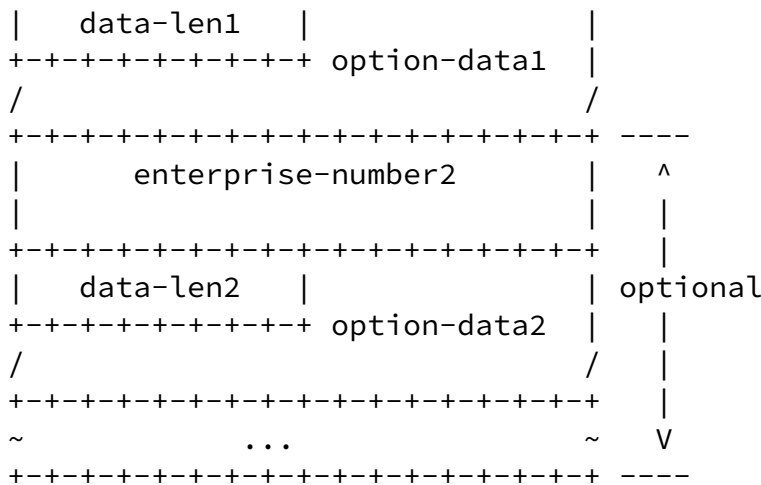

option-code OPTION_V-I_VENDOR_OPTS (to be assigned by IANA)

option-len 5 + length of option-data field

enterprise-numberN The vendor's registered 32-bit Enterprise Number as registered with IANA [3]

data-lenN Length of option-data field

option-dataN Vendor-specific options, described below.

The definition of the information carried in this option is vendor specific. The vendor is indicated in the enterprise-number field. This option contains information corresponding to one or more Enterprise Numbers. Multiple instances of this option may be present, and MUST be concatenated in accordance with [RFC 3396](#) [4]. An Enterprise Number SHOULD only occur once among all instances of this option. Behavior is undefined if an Enterprise Number occurs multiple times. The information for each Enterprise Number is treated independently, regardless or whether it occurs in an option

with other Enterprise Numbers, or in a separate option.

Use of vendor-specific information allows enhanced operation, utilizing additional features in a vendor's DHCP implementation. Servers not equipped to interpret the vendor-specific information sent by a client MUST ignore it. Clients that do not receive desired vendor-specific information SHOULD make an attempt to operate without

7. References

7.1 Normative References

- [1] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [2] Droms, R., "Dynamic Host Configuration Protocol", [RFC 2131](#), March 1997.
- [3] IANA, "Private Enterprise Numbers", [<http://www.iana.org/assignments/enterprise-numbers.html>](http://www.iana.org/assignments/enterprise-numbers.html).
- [4] Lemon, T. and S. Chesire, "Encoding Long Options in the Dynamic Host Configuration Protocol (DHCPv4)", [RFC 3396](#), November 2002.

7.2 Informative References

- [5] Alexander, S. and R. Droms, "DHCP Options and BOOTP Vendor Extensions", [RFC 2132](#), March 1997.
- [6] Droms, R., Bound, J., Volz, B., Lemon, T., Perkins, C. and M. Carney, "Dynamic Host Configuration Protocol for IPv6 (DHCPv6)", [RFC 3315](#), July 2003.
- [7] Droms, R., "Procedures and IANA Guidelines for Definition of New DHCP Options and Message Types", [BCP 43](#), [RFC 2939](#), September 2000.
- [8] Droms, R. and W. Arbaugh, "Authentication for DHCP Message", [RFC 3118](#), June 2001.

URIs

- [9] [<http://www.cablelabs.com/>](http://www.cablelabs.com/)

Author's Address

Josh Littlefield
Cisco Systems, Inc.
1414 Massachusetts Avenue
Boxborough, MA 01719
USA

Phone: +1 978-936-1379
EMail: joshl@cisco.com

Internet-Draft Vendor-Identifying Vendor Options

May 2004

Intellectual Property Statement

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at ietf-ipr@ietf.org.

Disclaimer of Validity

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Copyright Statement

Copyright (C) The Internet Society (2004). This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

Acknowledgment

Funding for the RFC Editor function is currently provided by the Internet Society.

Littlefield

Expires November 17, 2004

[Page 9]