

Network Working Group
Internet-Draft
Intended status: Standards Track
Expires: February 2, 2013

G. Zorn
Network Zen
Q. Wu
Huawei
J. Korhonen
NSN
August 1, 2012

Diameter Support for Proxy Mobile IPv6 Localized Routing
draft-ietf-dime-pmip6-lr-17

Abstract

In Proxy Mobile IPv6, packets received from a Mobile Node (MN) by the Mobile Access Gateway (MAG) to which it is attached are typically tunneled to a Local Mobility Anchor (LMA) for routing. The term "localized routing" refers to a method by which packets are routed directly between an MN's MAG and the MAG of its Correspondent Node (CN) without involving any LMA. In a Proxy Mobile IPv6 deployment, it may be desirable to control the establishment of localized routing sessions between two MAGs in a Proxy Mobile IPv6 domain by requiring that the session be authorized. This document specifies how to accomplish this using the Diameter protocol.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on February 2, 2013.

Copyright Notice

Copyright (c) 2012 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal

Provisions Relating to IETF Documents

(<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	3
2.	Terminology	3
3.	Solution Overview	3
4.	Attribute Value Pair Used in this Document	4
4.1.	User-Name AVP	5
4.2.	PMIP6-IPv4-Home-Address AVP	5
4.3.	MIP6-Home-Link-Prefix AVP	5
4.4.	MIP6-Feature-Vector AVP	5
5.	Example Signaling Flows for Localized Routing Service	
	Authorization	6
6.	Security Considerations	9
7.	IANA Considerations	10
8.	Contributors	10
9.	Acknowledgements	10
10.	References	10
10.1.	Normative References	10
10.2.	Informative References	11
	Authors' Addresses	11

1. Introduction

Proxy Mobile IPv6 (PMIPv6) [[RFC5213](#)] allows the Mobility Access Gateway (MAG) to optimize media delivery by locally routing packets from a Mobile Node to a Correspondent Node that is locally attached to an access link connected to the same Mobile Access Gateway, avoiding tunneling them to the Mobile Node's Local Mobility Anchor (LMA). This is referred to as "local routing" in [RFC 5213](#). However, this mechanism is not applicable to the typical scenarios in which the MN and CN are connected to different MAGs and are registered to the same LMA or different LMAs. [[RFC6279](#)] takes those typical scenarios into account and defines the problem statement for PMIPv6 localized routing. [[I-D.ietf-netext-pmip-lr](#)] specifies the PMIPv6 localized routing protocol based on the scenarios A11, A12, and A21 [[RFC6279](#)], which is used to establish a localized routing path between two Mobile Access Gateways in a PMIPv6 domain.

However, there is no relevant work discussing how AAA-based mechanisms can be used to provide authorization to the Mobile Node's MAG or LMA for enabling localized routing between MAGs.

This document describes Diameter [[I-D.ietf-dime-rfc3588bis](#)] support for the authorization of PMIPv6 mobility entities in case of A11,A12,A21 during localized routing.

2. Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

3. Solution Overview

This document addresses how to provide authorization to the Mobile Node's MAG or LMA for enabling localized routing and resolve the destination MN's MAG by means of interaction between the LMA and the AAA server. Figure 1 shows the reference architecture for Localized Routing Service Authorization. This reference architecture assumes that

- o If MN and CN belong to different LMAs, MN and CN should share the same MAG (i.e., A12 described in [[RFC6279](#)]), e.g., MN1 and CN2 in Figure 1 are attached to the same MAG1 and belong to LMA1 and LMA2 respectively. Note that LMA1 and LMA2 in Figure 1 are in the same provider domain (as described in [[RFC6279](#)]).

- o If MN and CN are attached to the different MAGs, MN and CN should belong to the same LMA (i.e., A21 described in [RFC6279]), e.g., MN1 and CN3 in the Figure 1 are attached to the MAG1 and MAG3 respectively but belong to LMA1.
- o MN and CN may belong to the same LMA and are attached to the same MAG (i.e., A11 described in [RFC6279]), e.g., MN1 and CN1 in the Figure 1 are both attached to the MAG1 and belong to LMA1.
- o The MAG and LMA support Diameter client functionality.

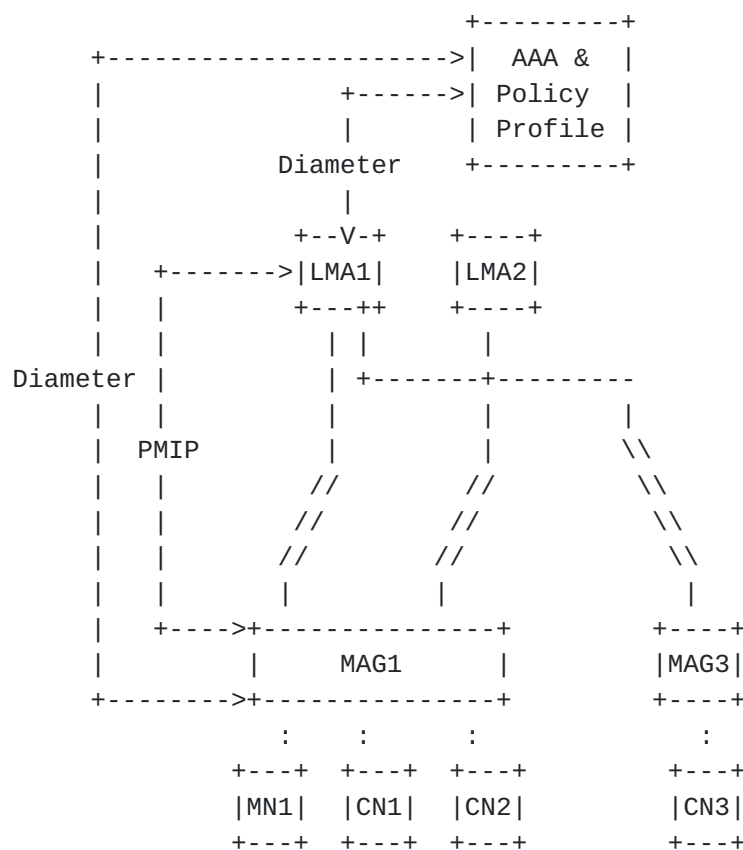


Figure 1: Localized Routing Service Authorization Reference Architecture

The interaction of the MAG and LMA with the AAA server according to the extension specified in this document is used to authorize the localized routing service.

4. Attribute Value Pair Used in this Document

This section describes Attribute Value Pairs (AVPs) defined by this

specification or re-used from existing specifications in a PMIPv6-specific way.

4.1. User-Name AVP

The User-Name AVP (AVP Code 1) is defined in [[I-D.ietf-dime-rfc3588bis](#)]. This AVP is used to carry the MN-Identifier (Mobile Node identifier) [[RFC5213](#)] in the AA-Request (AAR) message [[I-D.ietf-dime-rfc4005bis](#)].

4.2. PMIP6-IPv4-Home-Address AVP

The PMIP6-IPv4-Home-Address AVP (AVP Code 505) is defined in [[RFC5779](#)]. This AVP is used to carry the IPv4-MN-HoA (Mobile Node's IPv4 home address)[[RFC5844](#)] in the AA-Request (AAR) message [[I-D.ietf-dime-rfc4005bis](#)].

4.3. MIP6-Home-Link-Prefix AVP

The MIP6-Home-Link-Prefix AVP (AVP Code 125) is defined in [[RFC5779](#)]. This AVP is used to carry the MN-HNP (Mobile Node's home network prefix) in the AAR.

4.4. MIP6-Feature-Vector AVP

The MIP6-Feature-Vector AVP is defined in [[RFC5447](#)]. This document allocates a new capability flag bit according to the IANA rules in [RFC 5447](#).

INTER_MAG_ROUTING_SUPPORTED (TBD)

Direct routing of IP packets between MNs anchored to different MAGs without involving any LMA is supported. This bit is used with MN-Identifier. When a MAG or LMA sets this bit in the MIP6-Feature-Vector and MN-Identifier corresponding to the Mobile Node is carried with this bit, it indicates to the home AAA server (HAAA) that the Mobile Node associated with this LMA is allowed to use localized routing. If this bit is cleared and MN-Identifier corresponding to the Mobile Node is carried with this bit, it indicates to the home AAA server (HAAA) that the Mobile Node associated with this LMA is not allowed to use localized routing. When a MAG or LMA sets this bit in the MIP6-Feature-Vector and MN-Identifiers corresponding to the Mobile Node and Correspondent Node are both carried with this bit, it indicates to the HAAA that localized routing of IP packets between Mobile Node and Correspondent Node anchored to different MAGs is supported. If this bit is cleared and MN- Identifiers corresponding to the Mobile Node and Correspondent Node are both carried with this bit

to HAAA, it indicates to the HAAA that localized routing of IP packets between Mobile Node and Correspondent Node anchored to different MAGs is not supported. If this bit is cleared in the returned MIP6-Feature-Vector AVP, the HAAA does not authorize direct routing of packets between MNs anchored to the different MAG. The MAG and LMA MUST support this policy feature on a per-MN and per-subscription basis.

5. Example Signaling Flows for Localized Routing Service Authorization

Localized Routing Service Authorization can happen during the network access authentication procedure [[RFC5779](#)] before localized routing is initialized. In this case, the preauthorized pairs of LMA/prefix sets can be downloaded to Proxy Mobile IPv6 entities during the [RFC 5779](#) procedure. Localized routing can be initiated once the destination of a received packet matches one or more of the prefixes received during the [RFC 5779](#) procedure.

Figure 2 shows an example scenario in which MAG1 acts as a Diameter client, processing the data packet from MN1 to MN2 and requesting authorization of localized routing (i.e., MAG-Initiated LR authorization). In this example scenario, MN1 and MN2 are attached to the same MAG and anchored to the different LMAs (i.e., A12 described in [[RFC6279](#)]). In this case, MAG1 knows that MN2 belongs to a different LMA (which can be determined by looking up the binding cache entries corresponding to MN1 and MN2 and comparing the addresses of LMA1 and LMA2). In order to setup a localized routing path with MAG2, MAG1 acts as Diameter client and sends an AAR message to the Diameter server. The message contains an instance of the MIP6-Feature-Vector (MFV) AVP ([\[RFC5447\]](#), [Section 4.2.5](#)) with the LOCAL_MAG_ROUTING_SUPPORTED bit ([\[RFC5779\]](#), [Section 5.5](#)) set, two instances of the User-Name AVP ([\[I-D.ietf-dime-rfc3588bis\]](#), [Section 8.14](#)) containing MN1-Identifier and MN2-Identifier. In addition, the message may contain either an instance of the MIP6-Home-Link-Prefix AVP ([\[RFC5779\]](#), [Section 5.3](#)) or an instance of the PMIP6-IPv4- Home-Address AVP ([\[RFC5779\]](#), [Section 5.2](#)) containing the IP address/ HNP of MN1.

The Diameter server authorizes localized routing service by checking if MN1 and MN2 are allowed to use localized routing. If so, the Diameter server responds with an AAA message encapsulating an instance of the MIP6-Feature-Vector (MFV) AVP ([\[RFC5447\]](#), [Section 4.2.5](#)) with the LOCAL_MAG_ROUTING_SUPPORTED bit ([\[RFC5779\]](#), [Section 5.5](#)) set indicating direct routing of IP packets between MNs anchored to the same MAG is supported. MAG1 then knows the localized routing between MN1 and MN2 is allowed. Then MAG1 sends the Request messages respectively to LMA1 and LMA2. The

request message is the Localized Routing Initialization (LRI) message in Figure 2 and belongs to the Initial phase of the localized routing. LMA1 and LMA2 responds to MAG1 using the Localized Routing Acknowledge message (LRA in Figure 2) in accordance with [\[I-D.ietf-netext-pmip-lr\]](#).

In case of LRA_WAIT_TIME expiration [\[I-D.ietf-netext-pmip-lr\]](#), MAG1 should ask for authorization of localized routing again according to the procedure described above before LRI is retransmitted up to a maximum of LRI_RETRIES.

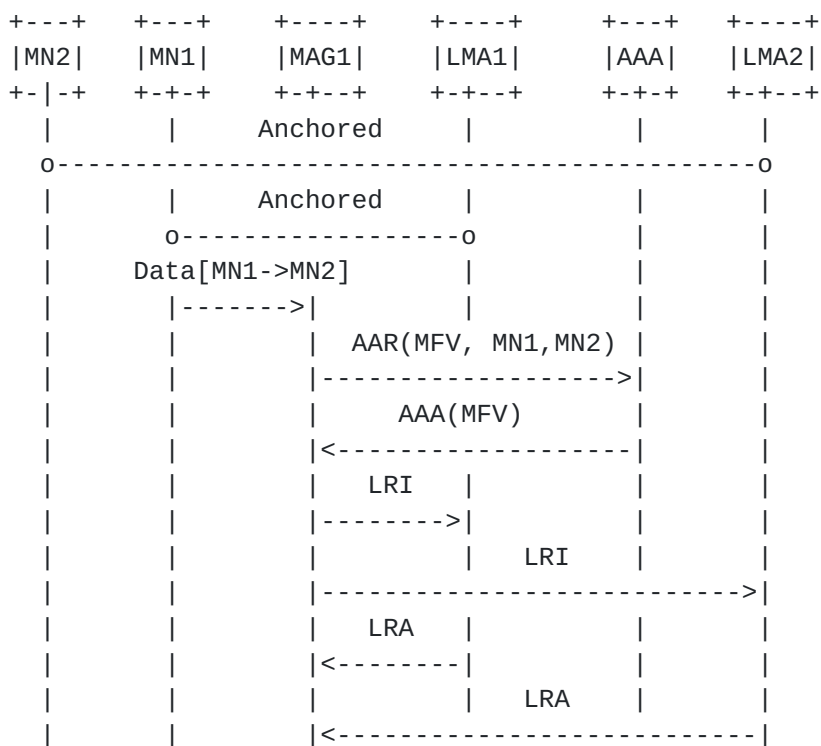


Figure 2: MAG-initiated Localized Routing Authorization in A12

Figure 3 shows the second example scenario, in which LMA1 acts as a Diameter client, processing the data packet from MN2 to MN1 and requesting the authorization of localized routing. In this scenario, MN1 and MN2 are attached to the different MAG and anchored to the same LMA (i.e., A21 described in [\[RFC6279\]](#)), LMA knows that MN1 and MN2 belong to the same LMA (which can be determined by looking up the binding cache entries corresponding to MN1 and MN2 and comparing the addresses of LMA corresponding to MN1 and LMA corresponding to MN2). In contrast with the signaling flow shown in Figure 2, it is LMA1 instead of MAG1 which initiates the setup of the localized routing path.

The Diameter client in LMA1 sends an AA-Request message to the Diameter server. The message contains an instance of the MIP6-Feature-Vector (MFV) AVP ([\[RFC5447\], Section 4.2.5](#)) with the INTER_MAG_ROUTING_SUPPORTED bit ([Section 4.5](#)) set indicating direct routing of IP packets between MNs anchored to different MAGs is supported and two instances of the User-Name AVP ([\[I-D.ietf-dime-rfc3588bis\], Section 8.14](#)) containing MN1-Identifier and MN2-Identifier. The Diameter server authorizes the localized routing service by checking if MN1 and MN2 are allowed to use localized routing. If so, the Diameter server responds with an AA-Answer message encapsulating an instance of the MIP6-Feature-Vector (MFV) AVP ([\[RFC5447\], Section 4.2.5](#)) with the INTER_MAG_ROUTING_SUPPORTED bit ([Section 4.5](#)) set indicating direct routing of IP packets between MNs anchored to different MAGs is supported. LMA1 then knows the localized routing is allowed. In success case, LMA1 responds to MAG1 in accordance with [\[I-D.ietf-netext-pmip-lr\]](#).

In case of LRA_WAIT_TIME expiration [\[I-D.ietf-netext-pmip-lr\]](#), LMA1 should ask for authorization of localized routing again according to the procedure described above before LRI is retransmitted up to a maximum of LRI_RETRIES.

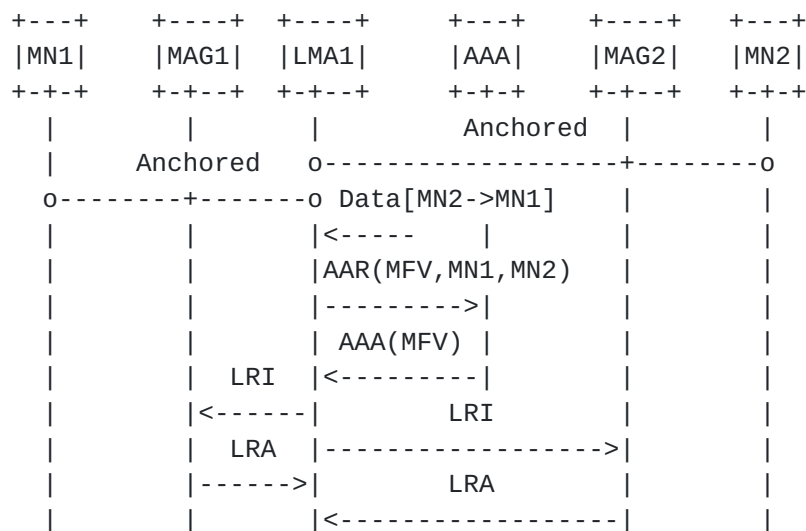


Figure 3: LMA-initiated Localized Routing Authorization in A21

Figure 4 shows another example scenario, in which LMA1 acts as a Diameter client, processing the data packet from MN2 to MN1 and requesting the authorization of localized routing. In this scenario, MN1 and MN2 are attached to the same MAG and anchored to the same LMA (i.e., A11 described in [\[RFC6279\]](#)), LMA knows that MN1 and MN2 belong to the same LMA (which can be determined by looking up the binding

cache entries corresponding to MN1 and MN2 and comparing the addresses of LMA corresponding to MN1 and LMA corresponding to MN2).

The Diameter client in LMA1 sends an AA-Request message to the Diameter server. The message contains an instance of the MIP6-Feature-Vector AVP ([\[RFC5447\], Section 4.2.5](#)) with the LOCAL_MAG_ROUTING_SUPPORTED bit set and two instances of the User-Name AVP ([\[I-D.ietf-dime-rfc3588bis\]](#), Section 8.14) containing MN1-Identifier and MN2-Identifier. The Diameter server authorizes the localized routing service by checking if MN1 and MN2 are allowed to use localized routing. If so, the Diameter server responds with an AA-Answer message encapsulating an instance of the MIP6-Feature-Vector (MFV) AVP ([\[RFC5447\], Section 4.2.5](#)) with the LOCAL_MAG_ROUTING_SUPPORTED bit ([\[RFC5779\], Section 5.5](#)) set indicating direct routing of IP packets between MNs anchored to the same MAG is supported. LMA1 then knows the localized routing is allowed and responds to MAG1 for localized routing in accordance with [\[I-D.ietf-netext-pmip-lr\]](#).

In case of LRA_WAIT_TIME expiration [\[I-D.ietf-netext-pmip-lr\]](#), LMA1 should ask for authorization of localized routing again according to the procedure described above before LRI is retransmitted up to a maximum of LRI_RETRIES.

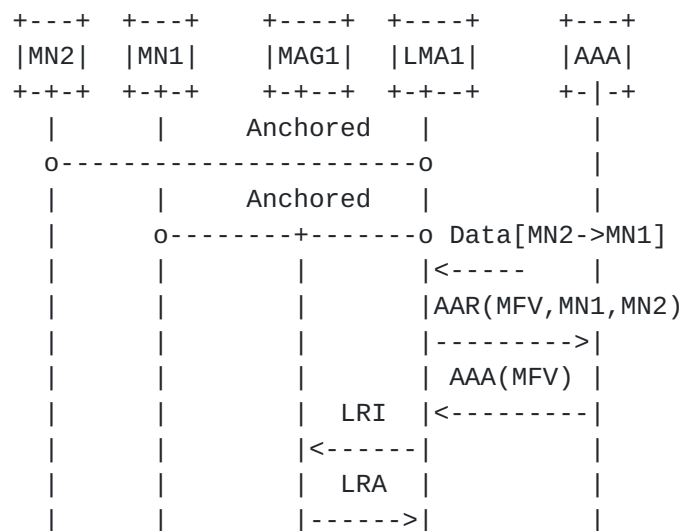


Figure 4: LMA-initiated Localized Routing Authorization in A11

6. Security Considerations

The security considerations for the Diameter NASREQ [\[I-D.ietf-dime-rfc4005bis\]](#) and Diameter Proxy Mobile IPv6 [\[RFC5779\]](#) applications are also applicable to this document.

The service authorization solicited by the MAG or the LMA relies upon the existing trust relationship between the MAG/LMA and the AAA server.

An authorised MAG could in principle track the movement of any participating CNS at the level of the MAG to which they are anchored. If such a MAG were compromised, or under the control of a bad-actor, then such tracking could represent a privacy breach for the set of tracked CNS. In such a case, the traffic pattern from the compromised MAG might be notable so monitoring for e.g. excessive queries from MAGs might be worthwhile.

7. IANA Considerations

This specification defines a new value in the Mobility Capability registry [[RFC5447](#)] for use with the MIP6-Feature-Vector AVP: INTER_MAG_ROUTING_SUPPORTED (see [Section 4.4](#)).

8. Contributors

Marco Liebsch, Paulo Loureiro, Jinwei Xia and Yungui Wang all contributed to early versions of this document.

9. Acknowledgements

The authors would like to thank Carlos Jesus Bernardos Cano, Dan Romascanu, Elwyn Davies, Basavaraj Patil, Ralph Droms, Stephen Farrel, Robert Sparks, Benoit Claise and Abhay Roy for their valuable comments and suggestions on this document.

10. References

10.1. Normative References

- [I-D.ietf-dime-rfc3588bis]
Fajardo, V., Arkko, J., Loughney, J., and G. Zorn,
"Diameter Base Protocol", [draft-ietf-dime-rfc3588bis-34](#)
(work in progress), June 2012.
- [I-D.ietf-dime-rfc4005bis]
Zorn, G., "Diameter Network Access Server Application",
[draft-ietf-dime-rfc4005bis-11](#) (work in progress),
July 2012.

[I-D.ietf-netext-pmip-lr]

Krishnan, S., Koodli, R., Loureiro, P., Wu, Q., and A. Dutta, "Localized Routing for Proxy Mobile IPv6", [draft-ietf-netext-pmip-lr-10](#) (work in progress), May 2012.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.

[RFC5213] Gundavelli, S., Leung, K., Devarapalli, V., Chowdhury, K., and B. Patil, "Proxy Mobile IPv6", [RFC 5213](#), August 2008.

[RFC5447] Korhonen, J., Bournelle, J., Tschofenig, H., Perkins, C., and K. Chowdhury, "Diameter Mobile IPv6: Support for Network Access Server to Diameter Server Interaction", [RFC 5447](#), February 2009.

[RFC5779] Korhonen, J., Bournelle, J., Chowdhury, K., Muhanna, A., and U. Meyer, "Diameter Proxy Mobile IPv6: Mobile Access Gateway and Local Mobility Anchor Interaction with Diameter Server", [RFC 5779](#), February 2010.

[RFC5844] Wakikawa, R. and S. Gundavelli, "IPv4 Support for Proxy Mobile IPv6", [RFC 5844](#), May 2010.

[10.2.](#) Informative References

[RFC6279] Liebsch, M., Jeong, S., and Q. Wu, "Proxy Mobile IPv6 (PMIPv6) Localized Routing Problem Statement", [RFC 6279](#), June 2011.

Authors' Addresses

Glen Zorn
Network Zen
227/358 Thanon Sanphawut
Bang Na, Bangkok 10260
Thailand

Phone: +66 (0) 87-040-4617
Email: glenzorn@gmail.com

Qin Wu
Huawei Technologies Co., Ltd.
101 Software Avenue, Yuhua District
Nanjing, Jiangsu 21001
China

Phone: +86-25-84565892
Email: sunseawq@huawei.com

Jouni Korhonen
Nokia Siemens Networks
Linnoitustie 6
Espoo FI-02600,
Finland

Email: jouni.nospam@gmail.com

