

DMM Working Group
Internet-Draft
Intended status: Standards Track
Expires: May 4, 2017

S. Matsushima
SoftBank
L. Bertz
Sprint
M. Liebsch
NEC
S. Gundavelli
Cisco
D. Moses
Intel Corporation
October 31, 2016

Protocol for Forwarding Policy Configuration (FPC) in DMM
draft-ietf-dmm-fpc-cpdp-05.txt

Abstract

This document describes the solution of data-plane separation from control-plane which enables a flexible mobility management system using agent and client functions. To configure data-plane nodes and functions, the data-plane is abstracted by an agent interface to the client. The data-plane abstraction model is extensible in order to support many different type of mobility management systems and data-plane functions.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on May 4, 2017.

Copyright Notice

Copyright (c) 2016 IETF Trust and the persons identified as the document authors. All rights reserved.

Internet-Draft

DMM FPC Protocol

October 2016

This document is subject to [BCP 78](http://trustee.ietf.org/license-info) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	3
2.	Conventions	4
3.	Terminology	4
4.	FPC Architecture	5
5.	Information Model	8
5.1.	FPC-Topology	8
5.1.1.	Domains	9
5.1.2.	DPN-groups	9
5.1.3.	DPNs	11
5.2.	FPC-Policy	12
5.2.1.	Descriptors	12
5.2.2.	Actions	13
5.2.3.	Policies	14
5.2.4.	Policy-groups	16
5.3.	FPC-Mobility	16
5.3.1.	Port	16
5.3.2.	Context	17
5.3.3.	Monitors	22
5.4.	Namespace and Format	23
5.5.	Attribute Application	24
5.6.	Policy and Runtime Data	25
6.	Protocol	25
6.1.	Protocol Messages and Semantics	25
6.1.1.	CONF and CONF_BUNDLES Messages	28
6.1.2.	Monitors	31
6.2.	Protocol Operation	32
6.2.1.	Simple RPC Operation	32
6.2.2.	Policy And Mobility on the Agent	37
6.2.3.	Optimization for Current and Subsequent Messages	39
6.2.4.	Pre-provisioning	44
7.	Protocol Message Details	45

7.1.	Data Structures And Type Assignment	45
7.1.1.	Policy Structures	45
7.1.2.	Mobility Structures	47
7.1.3.	Topology Structures	49
7.1.4.	Monitors	50

7.2.	Message Attributes	52
7.2.1.	Header	52
7.2.2.	CONF and CONF_BUNDLES Attributes and Notifications .	52
7.2.3.	Monitors	55
8.	Derived and Subtyped Attributes	55
8.1.	3GPP Specific Extensions	58
9.	Implementation Status	60
10.	Security Considerations	64
11.	IANA Considerations	65
12.	Work Team Participants	67
13.	References	67
13.1.	Normative References	67
13.2.	Informative References	67
Appendix A.	YANG Data Model for the FPC protocol	68
A.1.	FPC Agent YANG Model	69
A.2.	YANG Models	85
A.2.1.	FPC YANG Model	85
A.2.2.	PMIP QoS Model	99
A.2.3.	Traffic Selectors YANG Model	112
A.2.4.	FPC 3GPP Mobility YANG Model	123
A.2.5.	FPC / PMIP Integration YANG Model	138
A.2.6.	FPC Policy Extension YANG Model	145
A.3.	FPC Information Model YANG Tree	148
	Authors' Addresses	152

[1.](#) Introduction

This document describes Forwarding Policy Configuration (FPC), the solution of data-plane separation from control-plane which enables flexible mobility management systems using agent and client functions. To configure data-plane nodes and functions, the data-plane is abstracted in the agent which provides an interface to the client.

Control planes of mobility management systems, and/or any applications which require data-plane control, can utilize the FPC

Client in flexible granularities of operation. The configuration operations are capable of configuring not only single Data-Plane Node (DPN) directly, but also multiple DPNs from abstracted data-plane models on the FPC agent.

FPC agent provides the data-plane abstraction models in the following three areas:

Topology: DPNs are grouped and abstracted in terms of roles of mobility management such as access, anchors and domains. FPC Agent abstracts DPN-groups and consists of forwarding plane

topology, such as access nodes assigned to a DPN-group which peers to a DPN-group of anchor nodes.

Policy: Policy abstracts policies which handle specific traffic flows or packets such as QoS, packet processing to rewrite headers, etc. A policy consists of one or multiple rules which are composed of Descriptors and Actions. Descriptors in a rule identify traffic flows and Actions apply treatments to packets matched to the Descriptors in the rule. An arbitrary set of policies is abstracted as a Policy-group which is applied to Ports.

Mobility: An endpoint of a mobility session is abstracted as a Context with its associated runtime concrete attributes, such as tunnel endpoints, tunnel identifiers, delegated prefix(es), routing information, etc. Contexts are attached to DPN-groups along with consequence of the control plane. One or multiple Contexts which have same sets of policies are assigned Ports which abstract those policy sets. A Context can belong to multiple Ports which serve different kinds of purpose and policy. Monitors provide a mechanism to produce reports when events regarding Ports, Sessions, DPNs or the Agent occurs.

The Agent collects applicable sets of forwarding policies for the mobility sessions from the data model, and then renders those policies into specific configurations for each DPN to which the sessions attached. Specific protocols and configurations to configure DPN from FPC Agent are out of scope of this document.

The data-plane abstraction model is extensible in order to support many different types of mobility management systems and data-plane functions. The architecture and protocol design of FPC intends not to tie to specific types of access technologies and mobility protocols.

2. Conventions

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

3. Terminology

DPN: A data-plane node (DPN) is capable of deploying data-plane features. DPNs may be switches or routers regardless of their realization, i.e. whether they are hardware or software based.

FPC Agent: A functional entity in FPC that manages DPNs and provides abstracted data-plane networks to mobility management systems and/or applications through FPC Clients.

FPC Client: A functional entity in FPC that is integrated with mobility management systems and/or applications to control forwarding policy, mobility sessions and DPNs.

Tenant: An operational entity that manages mobility management systems or applications which require data-plane functions.

Domain: One or more DPNs that form a data-plane network. A mobility management system or an application in a tenant may utilize a single or multiple domains.

Port: A set of forwarding policies.

Context: An abstracted endpoint of a mobility session

associated with runtime attributes. Ports may apply to Context which instantiates those forwarding policies on a DPN.

4. FPC Architecture

In accordance with the requirements of flexible data-plane functions deployment described in [[RFC7333](#)], FPC provides a means for mobility control-plane and applications to handle DPNs that must be configured with various roles of the mobility management aspect described in [[I-D.ietf-dmm-deployment-models](#)].


FPC uses building blocks of Agent, Client and data-plane abstraction models as the interface between the agent and the client.

Mobility control-plane and applications integrate the FPC Client function and connect to FPC Agent functions. The Client and the Agent communicate based on data-plane abstraction models described in [Section 5](#). Along with models, the control-plane and the applications put forwarding policies for their mobility sessions on the Agent.

The Agent connects to DPN(s) to manage their configuration. These configurations are rendered from the forwarding policies by the Agent. FPC Agent may be implemented in a network controller that handles multiple DPNs or it also may be integrated into a DPN.

The FPC architecture supports multi-tenancy where the FPC enabled data-plane supports multiple tenants of mobile operator networks and/or applications. DPNs on the data-plane run in multiple data-plane roles which are defined per session, domain and tenant.

This architecture is illustrated in Figure 1. This document does not adopt a specific protocol for the FPC envelope protocol and it is out of scope. However it must be capable of supporting FPC protocol messages and transactions described in [Section 6](#).

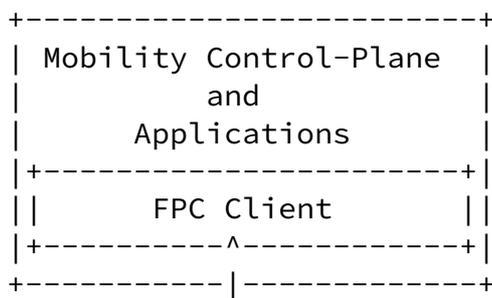

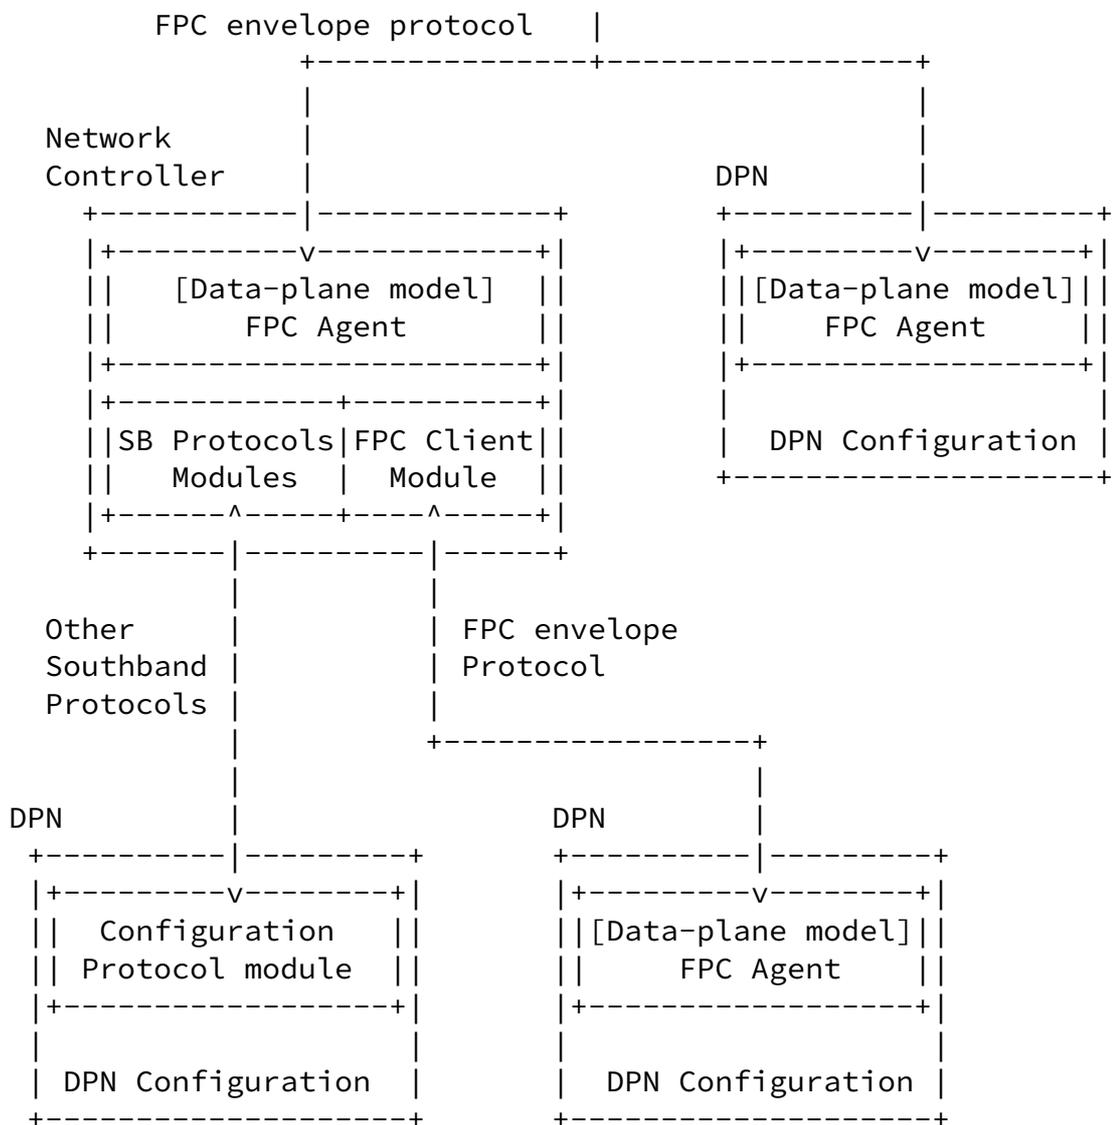


Figure 1: Reference Forwarding Policy Configuration (FPC) Architecture

Note that the FPC envelope protocol is only required to handle runtime data in the Mobility model. The rest of the FPC models, namely Topology and Policy, are pre-configured, therefore real-time data handling capabilities are not required for them. Operators that are tenants in the FPC data-plane can configure Topology and Policy

on the Agent through other means, such as Restconf

[[I-D.ietf-netconf-restconf](#)] or Netconf [[RFC6241](#)].

5. Information Model

This section describes information model that represents the concept of FPC which is language and protocol neutral. Figure 2 is an overview of FPC data-plane abstraction model.

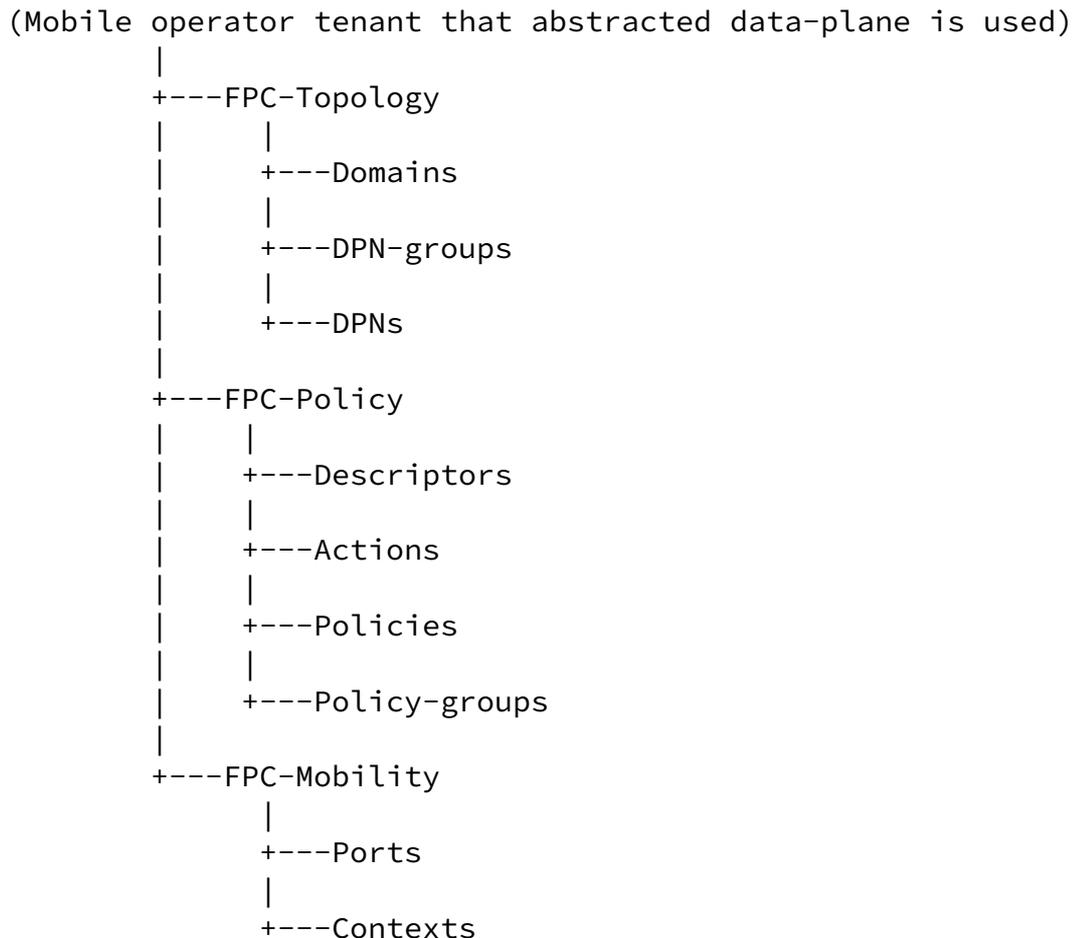


Figure 2: FPC Data-plane Abstraction Model

5.1. FPC-Topology

Topology abstraction enables an actual data-plane network to support multiple mobile operator's topologies of their data-plane. The FPC-Topology consists of DPNs, DPN-groups and Domains which abstract data-plane topologies for the Client's mobility control-planes and applications.

A mobile operator who utilizes a FPC enabled data-plane network can virtually create their DPNs along with their data-plane design on the Agent. The operator also creates a DPN-group of which the DPNs are attributed roles of mobility management such as access, anchors and domains.

[5.1.1.](#) Domains

A domain is defined by the operators to attribute DPN-groups to the domain. Domains may represent services or applications within the operator.

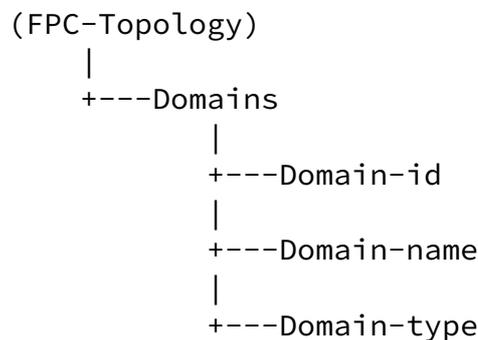


Figure 3: Domain Model Structure

Domain-id: Identifier of Domain. The ID format SHOULD refer to [Section 5.4](#).

Domain-name: Defines Domain name.

Domain-type: Specifies which type of communication allowed within the domain, such as ipv4, ipv6, ipv4v6 or ieee802.

[5.1.2.](#) DPN-groups

A DPN-group defines a set of DPNs which share common data-plane attributes. DPN-groups consist data-plane topology that consists of a DPN-group of access nodes connecting to an anchor nodes DPN-group.

DPN Group has attributes such as the data-plane role, supported access technologies, mobility profiles, connected peer groups and domain.

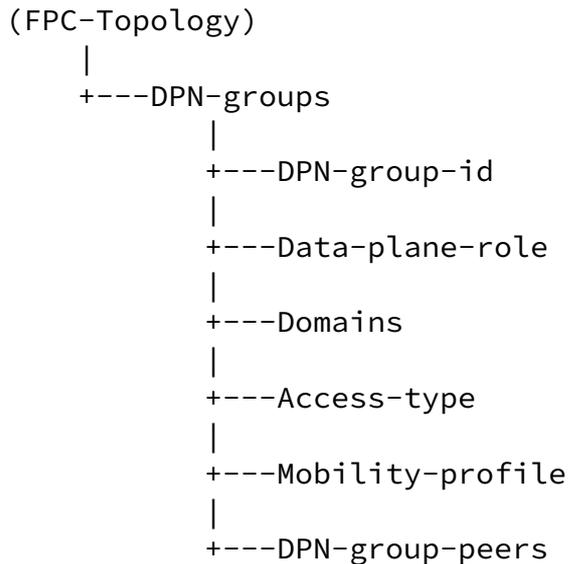


Figure 4: DPN-groups Model Structure

DPN-group-id: Defines identifier of DPN-group. The ID format SHOULD refer to [Section 5.4](#).

Data-plane-role: Defines data-plane role of the DPN-group, such as access-dpn, L2/L3 or anchor-dpn.

Domains: Specifies domains which the DPN-group belongs to.

Access-type: Defines access type which the DPN-group supports such as ethernet(802.3/11), 3gpp cellular(S1, RAB), if any.

Mobility-profile: Defines supported mobility profile, such as ietf-pmip, 3gpp, or new profiles defined as extensions of this specification. When those profiles are correctly defined, some or all data-plane parameters of contexts can be automatically derived from this profile by FPC Agent.

DPN-group-peers: Defines remote peers of DPN-group with parameters described in [Section 5.1.2.1](#).

5.1.2.1. DPN-group Peers

DPN-group-peers defines parameters of remote peer DPNs as illustrated in Figure 5.

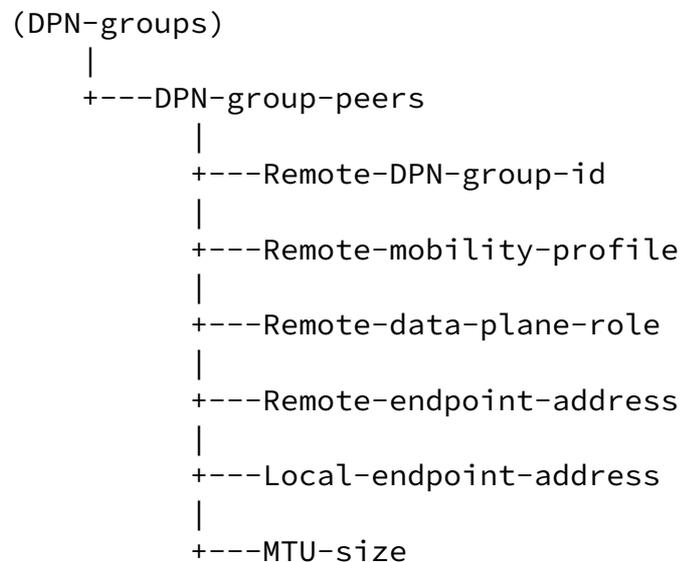


Figure 5: DPN-groups Peer Model Structure

Remote-DPN-group-id: Indicates peering DPN-Group.

Remote-mobility-profile: Defines mobility-profile used for this peer, currently defined profiles are ietf-pmip, 3gpp, or new profiles defined as extensions of this specification.

Remote-data-plane-role: Defines forwarding-plane role of peering DPN-group.

Remote-endpoint-address: Defines Endpoint address of the peering DPN-group.

Local-endpoint-address: Defines Endpoint address of its own DPN-

group to peer the remote DPN-group.

MTU-size: Defines MTU size of traffic between the DPN-Group and this DPN-group-peer.

5.1.3. DPNs

List of DPNs which defines all available nodes for a tenant of the FPC data-plane network. Role of a DPN in the data-plane is not determined until the DPN is attributed to a DPN-group.

A DPN may have multiple DPN-groups which are in different data-plane roles or domains. Mobility sessions of that DPN-groups are installed into actual data-plane nodes. The Agent defines DPN binding to actual nodes.

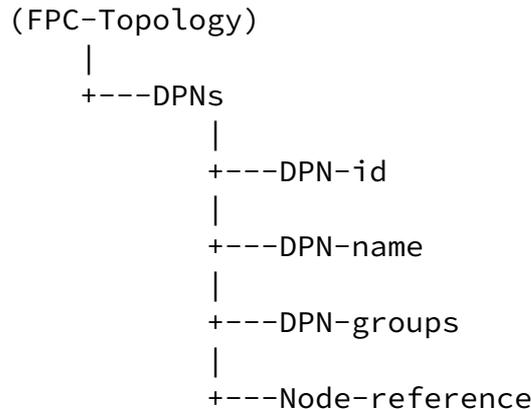


Figure 6: DPNs Model Structure

DPN-id: Defines identifier of DPN. The ID format SHOULD refer to [Section 5.4](#).

DPN-name: Defines name of DPN.

DPN-groups: List of DPN-group which the DPN belongs to.

Node-reference: Indicates an actual node to which the Agent binds the DPN. The Agent SHOULD maintain that nodes information including IP address of management and control protocol to

connect them.

5.2. FPC-Policy

The FPC-Policy consists of Descriptors, Actions, Policies and Policy-groups, which can be viewed as configuration data while Contexts and Ports are akin to structures that are instantiated on the Agent. The Descriptors and Actions in a Policy referenced by a Port are active when the Port is in a active Context, i.e. they can be applied to traffic on a DPN.

5.2.1. Descriptors

List of Descriptors which defines classifiers of specific traffic flow, such as those based on source and destination addresses, protocols, port numbers of TCP/UDP/SCTP/DCCP or any packet. Note that Descriptors are extensibly defined by specific profiles which 3gpp, ietf or other SDOs produce. Many specifications also use the terms Filter, Traffic Descriptor or Traffic Selector [[RFC6088](#)]. A packet that meets the criteria of a Descriptor is said to satisfy, pass or is consumed by the Descriptor. Descriptors are assigned an identifier and contain a type and value.

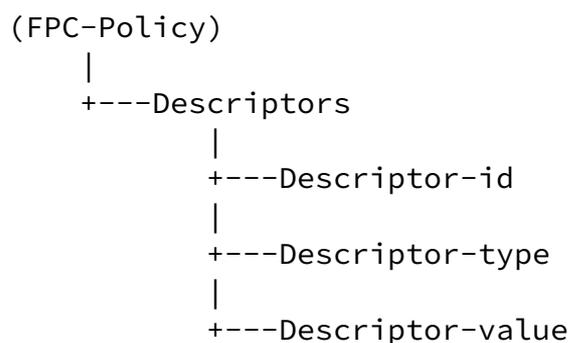


Figure 7: Descriptor Model Structure

Descriptor-id: Identifier of Descriptor. The ID format SHOULD refer to [Section 5.4](#).

Descriptor-type: Defines descriptor type, which classifies specific traffic flow, such as source and destination addresses,

protocols, port numbers of TCP/UDP/SCTP/DCCP or any packet.

Descriptor-value: Specifies the value of Descriptor such as IP prefix/address, protocol number, port number, etc.

[5.2.2.](#) Actions

List of Actions which defines treatment/actions to apply to classified traffic meeting the criteria defined by Descriptors. Actions include traffic management related activity such as shaping, policing based on given bandwidth, and connectivity management actions such as pass, drop, forward to given nexthop. Note that Actions are extensively defined by specific profiles which 3gpp, ietf or other SDOs produce.

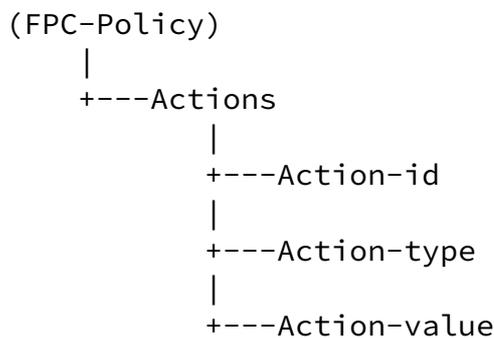


Figure 8: Action Model Structure

Action-id: Identifier of Action. The ID format SHOULD refer to [Section 5.4](#).

Action-type: Defines action type, i.e. how to treat the specified traffic flow, e.g. pass, drop, forward to given nexthop value and shape, police based on given bandwidth value, etc.

Action-value: Specifies value of Action, such as bandwidth, nexthop address or drop explicitly, etc.

[5.2.3.](#) Policies

Policies are collections of Rules. Each Policy has a Policy Identifier and a list of Rule/Order pairs. The Order and Rule values MUST be unique in the Policy. Unlike the AND filter matching of each Rule the Policy uses an OR matching to find the first Rule whose Descriptors are satisfied by the packet. The search for a Rule to apply to packet is executed according to the unique Order values of the Rules. This is an ascending order search, i.e. the Rule with the lowest Order value is tested first and if its Descriptors are not satisfied by the packet the Rule with the next lowest Order value is tested. If a Rule is not found then the Policy does not apply. Policies contain Rules as opposed to references to Rules.

```
(FPC-Policy)
|
+---Policies
|
```

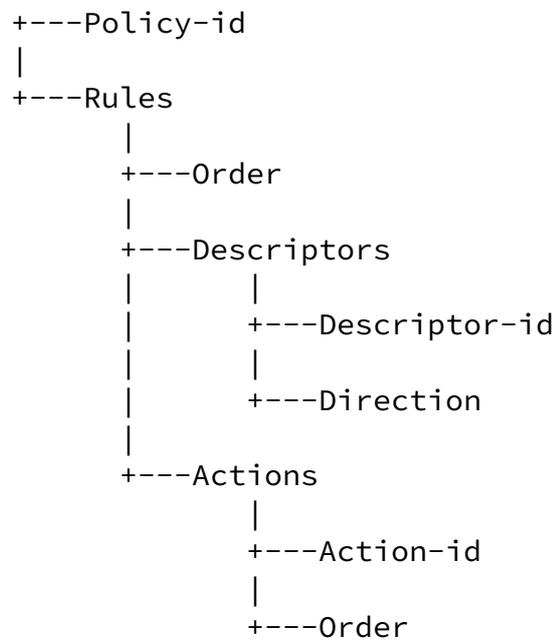


Figure 9: Policies Model Structure

Policy-id: Identifier of Policy. The ID format SHOULD refer to [Section 5.4](#).

Rules: List of Rules which are a collection of Descriptors and Actions. All Descriptors MUST be satisfied before the Actions are taken. This is known as an AND Descriptor list, i.e. Descriptor 1 AND Descriptor 2 AND ... Descriptor X MUST be satisfied for the Rule to apply. These are internal structure to the Policy, i.e. it is not a first class, visible object at the top level of an Agent.

Order: Specifies ordering if the Rule has multiple Descriptors and Action sets.

Descriptors: List of Descriptors.

Descriptor-id: Indicates each Descriptor in the Rule.

Direction: Specifies which direction applies, such as upstream, downstream or both.

Actions: List of Actions.

Action-id: Indicates each Action in the rule.

Order: Specifies Action ordering if the Rule has multiple actions.

[5.2.4.](#) Policy-groups

List of Policy-groups which are an aggregation of Policies. Common applications include aggregating Policies that are defined by different functions, e.g. Network Address Translation, Security, etc. The structure has an Identifier and references the Policies via their Identifiers.

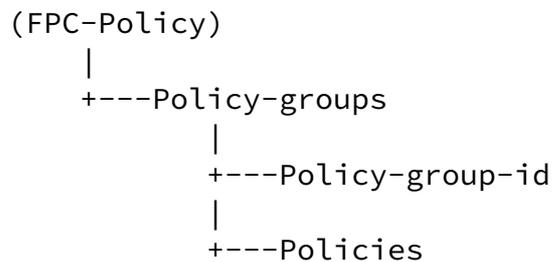


Figure 10: Policy-group Model Structure

Policy-group-id: Identifier of Policy-group. The ID format SHOULD refer to [Section 5.4](#).

Policies: List of Policies in the Policy-group.

[5.3.](#) FPC-Mobility

The FPC-Mobility consists of Port and Context. A mobility session is abstracted as a Context with its associated runtime concrete attributes, such as tunnel endpoints, tunnel identifiers, delegated prefix(es) and routing information, etc. A Port abstracts a set of policies applied to the Context.

[5.3.1.](#) Port

A port represents a collection of policy groups, a group of rules that can exist independent of the mobility/session lifecycle. Mobility control-plane or applications create, modify and delete Ports on FPC Agent through the FPC Client.

When a Port is indicated in a Context, the set of Descriptors and Actions in the Policies of the Port are collected and applied to the Context. They must be instantiated on the DPN as forwarding related

actions such as QoS differentiations, packet processing of encaps/decap, header rewrite, route selection, etc.

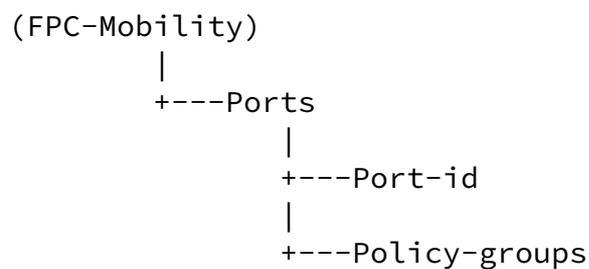


Figure 11: Port Model Structure

Port-id: Identifier of Port. The ID format SHOULD refer to [Section 5.4](#).

Policy-groups: List of references to Policy-groups which apply to the Port.

[5.3.2](#). Context

An endpoint of a mobility session or the instantiation of policy-groups is abstracted as a Context with its associated runtime concrete attributes, such as tunnel endpoints, tunnel identifiers, delegated prefix(es) and routing information, etc. Mobility control-plane or applications create, modify and delete contexts on FPC Agent through the FPC Client.

A Context directly describes traffic treatment policies in QoS profile and Mobility profiles or indirectly via Ports. Parameters in these profiles may be set by the FPC Client directly or indirectly derived from the set of Descriptors and Actions when the Ports indicate Policies which specify those descriptors and actions. If a Context doesn't have any Port, all parameters of the Context must be set by the Client.

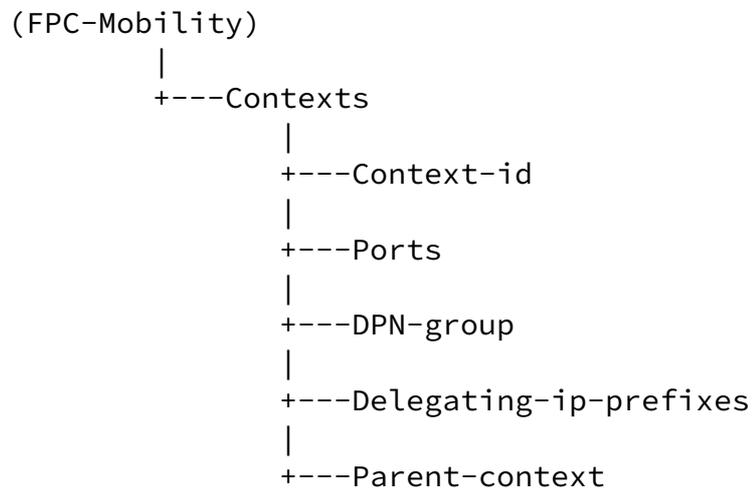


Figure 12: Common Context Model Structure

Context-id: Identifier of Context. The ID format SHOULD refer to [Section 5.4](#).

Ports: List of Ports. When a Context is applied to Port(s), the context is configured by policies of those Port(s). Port-id references indicate Ports which apply to the Context. Context can be a part of multiple Ports which have different policies.

DPN-group: The DPN-group assigned to the Context.

Delegating-ip-prefixes: List of IP prefixes to be delegated to the mobile node of the context.

Parent-context: Indicates context which the context inherits.

[5.3.2.1](#). Single DPN Agent Case

In the case where a FPC Agent supports only one DPN, the Agent MUST maintain context data just for the DPN. The Agent does not need to maintain a Topology model. The Context in single DPN case consists of following parameters for both direction of uplink and downlink.

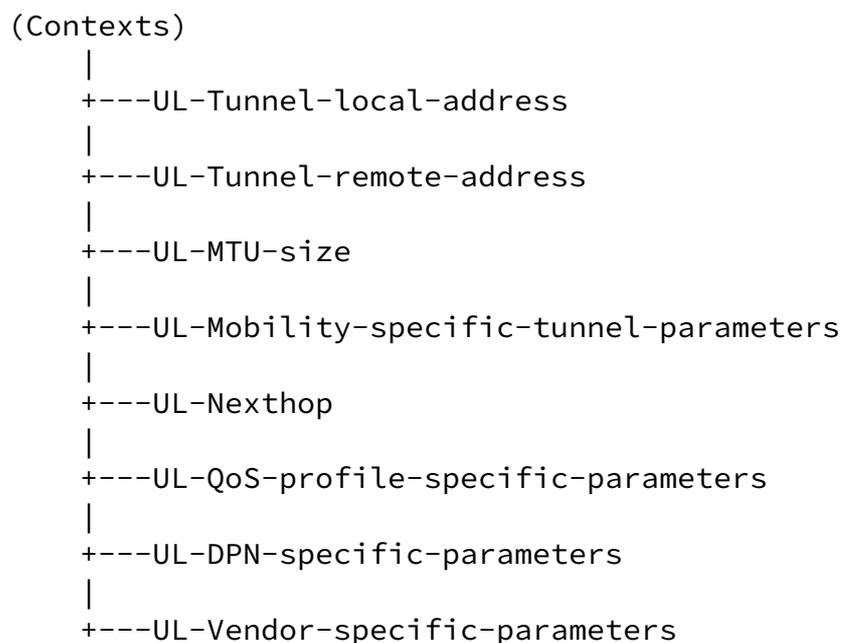


Figure 13: Uplink Context Model of Single DPN Structure

UL-Tunnel-local-address: Specifies uplink endpoint address of the DPN.

UL-Tunnel-remote-address: Specifies uplink endpoint address of the remote DPN.

UL-MTU-size: Specifies uplink MTU size.

UL-Mobility-specific-tunnel-parameters: Specifies profile specific uplink tunnel parameters to the DPN which the agent exists. The profiles includes GTP/TEID for 3gpp profile, GRE/Key for ietf-pmip profile, or new profiles defined by extensions of this specification.

UL-Nexthop: Indicates nexthop information of uplink in external network such as IP address, MAC address, SPI of service function chain, SID of segment routing, etc.

UL-QoS-profile-specific-parameters: Specifies profile specific QoS parameter of uplink, such as QCI/TFT for 3gpp profile, [\[RFC6089\]](#)/[\[RFC7222\]](#) for ietf-pmip, or new profiles defined by extensions of this specification.

UL-DPN-specific-parameters: Specifies optional node specific parameters of uplink in need, such as if-index, tunnel-if-number that must be unique in the DPN.

UL-Vendor-specific-parameters: Specifies a vendor specific parameter space for uplink.

(Contexts)

```
|
+---DL-Tunnel-local-address
|
+---DL-Tunnel-remote-address
|
+---DL-MTU-size
|
+---DL-Mobility-specific-tunnel-parameters
|
+---DL-Nexthop
|
+---DL-QoS-profile-specific-parameters
|
+---DL-DPN-specific-parameters
```

|
+---DL-Vendor-specific-parameters

Figure 14: Downlink Context Model of Single DPN Structure

- DL-Tunnel-local-address: Specifies downlink endpoint address of the DPN.
- DL-Tunnel-remote-address: Specifies downlink endpoint address of the remote DPN.
- DL-MTU-size: Specifies downlink MTU size of tunnel.
- DL-Mobility-specific-tunnel-parameters: Specifies profile specific downlink tunnel parameters to the DPN which the agent exists. The profiles includes GTP/TEID for 3gpp profile, GRE/Key for ietf-pmip profile, or new profiles defined by extensions of this specification.
- DL-Nexthop: Indicates nexthop information of downlink in external network such as IP address, MAC address, SPI of service function chain, SID of segment routing, etc.
- DL-QoS-profile-specific-parameters: Specifies profile specific QoS parameter of downlink, such as QCI/TFT for 3gpp profile, [\[RFC6089\]](#)/[\[RFC7222\]](#) for ietf-pmip, or new profiles defined by extensions of this specification.

DL-DPN-specific-parameters: Specifies optional node specific parameters of downlink in need such as if-index, tunnel-if-number that must be unique in the DPN.

DL-Vendor-specific-parameters: Specifies a vendor specific parameter space for downlink.

[5.3.2.2](#). Multiple DPN Agent Case

Another case is when a FPC Agent connects to multiple DPNs. This Agent MUST maintain a set of Context data for each DPN. The Context contains a DPNs list where each entry of the list consists of the

parameters in Figure 15. A Context data for one DPN has two entries for each direction of uplink and downlink or, where applicable, a direction of 'both'.

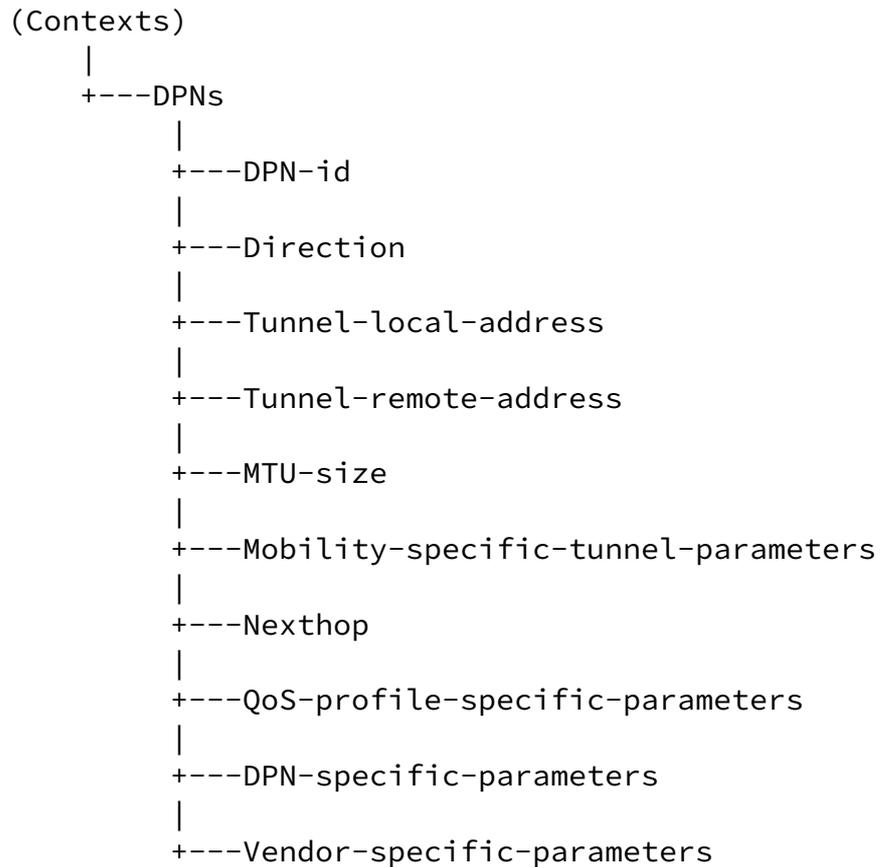


Figure 15: Multiple-DPN Supported Context Model Structure

DPN-id: Indicates DPN of which the runtime context data installed.

Direction: Specifies which side of connection at the DPN indicated, "uplink", "downlink" or "both".

Tunnel-local-address: Specifies endpoint address of the DPN at the uplink or downlink.

Tunnel-remote-address: Specifies endpoint address of remote DPN at the uplink or downlink.

MTU-size: Specifies the packet MTU size on uplink or downlink.

Mobility-specific-tunnel-parameters: Specifies profile specific tunnel parameters for uplink or downlink of the DPN. The profiles includes GTP/TEID for 3gpp profile, GRE/Key for ietf-pmip profile, or new profiles defined by extensions of this specification.

Nexthop: Indicates nexthop information for uplink or downlink in external network of the DPN such as IP address, MAC address, SPI of service function chain, SID of segment routing, etc.

QoS-profile-specific-parameters: Specifies profile specific QoS parameter for uplink or downlink of the DPN, such as QCI/TFT for 3gpp profile, [\[RFC6089\]](#)/[\[RFC7222\]](#) for ietf-pmip, or new profiles defined by extensions of this specification.

DPN-specific-parameters: Specifies optional node specific parameters for uplink or downlink of the DPN in need, such like if-index, tunnel-if-number that must be unique in the DPN.

Vendor-specific-parameters: Specifies a vendor specific parameter space for the DPN.

Multi-DPN Agents will only use the DPNs list of a Context for processing as described in this section. A single-DPN Agent MAY use both the Single Agent DPN model [Section 5.3.2.1](#) and the multi-DPN Agent Context described here. However, Agent feature support MUST be discoverable by the FPC Client in order to determine which option(s) an Agent supports.

[5.3.3](#). Monitors

Monitors provide a mechanism to produce reports when events occur. A Monitor will have a target that specifies what is to be watched.

When a Monitor is specified, the configuration MUST be applicable to the attribute/entity monitored, e.g. a Monitor using a Threshold configuration cannot be applied to a context but it can be applied to a numeric property.

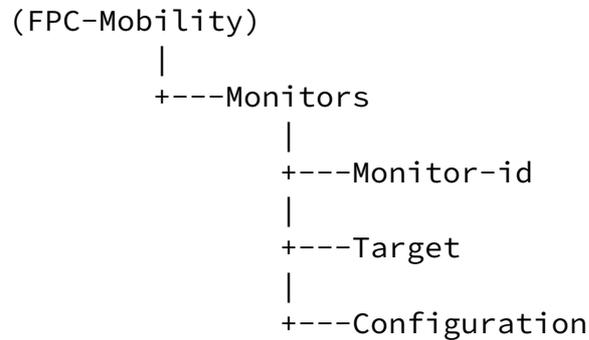


Figure 16: Common Monitor Model Structure

Monitor-id: Name of the Monitor. The ID format SHOULD refer to [Section 5.4](#).

Target: Target to be monitored. This may be an event, a Context, a Port or attribute(s) of Contexts. When the type is an attribute(s) of a Context, the target name is a concatenation of the Context-Id and the relative path (separated by '/') to the attribute(s) to be monitored.

Configuration: Determined by the Monitor subtype. Four report types are defined:

- * Periodic reporting specifies an interval by which a notification is sent to the Client.
- * Event reporting specifies a list of even types that, if they occur and are related to the monitored attribute, will result in sending a notification to the Client
- * Scheduled reporting specifies the time (in seconds since Jan 1, 1970) when a notification for the monitor should be sent to the Client. Once this Monitor's notification is completed the Monitor is automatically de-registered.
- * Threshold reporting specifies one or both of a low and high threshold. When these values are crossed a corresponding notification is sent to the Client.

[5.4](#). Namespace and Format

The identifiers and names in FPC models which reside in the same namespace must be unique. That uniqueness must be kept in agent or data-plane tenant namespace on an Agent. The tenant namespace uniqueness MUST be applied to all elements of the tenant model, i.e. Topology, Policy and Mobility models.

Internet-Draft

DMM FPC Protocol

October 2016

When a Policy needs to be applied to Contexts in all tenants on an Agent, the Agent SHOULD define that policy to be visible from all the tenants. In this case, the Agent assign an unique identifier in the agent namespace.

The format of identifiers can utilize any format with agreement between data-plane agent and client operators. The formats include but are not limited to Globally Unique IDentifiers (GUIDs), Universally Unique IDentifiers (UUIDs), Fully Qualified Domain Names (FQDNs), Fully Qualified Path Names (FQPNs) and Uniform Resource Identifiers (URIs).

The FPC model MUST NOT limit the types of format that dictate the choice of FPC protocol. It is noted that the choice of identifiers which are used in Mobility model should be suitable to handle runtime parameters in real-time. The Topology and Policy models are not restricted to meet that requirement as described in [Section 4](#).

[5.5](#). Attribute Application

Attributes in FPC Topology and Policy are pre-configured in a FPC Agent prior to Contexts and Ports. Those pre-configured attributes SHOULD NOT be instantiated on DPN(s) until the Contexts and Ports indicate them.

This is intentional as it provides FPC Clients ability to reuse attributes that helps to minimize over the wire exchanges and reduce system errors by exchanging less information.

When an Client creates Context, the Client would be able to indicate just DPN-group(s) instead of all endpoint addresses of the DPN(s) and MTU-size of the tunnels for example. This is because that the Agent can derive data for those details from pre-configured DPN-group information in the Topology.

The Agent turns those derived data into runtime attributes of UL and DL objects which are in the DPNs list of the Context (multiple-DPNs Agent case) or direct under the Context (single-DPN Agent case). The Agent consequently instantiates forwarding policies on DPN(s) based on that attributes.

When the attribute is a direct value of the Context, e.g. IMSI

defined in the 3GPP extension, only missing values can be provided by the Parent Context.

It is noted that the Agent SHOULD update the Context's attributes which are instantiated on DPN(s) when the applied attributes of Topology and Policy are changed.

[5.6.](#) Policy and Runtime Data

Contexts and Ports that are supporting runtime, realtime mobility sessions which are produced in the mobility control plane. These could be installed using any number of protocols, but in case of they need to be delivered in realtime that Restconf [[I-D.ietf-netconf-restconf](#)] and/or Netconf [[RFC6241](#)] will not fullfill, an appropriate FPC envelope protocol MUST be required.

When data is delivered as part of the FPC envelop protocol it should be part of a Context. If it is a binding to a generic policy that could be used by multiple Contexts a Port is used. Given the support for pre-configuration of policies and references by identifiers, e.g a Rule ID, most policies do not require realtime delivery.

In case of modifying an existing Context attribute, the Agent MUST overwrite that attribute with the value of which the Client brings to the Agent.

[6.](#) Protocol

[6.1.](#) Protocol Messages and Semantics

Five message types are supported:

Internet-Draft

DMM FPC Protocol

October 2016

Message	Type	Description
CONF	HEADER ADMIN_STATE SESSION_STATE OP_TYPE BODY	Configure processes a single operation.
CONF_BUNDLES	1*[HEADER ADMIN_STATE SESSION_STATE TRANS_STRATEGY OP_TYPE BODY]	Configure-bundles takes multiple operations that are to be executed as a group with partial failures allowed. They are executed according to the OP_ID value in the OP_BODY in ascending order. If a CONFIGURE_BUNDLES fails, any entities provisioned in the CURRENT operation are removed, however, any successful operations completed prior to the current operation are preserved in order to reduce system load.
REG_MONITOR	HEADER ADMIN_STATE *[MONITOR]	Install a monitor at an Agent. The message includes information about the attribute to monitor and the reporting method. Note

		that a MONITOR_CONFIG is required for this operation.
DEREG_MONITOR	HEADER * MONITOR_ID] [boolean]	Remove monitors from an Agent. Monitor IDs are provided. Boolean (optional) indicates if a successful DEREG triggers a NOTIFY with final data.
PROBE	HEADER MONITOR_ID	Probe the status of a registered monitor.

Table 1: Client to Agent Messages

Each message contains a header with the Client Identifier, an execution delay timer and an operation identifier. The delay, in ms, is processed as the delay for operation execution from the time the operation is received by the Agent.

The Client Identifier is used by the Agent to associate specific configuration characteristics, e.g. options used by the Client when communicating with the Agent, as well as the association of the Client and tenant in the information model.

Messages that create or update Monitors and Entities, i.e. CONF, CONF_BUNDLES and REG_MONITOR, specify an Administrative State which specifies the Administrative state of the message subject(s) after the successful completion of the operation. If the status is set to virtual, any existing data on the DPN is removed. If the value is set to disabled, then an operation to disable the associated entity will occur on the DPN IF that entity exists on the DPN. If set to 'active' the DPN will be provisioned. Values are 'enabled', 'disabled' or 'virtual'.

CONF_BUNDLES also has the Transaction Strategy (TRANS_STRATEGY) attribute. This value specifies the behavior of the Agent when an operation fails while processing a CONF_BUNDLES message. The value of 'default' uses the default strategy defined for the message. The value 'all_or_nothing' will roll back all successfully executed operations within the bundle as well as the operation that failed.

It is important to note that an envelope protocol used to support this specification may not need to support CONF_BUNDLES messages or specific TRANS_STRATEGY types beyond 'default' when the protocol provides similar semantics. However, this MUST be clearly defined in the specification that defines how the envelope protocol supports this specificaiton.

An Agent will respond with an error, ok, or an ok with indication that remaining data will be sent via a notify from the Agent to the Client [Section 6.1.1.6.2](#) for CONF and CONF_BUNDLES requests. When returning an 'ok' of any kind, optional data may be present.

Two Agent notifications are supported:

Message	Type	Description
CONFIG_RESULT_NOTIFY	See Table 15	An asynchronous notification from Agent to Client based upon a previous CONFIG or CONFIG_BUNDLES request.
NOTIFY	See Table 16	An asynchronous notification from Agent to Client based upon a registered MONITOR.

Table 2: Agent to Client Messages (notifications)

[6.1.1.1.](#) CONF and CONF_BUNDLES Messages

CONF and CONF_BUNDLES specify the following information for each operation in addition to the header information:

SESSION_STATE: sets the expected state of the entities embedded in the operation body after successful completion of the operation. Values can be 'complete', 'incomplete' or 'outdated'. Any operation that is 'incomplete' MAY NOT result in communication between the Agent and DPN. If the result is 'outdated' any new operations on these entities or new references to these entities have unpredictable results.

OP_TYPE: specifies the type of operation. Valid values are 'create' (0), 'update' (1), 'query' (2) or 'delete' (3).

COMMAND_SET: specifies the Command Set IF the feature is supported (see [Section 6.1.1.4](#)).

BODY A list of Clones, if supported, Ports and Contexts when the OP_TYPE is 'create' or 'update'. Otherwise it is a list of Targets for 'query' or 'deletion'. See [Section 7.2.2](#) for details.

[6.1.1.1.1.](#) Agent Operation Processing

The Agent will process entities provided in an operation in the following order:

1. Clone Instructions, if the feature is supported
2. Ports

3. Contexts according to COMMAND_SET order processing

The following Order Processing occurs when COMMAND Sets are present

1. The Entity specific COMMAND_SET is processed according to its bit order unless otherwise specified by the technology specific COMMAND_SET definition.

2. Operation specific COMMAND_SET is processed upon all applicable entities (even if they had Entity specific COMMAND_SET values present) according to its bit order unless otherwise specified by the technology specific COMMAND_SET definition.
3. Operation OP_TYPE is processed for all entities.

When deleting objects only their name needs to be provided. However, attributes MAY be provided if the Client wishes to avoid requiring the Agent cache lookups.

When deleting an attribute, a leaf reference should be provided. This is a path to the attributes.

[6.1.1.2.](#) Policy RPC Support

This optional feature permits policy elements, (Policy-Group, Policy, Action and Descriptor), values to be in CONF or CONF_BUNDLES requests. It enables RPC based policy provisioning.

[6.1.1.3.](#) Cloning

Cloning is an optional feature that allows a Client to copy one structure to another in an operation. Cloning is always done first within the operation (see Operation Order of Execution for more detail). If a Client wants to build an object then Clone it, use CONFIG_BUNDLES with the first operation being the entities to be copied and a second operation with the Cloning instructions. A CLONE operation takes two arguments, the first is the name of the target to clone and the second is the name of the newly created entity. Individual attributes are not clonable; only Ports and Contexts can be cloned.

[6.1.1.4.](#) Command Bitsets

The COMMAND_SET is a technology specific bitset that allows for a single entity to be sent in an operation with requested sub-transactions to be completed. For example, a Context could have the Home Network Prefix absent but it is unclear if the Client would like the address to be assigned by the Agent or if this is an error.

Rather than creating a specific command for assigning the IP a bit position in a COMMAND_SET is reserved for Agent based IP assignment. Alternatively, an entity could be sent in an update operation that would be considered incomplete, e.g. missing some required data in for the entity, but has sufficient data to complete the instructions provided in the COMMAND_SET.

6.1.1.5. Reference Scope

The Reference Scope is an optional feature that provides the scope of references used in a configuration command, i.e. CONFIG or CONFIG_BUNDLES. These scopes are defined as

- o none - all entities have no references to other entities. This implies only Contexts are present Ports MUST have references to Policy-Groups.
- o op - All references are contained in the operation body, i.e. only intra-operation references exist.
- o bundle - All references in exist in bundle (inter-operation/intra-bundle). NOTE - If this value comes in CONFIG call it is equivalent to 'op'.
- o storage - One or more references exist outside of the operation and bundle. A lookup to a cache / storage is required.
- o unknown - the location of the references are unknown. This is treated as a 'storage' type.

If supported by the Agent, when cloning instructions are present, the scope MUST NOT be 'none'. When Ports are present the scope MUST be 'storage' or 'unknown'.

An agent that only accepts 'op' or 'bundle' reference scope messages is referred to as 'stateless' as it has no direct memory of references outside messages themselves. This permits low memory footprint Agents. Even when an Agent supports all message types an 'op' or 'bundle' scoped message can be processed quickly by the Agent as it does not require storage access.

6.1.1.6. Operation Response

6.1.1.6.1. Immediate Response

Results will be supplied per operation input. Each result contains the RESULT_STATUS and OP_ID that it corresponds to. RESULT_STATUS values are:

Internet-Draft

DMM FPC Protocol

October 2016

OK - SUCCESS

ERR - An Error has occurred

OK_NOTIFY_FOLLOWS - The Operation has been accepted by the Agent but further processing is required. A CONFIG_RESULT_NOTIFY will be sent once the processing has succeeded or failed.

Any result MAY contain nothing or a entities created or partially fulfilled as part of the operation as specified in Table 14. For Clients that need attributes back quickly for call processing, the AGENT MUST respond back with an OK_NOTIFY_FOLLOWS and minimally the attributes assigned by the Agent in the response. These situations MUST be determined through the use of Command Sets (see [Section 6.1.1.4](#)).

If an error occurs the following information is returned.

ERROR_TYPE_ID (Unsigned 32) - The identifier of a specific error type

ERROR_INFORMATION - An OPTIONAL string of no more than 1024 characters.

[6.1.1.6.2](#). Asynchronous Notification

A CONFIG_RESULT_NOTIFY occurs after the Agent has completed processing related to a CONFIG or CONFIG_BUNDLES request. It is an asynchronous communication from the Agent to the Client.

The values of the CONFIG_RESULT_NOTIFY are detailed in Table 15.

[6.1.2](#). Monitors

When a monitor has a reporting configuration of SCHEDULED it is automatically de-registered after the NOTIFY occurs. An Agent or DPN may temporarily suspend monitoring if insufficient resources exist. In such a case the Agent MUST notify the Client.

All monitored data can be requested by the Client at any time using the PROBE message. Thus, reporting configuration is optional and when not present only PROBE messages may be used for monitoring. If a SCHEDULED or PERIODIC configuration is provided during registration

with the time related value (time or period respectively) of 0 a NOTIFY is immediately sent and the monitor is immediately de-registered. This method should, when a MONITOR has not been installed, result in an immediate NOTIFY sufficient for the Client's needs and lets the Agent realize the Client has no further need for

the monitor to be registered. An Agent may reject a registration if it or the DPN has insufficient resources.

PROBE messages are also used by a Client to retrieve information about a previously installed monitor. The PROBE message SHOULD identify one or more monitors by means of including the associated monitor identifier. An Agent receiving a PROBE message sends the requested information in a single or multiple NOTIFY messages.

[6.1.2.1.](#) Operation Response

[6.1.2.1.1.](#) Immediate Response

Results will be supplied per operation input. Each result contains the RESULT_STATUS and OP_ID that it corresponds to. RESULT_STATUS values are:

OK - SUCCESS

ERR - An Error has occurred

Any OK result will contain no more information.

If an error occurs the following information is returned.

ERROR_TYPE_ID (Unsigned 32) - The identifier of a specific error type

ERROR_INFORMATION - An OPTIONAL string of no more than 1024 characters.

[6.1.2.1.2.](#) Asynchronous Notification

A NOTIFY is sent as part of de-registration, a trigger based upon a Monitor Configuration or a PROBE. A NOTIFY is comprised of unique Notification Identifier from the Agent, the Monitor ID the

notification applies to, the Trigger for the notification, a timestamp of when the notification's associated event occurs and data that is specific to the monitored value's type.

[6.2.](#) Protocol Operation

[6.2.1.](#) Simple RPC Operation

An FPC Client and Agent MUST identify themselves using the CLI_ID and AGT_ID respectively to ensure that for all transactions a recipient of an FPC message can unambiguously identify the sender of the FPC message. A Client MAY direct the Agent to enforce a rule in a

particular DPN by including a DPN_ID value in a Context. Otherwise the Agent selects a suitable DPN to enforce a Context and notifies the Client about the selected DPN using the DPN_ID.

All messages sent from a Client to an Agent MUST be acknowledged by the Agent. The response must include all entities as well as status information, which indicates the result of processing the message, using the RESPONSE_BODY property. In case the processing of the message results in a failure, the Agent sets the ERROR_TYPE_ID and ERROR_INFORMATION accordingly and MAY clear the Context or Port, which caused the failure, in the response.


If based upon Agent configuration or the processing of the request possibly taking a significant amount of time the Agent MAY respond with an OK_NOTIFY_FOLLOWS with an optional RESPONSE_BODY containing the partially completed entities. When an OK_NOTIFY_FOLLOWS is sent, the Agent will, upon completion or failure of the operation, respond with an asynchronous CONFIG_RESULT_NOTIFY to the Client.

A Client MAY add a property to a Context without providing all required details of the attribute's value. In such case the Agent SHOULD determine the missing details and provide the completed property description back to the Client. If the processing will take too long or based upon Agent configuration, the Agent MAY respond with an OK_NOTIFY_FOLLOWS with a RESPONSE_BODY containing the partially completed entities.

In case the Agent cannot determine the missing value of an attribute's value per the Client's request, it leaves the attribute's

value cleared in the RESPONSE_BODY and sets the RESULT to Error, ERROR_TYPE_ID and ERROR_INFORMATION. As example, the Control-Plane needs to setup a tunnel configuration in the Data-Plane but has to rely on the Agent to determine the tunnel endpoint which is associated with the DPN that supports the Context. The Client adds the tunnel property attribute to the FPC message and clears the value of the attribute (e.g. IP address of the local tunnel endpoint). The Agent determines the tunnel endpoint and includes the completed tunnel property in its response to the Client.

Figure 17 illustrates an exemplary session life-cycle based on Proxy Mobile IPv6 registration via MAG Control-Plane function 1 (MAG-C1) and handover to MAG Control-Plane function 2 (MAG-C2). Edge DPN1 represents the Proxy CoA after attachment, whereas Edge DPN2 serves as Proxy CoA after handover. As exemplary architecture, the FPC Agent and the network control function are assumed to be co-located with the Anchor-DPN, e.g. a Router.

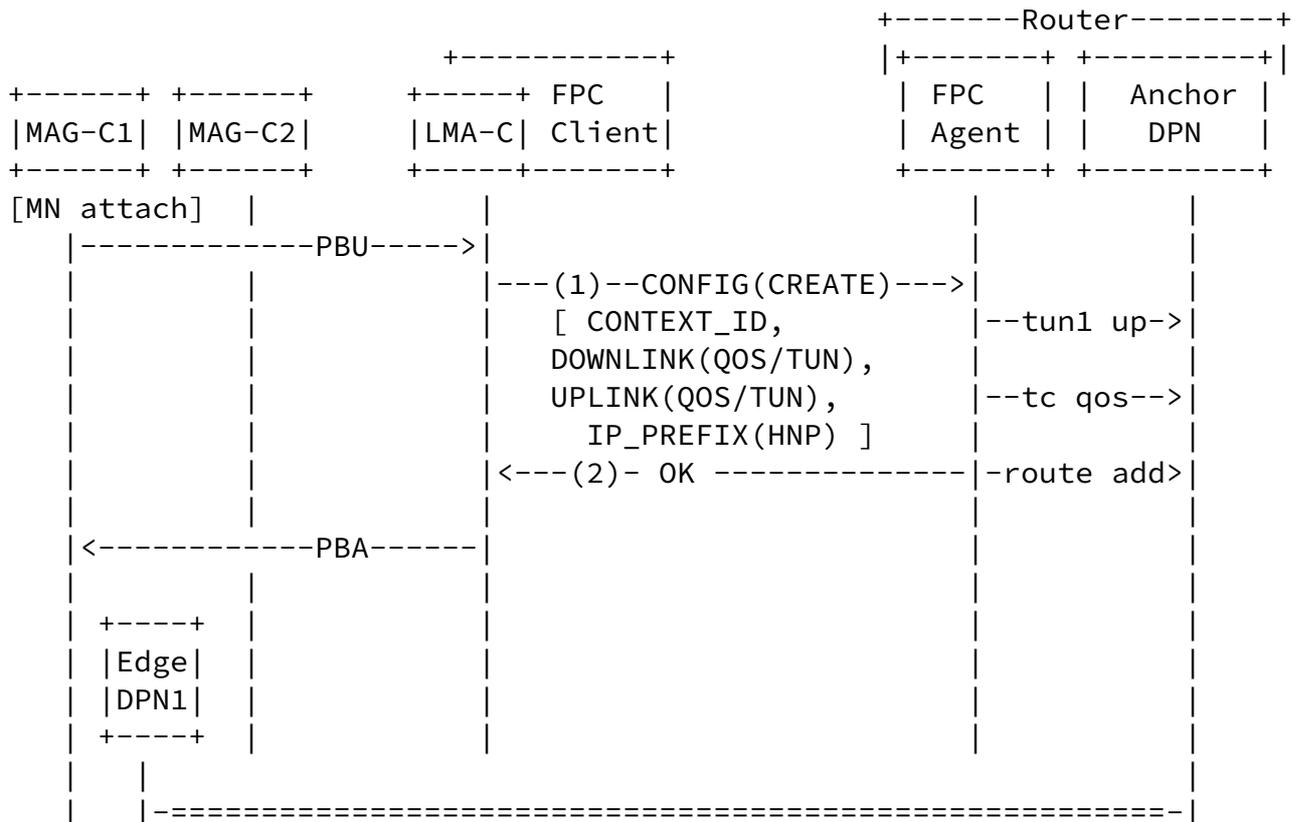

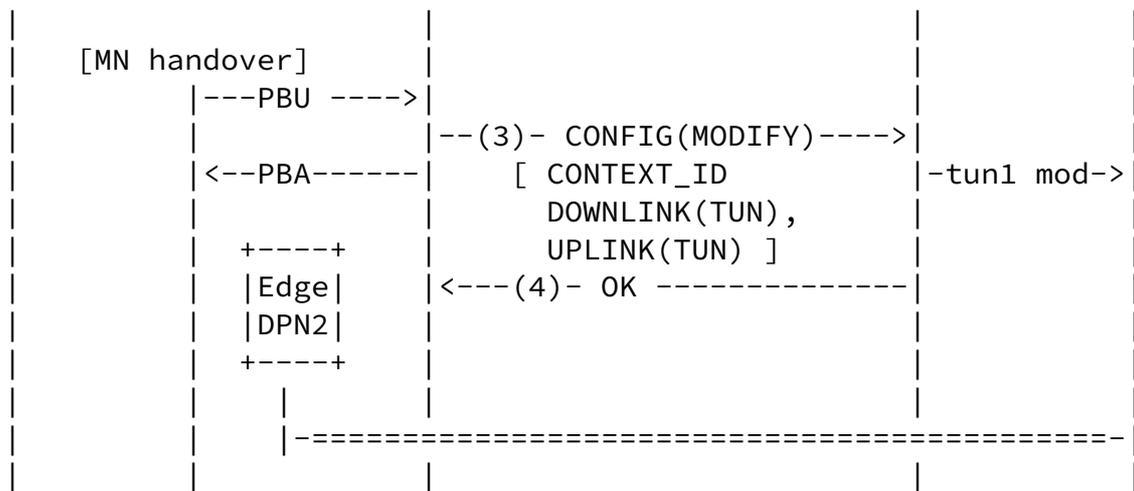


Figure 17: Exemplary Message Sequence (focus on FPC reference point)

After reception of the Proxy Binding Update (PBU) at the LMA Control-Plane function (LMA_C), the LMA-C selects a suitable DPN, which serves as Data-Plane anchor to the mobile node's (MN) traffic. The LMA-C adds a new logical Context to the DPN to treat the MN's traffic (1) and includes a Context Identifier (CONTEXT_ID) to the CONFIGURE command. The LMA-C identifies the selected Anchor DPN by including the associated DPN identifier.

The LMA-C adds properties during the creation of the new Context. One property is added to specify the forwarding tunnel type and endpoints (Anchor DPN, Edge DPN1) in each direction (as required). Another property is added to specify the QoS differentiation, which the MN's traffic should experience. At reception of the Context, the FPC Agent utilizes local configuration commands to create the tunnel (tun1) as well as the traffic control (tc) to enable QoS differentiation. After configuration has been completed, the Agent applies a new route to forward all traffic destined to the MN's HNP specified as a property in the Context to the configured tunnel interface (tun1).

During handover, the LMA-C receives an updating PBU from the handover target MAG-C2. The PBU refers to a new Data-Plane node (Edge DPN2) to represent the new tunnel endpoints in the downlink and uplink, as

CONFIGURE (3) message with a deletion request for the Context. Upon reception of the message, the Agent deletes the tunnel and route on the DPN and responds to the Client (4).

When a multi-DPN Agent is used the DPN list permits several DPNs to be provisioned in a single message.

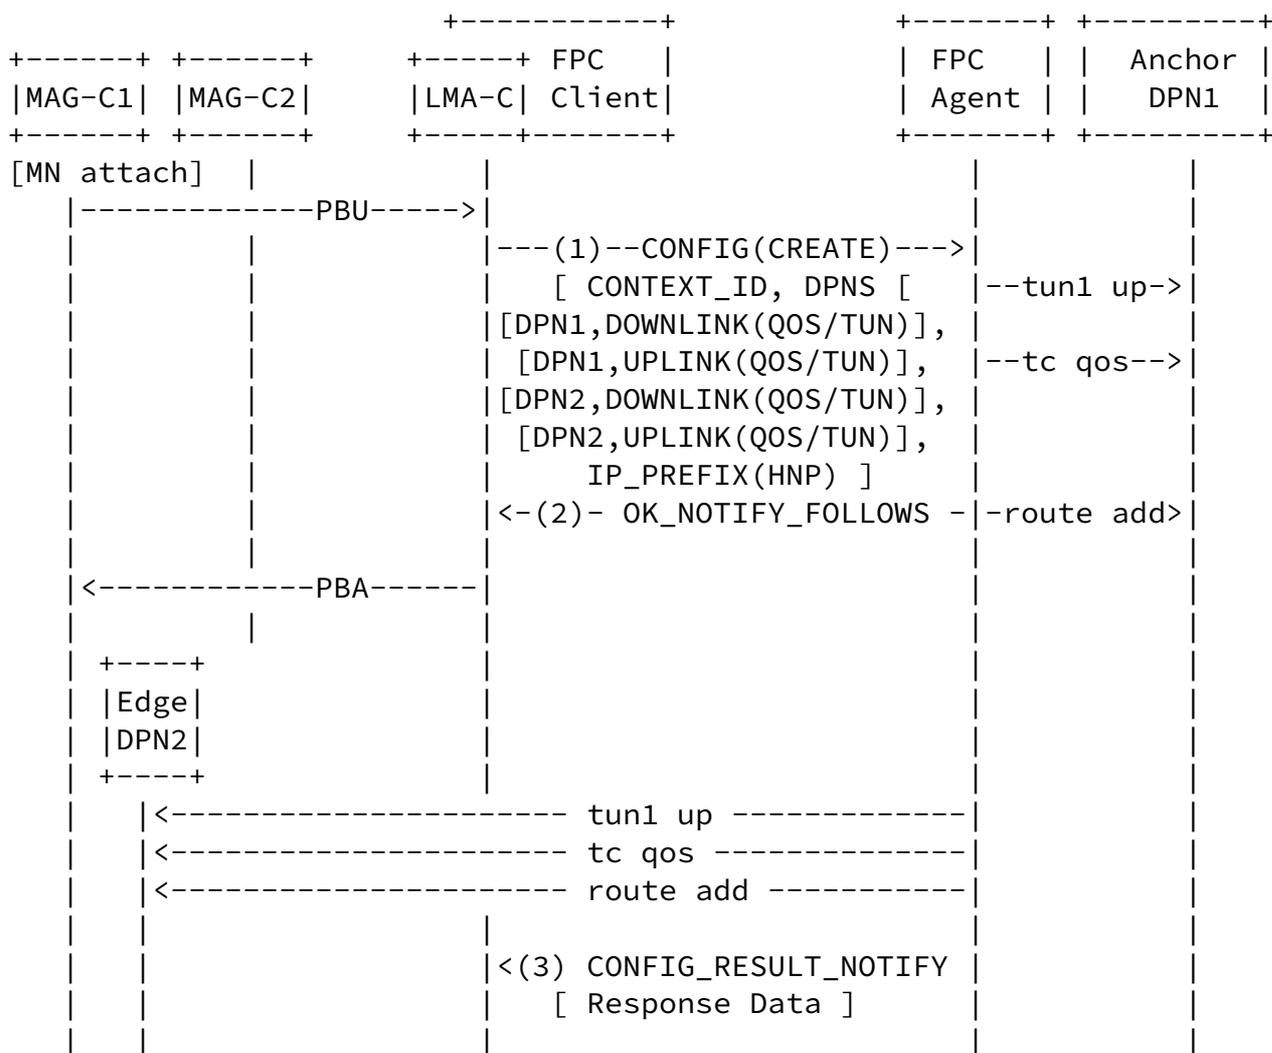


Figure 19: Exemplary Message Sequence for Multi-DPN Agent

Figure 19 shows how the first 2 messages in Figure 17 are supported

when a multi-DPN Agent communicates with both Anchor DPN1 and Edge DPN2. In such a case, the FPC Client sends the downlink and uplink for both DPNs in the "DPNS" list of the same Context. Message 1 shows the DPNS list with all entries. Each entry identifies the DPN and direction (one of 'uplink', 'downlink' or 'both'). Generally, the 'both' direction is not used for normal mobility session processing. It is commonly used for the instantiation of Policies on a specific DPN (see [Section 6.2.4](#)).

The Agent responds with an OK_NOTIFY_FOLLOWS while it simultaneously provisions both DPNs. Upon successful completion, the Agent responds to the Client with a CONFIG_RESULT_NOTIFY indicating the operation status.

[6.2.2](#). Policy And Mobility on the Agent

A Client may build Policy and Topology using any mechanism on the Agent. Such entities are not always required to be constructed in realtime and, therefore, there are no specific messages defined for them in this specification.

The Client may add, modify or delete many Ports and Contexts in a single FPC message. This includes linking Contexts to Actions and Descriptors, i.e. a Rule. As example, a Rule which performs re-writing of an arriving packet's destination IP address from IP_A to IP_B matching an associated Descriptor, can be enforced in the Data-Plane via an Agent to implicitly consider matching arriving packet's source IP address against IP_B and re-write the source IP address to IP_A.

Figure 20 illustrates the generic policy configuration model as used between a FPC Client and a FPC Agent.

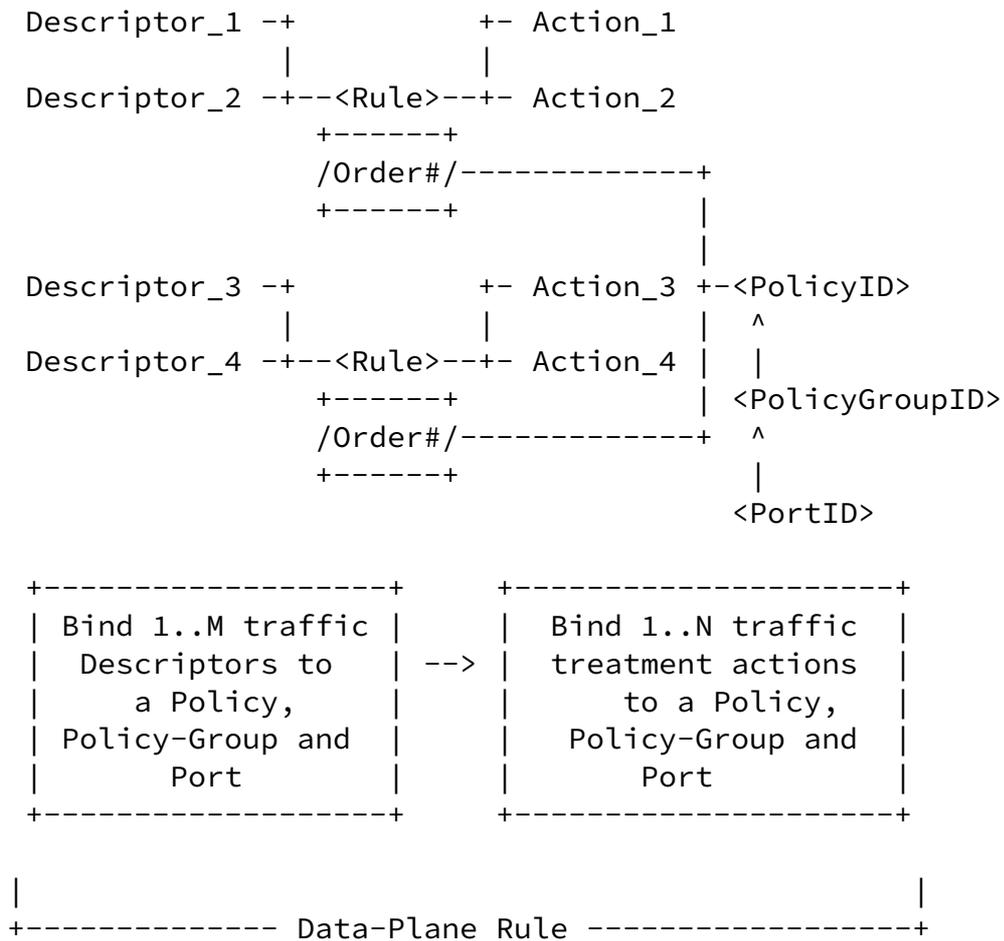


Figure 20: Structure of Policies and Ports

As depicted in Figure 20, the Port represents the anchor of Rules through the Policy-group, Policy, Rule hierarchy configured by any mechanism including RPC or N. A Client and Agent use the identifier of the associated Policy to directly access the Rule and perform modifications of traffic Descriptors or Action references. A Client and Agent use the identifiers to access the Descriptors or Actions to perform modifications. From the viewpoint of packet processing, arriving packets are matched against traffic Descriptors and processed according to the treatment Actions specified in the list of properties associated with the Port.

A Client complements a rule's Descriptors with a Rule's Order (priority) value to allow unambiguous traffic matching on the Data-Plane.

Figure 21 illustrates the generic context configuration model as used between a FPC Client and a FPC Agent.

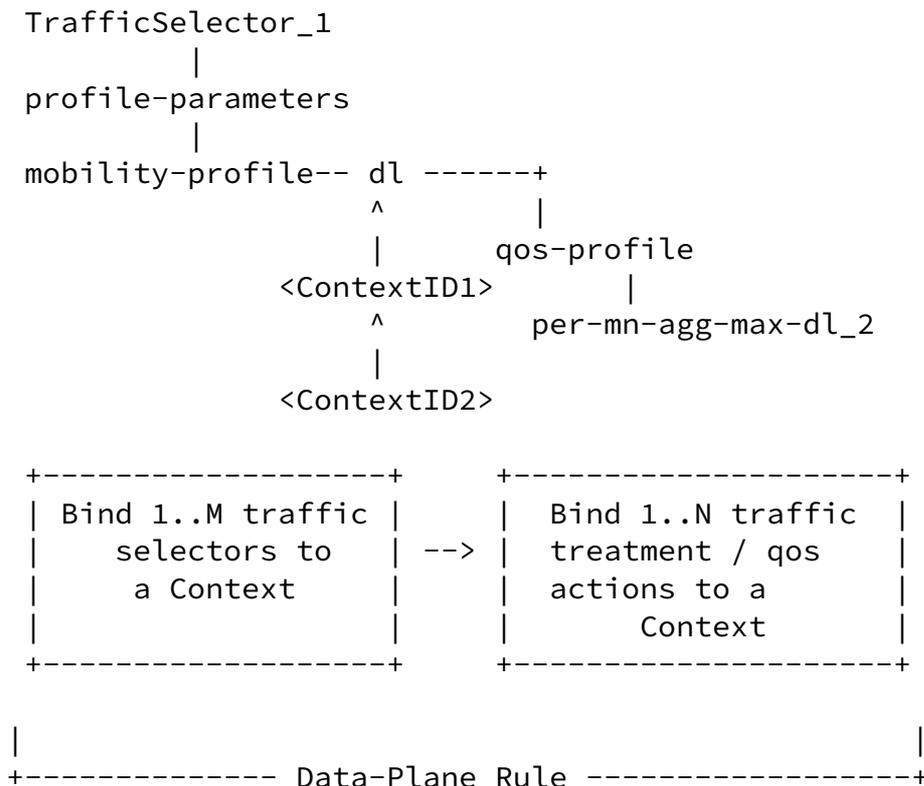


Figure 21: Structure of Contexts

As depicted in Figure 21, the Context represents a mobility session hierarchy. A Client and Agent directly assigns values such as downlink traffic descriptors, QoS information, etc. A Client and Agent use the context identifiers to access the descriptors, qos information, etc. to perform modifications. From the viewpoint of packet processing, arriving packets are matched against traffic Descriptors and processed according to the qos or other mobility profile related Actions specified in the Context's properties. If present, the final action is to use a Context's tunnel information to encapsulate and forward the packet.

A second Context also references context1 in the figure. Based upon the technology a property in a parent context MAY be inherited by its descendants. This permits concise over the wire representation. When a Client deletes a parent Context all children are also deleted.

Figure 22: Exemplary Bulk Entity with Asynchronous Notification Sequence (focus on FPC reference point)

6.2.3.2. Configuration Bundles

Bundles provide transaction boundaries around work in a single message. Operations in a bundle MUST be successfully executed in the order specified. This allows references created in one operation to be used in a subsequent operation in the bundle.

The example bundle shows in Operation 1 (OP 1) the creation of a Context 1 which is then referenced in Operation 2 (OP 2) by CONTEXT_ID 2. If OP 1 fails then OP 2 will not be executed. The advantage of the CONFIGURE_BUNDLES is preservation of dependency orders in a single message as opposed to sending multiple CONFIGURE messages and awaiting results from the Agent.

When a CONFIGURE_BUNDLES fails, any entities provisioned in the CURRENT operation are removed, however, any successful operations completed prior to the current operation are preserved in order to reduce system load.

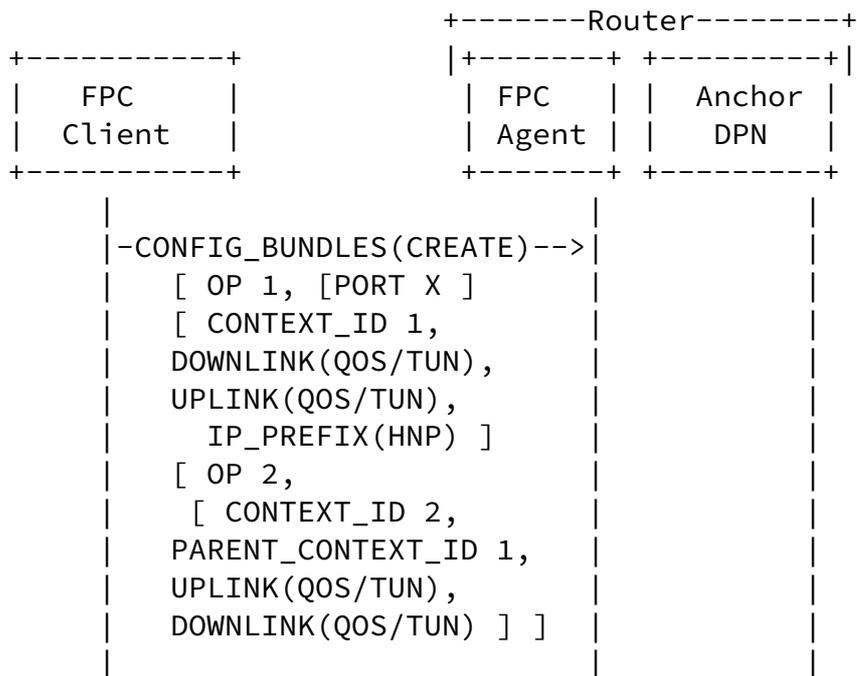


Figure 23: Exemplary Bundle Message (focus on FPC reference point)

6.2.3.3. Cloning Feature (Optional)

Cloning provides a high speed copy/paste mechanism. The example below shows a single Context that will be copied two times. A subsequent update then overrides the value. To avoid the accidental activation of the Contexts on the DPN, the CONFIGURE (1) message with the cloning instruction has a SESSION_STATE with a value of 'incomplete' and OP_TYPE of 'CREATE'. A second CONFIGURE (2) is sent with the SESSION_STATE of 'complete' and OP_TYPE of 'UPDATE'. The second message includes any differences between the original (copied) Context and its Clones.

```

+-----Router-----+
|+-----+ +-----+|
| FPC   | | Anchor |
| Client| | DPN   |
|+-----+ +-----+|
|
| -CONFIG_BUNDLES(CREATE)-->|
|   [ OP 1,                  |
|     [ SESSION_STATE       |
|       (incomplete) ],    |
|   [CLONE SRC=2, TARGET=3],|
|   [CLONE SRC=2, TARGET=4],|
|     [ CONTEXT_ID 2,      |
|       PARENT_CONTEXT_ID 1,|
|       UPLINK(QOS/TUN),    |
|       DOWNLINK(QOS/TUN),  |
|       IP_PREFIX(HNP)   ] ]|
| <----- OK ----->|

```

```

|
| -CONFIG_BUNDLES(UPDATE)-->|
|   [ CONTEXT_ID 3,         |
|   PARENT_CONTEXT_ID(empty),|
|   UPLINK(QOS/TUN),        |
|   DOWNLINK(QOS/TUN) ],    |
|   [ CONTEXT_ID 4,         |
|   PARENT_CONTEXT_ID(empty),|
|   UPLINK(QOS/TUN),        |
|   DOWNLINK(QOS/TUN) ] ]   |
| <----- OK ----->     |
|

```

Figure 24: Exemplary Bundle Message (focus on FPC reference point)

Cloning has the added advantage of reducing the over the wire data size required to create multiple entities. This can improve performance if serialization / deserialization of multiple entities incurs some form of performance penalty.

[6.2.3.4.](#) Command Bitsets (Optional)

Command Sets permit the ability to provide a single, unified data structure, e.g. CONTEXT, and specify which activities are expected to be performed on the DPN. This has some advantages

- o Rather than sending N messages with a single operation performed on the DPN a single message can be used with a Command Set that specifies the N DPN operations to be executed.

- o Errors become more obvious. For example, if the HNP is NOT provided but the Client did not specify that the HNP should be assigned by the Agent this error is easily detected. Without the Command Set the default behavior of the Agent would be to assign the HNP and then respond back to the Client where the error would be detected and subsequent messaging would be required to remedy the error. Such situations can increase the time to error detection and overall system load without the Command Set present.
- o Unambiguous provisioning specification. The Agent is exactly in sync with the expectations of the Client as opposed to guessing

what DPN work could be done based upon data present at the Agent. This greatly increases the speed by which the Agent can complete work.

- o Permits different technologies with different instructions to be sent in the same message.

As Command Bitsets are technology specific, e.g. PMIP or 3GPP Mobility, the type of work varies on the DPN and the amount of data present in a Context or Port will vary. Using the technology specific instructions allows the Client to serve multiple technologies and MAY result in a more stateless Client as the instructions are transferred to the Agent which will match the desired, technology specific instructions with the capabilities and over the wire protocol of the DPN more efficiently.

[6.2.3.5](#). Reference Scope(Optional)

Although entities MAY refer to any other entity of an appropriate type, e.g. Contexts can refer to Ports or Contexts, the Reference Scope gives the Agent an idea of where those references reside. They may be in the same operation, an operation in the same CONFIG_BUNDLES message or in storage. There may also be no references. This permits the Agent to understand when it can stop searching for reference it cannot find. For example, if a CONFIG_BUNDLES message uses a Reference Scope of type 'op' then it merely needs to keep an operation level cache and consume no memory or resources searching across the many operations in the CONFIG_BUNDLES message or the data store.

Agents can also be stateless by only supporting the 'none', 'op' and 'bundle' reference scopes. This does not imply they lack storage but merely the search space they use when looking up references for an entity. The figure below shows the caching hierarchy provided by the Reference Scope

Caches are temporarily created at each level and as the scope includes more caches the amount of entities that are searched increases. Figure 25 shows an example cache where each Cache where a containment hierarchy is provided for all caches.

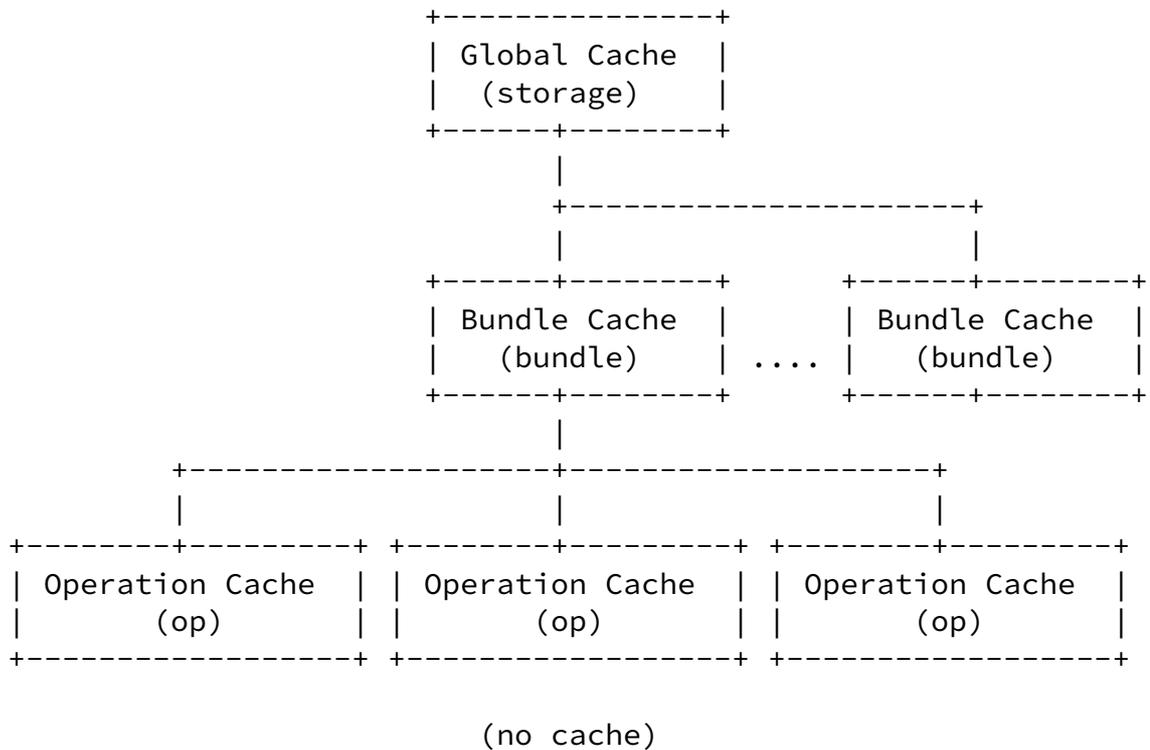


Figure 25: Exemplary Hierarchical Cache

6.2.4. Pre-provisioning

Although Contexts are used for Session based lifecycle elements, Ports may exist outside of a specific lifecycle and represent more general policies that may affect multiple Contexts (sessions). The use of pre-provisioning of Ports permits policy and administrative use cases to be executed. For example, creating tunnels to forward traffic to a trouble management platform and dropping packets to a defective web server can be accomplished via provisioning of Ports.

The figure below shows a CONFIGURE (1) message used to install a Policy-group, policy-group1, using a Context set aside for pre-provisioning on a DPN.

Internet-Draft

DMM FPC Protocol

October 2016

Structure	Field	Type
ACTION	ACTION_ID	FPC-Identity (Section 5.4)
ACTION	TYPE	[32, unsigned integer]
ACTION	VALUE	Type specific
DESCRIPTOR	DESCRIPTOR_ID	FPC-Identity (Section 5.4)
DESCRIPTOR	TYPE	[32, unsigned integer]
DESCRIPTOR	VALUE	Type specific
POLICY	POLICY_ID	FPC-Identity (Section 5.4)
POLICY	RULES	*[RULE] (See Table 4)
POLICY-GROUP	POLICY_GROUP_ID	FPC-Identity (Section 5.4)
POLICY-GROUP	POLICIES	*[POLICY_ID]

Table 3: Action Fields

Policies contain a list of Rules by their order value. Each Rule contains Descriptors with optional directionality and Actions with order values that specifies action execution ordering if the Rule has multiple actions.

Rules consist of the following fields.

Field	Type	Sub-Fields
ORDER	[16, INTEGER]	
RULE_DESCRIPTOR	*[DESCRIPTOR_ID	DIRECTION [2, unsigned bits] is an ENUMERATION (uplink,

	DIRECTION]	downlink or both).
RULE_ACTIONS	*[ACTION_ID ORDER]	ORDER [8, unsigned integer] specifies action execution order.

Table 4: Rule Fields

[7.1.2.](#) Mobility Structures

Field	Type
PORT_ID	FPC-Identity (Section 5.4)
POLICIES	*[POLICY_GROUP_ID]

Table 5: Port Fields

Field	Type
CONTEXT_ID	FPC-Identity (Section 5.4)
PORTS	*[PORT_ID]
DPN_GROUP_ID	FPC-Identity (Section 5.4)
DELEGATING IP PREFIXES	*[IP_PREFIX]
PARENT_CONTEXT_ID	FPC-Identity (Section 5.4)
UPLINK [NOTE 1]	MOB_FIELDS
DOWNLINK [NOTE 1]	MOB_FIELDS
DPNS [NOTE 2]	*[DPN_ID DPN_DIRECTION MOB_FIELDS
MOB_FIELDS	All parameters from Table 7

Table 6: Context Fields

NOTE 1 - These fields are present when the Agent supports only a single DPN.

NOTE 2 - This fields is present when the Agent supports multiple DPNs.

Field	Type	Detail
TUN_LOCAL_ADDRESS	IP Address	[NOTE 1]
TUN_REMOTE_ADDRESS	IP Address	[NOTE 1]

TUN_MTU	[32, unsigned integer]	
TUN_PAYLOAD_TYPE	[2, bits]	Enumeration: payload_ipv4(0), payload_ipv6(1) or payload_dual(2).
TUN_TYPE	[8, unsigned integer]	Enumeration: IP-in-IP(0), UDP(1), GRE(2) and GTP(3).
TUN_IF	[16, unsigned integer]	Input interface index.
MOBILITY_SPECIFIC_TUN_PARAMS	[IETF_PMIP_MOB_PROFILE 3GPP_MOB_PROFILE]	[NOTE 1]
NEXTHOP	[IP Address MAC Address SPI MPLS Label SID Interface Index]	[NOTE 1]

	(See Table 19).	
QOS_PROFILE_PARAMS	[3GPP_QOS PMIP_QOS]	[NOTE 1]
DPN_SPECIFIC_PARAMS	[TUN_IF or Varies]	Specifies optional node specific parameters in need such as if-index, tunnel-if-number that must be unique in the DPN.
VENDOR_SPECIFIC_PARAM	*[Varies]	[NOTE 1]

NOTE 1 - These parameters are extensible. The Types may be extended for Field value by future specifications or in the case of Vendor Specific Attributes by enterprises.

Table 7: Context Downlink/Uplink Field Definitions

7.1.3. Topology Structures

Field	Type
DPN_ID	FPC-Identity. See Section 5.4
DPN_NAME	[1024, OCTET STRING]
DPN_GROUPS	* [FPC-Identity] See Section 5.4
NODE_REFERENCE	[1024, OCTET STRING]

Table 8: DPN Fields

Field	Type
DOMAIN_ID	[1024, OCTET STRING]
DOMAIN_NAME	[1024, OCTET STRING]
DOMAIN_TYPE	[1024, OCTET STRING]

Table 9: Domain Fields

Field	Type
DPN_GROUP_ID	FPC-Identity. See Section 5.4
DATA_PLANE_ROLE	[4, ENUMERATION (data-plane, such as access-dpn, L2/L3 anchor-dpn.)]
ACCESS_TYPE	[4, ENUMERATION ()ethernet(802.3/11), 3gpp cellular(S1,RAB)]
MOBILITY_PROFILE	[4, ENUMERATION (ietf-pmip, 3gpp, or new

	profile)]
PEER_DPN_GROUPS	* [DPN_GROUP_ID MOBILITY_PROFILE REMOTE_ENDPOINT_ADDRESS LOCAL_ENDPOINT_ADDRESS TUN_MTU DATA_PLANE_ROLE]

Table 10: DPN Groups Fields

[7.1.4.](#) Monitors

Field	Type	Description
MONITOR	MONITOR_ID TARGET [REPORT_CONFIG]	

MONITOR_ID	FPC-Identity. See Section 5.4	
EVENT_TYPE_ID	[8, Event Type ID]	Event Type (unsigned integer).
TARGET	OCTET STRING (See Section 5.3.3)	
REPORT_CONFIG	[8, REPORT-TYPE] [TYPE_SPECIFIC_INFO]	
PERIODIC_CONFIG	[32, period]	report interval (ms).
THRESHOLD_CONFIG	[32, low] [32, hi]	thresholds (at least one value must be present)
SCHEDULED_CONFIG	[32, time]	
EVENTS_CONFIG	*[EVENT_TYPE_ID]	

Table 11: Monitor Structures and Attributes

TRIGGERS include but are not limited to the following values:

- o Events specified in the Event List of an EVENTS CONFIG
- o LOW_THRESHOLD_CROSSED
- o HIGH_THRESHOLD_CROSSED
- o PERIODIC_REPORT
- o SCHEDULED_REPORT
- o PROBES
- o DEREG_FINAL_VALUE

[7.2.](#) Message Attributes

[7.2.1.](#) Header

Each operation contains a header with the following fields:

Field	Type	Messages
CLIENT_ID	FPC-Identity (Section 5.4)	All
DELAY	[32, unsigned integer]	All
OP_ID	[64, unsigned integer]	All
ADMIN_STATE	[8, admin state]	CONF, CONF_BUNDLES and REG_MONITOR
OP_TYPE	[8, op type]	CONF and CONF_BUNDLES

Table 12: Message Header Fields

[7.2.2.](#) CONF and CONF_BUNDLES Attributes and Notifications

Internet-Draft

DMM FPC Protocol

October 2016

Field	Type	Operation Types Create(C), Update(U), Query(Q) and Delete(D)
SESSION_STATE	[8, session state]	C,U
COMMAND_SET	FPC Command Bitset. See Section 6.1.1.4 .	C,U [NOTE 1]
CLONES	*[FPC-Identity FPC-Identity] (Section 5.4)	C,U [NOTE 1]
PORTS	*[PORT]	C,U
CONTEXTS	*[CONTEXT [COMMAND_SET [NOTE 1]]]	C,U
TARGETS	FPC-Identity (Section 5.4) *[DPN_ID]	Q,D
POLICY_GROUPS	*[POLICY-GROUP]	C,U [NOTE 1]
POLICIES	*[POLICY]	C,U [NOTE 1]
DESCRIPTORS	*[DESCRIPTOR]	C,U [NOTE 1]
ACTIONS	*[ACTION]	C,U [NOTE 1]

NOTE 1 - Only present if the corresponding feature is supported by the Agent.

Table 13: CONF and CONF_BUNDLES OP_BODY Fields

Internet-Draft

DMM FPC Protocol

October 2016

Field	Type	Operation Types Create(C), Update(U), Query(Q) and Delete(D)
PORTS	*[PORT]	C,U [NOTE 2]
CONTEXTS	*[CONTEXT [COMMAND_SET [NOTE 1]]]	C,U [NOTE 2]
TARGETS	*[FPC-Identity (Section 5.4) *[DPN_ID]]	Q,D [NOTE 2]
ERROR_TYPE_ID	[32, unsigned integer]	All [NOTE 3]
ERROR_INFORMATION	[1024, octet string]	All [NOTE 3]

Table 14: Immediate Response RESPONSE_BODY Fields

Notes:

NOTE 1 - Only present if the corresponding feature is supported by the Agent.

NOTE 2 - Present in OK and OK_NOTIFY_FOLLOWS for both CONF and CONF_BUNDLES. MAY also be present in an CONF_BUNDLES Error response (ERR) if one of the operations completed successfully.

NOTE 3 - Present only for Error (ERR) responses.

Field	Type	Description
AGENT_ID	FPC-Identity (Section 5.4)	
NOTIFICATION_ID	[32, unsigned integer]	A Notification Identifier used to determine notification order.
TIMESTAMP	[32, unsigned integer]	The time that the notification occurred.
DATA	*[OP_ID RESPONSE_BODY (Table 14)]	

Table 15: CONFIG_RESULT_NOTIFY Asynchronous Notification Fields

[7.2.3.](#) Monitors

Field	Type	Description
NOTIFICATION_ID	[32, unsigned integer]	

TRIGGER	[32, unsigned integer]	
NOTIFY	NOTIFICATION_ID MONITOR_ID TRIGGER [32, timestamp] [NOTIFICATION_DATA]	Timestamp notes when the event occurred. Notification Data is TRIGGER and Monitor type specific.

Table 16: Monitor Notifications

8. Derived and Subtyped Attributes

This section notes derived attributes.

Field	Type Value	Type	Description
TO_PREFIX	0	[IP Address] [Prefix Len]	Aggregated or per-host destination IP address/prefix descriptor.
FROM_PREFIX	1	[IP Address] [Prefix Len]	Aggregated or per-host source IP address/prefix descriptor.
TRAFFIC_SELECTOR	2	Format per specification [RFC6088].	Traffic Selector.

Table 17: Descriptor Subtypes

Field	Type Value	Type	Description
DROP	0	Empty	Drop the associated packets.
REWRITE	1	[in_src_ip] [out_src_ip] [in_dst_ip] [out_dst_ip] [in_src_port] [out_src_port] [in_dst_port] [out_dst_port]	Rewrite IP Address (NAT) or IP Address / Port (NAPT).
COPY_FORWARD	2	FPC-Identity. See Section 5.4 .	Copy all packets and forward them to the provided identity. The value of the identity MUST be a port or context.

Table 18: Action Subtypes

Field	Type Value	Type	Description
IP_ADDR	0	IP Address	An IP Address.
MAC_ADDR	1	MAC Address	A MAC Address.
SERVICE_PATH_ID	2	[24, unsigned integer]	Service Path Identifier (SPI)
MPLS_LABEL	3	[20, unsigned integer]	MPLS Label

NSH	4	[SERVICE_PATH_ID] [8, unsigned integer]	Included NSH which is a SPI and Service Index (8 bits).
INTERFACE_INDEX	5	[16, unsigned integer]	Interface Index (an unsigned integer).

Table 19: Next Hop Subtypes

Field	Type Value	Type	Description
QOS	0	[qos index type] [index] [DSCP]	Refers to a single index and DSCP to write to the packet.
GBR	1	[32, unsigned integer]	Guaranteed bit rate.
MBR	2	[32, unsigned integer]	Maximum bit rate.
PMIP_QOS	3	Varies by Type	A non-traffic selector PMIP QoS Attribute per RFC7222

Table 20: QoS Subtypes

Field	Type Value	Type	Description
IPIP_TUN	0		IP in IP Configuration
UDP_TUN	1	[src_port]	UDP Tunnel - source and/or

		[dst_port]	destination port
GRE_TUN	2	[32, GRE Key]	GRE Tunnel.

Table 21: Tunnel Subtypes

The following COMMAND_SET values are supported for IETF_PMIP.

- o assign-ip - Assign the IP Address for the mobile session.
- o assign-dpn - Assign the Dataplane Node.
- o session - Assign values for the Session Level.
- o uplink - Command applies to uplink.
- o downlink - Command applies to downlink.

8.1. 3GPP Specific Extensions

3GPP support is optional and detailed in this section. The following acronyms are used:

APN-AMBR: Access Point Name Aggregate Maximum Bit Rate

ARP: Allocation of Retention Priority

EBI: EPS Bearer Identity

GBR: Guaranteed Bit Rate

GTP: GPRS (General Packet Radio Service) Tunneling Protocol

IMSI: International Mobile Subscriber Identity

MBR: Maximum Bit Rate

QCI: QoS Class Identifier

TEID: Tunnel Endpoint Identifier.

TFT: Traffic Flow Template (TFT)

UE-AMBR: User Equipment Aggregate Maximum Bit Rate

NOTE: GTP Sequence Number (SEQ_NUMBER) is used in failover and handover.

Field	Type Value	Namespace / Entity Extended	Type
GTPV1	3	Tunnel Subtypes namespace.	LOCAL_TEID REMOTE_TEID SEQ_NUMBER
GTPV2	4	Tunnel Subtypes namespace.	LOCAL_TEID REMOTE_TEID SEQ_NUMBER
LOCAL_TEID	N/A	N/A	[32, unsigned integer]
REMOTE_TEID	N/A	N/A	[32, unsigned integer]
SEQ_NUMBER	N/A	N/A	[32, unsigned integer]
TFT	3	Descriptors Subtypes namespace.	Format per TS 24.008 Section 10.5.6.12.
IMSI	N/A	Context (new attribute)	[64, unsigned integer]
EBI	N/A	Context (new attribute)	[4, unsigned integer]
3GPP_QOS	4	QoS Subtypes namespace.	[8, qci] [32, gbr] [32, mbr] [32, apn_ambr] [32, ue_ambr] ARP
ARP	N/A	N/A	See Allocation-Retention-Priority from RFC7222

Table 22: 3GPP Attributes and Structures

Internet-Draft

DMM FPC Protocol

October 2016

The following COMMAND_SET values are supported for 3GPP.

- o assign-ip - Assign the IP Address for the mobile session.
- o assign-dpn - Assign the Dataplane Node.
- o assign-fteid-ip - Assign the Fully Qualified TEID (F-TEID) LOCAL IP address.
- o assign-fteid-teid - Assign the Fully Qualified TEID (F-TEID) LOCAL TEID.
- o session - Assign values for the Session Level. When this involves 'assign-fteid-ip' and 'assign-fteid-teid' this implies the values are part of the default bearer.
- o uplink - Command applies to uplink.
- o downlink - Command applies to downlink.

9. Implementation Status

Two FPC Agent implementations have been made to date. The first was based upon Version 03 of the draft and followed Model 1. The second follows Version 04 of the document. Both implementations were OpenDaylight plug-ins developed in Java by Sprint. Version 03 was known as fpcagent and version 04's implementation is simply referred to as 'fpc'.

fpcagent's intent was to provide a proof of concept for FPC Version 03 Model 1 in January 2016 and research various errors, corrections and optimizations that the Agent could make when supporting multiple DPNs.

As the code developed to support OpenFlow and a proprietary DPN from a 3rd party, several of the advantages of a multi-DPN Agent became obvious including the use of machine learning to reduce the number of Flows and Policy entities placed on the DPN. This work has driven new efforts in the DIME WG, namely Diameter Policy Groups [[I-D.bertz-dime-policygroups](#)].

A throughput performance of tens per second using various NetConf based solutions in OpenDaylight made fpcagent undesirable for call

processing. The RPC implementation improved throughput by an order of magnitude but was not useful based upon FPC's Version 03 design using two information models. During this time the features of version 04 and its converged model became attractive and the fpcagent

project was closed in August 2016. fpcagent will no longer be developed and will remain a proprietary implementation.

The learnings of fpcagent has influenced the second project, fpc. Fpc is also an OpenDaylight project but is intended for open source release, if circumstances permit. It is also scoped to be a fully compliant FPC Agent that supports multiple DPNs including those that communicate via OpenFlow. The following features present in this draft and others developed by the FPC development team have already lead to an order of magnitude improvement.

Migration of non-realtime provisioning of entities such as topology and policy allowed the implementation to focus only on the rpc.

Using only 5 messages and 2 notifications has also reduced implementation time.

Command Sets, an optional feature in this specification, have eliminated 80% of the time spent determining what needs to be done with a Context during a Create or Update operation.

Op Reference is an optional feature modeled after video delivery. It has reduced unnecessary cache lookups. It also has the additional benefit of allowing an Agent to become cacheless and effectively act as a FPC protocol adapter remotely with multi-DPN support or colocated on the DPN in a single-DPN support model.

Multi-tenant support allows for Cache searches to be partitioned for clustering and performance improvements. This has not been capitalized upon by the current implementation but is part of the development roadmap.

Use of Contexts to pre-provision policy has also eliminated any processing of Ports for DPNs which permitted the code for CONFIGURE and CONFIGURE_BUNDLES to be implemented as a simple

nested FOR loops (see below).

Current performance results without code optimizations or tuning allow 2-5K FPC Contexts processed per second on a 2013 Mac laptop. This results in 2x the number of transactions on the southbound interface to a proprietary DPN API on the same machine.

fpc currently supports the following:

1 proprietary DPN API

Matsushima, et al.

Expires May 4, 2017

[Page 61]

Internet-Draft

DMM FPC Protocol

October 2016

Policy and Topology as defined in this specification using OpenDaylight North Bound Interfaces such as NetConf and RestConf

CONFIGURE and CONFIGURE_BUNDLES (all operations)

DPN assignment, Tunnel allocations and IPv4 address assignment by the Agent or Client.

Immediate Response is always an OK_NOTIFY_FOLLOWS.

```
assignment system (receives rpc call):
  perform basic operation integrity check
  if CONFIGURE then
    goto assignments
    if assignments was ok then
      send request to activation system
      respond back to client with assignment data
    else
      send back error
    end if
  else if CONFIGURE_BUNDLES then
    for each operation in bundles
      goto assignments
      if assignments was ok then
        hold onto data
      else
        return error with the assignments that occurred in
          prior operations (best effort)
      end if
    end for
    send bundles to activation systems
  end if
```

```

assignments:
  assign DPN, IPv4 Address and/or tunnel info as required
  if an error occurs undo all assignments in this operation
  return result

activation system:
  build cache according to op-ref and operation type
  for each operation
    for each Context
      for each DPN / direction in Context
        perform actions on DPN according to Command Set
      end for
    end for
  end for
  commit changes to in memory cache
  log transaction for tracking and notification (CONFIG_RESULT_NOTIFY)

```

Figure 27: fpc pseudo code

For further information please contact Lyle Bertz who is also a co-author of this document.

NOTE: Tenant support requires binding a Client ID to a Tenant ID (it is a one to many relation) but that is outside of the scope of this

specification. Otherwise, the specification is complete in terms of providing sufficient information to implement an Agent.

10. Security Considerations

Detailed protocol implementations for DMM Forwarding Policy Configuration must ensure integrity of the information exchanged between an FPC Client and an FPC Agent. Required Security Associations may be derived from co-located functions, which utilize the FPC Client and FPC Agent respectively.

The YANG modules defined in this memo is designed to be accessed via the NETCONF protocol [[RFC6241](#)]. The lowest NETCONF layer is the secure transport layer and the mandatory-to-implement secure transport is SSH [[RFC6242](#)].

The information model defined in the memo is designed to be access by protocols specified in extensions to this document or, if using the YANG modules, as described above.

There are a number of data nodes defined which are writable/creatable/deletable. These data nodes may be considered sensitive or vulnerable in some network environments. Write operations (e.g., a NETCONF edit-config) to these data nodes without proper protection can have a negative effect on network operations. These are the subtrees and data nodes and their sensitivity/vulnerability:

Nodes under the Policy tree provide generic policy enforcement and traffic classification. The can be used to block or permit traffic. If this portion of the model was to be compromised it may be used to block, identify or permit traffic that was not intended by the Tenant or FPC CLient.

Nodes under the Topology tree provide defintion of the Tenant's fowarding topology. Any compromise of this information will provide topology information that could be used for subsequent attack vectors. Removal of topology can limit services.

Nodes under the Mobility Tree are runtime only and manipulated by remote procedure calls. The unwanted deletion or removal of such information would deny users service or provide services ot unauthorized parties.

Some of the readable data nodes defined may be considered sensitive or vulnerable in some network environments. It is thus important to control read access (e.g., via get, get-config, or notification) to

these data nodes. These are the subtrees and data nodes and their sensitivity/vulnerability:

IP address assignments in the Context along with their associated tunnel configurations/identifiers (from the FPC base module)

Internaional Mobile Subscriber Identity (IMSI) and bearer identifiers in the Context when using the optional 3GPP module

Some of the RPC operations defined may be considered sensitive or vulnerable in some network environments. It is thus important to control access to these operations. These are the operations and their sensitivity/vulnerability:

CONF and CONF_BUNDLES send Context information which can include information of a sensitive or vulnerable nature in some network environments as described above.

Monitor related RPC operations do not specially provide sensitive or vulnerable information but care must be taken by users to avoid identifier values that expose sensitive or vulnerable information.

Notifications MUST be treated with same level of protection and scrutiny as the operations they correspond to. For example, a CONFIG_RESULT_NOTIFY notification provides the same information that is sent as part of the input and output of the CONF and CONF_BUNDLES RPC operations.

General usage of FPC MUST consider the following:

FPC Naming [Section 5.4](#) permits arbitrary string values but a users MUST avoid placing sensitive or vulnerable information in those values.

Policies that are very narrow and permit the identification of specific traffic, e.g. that of a single user, SHOULD be avoided.

11. IANA Considerations

This document registers six URIs in the "IETF XML Registry" [[RFC3688](#)]. Following the format in [RFC 3688](#), the following registrations have been made.

URI: urn:ietf:params:xml:ns:yang:ietf-dmm-fpc
Registrant Contact: The DMM WG of the IETF.
XML: N/A, the requested URI is an XML namespace.

Registrant Contact: The DMM WG of the IETF.
XML: N/A, the requested URI is an XML namespace.

URI: urn:ietf:params:xml:ns:yang:ietf-dmm-pmip-qos
Registrant Contact: The DMM WG of the IETF.
XML: N/A, the requested URI is an XML namespace.

URI: urn:ietf:params:xml:ns:yang:ietf-dmm-traffic-selector-types
Registrant Contact: The DMM WG of the IETF.
XML: N/A, the requested URI is an XML namespace.

URI: urn:ietf:params:xml:ns:yang:ietf-dmm-fpc-policyext
Registrant Contact: The DMM WG of the IETF.
XML: N/A, the requested URI is an XML namespace.

URI: urn:ietf:params:xml:ns:yang:ietf-dmm-fpc-pmip
Registrant Contact: The DMM WG of the IETF.
XML: N/A, the requested URI is an XML namespace.

This document registers the following YANG modules in the "YANG Module Names" registry [[RFC6020](#)].

name: ietf-dmm-fpc
namespace: urn:ietf:params:xml:ns:yang:ietf-dmm-fpc
prefix: fpc
reference: TBD1

name: ietf-dmm-threegpp
namespace: urn:ietf:params:xml:ns:yang:ietf-dmm-threegpp
prefix: threegpp
reference: TBD1

name: ietf-dmm-pmip-qos
namespace: urn:ietf:params:xml:ns:yang:ietf-dmm-pmip-qos
prefix: qos-pmip
reference: TBD1

name: ietf-dmm-traffic-selector-types
namespace: urn:ietf:params:xml:ns:yang:ietf-dmm-traffic-selector-types
prefix: traffic-selectors
reference: TBD1

name: ietf-dmm-traffic-selector-types
namespace: urn:ietf:params:xml:ns:yang:ietf-dmm-fpc-policyext
prefix: fpcpolicyext
reference: TBD1

```
name:          ietf-dmm-traffic-selector-types
namespace:     urn:ietf:params:xml:ns:yang:ietf-dmm-fpc-pmip
prefix:        fpc-pmip
reference:     TBD1
```

The document registers the following YANG submodules in the "YANG Module Names" registry [[RFC6020](#)].

```
name:          ietf-dmm-fpc-base
parent:        ietf-dmm-fpc
reference:     TBD1
```

[12.](#) Work Team Participants

Participants in the FPSM work team discussion include Satoru Matsushima, Danny Moses, Sri Gundavelli, Marco Liebsch, Pierrick Seite, Alper Yegin, Carlos Bernardos, Charles Perkins and Fred Templin.

[13.](#) References

[13.1.](#) Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<http://www.rfc-editor.org/info/rfc2119>>.
- [RFC6088] Tsirtsis, G., Giarreta, G., Soliman, H., and N. Montavont, "Traffic Selectors for Flow Bindings", [RFC 6088](#), DOI 10.17487/RFC6088, January 2011, <<http://www.rfc-editor.org/info/rfc6088>>.
- [RFC6089] Tsirtsis, G., Soliman, H., Montavont, N., Giaretta, G., and K. Kuladinithi, "Flow Bindings in Mobile IPv6 and Network Mobility (NEMO) Basic Support", [RFC 6089](#), DOI 10.17487/RFC6089, January 2011, <<http://www.rfc-editor.org/info/rfc6089>>.
- [RFC6991] Schoenwaelder, J., Ed., "Common YANG Data Types", [RFC 6991](#), DOI 10.17487/RFC6991, July 2013, <<http://www.rfc-editor.org/info/rfc6991>>.

[13.2.](#) Informative References

[I-D.bertz-dime-policygroups]

Bertz, L., "Diameter Policy Groups and Sets", [draft-bertz-dime-policygroups-01](#) (work in progress), July 2016.

[I-D.ietf-dmm-deployment-models]

Gundavelli, S. and S. Jeon, "DMM Deployment Models and Architectural Considerations", [draft-ietf-dmm-deployment-models-00](#) (work in progress), August 2016.

[I-D.ietf-netconf-restconf]

Bierman, A., Bjorklund, M., and K. Watsen, "RESTCONF Protocol", [draft-ietf-netconf-restconf-18](#) (work in progress), October 2016.

[RFC3688] Mealling, M., "The IETF XML Registry", [BCP 81](#), [RFC 3688](#), DOI 10.17487/RFC3688, January 2004, <<http://www.rfc-editor.org/info/rfc3688>>.

[RFC5213] Gundavelli, S., Ed., Leung, K., Devarapalli, V., Chowdhury, K., and B. Patil, "Proxy Mobile IPv6", [RFC 5213](#), DOI 10.17487/RFC5213, August 2008, <<http://www.rfc-editor.org/info/rfc5213>>.

[RFC6241] Enns, R., Ed., Bjorklund, M., Ed., Schoenwaelder, J., Ed., and A. Bierman, Ed., "Network Configuration Protocol (NETCONF)", [RFC 6241](#), DOI 10.17487/RFC6241, June 2011, <<http://www.rfc-editor.org/info/rfc6241>>.

[RFC6242] Wasserman, M., "Using the NETCONF Protocol over Secure Shell (SSH)", [RFC 6242](#), DOI 10.17487/RFC6242, June 2011, <<http://www.rfc-editor.org/info/rfc6242>>.

[RFC7222] Liebsch, M., Seite, P., Yokota, H., Korhonen, J., and S. Gundavelli, "Quality-of-Service Option for Proxy Mobile IPv6", [RFC 7222](#), DOI 10.17487/RFC7222, May 2014, <<http://www.rfc-editor.org/info/rfc7222>>.

[RFC7333] Chan, H., Ed., Liu, D., Seite, P., Yokota, H., and J. Korhonen, "Requirements for Distributed Mobility Management", [RFC 7333](#), DOI 10.17487/RFC7333, August 2014, <<http://www.rfc-editor.org/info/rfc7333>>.

These modules define YANG definitions. Seven modules are defined:

- o ietf-dmm-fpc (fpc) - Defines the base model and messages for FPC
- o ietf-dmm-fpc-base An FPC submodule that defines the information model that is specified in this document

- o ietf-pmip-qos (pmip-qos) - Defines proxy mobile IPv6 QoS parameters per [RFC 7222](#)
- o ietf-traffic-selectors-types (traffic-selectors) - Defines Traffic Selectors per [RFC 6088](#)
- o ietf-dmm-threegpp - Defines the base structures for 3GPP based IP mobility and augments fpcagent to support these parameters.
- o ietf-dmm-fpc-pmip - Augments fpcp-base to include PMIP Traffic Selectors as a Traffic Descriptor subtype and pmip-qos QoS parameters, where applicable, as properties.
- o ietf-dmm-fpc-policyext - defines basic policy extensions, e.g. Actions and Descriptors, to fpcbase and as defined in this document.

[A.1.](#) FPC Agent YANG Model

This module defines the information model and protocol elements specified in this document.

This module references [[RFC6991](#)] and the fpc-base module defined in this document.

```
<CODE BEGINS> file "ietf-dmm-fpc@2016-08-03.yang"
module ietf-dmm-fpc {
  namespace "urn:ietf:params:xml:ns:yang:ietf-dmm-fpc";
  prefix fpc;

  import ietf-inet-types { prefix inet; revision-date 2013-07-15; }
```

```
include ietf-dmm-fpc-base;

organization "IETF Distributed Mobility Management (DMM)
  Working Group";

contact
  "WG Web:  <http://tools.ietf.org/wg/netmod/>
  WG List:  <mailto:netmod@ietf.org>

  WG Chair: Dapeng Liu
             <mailto:maxpassion@gmail.com>

  WG Chair: Jouni Korhonen
             <mailto:jouni.nospam@gmail.com>

  Editor:   Satoru Matsushima
```

Matsushima, et al.

Expires May 4, 2017

[Page 69]

Internet-Draft

DMM FPC Protocol

October 2016

<<mailto:satoru.matsushima@g.softbank.co.jp>>

Editor: Lyle Bertz
<<mailto:lyleb551144@gmail.com>>;

description

"This module contains YANG definition for Forwarding Policy Configuration Protocol (FPCP).

Copyright (c) 2016 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Simplified BSD License.";

```
revision 2016-08-03 {
  description "Initial Revision.";
  reference "draft-ietf-dmm-fpc-cpdp-05";
```

```

}
feature fpc-cloning {
    description "An ability to support cloning in the RPC.";
}
feature fpc-basename-registry {
    description "Ability to track Base Names already provisioned on the Agent";
}
feature fpc-bundles {
    description "Ability for Client to send multiple bundles of actions to
        an Agent";
}
feature fpc-client-binding {
    description "Allows a FPC Client to bind a DPN to an Topology Object";
}
feature fpc-auto-binding {
    description "Allows a FPC Agent to advertise Topology Objects that could
}
feature instruction-bitset {
    description "Allows the expression of instructions (bit sets) over FPC.";
}
feature operation-ref-scope {
    description "Provides the scope of referenes in an operation. Used to op
        the Agent processing.";
}

```

```

}
feature policy-rpc-provisioning {
    description "Enables the ability to send policy elements (Policy Groups,
        Descriptors and Actions) to be sent in CONF or CONF_BUNDLES operations.
}

typedef agent-identifier {
    type fpc:fpc-identity;
    description "Agent Identifier";
}

typedef client-identifier {
    type fpc:fpc-identity;
    description "Client Identifier";
}

grouping basename-info {
    leaf basename {

```

```

        if-feature fpc:fpc-basename-registry;
        type fpc:fpc-identity;
        description "Rules Basename";
    }
    leaf base-state {
        if-feature fpc:fpc-basename-registry;
        type string;
        description "Current State";
    }
    leaf base-checkpoint {
        if-feature fpc:fpc-basename-registry;
        type string;
        description "Checkpoint";
    }
    description "Basename Information";
}

// Top Level Structures
container tenants {
    list tenant {
        key "tenant-id";
        leaf tenant-id {
            type fpc:fpc-identity;
            description "Tenant ID";
        }
    }

    container fpc-policy {
        list policy-groups {
            key "policy-group-id";
            uses fpc:fpc-policy-group;
        }
    }
}

```

```

        description "Policy Groups";
    }
    list policies {
        key "policy-id";
        uses fpc:fpc-policy;
        description "Policies";
    }
    list descriptors {
        key descriptor-id;
        uses fpc:fpc-descriptor;
        description "Descriptors";
    }
}

```

```

    }
    list actions {
        key action-id;
        uses fpc:fpc-action;
        description "Actions";
    }
    description "Policy";
}

container fpc-mobility {
    config false;
    list contexts {
        key context-id;
        uses fpc:fpc-context;
        description "Contexts";
    }
    list ports {
        key port-id;
        uses fpc:fpc-port;
        description "Ports";
    }
    list monitors {
        uses fpc:monitor-config;
        description "Monitors";
    }
    description "Mobility";
}

container fpc-topology {
    // Basic Agent Topology Structures
    list domains {
        key domain-id;
        uses fpc:fpc-domain;
        uses fpc:basename-info;
        description "Domains";
    }

    leaf dpn-id {

```

```

        if-feature fpc:fpc-basic-agent;
        type fpc:fpc-dpn-id;
        description "DPN ID";
    }

```

```

leaf-list control-protocols {
  if-feature fpc:fpc-basic-agent;
  type identityref {
    base "fpc:fpc-dpn-control-protocol";
  }
  description "Control Protocols";
}

list dpn-groups {
  if-feature fpc:fpc-multi-dpn;
  key dpn-group-id;
  uses fpc:fpc-dpn-group;
  list domains {
    key domain-id;
    uses fpc:fpc-domain;
    uses fpc:basename-info;
    description "Domains";
  }
  description "DPN Groups";
}
list dpns {
  if-feature fpc:fpc-multi-dpn;
  key dpn-id;
  uses fpc:fpc-dpn;
  description "DPNs";
}
description "Topology";
}
description "Tenant";
}
description "Tenant List";
}

container fpc-agent-info {
  // General Agent Structures
  leaf-list supported-features {
    type string;
    description "Agent Features";
  }

  // Common Agent Info
  list supported-events {
    key event;
    leaf event {

```

```
        type identityref {
            base "fpc:event-type";
        }
        description "Event Types";
    }
    leaf event-id {
        type fpc:event-type-id;
        description "Event ID";
    }
    description "Supported Events";
}

list supported-error-types {
    key error-type;
    leaf error-type {
        type identityref {
            base "fpc:error-type";
        }
        description "Error Type";
    }
    leaf error-type-id {
        type fpc:error-type-id;
        description "Error Type ID";
    }
    description "Supported Error Types";
}
description "General Agent Information";
}

// Multi-DPN Agent Structures
grouping fpc-dpn-group {
    leaf dpn-group-id {
        type fpc:fpc-dpn-group-id;
        description "DPN Group ID";
    }
    leaf data-plane-role {
        type identityref {
            base "fpc:fpc-forwardingplane-role";
        }
        description "Dataplane Role";
    }
    leaf access-type {
        type identityref {
            base "fpc:fpc-access-type";
        }
        description "Access Type";
    }
}
```

```
}
```

```
    leaf mobility-profile {
      type identityref {
        base "fpc:fpc-mobility-profile-type";
      }
      description "Mobility Profile";
    }
    list dpn-group-peers {
      key "remote-dpn-group-id";
      uses fpc:fpc-dpn-peer-group;
      description "Peer DPN Groups";
    }
    description "FPC DPN Group";
  }
}
```

```
// RPC
// RPC Specific Structures
//Input Structures
typedef admin-status {
  type enumeration {
    enum enabled {
      value 0;
      description "enabled";
    }
    enum disabled {
      value 1;
      description "disabled";
    }
    enum virtual {
      value 2;
      description "virtual";
    }
  }
  description "Administrative Status";
}
```

```
typedef session-status {
  type enumeration {
    enum complete {
      value 0;
    }
  }
}
```

```
        description "complete";
    }
    enum incomplete {
        value 1;
        description "incomplete";
    }
    enum outdated {
        value 2;
```

```
        description "outdated";
    }
}
description "Session Status";
}

typedef op-delay {
    type uint32;
    description "Operation Delay (ms)";
}

typedef op-identifier {
    type uint64;
    description "Operation Identifier";
}

typedef ref-scope {
    type enumeration {
        enum none {
            value 0;
            description "no references";
        }
        enum op {
            value 1;
            description "op - All references are contained in the operation body";
        }
        enum bundle {
            value 2;
            description "bundle - All references in exist in bundle (inter-operat
            NOTE - If this value comes in CONFIG call it is equivalen to 'op'.";
        }
        enum storage {
            value 3;
```

```

        description "storage - One or more references exist outside of the op
        A lookup to a cache / storage is required.";
    }
    enum unknown {
        value 4;
        description " unknown - the location of the references are unknown.
        a 'storage' type.";
    }
}
description "Search scope for references in the operation.";
}

grouping instructions {
    container instructions {
        if-feature instruction-bitset;

```

```

        choice instr-type {
            description "Instruction Value Choice";
        }
        description "Instructions";
    }
    description "Instructions Value";
}

grouping op-header {
    leaf client-id {
        type fpc:client-identifier;
        description "Client ID";
    }
    leaf delay {
        type op-delay;
        description "Delay";
    }
    leaf session-state {
        type session-status;
        description "Session State";
    }
    leaf admin-state {
        type admin-status;
        description "Admin State";
    }
    leaf op-type {

```

```

type enumeration {
  enum create {
    value 0;
    description "create";
  }
  enum update {
    value 1;
    description "update";
  }
  enum query {
    value 2;
    description "query";
  }
  enum delete {
    value 3;
    description "delete";
  }
}
description "Type";
}
leaf op-ref-scope {
  if-feature operation-ref-scope;

```

```

    type fpc:ref-scope;
    description "Reference Scope";
  }
  uses fpc:instructions;
  description "Operation Header";
}

grouping clone-ref {
  leaf entity {
    type fpc:fpc-identity;
    description "Clone ID";
  }
  leaf source {
    type fpc:fpc-identity;
    description "Source";
  }
  description "Clone Reference";
}

```

```

identity command-set {
  description "protocol specific commands";
}

grouping context-operation {
  uses fpc:fpc-context;
  uses fpc:instructions;
  description "Context Operation";
}

// Output Structure
grouping payload {
  list ports {
    uses fpc:fpc-port;
    description "Ports";
  }
  list contexts {
    uses fpc:context-operation;
    description "Contexts";
  }
  list policy-groups {
    if-feature fpc:policy-rpc-provisioning;
    key "policy-group-id";
    uses fpc:fpc-policy-group;
    description "Policy Groups";
  }
  list policies {
    if-feature fpc:policy-rpc-provisioning;
    key "policy-id";

```

```

  uses fpc:fpc-policy;
  description "Policies";
}
list descriptors {
  if-feature fpc:policy-rpc-provisioning;
  key descriptor-id;
  uses fpc:fpc-descriptor;
  description "Descriptors";
}
list actions {
  if-feature fpc:policy-rpc-provisioning;
  key action-id;

```

```

        uses fpc:fpc-action;
        description "Actions";
    }
    description "Payload";
}

grouping op-input {
    uses fpc:op-header;
    leaf op-id {
        type op-identifier;
        description "Operation ID";
    }
    choice op_body {
        case create_or_update {
            list clones {
                if-feature fpc-cloning;
                key entity;
                uses fpc:clone-ref;
                description "Clones";
            }
            uses fpc:payload;
            description "Create/Update input";
        }
        case delete_or_query {
            uses fpc:targets-value;
            description "Delete/Query input";
        }
        description "Opeartion Input value";
    }
    description "Operation Input";
}

typedef result {
    type enumeration {
        enum ok {
            value 0;

```

```

        description "OK";
    }
    enum err {
        value 1;
        description "Error";

```

```

    }
    enum ok-notify-follows {
        value 2;
        description "OK with NOTIFY following";
    }
}
description "Result Status";
}

identity error-type {
    description "Base Error Type";
}
identity name-already-exists {
    description "Notification that an entity of the same name already exists"
}

typedef error-type-id {
    type uint32;
    description "Integer form of the Error Type";
}

grouping op-status-value {
    leaf op-status {
        type enumeration {
            enum ok {
                value 0;
                description "OK";
            }
            enum err {
                value 1;
                description "Error";
            }
        }
        description "Operation Status";
    }
    description "Operation Status Value";
}

grouping error-info {
    leaf error-type-id {
        type fpc:error-type-id;
        description "Error ID";
    }
}

```

```

        leaf error-info {
            type string {
                length "1..1024";
            }
            description "Error Detail";
        }
        description "Error Information";
    }
}

grouping result-body {
    leaf op-id {
        type op-identifier;
        description "Operation Identifier";
    }
    choice result-type {
        case err {
            uses fpc:error-info;
            description "Error Information";
        }
        case create-or-update-success {
            uses fpc:payload;
            description "Create/Update Success";
        }
        case delete_or_query-success {
            uses fpc:targets-value;
            description "Delete/Query Success";
        }
        case empty-case {
            description "Empty Case";
        }
        description "Result Value";
    }
    description "Result Body";
}

// Common RPCs
rpc configure {
    description "CONF message";
    input {
        uses fpc:op-input;
    }
    output {
        leaf result {
            type result;
            description "Result";
        }
        uses fpc:result-body;
    }
}

```

Internet-Draft

DMM FPC Protocol

October 2016

```
}

rpc configure-bundles {
  if-feature fpc:fpc-bundles;
  description "CONF_BUNDLES message";
  input {
    leaf highest-op-ref-scope {
      if-feature operation-ref-scope;
      type fpc:ref-scope;
      description "Highest Op-Ref used in the input";
    }
    list bundles {
      key op-id;
      uses fpc:op-input;
      description "List of operations";
    }
  }
  output {
    list bundles {
      key op-id;
      uses fpc:result-body;
      description "Operation Identifier";
    }
  }
}

// Notification Messages & Structures
typedef notification-id {
  type uint32;
  description "Notification Identifier";
}

grouping notification-header {
  leaf notification-id {
    type fpc:notification-id;
    description "Notification ID";
  }
  leaf timestamp {
    type uint32;
    description "timestamp";
  }
  description "Notification Header";
}
```

```
}

notification config-result-notification {
  uses fpc:notification-header;
  choice value {
    case config-result {
```

```
    uses fpc:op-status-value;
    uses fpc:result-body;
    description "CONF Result";
  }
  case config-bundle-result {
    list bundles {
      uses fpc:op-status-value;
      uses fpc:result-body;
      description "Operation Results";
    }
    description "CONF_BUNDLES Result";
  }
  description "Config Result value";
}
description "CONF/CONF_BUNDLES Async Result";
}

rpc event_register {
  description "Used to register monitoring of parameters/events";
  input {
    uses fpc:monitor-config;
  }
  output {
    leaf monitor-result {
      type fpc:result;
      description "Result";
    }
    uses fpc:error-info;
  }
}

rpc event_deregister {
  description "Used to de-register monitoring of parameters/events";
  input {
    list monitors {
```

```

        uses fpc:monitor-id;
        description "Monitor ID";
    }
}
output {
    leaf monitor-result {
        type fpc:result;
        description "Result";
    }
    uses fpc:error-info;
}
}

```

```

rpc probe {
    description "Probe the status of a registered monitor";
    input {
        uses fpc:targets-value;
    }
    output {
        leaf monitor-result {
            type fpc:result;
            description "Result";
        }
        uses fpc:error-info;
    }
}
}

```

```

notification notify {
    uses fpc:notification-header;
    choice value {
        case dpn-candidate-available {
            if-feature fpc:fpc-auto-binding;
            leaf node-id {
                type inet:uri;
                description "Topology URI";
            }
            leaf-list access-types {
                type identityref {
                    base "fpc:fpc-access-type";
                }
                description "Access Types";
            }
        }
    }
}
}

```

```

}
leaf-list mobility-profiles {
  type identityref {
    base "fpc:fpc-mobility-profile-type";
  }
  description "Mobility Profiles";
}
leaf-list forwarding-plane-roles {
  type identityref {
    base "fpc:fpc-forwardingplane-role";
  }
  description "Forwarding Plane Role";
}
description "DPN Candidate Availability";
}
case monitor-notification {
  choice monitor-notification-value {
    case simple-monitor {
      uses fpc:report;
      description "Report";
    }
  }
}

```

```

}
case bulk-monitors {
  list reports {
    uses fpc:report;
    description "Reports";
  }
  description "Bulk Monitor Response";
}
description "Monitor Notification value";
}
description "Monitor Notification";
}
description "Notify Value";
}
description "Notify Message";
}
}
<CODE ENDS>

```

[A.2.1.](#) FPC YANG Model

This module defines the base data elements specified in this document.

This module references [[RFC6991](#)].

```
<CODE BEGINS> file "ietf-dmm-fpc-base@2016-08-03.yang"
submodule ietf-dmm-fpc-base {
  belongs-to ietf-dmm-fpc {
    prefix fpc;
  }

  import ietf-inet-types { prefix inet; revision-date 2013-07-15; }

  organization "IETF Distributed Mobility Management (DMM)
    Working Group";

  contact
    "WG Web:   <http://tools.ietf.org/wg/netmod/>
    WG List:  <mailto:netmod@ietf.org>

    WG Chair: Dapeng Liu
              <mailto:maxpassion@gmail.com>

    WG Chair: Jouni Korhonen
              <mailto:jouni.nospam@gmail.com>
```

Matsushima, et al.

Expires May 4, 2017

[Page 85]

Internet-Draft

DMM FPC Protocol

October 2016

Editor: Satoru Matsushima
<<mailto:satoru.matsushima@g.softbank.co.jp>>

Editor: Lyle Bertz
<<mailto:lyleb551144@gmail.com>>;

description

"This module contains YANG definition for Forwarding Policy Configuration Protocol(FPCP).

Copyright (c) 2016 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal

Provisions Relating to IETF Documents
(<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Simplified BSD License.";

```
revision 2016-08-03 {
    description "Initial Revision.";
    reference "draft-ietf-dmm-fpc-cpdp-05";
}

feature fpc-basic-agent {
    description "This is an agent co-located with a DPN. In this case
    only DPN Peer Groups, the DPN Id and Control Protocols are exposed
    along with the core structures.";
}
feature fpc-multi-dpn {
    description "The agent supports multiple DPNs.";
}

typedef fpc-identity {
    type union {
        type uint32;
        type string;
        type instance-identifier;
    }
    description "FPC Identity";
}

grouping target-value {
    leaf target {
```

```
        type fpc-identity;
        description "Target Identity";
    }
    description "FPC Target Value";
}

grouping targets-value {
```

```

list targets {
    key "target";
    leaf target {
        type fpc-identity;
        description "Target Id";
    }
    leaf dpn-id {
        type fpc:fpc-dpn-id;
        description "DPN Id";
    }
    description "List of Targets";
}
description "Targets Value";
}

// Descriptor Structure
typedef fpc-descriptor-id-type {
    type fpc:fpc-identity;
    description "Descriptor-ID";
}
identity fpc-descriptor-type {
    description "A traffic descriptor";
}
grouping fpc-descriptor-id {
    leaf descriptor-id {
        type fpc:fpc-identity;
        description "Descriptor Id";
    }
    description "FPC Descriptor ID value";
}
grouping fpc-descriptor {
    uses fpc:fpc-descriptor-id;
    leaf descriptor-type {
        type identityref {
            base "fpc-descriptor-type";
        }
        mandatory true;
        description "Descriptor Type";
    }
    choice descriptor-value {
        case all-traffic {

```

```

        leaf all-traffic {
            type empty;
            description "Empty Value";
        }
    }
    description "Descriptor Value";
}
description "FPC Descriptor";
}

// Action Structure
typedef fpc-action-id-type {
    type fpc:fpc-identity;
    description "Action-ID";
}
identity fpc-action-type {
    description "Action Type";
}
grouping fpc-action-id {
    leaf action-id {
        type fpc:fpc-action-id-type;
        description "Action Identifier";
    }
    description "FPC Action ID";
}
grouping fpc-action {
    uses fpc:fpc-action-id;
    leaf action-type {
        type identityref {
            base "fpc-action-type";
        }
        mandatory true;
        description "Action Type";
    }
    choice action-value {
        case drop {
            leaf drop {
                type empty;
                description "Empty Value";
            }
        }
        description "FPC Action Value";
    }
    description "FPC Action";
}

// Rule Structure
grouping fpc-rule {

```

Internet-Draft

DMM FPC Protocol

October 2016

```
list descriptors {
  key descriptor-id;
  uses fpc:fpc-descriptor-id;
  leaf direction {
    type fpc:fpc-direction;
    description "Direction";
  }
  description "Descriptors";
}
list actions {
  key action-id;
  leaf order {
    type uint32;
    description "Action Execution Order";
  }
  uses fpc:fpc-action-id;
  description "Actions";
}
description
  "FPC Rule. When no actions are present the action is DROP.
  When no Descriptors are empty the default is 'all traffic'.";
}

// Policy Structures
typedef fpc-policy-id {
  type fpc:fpc-identity;
  description "Policy Identifier";
}
grouping fpc-policy {
  leaf policy-id {
    type fpc:fpc-policy-id;
    description "Policy Id";
  }
  list rules {
    key order;
    leaf order {
      type uint32;
      description "Rule Order";
    }
    uses fpc:fpc-rule;
    description "Rules";
  }
  description "FPC Policy";
}
```

```
}
```

```
// Policy Group  
typedef fpc-policy-group-id {  
    type fpc:fpc-identity;
```

```
    description "Policy Group Identifier";  
}  
grouping fpc-policy-group {  
    leaf policy-group-id {  
        type fpc:fpc-policy-group-id;  
        description "Policy Group ID";  
    }  
    leaf-list policies {  
        type fpc:fpc-policy-id;  
        description "Policies";  
    }  
    description "FPC Policy Group";  
}
```

```
// Mobility Structures  
// Port Group  
typedef fpc-port-id {  
    type fpc:fpc-identity;  
    description "FPC Port Identifier";  
}  
grouping fpc-port {  
    leaf port-id {  
        type fpc:fpc-port-id;  
        description "Port ID";  
    }  
    leaf-list policy-groups {  
        type fpc:fpc-policy-group-id;  
        description "Policy Groups";  
    }  
    description "FPC Port";  
}
```

```
// Context Group  
typedef fpc-context-id {  
    type fpc:fpc-identity;  
    description "FPC Context Identifier";
```

```

}
grouping fpc-context-profile {
    leaf tunnel-local-address {
        type inet:ip-address;
        description "Uplink endpoint address of the DPN which agent exists."
    }
    leaf tunnel-remote-address {
        type inet:ip-address;
        description "Uplink endpoint address of the DPN which agent exists."
    }
    leaf mtu-size {
        type uint32;
    }
}

```

```

        description "MTU size";
    }
    container mobility-tunnel-parameters {
        uses fpc:mobility-info;
        description
            "Specifies profile specific uplink tunnel parameters to the DPN
            which the agent exists. The profiles includes GTP/TEID for 3gpp pro
            GRE/Key for ietf-pmip profile, or new profile if anyone will define
        }
    container nexthop {
        uses fpc:fpc-nexthop;
        description "Next Hop";
    }
    container qos-profile-parameters {
        uses fpc:fpc-qos-profile;
        description "QoS Parameters";
    }
    container dpn-parameters {
        description "DPN Parameters";
    }
    list vendor-parameters {
        key "vendor-id vendor-type";
        uses fpc:vendor-attributes;
        description "Vendor Parameters";
    }
    description "A profile that applies to a specific direction";
}

typedef fpc-direction {

```

```

type enumeration {
  enum uplink {
    description "Uplink";
  }
  enum downlink {
    description "Downlink";
  }
  enum both {
    description "Both";
  }
}
description "FPC Direction";
}

grouping fpc-context {
  leaf context-id {
    type fpc:fpc-context-id;
    description "Context ID";
  }
}

```

```

leaf-list ports {
  type fpc:fpc-port-id;
  description "Ports";
}
leaf dpn-group {
  type fpc:fpc-dpn-group-id;
  description "DPN Group";
}
leaf-list delegating-ip-prefixes {
  type inet:ip-prefix;
  description "Delegating Prefix(es)";
}
container ul {
  if-feature fpc:fpc-basic-agent;
  uses fpc:fpc-context-profile;
  description "Uplink";
}
container dl {
  if-feature fpc:fpc-basic-agent;
  uses fpc:fpc-context-profile;
  description "Downlink";
}

```

```

list dpns {
    if-feature fpc:fpc-multi-dpn;
    key "dpn-id direction";
    leaf dpn-id {
        type fpc:fpc-dpn-id;
        description "DPN";
    }
    leaf direction {
        type fpc:fpc-direction;
        mandatory true;
        description "Direction";
    }
    uses fpc:fpc-context-profile;
    description "DPNs";
}
leaf parent-context {
    type fpc:fpc-context-id;
    description "Parent Context";
}
description "FCP Context";
}

```

```

// Mobility (Tunnel) Information
grouping mobility-info {
    choice profile-parameters {
        case nothing {

```

```

        leaf none {
            type empty;
            description "Empty Value";
        }
        description "No Parameters Case";
    }
    description "Mobility Profile Parameters";
}
description "Mobility Information";
}

```

```

// Next Hop Structures
typedef fpcp-service-path-id {
    type uint32 {
        range "0..33554431";

```

```

    }
    description "SERVICE_PATH_ID";
}

identity fpc-nexthop-type {
    description "Next Hop Type";
}
identity fpc-nexthop-ip {
    base "fpc:fpc-nexthop-type";
    description "Nexthop IP";
}
identity fpc-nexthop-servicepath {
    base "fpc:fpc-nexthop-type";
    description "Nexthop Service Path";
}
grouping fpc-nexthop {
    leaf nexthop-type {
        type identityref {
            base "fpc:fpc-nexthop-type";
        }
        description "Nexthop Type";
    }
    choice nexthop-value {
        case ip {
            leaf ip {
                type inet:ip-address;
                description "IP Value";
            }
            description "IP Case";
        }
        case servicepath {
            leaf servicepath {
                type fpc:fpcp-service-path-id;
            }
        }
    }
}

```

```

        description "Service Path Value";
    }
    description "Service Path Case";
}
description "Value";
}
description "Nexthop Value";
}

```

```

// QoS Information
identity fpc-qos-type {
    description "Base identity from which specific uses of QoS types are de
}
grouping fpc-qos-profile {
    leaf qos-type {
        type identityref {
            base fpc:fpc-qos-type;
        }
        description "the profile type";
    }
    choice value {
        description "QoS Value";
    }
    description "QoS Profile";
}

// Vendor Specific Attributes
identity vendor-specific-type {
    description "Vendor Specific Attribute Type";
}
grouping vendor-attributes {
    leaf vendor-id {
        type fpc:fpc-identity;
        description "Vendor ID";
    }
    leaf vendor-type {
        type identityref {
            base "fpc:vendor-specific-type";
        }
        description "Attribute Type";
    }
    choice value {
        case empty-type {
            leaf empty-type {
                type empty;
                description "Empty Value";
            }
            description "Empty Case";
        }
    }
}

```

}

```

        description "Attribute Value";
    }
    description "Vendor Specific Attributes";
}

// Topology
typedef fpc-domain-id {
    type fpc:fpc-identity;
    description "Domain Identifier";
}
grouping fpc-domain {
    leaf domain-id {
        type fpc:fpc-domain-id;
        description "Domain ID";
    }
    leaf domain-name {
        type string;
        description "Domain Name";
    }
    leaf domain-type {
        type string;
        description "Domain Type";
    }
    description "FPC Domain";
}

typedef fpc-dpn-id {
    type fpc:fpc-identity;
    description "DPN Identifier";
}
identity fpc-dpn-control-protocol {
    description "DPN Control Protocol";
}
grouping fpc-dpn {
    leaf dpn-id {
        type fpc:fpc-dpn-id;
        description "DPN ID";
    }
    leaf dpn-name {
        type string;
        description "DPN Name";
    }
    leaf-list dpn-groups {
        type fpc:fpc-dpn-group-id;
        description "DPN Groups";
    }
    leaf node-reference {

```

```
        type instance-identifier;
        description "DPN => Node (Topology) Mapping";
    }
    description "FPC DPN";
}

typedef fpc-dpn-group-id {
    type fpc:fpc-identity;
    description "DPN Group Identifier";
}
identity fpc-forwardingplane-role {
    description "Role of DPN Group in the Forwarding Plane";
}
identity fpc-access-type {
    description "Access Type of the DPN Group";
}
identity fpc-mobility-profile-type {
    description "Mobility Profile Type";
}

grouping fpc-dpn-peer-group {
    leaf remote-dpn-group-id {
        type fpc:fpc-dpn-group-id;
        description "Remote DPN Group ID";
    }
    leaf remote-mobility-profile {
        type identityref {
            base "fpc:fpc-mobility-profile-type";
        }
        description "Mobility Profile";
    }
    leaf remote-data-plane-role {
        type identityref {
            base "fpc:fpc-forwardingplane-role";
        }
        description "Forwarding Plane Role";
    }
    leaf remote-endpoint-address {
        type inet:ip-address;
        description "Remote Endpoint Address";
    }
    leaf local-endpoint-address {
        type inet:ip-address;
        description "Local Endpoint Address";
    }
    leaf mtu-size {
```

```
    type uint32;
    description "MTU Size";
```

```
    }
    description "FPC DPN Peer Group";
}

// Events, Probes & Notifications
identity event-type {
    description "Base Event Type";
}
typedef event-type-id {
    type uint32;
    description "Event ID Type";
}

grouping monitor-id {
    leaf monitor-id {
        type fpc:fpc-identity;
        description "Monitor Identifier";
    }
    description "Monitor ID";
}

identity report-type {
    description "Type of Report";
}
identity periodic-report {
    base "fpc:report-type";
    description "Periodic Report";
}
identity threshold-report {
    base "fpc:report-type";
    description "Threshold Report";
}
identity scheduled-report {
    base "fpc:report-type";
    description "Scheduled Report";
}
identity events-report {
    base "fpc:report-type";
    description "Events Report";
```

```

}

grouping report-config {
  choice event-config-value {
    case periodic-config {
      leaf period {
        type uint32;
        description "Period";
      }
    }
  }
}

```

```

        description "Periodic Config Case";
    }
    case threshold-config {
      leaf lo-thresh {
        type uint32;
        description "lo threshold";
      }
      leaf hi-thresh {
        type uint32;
        description "hi threshold";
      }
      description "Threshold Config Case";
    }
    case scheduled-config {
      leaf report-time {
        type uint32;
        description "Reporting Time";
      }
      description "Scheduled Config Case";
    }
    case events-config-ident {
      leaf-list event-identities {
        type identityref {
          base "fpc:event-type";
        }
        description "Event Identities";
      }
      description "Events Config Identities Case";
    }
    case events-config {
      leaf-list event-ids {
        type uint32;

```

```

        description "Event IDs";
    }
    description "Events Config Case";
}
description "Event Config Value";
}
description "Report Configuration";
}

grouping monitor-config {
    uses fpc:monitor-id;
    uses fpc:target-value;
    uses fpc:report-config;
    description "Monitor Configuration";
}

```

```

grouping report {
    uses fpc:monitor-config;
    choice report-value {
        leaf trigger {
            type fpc:event-type-id;
            description "Trigger Identifier";
        }
        case simple-empty {
            leaf nothing {
                type empty;
                description "Empty Value";
            }
            description "Empty Case";
        }
        case simple-val32 {
            leaf val32 {
                type uint32;
                description "Unsigned 32 bit value";
            }
            description "Simple Value Case";
        }
        description "Report Value";
    }
    description "Monitor Report";
}

```

```
}  
<CODE ENDS>
```

[A.2.2.](#) PMIP QoS Model

This module defines the base protocol elements specified in this document.

This module references [[RFC6991](#)] and the traffic-selector-types module defined in this document.

```
<CODE BEGINS> file "ietf-pmip-qos@2016-02-10.yang"  
module ietf-pmip-qos {  
  yang-version 1;  
  
  namespace  
    "urn:ietf:params:xml:ns:yang:ietf-pmip-qos";  
  
  prefix "qos-pmip";  
  
  import ietf-inet-types {  
    prefix inet;  
    revision-date 2013-07-15;
```

```
}  
import ietf-traffic-selector-types { prefix traffic-selectors; }  
  
organization "IETF Distributed Mobility Management (DMM)  
  Working Group";  
  
contact  
  "WG Web:   <http://tools.ietf.org/wg/netmod/>  
  WG List:  <mailto:netmod@ietf.org>  
  
  WG Chair: Dapeng Liu  
            <mailto:maxpassion@gmail.com>  
  
  WG Chair: Jouni Korhonen  
            <mailto:jouni.nospam@gmail.com>  
  
  Editor:   Satoru Matsushima  
            <mailto:satoru.matsushima@g.softbank.co.jp>
```

Editor: Lyle Bertz
<mailto:lyleb551144@gmail.com>;

description

"This module contains a collection of YANG definitions for quality of service parameters used in Proxy Mobile IPv6.

Copyright (c) 2016 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Simplified BSD License.";

```
revision 2016-02-10 {  
    description "Initial revision";  
    reference  
        "RFC 7222: Quality-of-Service Option for Proxy Mobile IPv6";  
}
```

```
// Type Definitions
```

```
// QoS Option Field Type Definitions
```

Matsushima, et al.

Expires May 4, 2017

[Page 100]

Internet-Draft

DMM FPC Protocol

October 2016

```
typedef sr-id {  
    type uint8;  
    description  
        "An 8-bit unsigned integer used  
        for identifying the QoS Service Request. Its uniqueness is within  
        the scope of a mobility session. The local mobility anchor always  
        allocates the Service Request Identifier. When a new QoS Service  
        Request is initiated by a mobile access gateway, the Service  
        Request Identifier in the initial request message is set to a  
        value of (0), and the local mobility anchor allocates a Service  
        Request Identifier and includes it in the response. For any new
```

```

        QoS Service Requests initiated by a local mobility anchor, the
        Service Request Identifier is set to the allocated value.";
    }

typedef traffic-class {
    type inet:dscp;
    description
        "Traffic Class consists of a 6-bit DSCP field followed by a 2-bit
        reserved field.";
    reference
        "RFC 3289: Management Information Base for the Differentiated
        Services Architecture
        RFC 2474: Definition of the Differentiated Services Field
        (DS Field) in the IPv4 and IPv6 Headers
        RFC 2780: IANA Allocation Guidelines For Values In
        the Internet Protocol and Related Headers";
}

typedef operational-code {
    type enumeration {
        enum RESPONSE {
            value 0;
            description "Response to a QoS request";
        }

        enum ALLOCATE {
            value 1;
            description "Request to allocate QoS resources";
        }

        enum DE-ALLOCATE {
            value 2;
            description "Request to de-allocate QoS resources";
        }

        enum MODIFY {
            value 3;
            description "Request to modify QoS parameters for a previously negotiated
            QoS Service Request";
        }
    }
}

```

```

        enum QUERY {
            value 4;
            description "Query to list the previously negotiated QoS Service Requests
            that are still active";
        }
    }
}

```

```

    }
        enum NEGOTIATE {
            value 5;
            description "Response to a QoS Service Request with a counter QoS pro
        }
    }
description
    "1-octet Operational code indicates the type of QoS request.
    Reserved values: (6) to (255)
    Currently not used. Receiver MUST ignore the option received
    with any value in this range.";
}

// QoS Attribute Types

//The enumeration value for mapping - don't confuse with the identities
typedef qos-attribute-type-enum {
    type enumeration {
        enum Reserved {
            value 0;
            description "This value is reserved and cannot be used";
        }
        enum Per-MN-Agg-Max-DL-Bit-Rate {
            value 1;
            description "Per-Mobile-Node Aggregate Maximum Downlink Bit Rate.";
        }
        enum Per-MN-Agg-Max-UL-Bit-Rate {
            value 2;
            description "Per-Mobile-Node Aggregate Maximum Uplink Bit Rate.";
        }
        enum Per-Session-Agg-Max-DL-Bit-Rate {
            value 3;
            description "Per-Mobility-Session Aggregate Maximum Downlink Bit Rate";
        }
        enum Per-Session-Agg-Max-UL-Bit-Rate {
            value 4;
            description "Per-Mobility-Session Aggregate Maximum Uplink Bit Rate.";
        }
        enum Allocation-Retention-Priority {
            value 5;
            description "Allocation and Retention Priority.";
        }
        enum Aggregate-Max-DL-Bit-Rate {
            value 6;

```

```
        description "Aggregate Maximum Downlink Bit Rate.";
    }
    enum Aggregate-Max-UL-Bit-Rate {
        value 7;
        description "Aggregate Maximum Uplink Bit Rate.";
    }
    enum Guaranteed-DL-Bit-Rate {
        value 8;
        description "Guaranteed Downlink Bit Rate.";
    }
    enum Guaranteed-UL-Bit-Rate {
        value 9;
        description "Guaranteed Uplink Bit Rate.";
    }
    enum QoS-Traffic-Selector {
        value 10;
        description "QoS Traffic Selector.";
    }
    enum QoS-Vendor-Specific-Attribute {
        value 11;
        description "QoS Vendor-Specific Attribute.";
    }
}

        description
            "8-bit unsigned integer indicating the type of the QoS
            attribute. This specification reserves the following reserved va
            (12) to (254) - Reserved
                These values are reserved for future allocation.

            (255) Reserved
                This value is reserved and cannot be used.";
}

// Attribute Type as Identities
// Added for convenience of inclusion and extension in other YANG modules.
identity qos-attribute-type {
    description
        "Base type for Quality of Service Attributes";
}

identity Per-MN-Agg-Max-DL-Bit-Rate-type {
    base qos-attribute-type;
    description
        "Per-Mobile-Node Aggregate Maximum Downlink Bit Rate.";
}

identity Per-MN-Agg-Max-UL-Bit-Rate-type {
```

base qos-attribute-type;

```
description
    "Per-Mobile-Node Aggregate Maximum Uplink Bit Rate";
}

identity Per-Session-Agg-Max-DL-Bit-Rate-type {
base qos-attribute-type;
description
    "Per-Mobility-Session Aggregate Maximum Downlink Bit Rate.";
}

identity Per-Session-Agg-Max-UL-Bit-Rate-type {
base qos-attribute-type;
description
    "Per-Mobility-Session Aggregate Maximum Uplink Bit Rate.";
}

identity Allocation-Retention-Priority-type {
base qos-attribute-type;
description
    "Allocation and Retention Priority.";
}

identity Aggregate-Max-DL-Bit-Rate-type {
    base qos-attribute-type;
    description "Aggregate Maximum Downlink Bit Rate.";
}

identity Aggregate-Max-UL-Bit-Rate-type {
    base qos-attribute-type;
    description "Aggregate Maximum Uplink Bit Rate.";
}

identity Guaranteed-DL-Bit-Rate-type {
    base qos-attribute-type;
    description "Guaranteed Downlink Bit Rate.";
}

identity Guaranteed-UL-Bit-Rate-type {
    base qos-attribute-type;
    description "Guaranteed Uplink Bit Rate.";
```

```

}

identity QoS-Traffic-Selector-type {
    base qos-attribute-type;
    description "QoS Traffic Selector.";
}

identity QoS-Vendor-Specific-Attribute-type {

```

```

    base qos-attribute-type;
    description "QoS Vendor-Specific Attribute.";
}

```

```
//value definitions
```

```

typedef Per-MN-Agg-Max-DL-Bit-Rate-Value {
    type uint32;
    description
        "This is a 32-bit unsigned integer that
        indicates the aggregate maximum downlink bit rate that is
        requested/allocated for all the mobile node's IP flows. The
        measurement units for Per-MN-Agg-Max-DL-Bit-Rate are bits per
        second.";
}

```

```

typedef Per-MN-Agg-Max-UL-Bit-Rate-Value {
    type uint32;
    description
        "This is a 32-bit unsigned integer that
        indicates the aggregate maximum uplink bit rate that is requested
        allocated for the mobile node's IP flows. The measurement units
        for Per-MN-Agg-Max-UL-Bit-Rate are bits per second.";
}

```

```

// Generic Structure for the uplink and downlink
grouping Per-Session-Agg-Max-Bit-Rate-Value {
    leaf max-rate {
        type uint32;
        mandatory true;
        description
            "This is a 32-bit unsigned integer
            that indicates the aggregate maximum bit rate tha
            for all the IP flows associated with that mob

```

```

        units for Per-Session-Agg-Max-UL/DL-Bit-Rate
    }
    leaf service-flag {
        type boolean;
        mandatory true;
        description
            "This flag is used for extending the scope of t
            target flows for Per-Session-Agg-Max-UL/DL-Bit-Ra
            node's other mobility sessions sharing the same S
            Identifier. 3GPP Access Point Name (APN) is an ex
            Service Identifier, and that identifier is carrie
            Service Selection mobility option [RFC5149].

            * When the (S) flag is set to a value of (1), th
            Session-Agg-Max-Bit-Rate is measured as an agg

```

```

        all the mobile node's other mobility sessions
        Service Identifier associated with this mobili

        * When the (S) flag is set to a value of (0), th
        flows are limited to the current mobility sess

        * The (S) flag MUST NOT be set to a value of (1)
        Service Identifier associated with the mobili
        reference
            "RFC 5149 - Service Selection mobility option";
    }
    leaf exclude-flag {
        type boolean;
        mandatory true;
        description
            "This flag is used to request that the uplink/d
            flows for which the network is providing Guarante
            service be excluded from the target IP flows for
            Session-Agg-Max-UL/DL-Bit-Rate is measured.

            * When the (E) flag is set to a value of (1), th
            to exclude the IP flows for which Guaranteed-U
            is negotiated from the flows for which Per-Ses
            is measured.

            * When the (E) flag is set to a value of (0), th

```



```

    value 0;
    description "enabled";
}
        enum disabled {
    value 1;
    description "disabled";
}
        enum reserved1 {
    value 2;
    description "reserved1";
}
        enum reserved2 {
    value 3;
    description "reserved2";
}
    }
    mandatory true;
    description
        "This is a 2-bit unsigned integer
value. It defines whether a service data flow can
that were already assigned to another service data
lower priority level. The following values are defined:

    Enabled (0): This value indicates that the service data flow
is allowed to get resources that were already assigned to another
IP data flow with a lower priority level.

    Disabled (1): This value indicates that the service data flow
is not allowed to get resources that were already assigned to another
IP data flow with a lower priority level."

```

```

        another IP data flow with a lower priority level.
        (2) and (3) are reserved."
    }
    leaf preemption-vulnerability {
        type enumeration {
            enum enabled {
    value 0;
    description "enabled";
}
            enum disabled {
    value 1;
    description "disabled";
}

```

```

}
        enum reserved1 {
    value 2;
    description "reserved1";
}
        enum reserved2 {
    value 3;
    description "reserved2";
}
    }
    mandatory true;
    description
        "This is a 2-bit unsigned integer
value. It defines whether a service data flow can
resources assigned to it in order to admit a serv
with a higher priority level. The following valu

        Enabled (0): This value indicates that the res
to the IP data flow can be preempted and alloc
data flow with a higher priority level.

        Disabled (1): This value indicates that the re
to the IP data flow shall not be preempted and
service data flow with a higher priority level
and (3) are reserved.";
    }
description "Allocation-Retention-Priority Value";
}

typedef Aggregate-Max-DL-Bit-Rate-Value {
    type uint32;
    description
        "This is a 32-bit unsigned integer that
indicates the aggregate maximum downlink bit rate that is
requested/allocated for downlink IP flows. The measurement uni
for Aggregate-Max-DL-Bit-Rate are bits per second.";
}

```

```

}

```

```

typedef Aggregate-Max-UL-Bit-Rate-Value {
    type uint32;
    description

```

```

        "This is a 32-bit unsigned integer that
        indicates the aggregate maximum downlink bit rate that is
        requested/allocated for downlink IP flows. The measurement units
        for Aggregate-Max-DL-Bit-Rate are bits per second.";
    }

typedef Guaranteed-DL-Bit-Rate-Value {
    type uint32;
    description
        "This is a 32-bit unsigned integer that
        indicates the guaranteed bandwidth in bits per second for downl
        IP flows. The measurement units for Guaranteed-DL-Bit-Rate are
        bits per second.";
}

typedef Guaranteed-UL-Bit-Rate-Value {
type uint32;
description
    "This is a 32-bit unsigned integer that
    indicates the guaranteed bandwidth in bits per second for uplink
    IP flows. The measurement units for Guaranteed-UL-Bit-Rate are
    bits per second.";
}

grouping QoS-Vendor-Specific-Attribute-Value-Base {
    leaf vendorid {
        type uint32;
        mandatory true;
        description
            "The Vendor ID is the SMI (Structure of Management
            Information) Network Management Private Enterprise Code of
            IANA-maintained 'Private Enterprise Numbers' registry [SMI
            reference
                "'PRIVATE ENTERPRISE NUMBERS', SMI Network Management
                Private Enterprise Codes, April 2014,
                <http://www.iana.org/assignments/enterprise-numbers>";
            }
        leaf subtype {
            type uint8;
            mandatory true;
            description
                "An 8-bit field indicating the type of vendor-specific
                information carried in the option. The namespace for this

```

```

        type is managed by the vendor identified by the Vendor ID
    }
    description
        "QoS Vendor-Specific Attribute.";
}

//NOTE - We do NOT add the Status Codes or other changes in PMIP in this mo

//Primary Structures (groupings)
grouping qosattribute {
    leaf attributetype {
        type identityref {
            base qos-attribute-type;
        }
        mandatory true;
        description "the attribute type";
    }

    //All of the sub-types by constraint
    choice attribute-choice {
        case per-mn-agg-max-dl-case {
            when "../attributetype = 'Per-MN-Agg-Max-DL-Bit-Rate-type'";
            leaf per-mn-agg-max-dl {
                type qos-pmip:Per-MN-Agg-Max-DL-Bit-Rate-Value;
                description "Per-MN-Agg-Max-DL-Bit-Rate Value";
            }
            description "Per-MN-Agg-Max-DL-Bit-Rate Case";
        }
        case per-mn-agg-max-ul-case {
            when "../attributetype = 'Per-MN-Agg-Max-UL-Bit-Rate-type'";
            leaf per-mn-agg-max-ul {
                type qos-pmip:Per-MN-Agg-Max-UL-Bit-Rate-Value;
                description "Per-MN-Agg-Max-UL-Bit-Rate Value";
            }
            description "Per-MN-Agg-Max-UL-Bit-Rate Case";
        }
        case per-session-agg-max-dl-case {
            when "../attributetype = 'Per-Session-Agg-Max-DL-Bit-Rate-type'";
            container per-session-agg-max-dl {
                uses qos-pmip:Per-Session-Agg-Max-Bit-Rate-Value;
                description "Per-Session-Agg-Max-Bit-Rate Value";
            }
            description "Per-Session-Agg-Max-Bit-Rate Case";
        }
        case per-session-agg-max-ul-case {
            when "../attributetype = 'Per-Session-Agg-Max-UL-Bit-Rate-type'";
            container per-session-agg-max-ul {
                uses qos-pmip:Per-Session-Agg-Max-Bit-Rate-Value;
            }
        }
    }
}

```

Internet-Draft

DMM FPC Protocol

October 2016

```
        description "Per-Session-Agg-Max-Bit-Rate Value";
    }
    description "Per-Session-Agg-Max-Bit-Rate Case";
}
case allocation-retention-priority-case {
    when "../attributetype = 'Allocation-Retention-Priority-type'";
    uses qos-pmip:Allocation-Retention-Priority-Value;
    description "Allocation-Retention-Priority Case";
}
case agg-max-dl-case {
    when "../attributetype = 'Aggregate-Max-DL-Bit-Rate-type'";
    leaf agg-max-dl {
        type qos-pmip:Aggregate-Max-DL-Bit-Rate-Value;
        description "Aggregate-Max-DL-Bit-Rate Value";
    }
    description "Aggregate-Max-DL-Bit-Rate Case";
}
case agg-max-ul-case {
    when "../attributetype = 'Aggregate-Max-UL-Bit-Rate-type'";
    leaf agg-max-ul {
        type qos-pmip:Aggregate-Max-UL-Bit-Rate-Value;
        description "Aggregate-Max-UL-Bit-Rate Value";
    }
    description "Aggregate-Max-UL-Bit-Rate Case";
}
case gbr-dl-case {
    when "../attributetype = 'Guaranteed-DL-Bit-Rate-type'";
    leaf gbr-dl {
        type qos-pmip:Guaranteed-DL-Bit-Rate-Value;
        description "Guaranteed-DL-Bit-Rate Value";
    }
    description "Guaranteed-DL-Bit-Rate Case";
}
case gbr-ul-case {
    when "../attributetype = 'Guaranteed-UL-Bit-Rate-type'";
    leaf gbr-ul {
        type qos-pmip:Guaranteed-UL-Bit-Rate-Value;
        description "Guaranteed-UL-Bit-Rate Value";
    }
    description "Guaranteed-UL-Bit-Rate Case";
}
case traffic-selector-case {
```

```
when "../attributetype = 'QoS-Traffic-Selector-type'";
container traffic-selector {
    uses traffic-selectors:traffic-selector;
    description "traffic selector";
}
description "traffic selector Case";
```

```
    }
    description "Attribute Value";
}
description "PMIP QoS Attribute";
}

grouping qosoption {
leaf srid {
    type sr-id;
    mandatory true;
    description "Service Request Identifier";
}
leaf trafficclass {
    type traffic-class;
    mandatory true;
    description "Traffic Class";
}
leaf operationcode {
    type operational-code;
    mandatory true;
    description "Operation Code";
}
list attributes {
    unique "attributetype";
    uses qosattribute;
    min-elements 1;
    description "Attributes";
}
description "PMIP QoS Option";
}
}
<CODE ENDS>
```

[A.2.3.](#) Traffic Selectors YANG Model

This module defines traffic selector types commonly used in Proxy Mobile IP (PMIP).

This module references [[RFC6991](#)].

```
<CODE BEGINS> file "ietf-traffic-selector-types@2016-01-14.yang"
module ietf-traffic-selector-types {
  yang-version 1;

  namespace
    "urn:ietf:params:xml:ns:yang:ietf-traffic-selector-types";

  prefix "traffic-selectors";
```

Matsushima, et al.

Expires May 4, 2017

[Page 112]

Internet-Draft

DMM FPC Protocol

October 2016

```
import ietf-inet-types {
  prefix inet;
  revision-date 2013-07-15;
}
```

```
organization "IETF Distributed Mobility Management (DMM)
  Working Group";
```

```
contact
```

```
"WG Web: <http://tools.ietf.org/wg/netmod/>
  WG List: <mailto:netmod@ietf.org>
```

```
  WG Chair: Dapeng Liu
            <mailto:maxpassion@gmail.com>
```

```
  WG Chair: Jouni Korhonen
            <mailto:jouni.nospam@gmail.com>
```

```
  Editor: Satoru Matsushima
          <mailto:satoru.matsushima@g.softbank.co.jp>
```

```
  Editor: Lyle Bertz
          <mailto:lyleb551144@gmail.com>";
```

```
description
```

```
"This module contains a collection of YANG definitions for
  traffic selectors for flow bindings.
```

Copyright (c) 2016 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Simplified BSD License.";

```
revision 2016-01-14 {
    description "Updated for IETF-PACKET-FIELDS module alignment";
    reference
        "draft-ietf-netmod-acl-model-06";
}
```

```
revision 2016-01-12 {
```

Matsushima, et al.

Expires May 4, 2017

[Page 113]

Internet-Draft

DMM FPC Protocol

October 2016

```
    description "Initial revision";
    reference
        "RFC 6088: Traffic Selectors for Flow Bindings";
}

// Identities
identity traffic-selector-format {
    description "The base type for Traffic-Selector Formats";
}

identity ipv4-binary-selector-format {
    base traffic-selector-format;
    description
        "IPv4 Binary Traffic Selector Format";
}

identity ipv6-binary-selector-format {
    base traffic-selector-format;
    description
        "IPv6 Binary Traffic Selector Format";
}
```

```

// Type definitions and groupings
typedef ipsec-spi {
    type uint32;
    description "This type defines the first 32-bit IPsec Security
                Index (SPI) value on data packets sent from a c
                node to the mobile node as seen by the home age
                is defined in [RFC4303].";
    reference
        "RFC 4303: IP Encapsulating Security Payload (E
}

grouping traffic-selector-base {
    description "A grouping of the commen leaves between the v4 and
container ipsec-spi-range {
    presence "Enables setting ipsec spi range";
    description
        "Inclusive range representing IPSec Security Parameter Indices
        When only start-spi is present, it represents a single spi.";
        leaf start-spi {
            type ipsec-spi;
            mandatory true;
            description
                "This field identifies the first 32-bit
                range of SPI values to be matched, on data packet
                corresponding node to the mobile node as seen by
                This field is defined in [RFC4303].";

```

```

}
leaf end-spi {
    type ipsec-spi;
    must ". >= ../start-spi" {
        error-message
            "The end-spi must be greater than or equal to start
    }
    description
        "If more than one contiguous SPI value
        this field can be used to indicate the end value
        starting from the value of the Start SPI field.
        MUST NOT be included unless the Start SPI field i
        and has a value less than or equal to this fi

```

```

        When this field is included, the receiver will ma
        SPI values between fields start-spi and end-spi,
        inclusive of start-spi and end-spi.";
    }
}
container source-port-range {
    presence "Enables setting source port range";
    description
        "Inclusive range representing source ports to be used.
        When only start-port is present, it represents a single port.";
        leaf start-port {
            type inet:port-number;
            mandatory true;
            description
                "This field identifies the first 16-bit
                the range of port numbers to be matched, on data
                a corresponding node to the mobile node as seen b
                This is from the range of port numbers defined by
                (http://www.iana.org).";
        }
        leaf end-port {
            type inet:port-number;
            must ". >= ../start-port" {
                error-message
                    "The end-port must be greater than or equal to start-
            }
            description
                "If more than one contiguous source por
                matched, then this field can be used to indicate
                a range starting from the value of the Start Port
                This field MUST NOT be included unless the Start
                is included and has a value less than or equal to

```

When this field is included, the receiver wil

```

        all of the port numbers between fields start-port
        end-port, inclusive of start-port and end-por
    }
}
container destination-port-range {
    presence "Enables setting destination port range";
    description

```

```

    "Inclusive range representing destination ports to be used. When
      only start-port is present, it represents a single port
leaf start-port {
    type inet:port-number;
    mandatory true;
    description
      "This field identifies the first 16-bit
      from the range of port numbers to be matched, on
      from a corresponding node to the mobile node as s
      agent.";
}
leaf end-port {
    type inet:port-number;
must ". >= ../start-port" {
    error-message
      "The end-port must be greater than or equal to start-
}
    description
      "If more than one contiguous destination
      matched, then this field can be used to indicate
      a range starting from the value of the Start Dest
      field. This field MUST NOT be included unless the
      Port field is included and has a value less than
      field.

      When this field is included, the receiver will
      port numbers between fields start-port and end-
      start-port and end-port.";
}
}
}

```

```

grouping ipv4-binary-traffic-selector {
    container source-address-range-v4 {
        presence "Enables setting source IPv4 address range";
        description
            "Inclusive range representing IPv4 addresses to be used. When
              only start-address is present, it represents a single
leaf start-address {
                type inet:ipv4-address;
                mandatory true;

```

```

        description
            "This field identifies the first source
            32-bit IPv4 addresses to be matched, on data pack
            corresponding node to the mobile node as seen by
            In other words, this is one of the addresses of t
            node.";
    }
    leaf end-address {
        type inet:ipv4-address;
        description
            "If more than one contiguous source add
            then this field can be used to indicate the end v
            starting from the value of the Start Address fiel
            field MUST NOT be included unless the Start Addre
            is included. When this field is included, the re
            all of the addresses between fields start-address
            end-address, inclusive of start-address and e
        }
    }
}
container destination-address-range-v4 {
    presence "Enables setting destination IPv4 address range";
    description
        "Inclusive range representing IPv4 addresses to be used. When
        only start-address is present, it represents a single
    leaf start-address {
        type inet:ipv4-address;
        mandatory true;
        description
            "This field identifies the first destin
            range of 32-bit IPv4 addresses to be matched, on
            from a corresponding node to the mobile node as s
            agent. In other words, this is one of the regist
            addresses of the mobile node.";
    }
    leaf end-address {
        type inet:ipv4-address;
        description
            "If more than one contiguous destinatio
            matched, then this field can be used to indicate
            a range starting from the value of the Start Dest
            field. This field MUST NOT be included unless th
            Address field is included. When this field is in
            will match all of the addresses between field
            end-address, inclusive of start-address and e
        }
    }
}
container ds-range {
    presence "Enables setting dscp range";

```

Internet-Draft

DMM FPC Protocol

October 2016

```

description
  "Inclusive range representing DiffServ Codepoints to be used. When
  only start-ds is present, it represents a single Codepoint."
leaf start-ds {
  type inet:dscp;
  mandatory true;
  description
    "This field identifies the first differential service value in
    the range of differential services values to be matched, for
    packets sent from a corresponding node to the mobile node
    by the home agent. Note that this field is called a 'Type of
    Service field' in [RFC0791]. [RFC3260] then clarified that this
    field has been redefined as a 6-bit DS field with 2 bits
    later claimed by Explicit Congestion Notification (ECN) [RFC2474].
    For the purpose of this specification, the Start DS field is
    6 bits long, where the 6 most significant bits indicate the
    values to be matched and the 2 least significant bits' values MUST
    be ignored in any comparison.";
}
leaf end-ds {
  type inet:dscp;
  must ". >= ../start-ds" {
    error-message
      "The end-ds must be greater than or equal to start-ds."
  }
  description
    "If more than one contiguous DS value is present in this field,
    this field can be used to indicate the end value of a range of
    values starting from the value of the Start DS field. This field
    MUST NOT be included unless the Start DS field is included. If
    this field is included, it MUST be coded the same way as the
    start-ds. When this field is included, the receiver MUST accept
    the values between fields start-ds and end-ds, inclusive of
    start-ds and end-ds."
}
}
container protocol-range {
  presence "Enables setting protocol range";
  description
    "Inclusive range representing IP protocol(s) to be used. When
    only start-protocol is present, it represents a single protocol."
leaf start-protocol {
  type uint8;

```

```
    mandatory true;
    description
        "This field identifies the first 8-bit protocol
range of protocol values to be matched, on data packets s
a corresponding node to the mobile node as seen by the ho
```

```
    }
    leaf end-protocol {
        type uint8;
    must ". >= ../start-protocol" {
        error-message
            "The end-protocol must be greater than or equal to start-pr
    }
        description
            "If more than one contiguous protocol value need
then this field can be used to indicate the end value of
starting from the value of the Start Protocol field. Thi
MUST NOT be included unless the Start Protocol field is i
When this field is included, the receiver will match all
values between fields start-protocol and end-protocol, in
of start-protocol and end-protocol.";
    }
}
description "ipv4 binary traffic selector";
}

grouping ipv6-binary-traffic-selector {
    container source-address-range-v6 {
        presence "Enables setting source IPv6 address range";
        description
            "Inclusive range representing IPv6 addresses to be used. When
            only start-address is present, it represents a single
        leaf start-address {
            type inet:ipv6-address;
            mandatory true;
            description
                "This field identifies the first source
                128-bit IPv6 addresses to be matched, on data pac
                corresponding node to the mobile node as seen by
                In other words, this is one of the addresses of t
                node.";
        }
    }
}
```



```

description
  "Inclusive range representing IPv4 addresses to be used. When
    only start-flow-label is present, it represents a single flow
  leaf start-flow-label {
    type inet:ipv6-flow-label;
    description
      "This field identifies the first flow label value
        of flow label values to be matched, on data packets sent
        corresponding node to the mobile node as seen by the home
        According to RFC2460, the flow label is 24 bits long.
        purpose of this specification, the sender of this option
        prefix the flow label value with 8 bits of '0' before its
        in the start-flow-label field. The receiver SHOULD ignore
        first 8 bits of this field before using it in comparisons
        flow labels in packets.";
  }
  leaf end-flow-label {
    type inet:ipv6-flow-label;
  must ". >= ../start-flow-label" {

```

```

  error-message
    "The end-flow-label must be greater than or equal to start-
  }
  description
    "If more than one contiguous flow label value n
    then this field can be used to indicate the end value of
    starting from the value of the Start Flow Label field. T
    MUST NOT be included unless the Start Flow Label field is
    included. When this field is included, the receiver will
    all of the flow label values between fields start-flow-la
    and end-flow-label, inclusive of start-flow-label and
    When this field is included, it MUST be coded the same
    for end-flow-label.";
  }
}
  container traffic-class-range {
presence "Enables setting the traffic class range";
description
  "Inclusive range representing IPv4 addresses to be used. When
    only start-traffic-class is present, it represents a single tr
  leaf start-traffic-class {
    type inet:dscp;

```

```

        description
            "This field identifies the first traffic class
            range of traffic class values to be matched, on data pack
            from a corresponding node to the mobile node as seen by t
            agent. This field is equivalent to the Start DS field in
            traffic selector in Figure 1. As per RFC 3260, the field
            defined as a 6-bit DS field with 2 bits reserved, later c
            Explicit Congestion Notification (ECN) RFC 3168. For the
            of this specification, the start-traffic-class field is 8
            the 6 most significant bits indicate the DS field to be m
            and the 2 least significant bits' values MUST be ignored
            comparison.";
        reference
            "RFC 3260: New Terminology and Clarifications f
            RFC 3168: The Addition of Explicit Congestion
    }
    leaf end-traffic-class {
        type inet:dscp;
    must ". >= ../start-traffic-class" {
        error-message
            "The end-traffic-class must be greater than or equal to sta
    }

        description
            "If more than one contiguous TC value needs to
            this field can be used to indicate the end value of a ran
            starting from the value of the Start TC field. This fiel

```

```

        NOT be included unless the Start TC field is included. W
        field is included, it MUST be coded the same way as defin
        start-traffic-class. When this field is included, th
        will match all of the values between fields start-tra
        and end-traffic-class, inclusive of start-traffic-cla
        end-traffic-class.";
    }
}
    container next-header-range {
    presence "Enables setting Next Header range";
    description
        "Inclusive range representing Next Headers to be used. When
        only start-next-header is present, it represents a single Next
        leaf start-next-header {
            type uint8;

```

```

        description
            "This field identifies the first 8-bit next header value
            range of next header values to be matched, on data packet
            from a corresponding node to the mobile node as seen by the
            agent.";
    }
    leaf end-next-header {
        type uint8;
    must ". >= ../start-next-header" {
        error-message
            "The end-next-header must be greater than or equal to start
            next-header.";
    }
        description
            "If more than one contiguous next header value is present,
            then this field can be used to indicate the end value of the
            starting from the value of the Start NH field. This field
            NOT be included unless the Start next header field is included.
            When this field is included, the receiver will match all
            values between fields start-next-header and end-next-header
            inclusive of start-next-header and end-next-header.";
    }
}
description "ipv6 binary traffic selector";
}

grouping traffic-selector {
    leaf ts-format {
        type identityref {
            base traffic-selector-format;
        }
        description "Traffic Selector Format";
    }
    uses traffic-selector-base {

```

```

        when "boolean(../ts-format/text() = 'ipv6-binary-selector');
    }
    uses ipv4-binary-traffic-selector {
        when "boolean(../ts-format/text() = 'ipv4-binary-selector');
    }
    uses ipv6-binary-traffic-selector {
        when "boolean(../ts-format/text() = 'ipv6-binary-selector');
    }
}

```

```

        description
            "The traffic selector includes the parameters used to m
                packets for a specific flow binding.";
        reference
            "RFC 6089: Flow Bindings in Mobile IPv6 and Network Mob
    }

    grouping ts-list {
        list selectors {
            key index;
            leaf index {
                type uint64;
            }
            description "index";
            uses traffic-selector;
        }
        description "traffic selectors";
    }
    description "traffic selector list";
}
<CODE ENDS>

```

[A.2.4.](#) FPC 3GPP Mobility YANG Model

This module defines the base protocol elements of 3GPP mobility.

This module references [[RFC6991](#)], the fpc-base, fpc-agent, ietf-traffic-selector and pmip-qos modules defined in this document.

```

<CODE BEGINS> file "ietf-dmm-threegpp@2016-08-03.yang"
module ietf-dmm-threegpp {
    namespace "urn:ietf:params:xml:ns:yang:ietf-dmm-threegpp";
    prefix threegpp;

    import ietf-inet-types { prefix inet; revision-date 2013-07-15; }
    import ietf-dmm-fpc { prefix fpc; revision-date 2016-08-03; }
    import ietf-traffic-selector-types { prefix traffic-selectors; revision-dat
    import ietf-pmip-qos { prefix pmipqos; revision-date 2016-02-10; }

    organization "IETF Distributed Mobility Management (DMM)

```

contact

"WG Web: <<http://tools.ietf.org/wg/netmod/>>

WG List: <<mailto:netmod@ietf.org>>

WG Chair: Dapeng Liu

<<mailto:maxpassion@gmail.com>>

WG Chair: Jouni Korhonen

<<mailto:jouni.nospam@gmail.com>>

Editor: Satoru Matsushima

<<mailto:satoru.matsushima@g.softbank.co.jp>>

Editor: Lyle Bertz

<<mailto:lyleb551144@gmail.com>>";

description

"This module contains YANG definition for 3GPP Related Mobility Structures.

Copyright (c) 2016 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Simplified BSD License.";

```
revision 2016-08-03 {  
    description "Initial";  
    reference "draft-ietf-dmm-fpc-cpdp-04";  
}
```

```
identity threeGPP-access-type {  
    base "fpc:fpc-access-type";  
    description "3GPP Access Type";  
}
```

```
// Profile Type  
identity threeGPP-mobility {  
    base "fpc:fpc-mobility-profile-type";
```

```
        description "3GPP Mobility Profile";
    }

    // Tunnel Types
    identity threeGPP-tunnel-type {
        description "3GPP Base Tunnel Type";
    }

    identity gtpv1 {
        base "threegpp:threeGPP-tunnel-type";
        description "GTP version 1 Tunnel";
    }

    identity gtpv2 {
        base "threegpp:threeGPP-tunnel-type";
        description "GTP version 2 Tunnel";
    }

    grouping teid-value {
        description "TEID value holder";
        leaf tunnel-identifier {
            type uint32;
            description "Tunnel Endpoint Identifier (TEID)";
        }
    }

    grouping threeGPP-tunnel {
        description "3GPP Tunnel Definition";
        leaf tunnel-type {
            type identityref {
                base "threegpp:threeGPP-tunnel-type";
            }
            description "3GPP Tunnel Subtype";
        }
        uses threegpp:teid-value;
    }

    // QoS Profile
    identity threeGPP-qos-profile-parameters {
        base "fpc:fpc-qos-type";
        description "3GPP QoS Profile";
    }

    typedef fpc-qos-class-identifier {
        type uint8 {
            range "1..9";
        }
    }
```

```
}
description "QoS Class Identifier (QCI)";
```

```
}

grouping threeGPP-QoS {
    description "3GPP QoS Attributes";
    leaf qci {
        type fpc-qos-class-identifier;
        description "QCI";
    }
    leaf gbr {
        type uint32;
        description "Guaranteed Bit Rate";
    }
    leaf mbr {
        type uint32;
        description "Maximum Bit Rate";
    }
    leaf apn-ambr {
        type uint32;
        description "Access Point Name Aggregate Max Bit Rate";
    }
    leaf ue-ambr {
        type uint32;
        description "User Equipment Aggregate Max Bit Rate";
    }
    container arp {
        uses pmipqos:Allocation-Retention-Priority-Value;
        description "Allocation Retention Priority";
    }
}

typedef ebi-type {
    type uint8 {
        range "0..15";
    }
    description "EUTRAN Bearere Identifier (EBI) Type";
}
```

```
// From 3GPP TS 24.008 version 13.5.0 Release 13
typedef component-type-enum {
```

```
type enumeration {
  enum ipv4RemoteAddress {
    value 16;
    description "IPv4 Remote Address";
  }
  enum ipv4LocalAddress {
    value 17;
    description "IPv4 Local Address";
  }
}
```

```
enum ipv6RemoteAddress {
  value 32;
  description "IPv6 Remote Address";
}
enum ipv6RemoteAddressPrefix {
  value 33;
  description "IPv6 Remote Address Prefix";
}
enum ipv6LocalAddressPrefix {
  value 35;
  description "IPv6 Local Address Prefix";
}
enum protocolNextHeader {
  value 48;
  description "Protocol (IPv4) or NextHeader (IPv6) value";
}
enum localPort {
  value 64;
  description "Local Port";
}
enum localPortRange {
  value 65;
  description "Local Port Range";
}
enum reomotePort {
  value 80;
  description "Remote Port";
}
enum remotePortRange {
  value 81;
  description "Remote Port Range";
}
```

```

enum secParamIndex {
    value 96;
    description "Security Parameter Index (SPI)";
}
enum tosTraffClass {
    value 112;
    description "TOS Traffic Class";
}
enum flowLabel {
    value 128;
    description "Flow Label";
}
}
description "TFT Component Type";
}

```

```

typedef packet-filter-direction {
    type enumeration {
        enum preRel7Tft {
            value 0;
            description "Pre-Release 7 TFT";
        }
        enum uplink {
            value 1;
            description "uplink";
        }
        enum downlink {
            value 2;
            description "downlink";
        }
        enum bidirectional {
            value 3;
            description "bi-direcitonal";
        }
    }
    description "Packet Filter Direction";
}

```

```

typedef component-type-id {
    type uint8 {
        range "16 | 17 | 32 | 33 | 35 | 48 | 64 | 65 | 80 | 81 | 96 | 112 | 1

```

```

    }
    description "Specifies the Component Type";
}

grouping packet-filter {
  leaf direction {
    type threegpp:packet-filter-direction;
    description "Filter Direction";
  }
  leaf identifier {
    type uint8 {
      range "1..15";
    }
    description "Filter Identifier";
  }
  leaf evaluation-precedence {
    type uint8;
    description "Evaluation Precedence";
  }
  list contents {
    key component-type-identifier;
    description "Filter Contents";
    leaf component-type-identifier {

```

```

    type threegpp:component-type-id;
    description "Component Type";
  }
  choice value {
    case ipv4-local {
      leaf ipv4-local {
        type inet:ipv4-address;
        description "IPv4 Local Address";
      }
    }
    case ipv6-prefix-local {
      leaf ipv6-prefix-local {
        type inet:ipv6-prefix;
        description "IPv6 Local Prefix";
      }
    }
    case ipv4-ipv6-remote {
      leaf ipv4-ipv6-remote {

```

```

        type inet:ip-address;
        description "Ipv4 Ipv6 remote address";
    }
}
case ipv6-prefix-remote {
    leaf ipv6-prefix-remote {
        type inet:ipv6-prefix;
        description "IPv6 Remote Prefix";
    }
}
case next-header {
    leaf next-header {
        type uint8;
        description "Next Header";
    }
}
case local-port {
    leaf local-port {
        type inet:port-number;
        description "Local Port";
    }
}
case local-port-range {
    leaf local-port-lo {
        type inet:port-number;
        description "Local Port Min Value";
    }
    leaf local-port-hi {
        type inet:port-number;
        description "Local Port Max Value";
    }
}

```

```

    }
}
case remote-port {
    leaf remote-port {
        type inet:port-number;
        description "Remote Port";
    }
}
case remote-port-range {
    leaf remote-port-lo {
        type inet:port-number;
    }
}

```

```

        description "Remote Por Min Value";
    }
    leaf remote-port-hi {
        type inet:port-number;
        description "Remote Port Max Value";
    }
}
case ipsec-index {
    leaf ipsec-index {
        type traffic-selectors:ipsec-spi;
        description "IPSec Index";
    }
}
case traffic-class {
    leaf traffic-class {
        type inet:dscp;
        description "Traffic Class";
    }
}
case traffic-class-range {
    leaf traffic-class-lo {
        type inet:dscp;
        description "Traffic Class Min Value";
    }
    leaf traffic-class-hi {
        type inet:dscp;
        description "Traffic Class Max Value";
    }
}
case flow-label-type {
    leaf-list flow-label {
        type inet:ipv6-flow-label;
        description "Flow Label";
    }
}
description "Component Value";
}

```

```

    }
    description "Packet Filter";
}

```

```

grouping tft {
    list packet-filters {
        key identifier;
        uses threegpp:packet-filter;
        description "List of Packet Filters";
    }
    description "Packet Filter List";
}

typedef imsi-type {
    type uint64;
    description "International Mobile Subscriber Identity (IMSI) Value Type";
}

typedef threegpp-instr {
    type bits {
        bit assign-ip {
            position 0;
            description "Assign IP Address/Prefix";
        }
        bit assign-fteid-ip {
            position 1;
            description "Assign FTEID-IP";
        }
        bit assign-fteid-teid {
            position 2;
            description "Assign FTEID-TEID";
        }
        bit session {
            position 3;
            description "Commands apply to the Session Level";
        }
        bit uplink {
            position 4;
            description "Commands apply to the Uplink";
        }
        bit downlink {
            position 5;
            description "Commands apply to the Downlink";
        }
        bit assign-dpn {
            position 6;
            description "Assign DPN";
        }
    }
}

```

```
    }
    description "Instruction Set for 3GPP R11";
}

// Descriptors update - goes to Entities, Configure and Configure Bundles
augment "/fpc:tenants/fpc:tenant/fpc:fpc-policy/fpc:descriptors/fpc:descrip
  case threegpp-tft {
    uses threegpp:tft;
    description "3GPP TFT";
  }
  description "3GPP TFT Descriptor";
}

// Contexts Update - Contexts / UL / mob-profile
augment "/fpc:tenants/fpc:tenant/fpc:fpc-mobility/fpc:contexts/fpc:ul/fpc:m
  case threegpp-tunnel {
    uses threegpp:threeGPP-tunnel;
    uses threegpp:tft;
    description "3GPP TFT and Tunnel Information";
  }
  description "Context UL Tunnel";
}
augment "/fpc:configure/fpc:input/fpc:op_body/fpc:create_or_update/fpc:cont
  case threegpp-tunnel {
    uses threegpp:threeGPP-tunnel;
    uses threegpp:tft;
    description "3GPP TFT and Tunnel Information";
  }
  description "Create Context UL Tunnel";
}
augment "/fpc:configure-bundles/fpc:input/fpc:bundles/fpc:op_body/fpc:creat
  case threegpp-tunnel {
    uses threegpp:threeGPP-tunnel;
    uses threegpp:tft;
    description "3GPP TFT and Tunnel Information";
  }
  description "Bundles Create Context UL Tunnel";
}
augment "/fpc:configure/fpc:output/fpc:result-type/fpc:create-or-update-suc
  case threegpp-tunnel {
    uses threegpp:threeGPP-tunnel;
    uses threegpp:tft;
    description "3GPP TFT and Tunnel Information";
  }
  description "Create Context UL Tunnel Response";
}
augment "/fpc:configure-bundles/fpc:output/fpc:bundles/fpc:result-type/fpc:
```

```
case threegpp-tunnel {
```

```
    uses threegpp:threeGPP-tunnel;
    uses threegpp:tft;
    description "3GPP TFT and Tunnel Information";
}
description "Bundles Create Context UL Tunnel Response";
}

// Contexts Update - Contexts / DL / mob-profile
augment "/fpc:tenants/fpc:tenant/fpc:fpc-mobility/fpc:contexts/fpc:dl/fpc:m
  case threegpp-tunnel {
    uses threegpp:threeGPP-tunnel;
    uses threegpp:tft;
    description "3GPP TFT and Tunnel Information";
  }
  description "Context DL Tunnel";
}
augment "/fpc:configure/fpc:input/fpc:op_body/fpc:create_or_update/fpc:cont
  case threegpp-tunnel {
    uses threegpp:threeGPP-tunnel;
    uses threegpp:tft;
    description "3GPP TFT and Tunnel Information";
  }
  description "Bundles Create Context DL Tunnel";
}
augment "/fpc:configure-bundles/fpc:input/fpc:bundles/fpc:op_body/fpc:creat
  case threegpp-tunnel {
    uses threegpp:threeGPP-tunnel;
    uses threegpp:tft;
    description "3GPP TFT and Tunnel Information";
  }
  description "Bundles Create Context DL Tunnel";
}
augment "/fpc:configure/fpc:output/fpc:result-type/fpc:create-or-update-suc
  case threegpp-tunnel {
    uses threegpp:threeGPP-tunnel;
    uses threegpp:tft;
    description "3GPP TFT and Tunnel Information";
  }
  description "Create Context DL Tunnel Response";
}
```

```

augment "/fpc:configure-bundles/fpc:output/fpc:bundles/fpc:result-type/fpc:
  case threegpp-tunnel {
    uses threegpp:threeGPP-tunnel;
    uses threegpp:tft;
    description "3GPP TFT and Tunnel Information";
  }
  description "Bundles Create Context DL Tunnel Response";
}

```

```

// Contexts Update - Contexts / dpns / mobility-tunnel-parameters
augment "/fpc:tenants/fpc:tenant/fpc:fpc-mobility/fpc:contexts/fpc:dpns/fpc:
  case threegpp-tunnel {
    uses threegpp:threeGPP-tunnel;
    uses threegpp:tft;
    description "3GPP TFT and Tunnel Information";
  }
  description "Context 3GPP TFT and Tunnel Information";
}
augment "/fpc:configure/fpc:input/fpc:op_body/fpc:create_or_update/fpc:cont
  case threegpp-tunnel {
    uses threegpp:threeGPP-tunnel;
    uses threegpp:tft;
    description "3GPP TFT and Tunnel Information";
  }
  description "Configure 3GPP TFT and Tunnel Information";
}
augment "/fpc:configure-bundles/fpc:input/fpc:bundles/fpc:op_body/fpc:creat
  case threegpp-tunnel {
    uses threegpp:threeGPP-tunnel;
    uses threegpp:tft;
    description "3GPP TFT and Tunnel Information";
  }
  description "Configure Bundles 3GPP TFT and Tunnel Information";
}
augment "/fpc:configure/fpc:output/fpc:result-type/fpc:create-or-update-suc
  case threegpp-tunnel {
    uses threegpp:threeGPP-tunnel;
    uses threegpp:tft;
    description "3GPP TFT and Tunnel Information";
  }
  description "Configure 3GPP TFT and Tunnel Information Response";
}

```

```

augment "/fpc:configure-bundles/fpc:output/fpc:bundles/fpc:result-type/fpc:
  case threegpp-tunnel {
    uses threegpp:threeGPP-tunnel;
    uses threegpp:tft;
    description "3GPP TFT and Tunnel Information";
  }
  description "Configure Bundles 3GPP TFT and Tunnel Information Response";
}

```

```

// QoS Updates - Context / UL / qosprofile
augment "/fpc:tenants/fpc:tenant/fpc:fpc-mobility/fpc:contexts/fpc:ul/fpc:q
  case threegpp-qos {
    uses threegpp:threeGPP-QoS;
    description "3GPP QoS Values";
  }

```

```

  }
  description "Context UL 3GPP QoS Values";
}
augment "/fpc:configure/fpc:input/fpc:op_body/fpc:create_or_update/fpc:cont
  case threegpp-qos {
    uses threegpp:threeGPP-QoS;
    description "3GPP QoS Values";
  }
  description "Configure Context UL 3GPP QoS Values";
}
augment "/fpc:configure-bundles/fpc:input/fpc:bundles/fpc:op_body/fpc:creat
  case threegpp-qos {
    uses threegpp:threeGPP-QoS;
    description "3GPP QoS Values";
  }
  description "Configure Bundles Context UL 3GPP QoS Values";
}
augment "/fpc:configure/fpc:output/fpc:result-type/fpc:create-or-update-suc
  case threegpp-qos {
    uses threegpp:threeGPP-QoS;
    description "3GPP QoS Values";
  }
  description "Configure Context UL 3GPP QoS Values Response";
}
augment "/fpc:configure-bundles/fpc:output/fpc:bundles/fpc:result-type/fpc:
  case threegpp-qos {

```

```

        uses threegpp:threeGPP-QoS;
        description "3GPP QoS Values";
    }
    description "Configure Bundles Context UL 3GPP QoS Values Response";
}

// QoS Updates - Context / DL / QoS Profile
augment "/fpc:tenants/fpc:tenant/fpc:fpc-mobility/fpc:contexts/fpc:dl/fpc:q
    case threegpp-qos {
        uses threegpp:threeGPP-QoS;
        description "3GPP QoS Values";
    }
    description "Context DL 3GPP QoS Values";
}
augment "/fpc:configure/fpc:input/fpc:op_body/fpc:create_or_update/fpc:cont
    case threegpp-qos {
        uses threegpp:threeGPP-QoS;
        description "3GPP QoS Values";
    }
    description "Configure Context DL 3GPP QoS Values";
}
augment "/fpc:configure-bundles/fpc:input/fpc:bundles/fpc:op_body/fpc:creat

```

```

        case threegpp-qos {
            uses threegpp:threeGPP-QoS;
            description "3GPP QoS Values";
        }
        description "Configure Bundles Context DL 3GPP QoS Values";
    }
    augment "/fpc:configure/fpc:output/fpc:result-type/fpc:create-or-update-suc
        case threegpp-qos {
            uses threegpp:threeGPP-QoS;
            description "3GPP QoS Values";
        }
        description "Configure Context DL 3GPP QoS Values Response";
    }
    augment "/fpc:configure-bundles/fpc:output/fpc:bundles/fpc:result-type/fpc:
        case threegpp-qos {
            uses threegpp:threeGPP-QoS;
            description "3GPP QoS Values";
        }
        description "Configure Bundles Context DL 3GPP QoS Values Response";
    }

```

```

}

grouping threegpp-properties {
  leaf imsi {
    type threegpp:imsi-type;
    description "IMSI";
  }
  leaf ebi {
    type threegpp:ebi-type;
    description "EUTRAN Bearere Identifier (EBI)";
  }
  leaf lbi {
    type threegpp:ebi-type;
    description "Linked Bearer Identifier (LBI)";
  }
  description "3GPP Mobility Session Properties";
}

augment "/fpc:tenants/fpc:tenant/fpc:fpc-mobility/fpc:contexts" {
  uses threegpp:threegpp-properties;
  description "3GPP Mobility Session Properties";
}

augment "/fpc:configure/fpc:input/fpc:op_body/fpc:create_or_update/fpc:cont
  uses threegpp:threegpp-properties;
  description "3GPP Mobility Session Properties";
}

augment "/fpc:configure-bundles/fpc:input/fpc:bundles/fpc:op_body/fpc:creat
  uses threegpp:threegpp-properties;
  description "3GPP Mobility Session Properties";
}

```

```

}

augment "/fpc:configure/fpc:output/fpc:result-type/fpc:create-or-update-suc
  uses threegpp:threegpp-properties;
  description "3GPP Mobility Session Properties";
}

augment "/fpc:configure-bundles/fpc:output/fpc:bundles/fpc:result-type/fpc:
  uses threegpp:threegpp-properties;
  description "3GPP Mobility Session Properties";
}

grouping threegpp-commandset {
  leaf instr-3gpp-mob {

```

```

        type threegpp:threegpp-instr;
        description "3GPP Specific Command Set";
    }
    description "3GPP Instructions";
}

augment "/fpc:configure/fpc:input/fpc:instructions/fpc:instr-type" {
    case instr-3gpp-mob {
        uses threegpp:threegpp-commandset;
        description "3GPP Instructions";
    }
    description "Configure 3GPP Instructions";
}

augment "/fpc:configure/fpc:input/fpc:op_body/fpc:create_or_update/fpc:cont
case instr-3gpp-mob {
    uses threegpp:threegpp-commandset;
    description "3GPP Instructions";
}
description "Configure 3GPP Context Instructions";
}

augment "/fpc:configure/fpc:output/fpc:result-type/fpc:create-or-update-suc
case instr-3gpp-mob {
    uses threegpp:threegpp-commandset;
    description "3GPP Instructions";
}
description "Configure 3GPP Context Instructions Response";
}

augment "/fpc:configure-bundles/fpc:input/fpc:bundles/fpc:instructions/fpc:
case instr-3gpp-mob {
    uses threegpp:threegpp-commandset;
    description "3GPP Instructions";
}
description "Configure Bundles 3GPP Instructions";
}

```

```

augment "/fpc:configure-bundles/fpc:input/fpc:bundles/fpc:op_body/fpc:creat
case instr-3gpp-mob {
    uses threegpp:threegpp-commandset;
    description "3GPP Instructions";
}

```

```

    description "Configure Bundles 3GPP Context Instructions";
  }
  augment "/fpc:configure-bundles/fpc:output/fpc:bundles/fpc:result-type/fpc:
    case instr-3gpp-mob {
      uses threegpp:threegpp-commandset;
      description "3GPP Instructions";
    }
    description "Configure Bundles 3GPP Context Instructions Response";
  }
}
<CODE ENDS>

```

[A.2.5.](#) FPC / PMIP Integration YANG Model

This module defines the integration between FPC and PMIP models.

This module references the fpc-base, fpc-agent, pmip-qos and traffic-selector-types module defined in this document.

```

<CODE BEGINS> file "ietf-dmm-fpc-pmip@2016-01-19.yang"
module ietf-dmm-fpc-pmip {
  namespace "urn:ietf:params:xml:ns:yang:ietf-dmm-fpc-pmip";
  prefix fpc-pmip;

  import ietf-dmm-fpc { prefix fpc; }
  import ietf-pmip-qos { prefix qos-pmip; }
  import ietf-traffic-selector-types { prefix traffic-selectors; }

  organization "IETF Distributed Mobility Management (DMM)
    Working Group";

  contact
    "WG Web:   <http://tools.ietf.org/wg/netmod/>
    WG List:  <mailto:netmod@ietf.org>

    WG Chair: Dapeng Liu
              <mailto:maxpassion@gmail.com>

    WG Chair: Jouni Korhonen
              <mailto:jouni.nospam@gmail.com>

    Editor:   Satoru Matsushima
              <mailto:satoru.matsushima@g.softbank.co.jp>

```

Editor: Lyle Bertz
<mailto:lyleb551144@gmail.com>;

description

"This module contains YANG definition for Forwarding Policy Configuration Protocol (FPCP).

Copyright (c) 2016 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](http://trustee.ietf.org/license-info) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Simplified BSD License.";

revision 2016-01-19 {
 description "Changes based on -01 version of FPCP draft."
 reference "[draft-ietf-dmm-fpc-cpdp-01](#)";
}

identity ietf-pmip-access-type {
 base "fpc:fpc-access-type";
 description "PMIP Access";
}

identity fpcp-qos-index-pmip {
 base "fpc:fpc-qos-type";
 description "PMIP QoS";
}

identity traffic-selector-mip6 {
 base "fpc:fpc-descriptor-type";
 description "MIP6 Traffic Selector";
}

identity ietf-pmip {
 base "fpc:fpc-mobility-profile-type";
 description "PMIP Mobility";
}

identity pmip-tunnel-type {
 description "PMIP Tunnel Type";
}

identity grev1 {
 base "fpc-pmip:pmip-tunnel-type";
}

Internet-Draft

DMM FPC Protocol

October 2016

```
        description "GRE v1";
    }
    identity grev2 {
        base "fpc-pmip:pmip-tunnel-type";
        description "GRE v2";
    }
    identity ipinip {
        base "fpc-pmip:pmip-tunnel-type";
        description "IP in IP";
    }
    grouping pmip-mobility {
        leaf type {
            type identityref {
                base "fpc-pmip:pmip-tunnel-type";
            }
            description "PMIP Mobility";
        }
        choice value {
            case gre {
                leaf key {
                    type uint32;
                    description "GRE_KEY";
                }
                description "GRE Value";
            }
            description "PMIP Mobility value";
        }
        description "PMIP Mobility Value";
    }
}

typedef pmip-instr {
    type bits {
        bit assign-ip {
            position 0;
            description "Assign IP";
        }
        bit assign-dpn {
            position 1;
            description "Assign DPN";
        }
        bit session {
            position 2;
        }
    }
}
```

```
    description "Session Level";
}
bit uplink {
    position 3;
    description "Uplink";
}
```

```
    bit downlink {
        position 4;
        description "Downlink";
    }
}
description "Instruction Set for PMIP";
}

// Descriptors update - goes to Entities, Configure and Configure Bundles
augment "/fpc:tenants/fpc:tenant/fpc:fpc-policy/fpc:descriptors/fpc:descrip
    case pmip-selector {
        uses traffic-selectors:traffic-selector;
        description "PMIP Selector";
    }
description "Policy Descriptor";
}

// Contexts Update - Contexts / UL / mob-profile, Contexts / DL / mob-profi
augment "/fpc:tenants/fpc:tenant/fpc:fpc-mobility/fpc:contexts/fpc:ul/fpc:m
    case pmip-tunnel {
        uses fpc-pmip:pmip-mobility;
        uses traffic-selectors:traffic-selector;
        description "PMIP Tunnel Information";
    }
description "Context UL Mobility";
}
augment "/fpc:configure/fpc:input/fpc:op_body/fpc:create_or_update/fpc:cont
    case pmip-tunnel {
        uses fpc-pmip:pmip-mobility;
        uses traffic-selectors:traffic-selector;
        description "PMIP Tunnel Information";
    }
description "CONF Context UL Mobility";
}
augment "/fpc:configure-bundles/fpc:input/fpc:bundles/fpc:op_body/fpc:creat
```

```

    case pmip-tunnel {
        uses fpc-pmip:pmip-mobility;
        uses traffic-selectors:traffic-selector;
        description "PMIP Tunnel Information";
    }
    description "CONF_BUNDLES Context UL Mobility";
}

augment "/fpc:tenants/fpc:tenant/fpc:fpc-mobility/fpc:contexts/fpc:dl/fpc:m
    case pmip-tunnel {
        uses fpc-pmip:pmip-mobility;
        uses traffic-selectors:traffic-selector;
        description "PMIP Tunnel Information";

```

```

    }
    description "Context DL Mobility";
}
augment "/fpc:configure/fpc:input/fpc:op_body/fpc:create_or_update/fpc:cont
    case pmip-tunnel {
        uses fpc-pmip:pmip-mobility;
        uses traffic-selectors:traffic-selector;
        description "PMIP Tunnel Information";
    }
    description "CONF Context DL Mobility";
}
augment "/fpc:configure-bundles/fpc:input/fpc:bundles/fpc:op_body/fpc:creat
    case pmip-tunnel {
        uses fpc-pmip:pmip-mobility;
        uses traffic-selectors:traffic-selector;
        description "PMIP Tunnel Information";
    }
    description "CONF_BUNDLES Context DL Mobility";
}

augment "/fpc:tenants/fpc:tenant/fpc:fpc-mobility/fpc:contexts/fpc:dpsn/fpc
    case pmip-tunnel {
        uses fpc-pmip:pmip-mobility;
        uses traffic-selectors:traffic-selector;
        description "PMIP Tunnel Information";
    }
    description "Context DPN Mobility";
}

```

```

augment "/fpc:configure/fpc:input/fpc:op_body/fpc:create_or_update/fpc:cont
  case pmip-tunnel {
    uses fpc-pmip:pmip-mobility;
    uses traffic-selectors:traffic-selector;
    description "PMIP Tunnel Information";
  }
  description "CONF Context DPN Mobility";
}
augment "/fpc:configure-bundles/fpc:input/fpc:bundles/fpc:op_body/fpc:creat
  case pmip-tunnel {
    uses fpc-pmip:pmip-mobility;
    uses traffic-selectors:traffic-selector;
    description "PMIP Tunnel Information";
  }
  description "CONF_BUNDLES Context DPN Mobility";
}

// QoS Updates - Context / UL / qosprofile, Context / DL / QoS Profile
augment "/fpc:tenants/fpc:tenant/fpc:fpc-mobility/fpc:contexts/fpc:ul/fpc:q
  case qos-pmip {

```

```

    uses qos-pmip:qosattribute;
    description "PMIP QoS Information";
  }
  description "Context UL QoS";
}
augment "/fpc:configure/fpc:input/fpc:op_body/fpc:create_or_update/fpc:cont
  case qos-pmip {
    uses qos-pmip:qosattribute;
    description "PMIP QoS Information";
  }
  description "CONF Context UL QoS";
}
augment "/fpc:configure-bundles/fpc:input/fpc:bundles/fpc:op_body/fpc:creat
  case qos-pmip {
    uses qos-pmip:qosattribute;
    description "PMIP QoS Information";
  }
  description "CONF_BUNDLES Context UL QoS";
}

augment "/fpc:tenants/fpc:tenant/fpc:fpc-mobility/fpc:contexts/fpc:dl/fpc:q

```

```

    case qos-pmip {
        uses qos-pmip:qosattribute;
        description "PMIP QoS Information";
    }
    description "Context DL QoS";
}
augment "/fpc:configure/fpc:input/fpc:op_body/fpc:create_or_update/fpc:cont
    case qos-pmip {
        uses qos-pmip:qosattribute;
        description "PMIP QoS Information";
    }
    description "CONF Context DL QoS";
}
augment "/fpc:configure-bundles/fpc:input/fpc:bundles/fpc:op_body/fpc:creat
    case qos-pmip {
        uses qos-pmip:qosattribute;
        description "PMIP QoS Information";
    }
    description "CONF_BUNDLES Context DL QoS";
}

grouping pmip-commandset {
    leaf instr-pmip {
        type fpc-pmip:pmip-instr;
        description "PMIP Instructions";
    }
    description "PMIP Commandset";
}

```

```

}

// Instructions Update - OP BODY, Context, Port
augment "/fpc:configure/fpc:input/fpc:instructions/fpc:instr-type" {
    case pmip-instr {
        uses fpc-pmip:pmip-commandset;
        description "PMIP Commandset";
    }
    description "CONF Instructions";
}
augment "/fpc:configure/fpc:input/fpc:op_body/fpc:create_or_update/fpc:cont
    case pmip-instr {
        uses fpc-pmip:pmip-commandset;
        description "PMIP Commandset";
    }
}

```

```

    }
    description "CONF Context Instructions";
  }
  augment "/fpc:configure/fpc:output/fpc:result-type/fpc:create-or-update-suc
    case pmip-instr {
      uses fpc-pmip:pmip-commandset;
      description "PMIP Commandset";
    }
    description "CONF Result Context Instructions";
  }

  augment "/fpc:configure-bundles/fpc:input/fpc:bundles/fpc:instructions/fpc:
    case pmip-instr {
      uses fpc-pmip:pmip-commandset;
      description "PMIP Commandset";
    }
    description "CONF_BUNDLES Instructions";
  }
  augment "/fpc:configure-bundles/fpc:input/fpc:bundles/fpc:op_body/fpc:creat
    case pmip-instr {
      uses fpc-pmip:pmip-commandset;
      description "PMIP Commandset";
    }
    description "CONF_BUNDLES Context Instructions";
  }
  augment "/fpc:configure-bundles/fpc:output/fpc:bundles/fpc:result-type/fpc:
    case pmip-instr {
      uses fpc-pmip:pmip-commandset;
      description "PMIP Commandset";
    }
    description "CONF_BUNDLES Result Context Instructions";
  }
}
<CODE ENDS>

```

[A.2.6.](#) FPC Policy Extension YANG Model

This module defines extensions to FPC policy structures.

This module references [[RFC6991](#)], the fpc-base and fpcagent module defined in this document.

```
<CODE BEGINS> file "ietf-dmm-fpc-policyext@2016-08-03.yang"
module ietf-dmm-fpc-policyext {
  namespace "urn:ietf:params:xml:ns:yang:ietf-dmm-fpc-policyext";
  prefix fpcpolicyext;

  import ietf-dmm-fpc { prefix fpc; revision-date 2016-08-03; }
  import ietf-inet-types { prefix inet; revision-date 2013-07-15; }

  organization "IETF Distributed Mobility Management (DMM)
    Working Group";

  contact
    "WG Web:   <http://tools.ietf.org/wg/netmod/>
    WG List:  <mailto:netmod@ietf.org>

    WG Chair: Dapeng Liu
              <mailto:maxpassion@gmail.com>

    WG Chair: Jouni Korhonen
              <mailto:jouni.nospam@gmail.com>

    Editor:   Satoru Matsushima
              <mailto:satoru.matsushima@g.softbank.co.jp>

    Editor:   Lyle Bertz
              <mailto:lyleb551144@gmail.com>";
```

description

"This module contains YANG definition for Forwarding Policy Configuration Protocol (FPCP) common Policy Action and Descriptor extensions.

Copyright (c) 2016 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](http://trustee.ietf.org/bcp78) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this

document must include Simplified BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Simplified BSD License.";

```
revision 2016-08-03 {
    description "Changes based on -04 version of FPC draft.";
    reference "draft-ietf-dmm-fpc-cpdp-04";
}

identity service-function {
    base "fpc:fpc-descriptor-type";
    description "Base Identifier for Service Functions.";
}
identity napt-service {
    base "service-function";
    description "NAPT Service";
}
grouping simple-nat {
    leaf outbound-nat-address {
        type inet:ip-address;
        description "Outbound NAT Address";
    }
    description "Simple NAT value";
}

identity nat-service {
    base "service-function";
    description "NAT Service";
}
grouping simple-napt {
    leaf source-port {
        type inet:port-number;
        description "Source Port";
    }
    leaf outbound-napt-address {
        type inet:ip-address;
        description "Outbound NAPT Address";
    }
    leaf destination-port {
        type inet:port-number;
        description "Destination Port";
    }
    description "Simple NAPT Configuration";
}

identity copy-forward {
    base "fpc:fpc-descriptor-type";
    description "Copies a packet then forwards to a specific destination";
```

Internet-Draft

DMM FPC Protocol

October 2016

```
}
grouping copy-forward {
  container destination {
    choice value {
      case port-ref {
        leaf port-ref {
          type fpc:fpc-port-id;
          description "Port";
        }
        description "Port Forward Case";
      }
      case context-ref {
        leaf context-ref {
          type fpc:fpc-context-id;
          description "Context";
        }
        description "Context Forward Case";
      }
      description "Copy Forward Value";
    }
    description "destination";
  }
  description "Copy Then Forward to Port/Context Action";
}

augment "/fpc:tenants/fpc:tenant/fpc:fpc-policy/fpc:actions/fpc:action-value" {
  case simple-nat {
    uses fpcpolicyext:simple-nat;
    description "Simple NAT value";
  }
  case simple-napt {
    uses fpcpolicyext:simple-napt;
    description "Simple NAPT Value";
  }
  case copy-forward {
    uses fpcpolicyext:copy-forward;
    description "Copy Forward Value";
  }
  description "Policy Actions Augmentations";
}

grouping prefix-traffic-descriptor {
  leaf destination-ip {
```

```

        type inet:ip-prefix;
        description "Rule of destination IP";
    }
    leaf source-ip {
        type inet:ip-prefix;
    }

```

```

        description "Rule of source IP";
    }
    description
    "Traffic descriptor group collects parameters to
    identify target traffic flow. It represents
    source/destination as IP prefixes";
}

augment "/fpc:tenants/fpc:tenant/fpc:fpc-policy/fpc:descriptors/fpc:descrip
case prefix-descriptor {
    uses fpcpolicyext:prefix-traffic-descriptor;
    description "traffic descriptor value";
}
description "Descriptor Augments";
}
}
}
<CODE ENDS>

```

[A.3.](#) FPC nformation Model YANG Tree

This section only shows the YANG tree for the information model.

```

module: ietf-dmm-fpc
module: ietf-dmm-fpc
+--rw tenants
| +--rw tenant* [tenant-id]
|   +--rw tenant-id          fpc:fpc-identity
|   +--rw fpc-policy
|     | +--rw policy-groups* [policy-group-id]
|     | | +--rw policy-group-id    fpc:fpc-policy-group-id
|     | | +--rw policies*         fpc:fpc-policy-id
|     | +--rw policies* [policy-id]
|     | | +--rw policy-id        fpc:fpc-policy-id
|     | | +--rw rules* [order]
|     | |   +--rw order          uint32
|     | |   +--rw descriptors* [descriptor-id]

```

```

| | | | +--rw descriptor-id    fpc:fpc-identity
| | | | +--rw direction?      fpc:fpc-direction
| | | | +--rw actions* [action-id]
| | | | |   +--rw order?        uint32
| | | | |   +--rw action-id    fpc:fpc-action-id-type
+--rw descriptors* [descriptor-id]
| | | | +--rw descriptor-id    fpc:fpc-identity
| | | | +--rw descriptor-type  identityref
| | | | +--rw (descriptor-value)?
| | | | |   +--:(all-traffic)
| | | | |   +--rw all-traffic?  empty
+--rw actions* [action-id]

```

```

| | | | +--rw action-id    fpc:fpc-action-id-type
| | | | +--rw action-type  identityref
| | | | +--rw (action-value)?
| | | | |   +--:(drop)
| | | | |   +--rw drop?    empty
+--ro fpc-mobility
| | | | +--ro contexts* [context-id]
| | | | |   +--ro context-id    fpc:fpc-context-id
| | | | |   +--ro ports*      fpc:fpc-port-id
| | | | |   +--ro dpn-group?   fpc:fpc-dpn-group-id
| | | | |   +--ro delegating-ip-prefixes* inet:ip-prefix
| | | | |   +--ro ul {fpc:fpc-basic-agent}?
| | | | | |   +--ro tunnel-local-address?  inet:ip-address
| | | | | |   +--ro tunnel-remote-address? inet:ip-address
| | | | | |   +--ro mtu-size?            uint32
| | | | |   +--ro mobility-tunnel-parameters
| | | | | |   +--ro (profile-parameters)?
| | | | | | |   +--:(nothing)
| | | | | | |   +--ro none?    empty
| | | | |   +--ro nexthop
| | | | | |   +--ro nexthop-type?  identityref
| | | | | |   +--ro (nexthop-value)?
| | | | | | |   +--:(ip)
| | | | | | | |   +--ro ip?      inet:ip-address
| | | | | | | |   +--:(servicepath)
| | | | | | | |   +--ro servicepath?  fpc:fpcp-service-path-id
| | | | |   +--ro qos-profile-parameters
| | | | | |   +--ro qos-type?  identityref
| | | | |   +--ro (value)?

```



```

|         +---ro none?    empty
| +---ro nexthop
|   +---ro nexthop-type?  identityref
|   +---ro (nexthop-value)?
|     +---:(ip)
|       | +---ro ip?          inet:ip-address
|       +---:(servicepath)
|         +---ro servicepath?  fpc:fpcp-service-path-id
| +---ro qos-profile-parameters
|   +---ro qos-type?  identityref
|   +---ro (value)?
| +---ro dpn-parameters
| +---ro vendor-parameters* [vendor-id vendor-type]
|   +---ro vendor-id      fpc:fpc-identity
|   +---ro vendor-type    identityref
|   +---ro (value)?
|     +---:(empty-type)
|       +---ro empty-type?  empty
| +---ro parent-context?    fpc:fpc-context-id
+---ro ports* [port-id]
|   +---ro port-id          fpc:fpc-port-id
|   +---ro policy-groups*  fpc:fpc-policy-group-id
+---ro monitors*
|   +---ro monitor-id?     fpc:fpc-identity
|   +---ro target?        fpc-identity
|   +---ro (event-config-value)?

```

```

|         +---:(periodic-config)
|         | +---ro period?          uint32
|         +---:(threshold-config)
|         | +---ro lo-thresh?      uint32
|         | +---ro hi-thresh?     uint32
|         +---:(scheduled-config)
|         | +---ro report-time?    uint32
|         +---:(events-config-ident)
|         | +---ro event-identities* identityref
|         +---:(events-config)
|         | +---ro event-ids*      uint32
+---rw fpc-topology
|   +---rw domains* [domain-id]
|     +---rw domain-id          fpc:fpc-domain-id
|     +---rw domain-name?      string

```

```

| | +---rw domain-type?          string
| | +---rw basename?           fpc:fpc-identity {fpc:fpc-basename-regi
| | +---rw base-state?        string {fpc:fpc-basename-registry}?
| | +---rw base-checkpoint?   string {fpc:fpc-basename-registry}?
+---rw dpn-group-peers* [remote-dpn-group-id] {fpc:fpc-basic-agent}?
| | +---rw remote-dpn-group-id    fpc:fpc-dpn-group-id
| | +---rw remote-mobility-profile? identityref
| | +---rw remote-data-plane-role? identityref
| | +---rw remote-endpoint-address? inet:ip-address
| | +---rw local-endpoint-address?  inet:ip-address
| | +---rw mtu-size?            uint32
+---rw dpn-id?                 fpc:fpc-dpn-id {fpc:fpc-basic-agent}?
+---rw control-protocols*     identityref {fpc:fpc-basic-agent}?
+---rw dpn-groups* [dpn-group-id] {fpc:fpc-multi-dpn}?
| | +---rw dpn-group-id          fpc:fpc-dpn-group-id
| | +---rw data-plane-role?     identityref
| | +---rw access-type?        identityref
| | +---rw mobility-profile?    identityref
+---rw dpn-group-peers* [remote-dpn-group-id]
| | +---rw remote-dpn-group-id    fpc:fpc-dpn-group-id
| | +---rw remote-mobility-profile? identityref
| | +---rw remote-data-plane-role? identityref
| | +---rw remote-endpoint-address? inet:ip-address
| | +---rw local-endpoint-address?  inet:ip-address
| | +---rw mtu-size?            uint32
+---rw domains* [domain-id]
| | +---rw domain-id            fpc:fpc-domain-id
| | +---rw domain-name?        string
| | +---rw domain-type?        string
| | +---rw basename?           fpc:fpc-identity {fpc:fpc-basename-r
| | +---rw base-state?        string {fpc:fpc-basename-registry}?
| | +---rw base-checkpoint?   string {fpc:fpc-basename-registry}?
+---rw dpns* [dpn-id] {fpc:fpc-multi-dpn}?

```

```

| | +---rw dpn-id              fpc:fpc-dpn-id
| | +---rw dpn-name?          string
| | +---rw dpn-groups*       fpc:fpc-dpn-group-id
| | +---rw node-reference?   instance-identifier
+---rw fpc-agent-info
| | +---rw supported-features* string
| | +---rw supported-events* [event]
| | | +---rw event            identityref

```

```
| +--rw event-id?    fpc:event-type-id
+--rw supported-error-types* [error-type]
  +--rw error-type    identityref
  +--rw error-type-id? fpc:error-type-id
rpcs: ...
```

Figure 28: YANG FPC Agent Tree

Authors' Addresses

Satoru Matsushima
SoftBank
1-9-1,Higashi-Shimbashi,Minato-Ku
Tokyo 105-7322
Japan

Email: satoru.matsushima@g.softbank.co.jp

Lyle Bertz
6220 Sprint Parkway
Overland Park KS, 66251
USA

Email: lyleb551144@gmail.com

Marco Liebsch
NEC Laboratories Europe
NEC Europe Ltd.
Kurfuersten-Anlage 36
D-69115 Heidelberg
Germany

Phone: +49 6221 4342146
Email: liebsch@neclab.eu

Cisco
170 West Tasman Drive
San Jose, CA 95134
USA

Email: sgundave@cisco.com

Danny Moses

Email: danny.moses@intel.com