

INTERNET-DRAFT

Obsoletes: RFC [2929](#)

Updates: RFCs [1183](#) and 3597

Intended status: Best Current Practice

Expires: January 12, 2009

Donald E. Eastlake 3rd

Eastlake Enterprises

July 13, 2008

Domain Name System (DNS) IANA Considerations

<[draft-ietf-dnsext-2929bis-07.txt](#)>

Status of This Document

By submitting this Internet-Draft, each author represents that any applicable patent or other IPR claims of which he or she is aware have been or will be disclosed, and any of which he or she becomes aware will be disclosed, in accordance with [Section 6 of BCP 79](#).

Distribution of this draft is unlimited. It is intended to become the new [BCP 42](#) obsoleting [RFC 2929](#). Comments should be sent to the DNS Extensions Working Group mailing list <namedroppers@ops.ietf.org>.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

Abstract

Internet Assigned Number Authority (IANA) parameter assignment considerations are specified for the allocation of Domain Name System (DNS) resource record types, CLASSes, operation codes, error codes, DNS protocol message header bits, and AFSDb resource record subtypes.

Table of Contents

Status of This Document.....	1
Abstract.....	1
1 . Introduction.....	3
1.1 Terminology.....	3
2 . DNS Query/Response Headers.....	4
2.1 One Spare Bit?.....	4
2.2 Opcode Assignment.....	5
2.3 RCODE Assignment.....	5
3 . DNS Resource Records.....	7
3.1 RRTYPE IANA Considerations.....	8
3.1.1 DNS RRTYPE Allocation Policy.....	9
3.1.2 DNS RRTYPE Expert Guidelines.....	10
3.1.3 Special Note on the OPT RR.....	10
3.1.4 The AFSDB RR Subtype Field.....	10
3.2 RR CLASS IANA Considerations.....	11
3.3 Label Considerations.....	13
3.3.1 Label Types.....	13
3.3.2 Label Contents and Use.....	13
4 . Security Considerations.....	14
5 . IANA Considerations.....	14
Annex A: RRTYPE Allocation Template.....	16
Additional IPR Provisions.....	18
Copyright.....	18
Normative References.....	19
Informative References.....	20
Author's Address.....	21

1. Introduction

The Domain Name System (DNS) provides replicated distributed secure hierarchical databases which store "resource records" (RRs) under domain names. DNS data is structured into CLASSes and zones which can be independently maintained. See [[RFC1034](#)], [[RFC1035](#)], [[RFC2136](#)], [[RFC2181](#)], and [[RFC4033](#)] familiarity with which is assumed.

This document provides, either directly or by reference, the general IANA parameter assignment considerations applying across DNS query and response headers and all RRs. There may be additional IANA considerations that apply to only a particular RRTYPE or query/response opcode. See the specific RFC defining that RRTYPE or query/response opcode for such considerations if they have been defined, except for AFSDb RR considerations [[RFC1183](#)] which are included herein. This RFC obsoletes [[RFC2929](#)].


IANA currently maintains a web page of DNS parameters. See [<http://www.iana.org/numbers.htm>](http://www.iana.org/numbers.htm).

1.1 Terminology

"IETF Standards Action", "IETF Review", "Specification Required", and "Private Use" are as defined in [[RFC5226](#)].

2. DNS Query/Response Headers

The header for DNS queries and responses contains field/bits in the following diagram taken from [\[RFC2136\]](#) and [\[RFC2929\]](#):

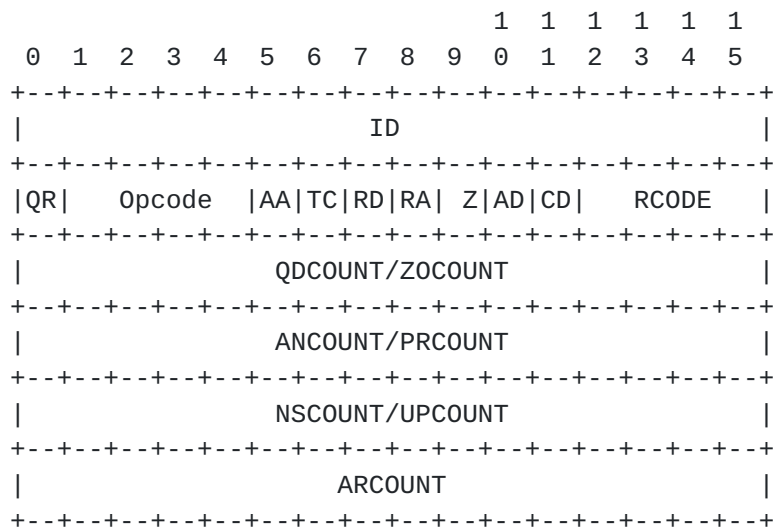

The ID field identifies the query and is echoed in the response so they can be matched.

The QR bit indicates whether the header is for a query or a response.

The AA, TC, RD, RA, AD, and CD bits are each theoretically meaningful only in queries or only in responses, depending on the bit. However, some DNS implementations copy the query header as the initial value of the response header without clearing bits. Thus any attempt to use a "query" bit with a different meaning in a response or to define a query meaning for a "response" bit is dangerous given existing implementation. Such meanings may only be assigned by an IETF Standards Action.

The unsigned integer fields query count (QDCOUNT), answer count (ANCOUNT), authority count (NSCOUNT), and additional information count (ARCOUNT) express the number of records in each section for all opcodes except Update [\[RFC2136\]](#). These fields have the same structure and data type for Update but are instead the counts for the zone (ZOCOUNT), prerequisite (PRCOUNT), update (UPCOUNT), and additional information (ARCOUNT) sections.

2.1 One Spare Bit?

There have been ancient DNS implementations for which the Z bit being on in a query meant that only a response from the primary server for

a zone is acceptable. It is believed that current DNS implementations

ignore this bit.

Assigning a meaning to the Z bit requires an IETF Standards Action.

2.2 Opcode Assignment

Currently DNS OpCodes are assigned as follows:

OpCode	Name	Reference
0	Query	[RFC1035]
1	IQuery (Inverse Query, Obsolete)	[RFC3425]
2	Status	[RFC1035]
3	available for assignment	
4	Notify	[RFC1996]
5	Update	[RFC2136]
6-15	available for assignment	

New OpCode assignments require an IETF Standards Action as modified by [[RFC4020](#)].

2.3 RCODE Assignment

It would appear from the DNS header above that only four bits of RCODE, or response/error code are available. However, RCODEs can appear not only at the top level of a DNS response but also inside OPT RRs [[RFC2671](#)], TSIG RRs [[RFC2845](#)], and TKEY RRs [[RFC2930](#)]. The OPT RR provides an eight-bit extension resulting in a 12-bit RCODE field and the TSIG and TKEY RRs have a 16-bit RCODE field.


Error codes appearing in the DNS header and in these three RR types all refer to the same error code space with the single exception of error code 16 which has a different meaning in the OPT RR from its meaning in other contexts. See table below.

RCODE	Name	Description	Reference
Decimal			
Hexadecimal			
0	NoError	No Error	[RFC1035]
1	FormErr	Format Error	[RFC1035]
2	ServFail	Server Failure	[RFC1035]
3	NXDomain	Non-Existent Domain	[RFC1035]
4	NotImp	Not Implemented	[RFC1035]
5	Refused	Query Refused	[RFC1035]
6	YXDomain	Name Exists when it should not	[RFC2136]
7	YXRRSet	RR Set Exists when it should not	[RFC2136]
8	NXRRSet	RR Set that should exist does not	[RFC2136]
9	NotAuth	Server Not Authoritative for zone	[RFC2136]
10	NotZone	Name not contained in zone	[RFC2136]
11 - 15		Available for assignment	
16	BADVERS	Bad OPT Version	[RFC2671]
16	BADSIG	TSIG Signature Failure	[RFC2845]
17	BADKEY	Key not recognized	[RFC2845]
18	BADTIME	Signature out of time window	[RFC2845]
19	BADMODE	Bad TKEY Mode	[RFC2930]
20	BADNAME	Duplicate key name	[RFC2930]
21	BADALG	Algorithm not supported	[RFC2930]
22	BADTRUC	Bad Truncation	[RFC4635]
23 - 3,840			
0x0017 - 0x0F00		Available for assignment	
3,841 - 4,095			
0x0F01 - 0x0FFF		Private Use	
4,096 - 65,534			
0x1000 - 0xFFFF		Available for assignment	
65,535			
0xFFFF		Reserved, can only be allocated by an IETF Standards Action.	

Since it is important that RCODEs be understood for interoperability, assignment of new RCODE listed above as "available for assignment" requires an IETF Review.

3. DNS Resource Records

All RRs have the same top-level format shown in the figure below taken from [\[RFC1035\]](#).

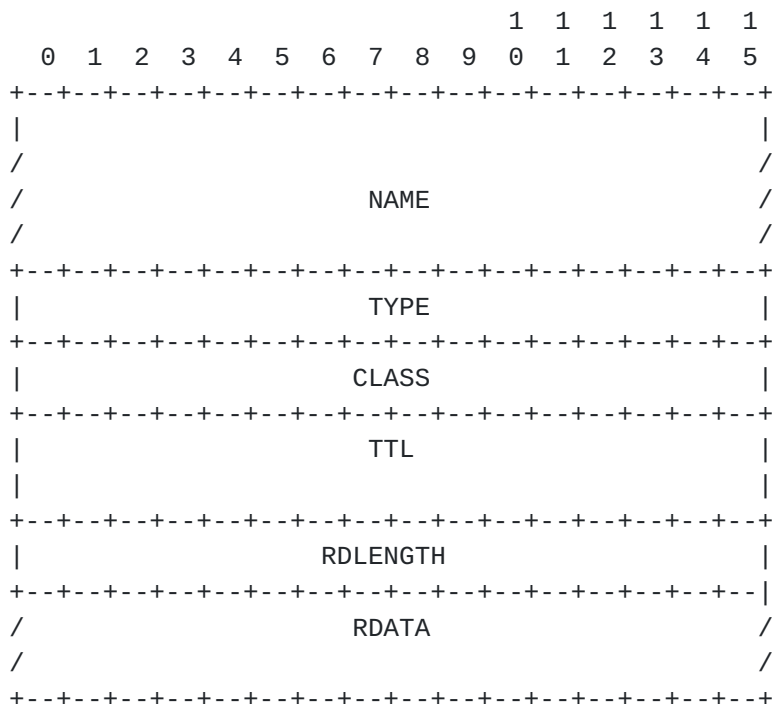

NAME is an owner name, i.e., the name of the node to which this resource record pertains. NAMES are specific to a CLASS as described in [section 3.2](#). NAMES consist of an ordered sequence of one or more labels each of which has a label type [\[RFC1035\]](#), [\[RFC2671\]](#).

TYPE is a two octet unsigned integer containing one of the RRTYPE codes. See [section 3.1](#).

CLASS is a two octet unsigned integer containing one of the RR CLASS codes. See [section 3.2](#).

TTL is a four octet (32 bit) unsigned integer that specifies, for data TYPES, the number of seconds that the resource record may be cached before the source of the information should again be consulted. Zero is interpreted to mean that the RR can only be used for the transaction in progress.

RDLENGTH is an unsigned 16-bit integer that specifies the length in octets of the RDATA field.

RDATA is a variable length string of octets that constitutes the resource. The format of this information varies according to the TYPE and in some cases the CLASS of the resource record.

3.1 RRTYPE IANA Considerations

There are three subcategories of RRTYPE numbers: data TYPES, QTYPES, and Meta-TYPES.

Data TYPES are the means of storing data. QTYPES can only be used in queries. Meta-TYPES designate transient data associated with a particular DNS message and in some cases can also be used in queries. Thus far, data TYPES have been assigned from 1 upward plus the block from 100 through 103 and from 32,768 upward, while Q and Meta-TYPES have been assigned from 255 downwards except for the OPT Meta-RR which is assigned TYPE 41. There have been DNS implementations which made caching decisions based on the top bit of the bottom byte of the RRTYPE.

There are currently three Meta-TYPES assigned: OPT [[RFC2671](#)], TSIG [[RFC2845](#)], and TKEY [[RFC2930](#)]. There are currently five QTYPES assigned: * (ALL), MAILA, MAILB, AXFR, and IXFR.

RRTYPES have mnemonics which must be completely disjoint from the mnemonics used for CLASSes and which must match the following regular expression:

[A-Z][A-Z0-9-]*

Considerations for the allocation of new RRTYPES are as follows:

Decimal

Hexadecimal

0

0x0000 - RRTYPE zero is used as a special indicator for the SIG RR [[RFC2931](#)], [[RFC4034](#)] and in other circumstances and must never be allocated for ordinary use.

1 - 127

0x0001 - 0x007F - remaining RRTYPES in this range are assigned for data TYPES by the DNS RRTYPE Allocation Policy as specified in [section 3.1.1](#).

128 - 255

0x0080 - 0x00FF - remaining RRTYPES in this range are assigned for Q and Meta TYPES by the DNS RRTYPE Allocation Policy as specified in [section 3.1.1](#).

256 - 61,439

0x0100 - 0xEFFF - remaining RRTYPES in this range are assigned for data RRTYPES by the DNS RRTYPE Allocation Policy as specified in [section 3.1.1](#). (32,768 and 32,769 (0x8000 and 0x8001) have

been assigned.)

D. Eastlake 3rd

[Page 8]

61,440 - 65,279
0xF000 - 0xFEFF - reserved for future use. IETF Review required to define use.

65,280 - 65,534
0xFF00 - 0xFFFE - Private Use.

65,535
0xFFFF - Reserved, can only be assigned by an IETF Standards Action.

3.1.1 DNS RRTYPE Allocation Policy

Parameter values specified in [Section 3.1](#) above as assigned based on DNS RRTYPE Allocation Policy are allocated by Expert Review if they meet the two requirements listed below. There will be a pool of a small number of Experts appointed by the IESG. Each application will be ruled on by an Expert selected by IANA. In any case where the selected Expert is unavailable or states they have a conflict of interest, IANA may select another Expert from the pool.

Some guidelines for the Experts are given in [Section 3.1.2](#). RRTYPES that do not meet the requirements below, may nonetheless be allocated by IETF Standards Action as modified by [[RFC4020](#)].

1. A complete template as specified in Annex A has been posted for three weeks to the TBD2@TBD mailing list before the Expert Review decision.
Note that partially completed or draft templates may be posted directly by the applicant for comment and discussion but the formal posting to start the three week period is made by the Expert.
2. The RR for which a RRTYPE code is being requested is either (a) a data TYPE which can be handled as an Unknown RR as described in [[RFC3597](#)] or (b) a Meta-Type whose processing is optional, i.e., it is safe to simply discard RRs with that Meta-Type in queries or responses.

Note that such RRs may include additional section processing provided such processing is optional.

No less than three weeks and no more than six weeks after a completed template has been formally posted to TBD2@TBD, the selected Expert shall post a message, explicitly accepting or rejecting the application, to IANA, TBD2@TBD, and the email address provided by the applicant. If the Expert does not post such a message, the application shall be considered rejected but may be re-submitted to IANA.

IANA shall maintain a public archive of approved templates.

3.1.2 DNS RRTYPE Expert Guidelines

The selected DNS RRTYPE Expert is required to monitor discussion of the proposed RRTYPE which may occur on the TBD2@TBD2 mailing list and may consult with other technical experts as necessary. The Expert should normally reject any RRTYPE allocation request which meets one or more of the following criterion:

1. Was documented in a manner that was not sufficiently clear to evaluate or implement.
2. Proposed RRTYPE or RRTYPEs affect DNS processing and do not meet the criteria in point 2 in [Section 3.1.1](#) above.
3. The documentation of the proposed RRTYPE or RRTYPEs is incomplete. (Additional documentation can be provided during the public comment period or by the Expert.)
4. Application use as documented makes incorrect assumptions about DNS protocol behavior, such as wild cards, CNAME, DNAME etc.
5. An excessive number of RRTYPE values is being requested when the purpose could be met with a smaller number or with Private Use values.

3.1.3 Special Note on the OPT RR

The OPT (OPTION) RR, RRTYPE 41, and its IANA Considerations are specified in [[RFC2671](#)]. Its primary purpose is to extend the effective field size of various DNS fields including RCODE, label type, OpCode, flag bits, and RDATA size. In particular, for resolvers and servers that recognize it, it extends the RCODE field from 4 to 12 bits.

3.1.4 The AFSDB RR Subtype Field

The AFSDB RR [[RFC1183](#)] is a CLASS insensitive RR that has the same RDATA field structure as the MX RR but the 16 bit unsigned integer field at the beginning of the RDATA is interpreted as a subtype as follows:

Decimal
Hexadecimal

0

0x0000 - Reserved, allocation requires IETF Standards Action.

1

0x0001 - Andrews File Service v3.0 Location Service [[RFC1183](#)].

2

0x0002 - DCE/NCA root cell directory node [[RFC1183](#)].

3 - 65,279

0x0003 - 0xFEFF - Allocation by IETF Review.

65,280 - 65,534

0xFF00 - 0xFFFE - Private Use.

65,535

0xFFFF - Reserved, allocation requires IETF Standards Action.

[3.2](#) RR CLASS IANA Considerations

There are currently two subcategories of DNS CLASSES: normal, data containing classes and QCLASSES that are only meaningful in queries or updates.

DNS CLASSES have been little used but constitute another dimension of the DNS distributed database. In particular, there is no necessary relationship between the name space or root servers for one data CLASS and those for another data CLASS. The same DNS NAME can have completely different meanings in different CLASSES. The label types are the same and the null label is usable only as root in every CLASS. As global networking and DNS have evolved, the IN, or Internet, CLASS has dominated DNS use.

As yet there has not been a requirement for "meta-CLASSES". That would be a CLASS to designate transient data associated with a particular DNS message and which might be usable in queries. However, it is possible that there might be a future requirement for one or more "meta-CLASSES".

CLASSES have mnemonics which must be completely disjoint from the mnemonics used for RRTYPES and which must match the following regular expression:

[A-Z][A-Z0-9-]*

The current CLASS assignments and considerations for future assignments are as follows:

Decimal
Hexadecimal

0

0x0000 - Reserved, assignment requires an IETF Standards Action.

1

0x0001 - Internet (IN).

2

0x0002 - Available for assignment by IETF Review as a data CLASS.

3

0x0003 - Chaos (CH) [[Moon1981](#)].

4

0x0004 - Hesiod (HS) [[Dyer1987](#)].

5 - 127

0x0005 - 0x007F - available for assignment by IETF Review for data CLASSes only.

128 - 253

0x0080 - 0x00FD - available for assignment by IETF Review for QCLASSes and meta-CLASSes only.

254

0x00FE - QCLASS NONE [[RFC2136](#)].

255

0x00FF - QCLASS * (ANY) [[RFC1035](#)].

256 - 32,767

0x0100 - 0x7FFF - Assigned by IETF Review.

32,768 - 57,343

0x8000 - 0xDFFF - Assigned for data CLASSes only based on Specification Required as defined in [[RFC5226](#)].

57,344 - 65,279

0xE000 - 0xFEFF - Assigned for QCLASSes and meta-CLASSes only based on Specification Required as defined in [[RFC5226](#)].

65,280 - 65,534

0xFF00 - 0xFFFE - Private Use.

65,535

0xFFFF - Reserved, can only be assigned by an IETF Standards Action.

3.3 Label Considerations

DNS NAMES are sequences of labels [[RFC1035](#)].

3.3.1 Label Types

At the present time, there are two categories of label types, data labels and compression labels. Compression labels are pointers to data labels elsewhere within an RR or DNS message and are intended to shorten the wire encoding of NAMES.

The two existing data label types are sometimes referred to as Text and Binary. Text labels can, in fact, include any octet value including zero value octets but many current uses involve only [US-ASCII]. For retrieval, Text labels are defined to treat ASCII upper and lower case letter codes as matching [[RFC4343](#)]. Binary labels are bit sequences [[RFC2673](#)]. The Binary label type is Experimental [[RFC3363](#)].

IANA considerations for label types are given in [[RFC2671](#)].

3.3.2 Label Contents and Use

The last label in each NAME is "ROOT" which is the zero length label. By definition, the null or ROOT label cannot be used for any other NAME purpose.

NAMES are local to a CLASS. The Hesiod [[Dyer1987](#)] and Chaos [[Moon1981](#)] CLASSES are for essentially local use. The IN or Internet CLASS is thus the only DNS CLASS in global use on the Internet at this time.

A somewhat out-of-date description of name allocation in the IN Class is given in [[RFC1591](#)]. Some information on reserved top level domain names is in [BCP 32](#) [[RFC2606](#)].

4. Security Considerations

This document addresses IANA considerations in the allocation of general DNS parameters, not security. See [[RFC4033](#)], [[RFC4034](#)], and [[RFC4035](#)] for secure DNS considerations.

5. IANA Considerations

This document consists entirely of DNS IANA Considerations and includes the following changes from its predecessor [[RFC2929](#)]. It affects the registry currently at <http://www.iana.org/assignments/dns-parameters> and its subregistries.

1. In the Domain Name System "Resource record (RR) TYPES and QTYPES" registry, it changes most "IETF Consensus" and all "Specification Required" allocation policies for RRTYPES to be "DNS TYPE Allocation Policy" and changes the policy for RRTYPE 0xFFFF to be "IETF Standards Action". Remaining instances of "IETF Consensus" are changed to "IETF Review" per [[RFC5226](#)]. It also specifies the "DNS TYPE Allocation Policy" which is based on Expert Review with additional provisions and restrictions, including the submittal of a completed copy of the template in Annex A to TBD1@TBD, in most cases, and requires "IETF Standards Action as modified by [[RFC4020](#)]" in other cases.

IANA shall establish a process for accepting such templates, selecting an Expert from those appointed to review such template form applications, and archive and make available all approved RRTYPE allocation templates. It is the duty of the selected Expert to post the formal application template to the TBD2@TBD mailing list. See [Section 3.1](#) and Annex A for more details.

< Note to IANA/IESG/RFC Editor: An email address for the formal submission of RR Type allocation templates and a email address for the discussion of RR Type allocations will be decided and the mailing lists created. All occurrences of TBD1@TBD in this document will be replaced by the formal submission email address. All occurrences of TBD2@TBD in this document will be replaced by the discussion email address. This note is to be deleted before publication. >

2. For Opcodes (see [Section 2.2](#)), it changes "IETF Standards Action" allocation requirements to add "as modified by [[RFC4020](#)]".
3. It changes the allocation status of RCODE 0xFFFF to be IETF Standards Action required. See [Section 2.3](#).

4. It adds an IANA allocation policy for the AFSDb RR Subtype field

D. Eastlake 3rd

[Page 14]

which requires the creation of a new registry. See [Section 3.1.4](#).

5. It splits Specification Required CLASSES into data CLASSES and query or meta CLASSES. See [Section 3.2](#).

Annex A: RRTYPE Allocation Template

DNS RRTYPE PARAMETER ALLOCATION TEMPLATE

When ready for formal consideration, this template is to be submitted to IANA for processing by emailing the template to TBD1@TBD.

- A. Submission Date:
- B. Submission Type:
 - ☐ New RRTYPE
 - ☐ Modification to existing RRTYPE
- C. Contact Information for submitter:
 - Name:
 - Email Address:
 - International telephone number:
 - Other contact handles:

(Note: This information will be publicly posted)
- D. Motivation for the new RRTYPE application?
Please keep this part at a high level to inform the Expert and reviewers about uses of the RRTYPE. Remember most reviewers will be DNS experts that may have limited knowledge of your application space.
- E. Description of the proposed RR type.
This description can be provided in-line in the template, as an attachment or with a publicly available URL:
- F. What existing RRTYPE or RRTYPEs come closest to filling that need and why are they unsatisfactory?
- G. What mnemonic is requested for the new RRTYPE (optional)?
Note: this can be left blank and the mnemonic decided after the template is accepted.
- H. Does the requested RRTYPE make use of any existing IANA Registry or require the creation of a new IANA Sub-registry and in DNS Parameters?
If so, please indicate which registry is to be used or created.

If a new sub-registry is needed, specify the allocation policy

D. Eastlake 3rd

[Page 16]

for it and initial contents. Also include what the modification procedures will be.

- I. Does the proposal require/expect any changes in DNS servers/resolvers that prevent the new type from being processed as an unknown RRTYPE (see [[RFC3597](#)])?
- J. Comments:

Additional IPR Provisions

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at ietf-ipr@ietf.org.

Copyright

Copyright (C) The IETF Trust (2008).

This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

Normative References

- [RFC1034] - Mockapetris, P., "Domain Names - Concepts and Facilities", STD 13, [RFC 1034](#), November 1987.
- [RFC1035] - Mockapetris, P., "Domain Names - Implementation and Specifications", STD 13, [RFC 1035](#), November 1987.
- [RFC1996] - Vixie, P., "A Mechanism for Prompt Notification of Zone Changes (DNS NOTIFY)", [RFC 1996](#), August 1996.
- [RFC2136] - Vixie, P., Thomson, S., Rekhter, Y. and J. Bound, "Dynamic Updates in the Domain Name System (DNS UPDATE)", [RFC 2136](#), April 1997.
- [RFC2181] - Elz, R. and R. Bush, "Clarifications to the DNS Specification", [RFC 2181](#), July 1997.
- [RFC2671] - Vixie, P., "Extension mechanisms for DNS (EDNS0)", [RFC 2671](#), August 1999.
- [RFC2845] - Vixie, P., Gudmundsson, O., Eastlake, D. and B. Wellington, "Secret Key Transaction Authentication for DNS (TSIG)", [RFC 2845](#), May 2000.
- [RFC2930] - Eastlake, D., "Secret Key Establishment for DNS (TKEY RR)", September 2000.
- [RFC3425] - Lawrence, D., "Obsoleting IQUERY", [RFC 3425](#), November 2002.
- [RFC3597] - Gustafsson, A., "Handling of Unknown DNS Resource Record (RR) Types", [RFC 3597](#), September 2003.
- [RFC4020] - Kompella, K. and A. Zinin, "Early IANA Allocation of Standards Track Code Points", [BCP 100](#), [RFC 4020](#), February 2005.
- [RFC4033] - Arends, R., Austein, R., Larson, M., Massey, D., and S. Rose, "DNS Security Introduction and Requirements", [RFC 4033](#), March 2005.
- [RFC4034] - Arends, R., Austein, R., Larson, M., Massey, D., and S. Rose, "Resource Records for the DNS Security Extensions", [RFC 4034](#), March 2005.
- [RFC4035] - Arends, R., Austein, R., Larson, M., Massey, D., and S. Rose, "Protocol Modifications for the DNS Security Extensions", [RFC 4035](#), March 2005.

Code, Secure Hash Algorithm) TSIG Algorithm Identifiers".

[RFC5226] - Narten, T. and H. Alvestrand, "Guidelines for Writing an IANA Considerations Section in RFCs", [BCP 26](#), [RFC 5226](#), May 2008.

[US-ASCII] - ANSI, "USA Standard Code for Information Interchange", X3.4, American National Standards Institute: New York, 1968.

Informative References

[Dyer1987] - Dyer, S., and F. Hsu, "Hesiod", Project Athena Technical Plan - Name Service, April 1987,

[Moon1981] - D. Moon, "Chaosnet", A.I. Memo 628, Massachusetts Institute of Technology Artificial Intelligence Laboratory, June 1981.

[RFC1183] - Everhart, C., Mamakos, L., Ullmann, R., and P. Mockapetris, "New DNS RR Definitions", [RFC 1183](#), October 1990.

[RFC1591] - Postel, J., "Domain Name System Structure and Delegation", [RFC 1591](#), March 1994.

[RFC2606] - Eastlake, D. and A. Panitz, "Reserved Top Level DNS Names", [RFC 2606](#), June 1999.

[RFC2673] - Crawford, M., "Binary Labels in the Domain Name System", [RFC 2673](#), August 1999.

[RFC2929] - Eastlake 3rd, D., Brunner-Williams, E., and B. Manning, "Domain Name System (DNS) IANA Considerations", [BCP 42](#), [RFC 2929](#), September 2000.

[RFC2931] - Eastlake, E., "DNS Request and Transaction Signatures (SIG(0)s)", [RFC 2931](#), September 2000.

[RFC3363] - Bush, R., Durand, A., Fink, B., Gudmundsson, O., and T. Hain, "Representing Internet Protocol version 6 (IPv6) Addresses in the Domain Name System (DNS)", [RFC 3363](#), August 2002.

[RFC4343] - Eastlake, D., "Domain Name System (DNS) Case Insensitivity Clarification", [RFC 4343](#), December 2005.

Author's Address

Donald E. Eastlake 3rd
Eastlake Enterprises
155 Beaver Street
Milford, MA 01757 USA

Telephone: +1-508-634-2066 (h)
email: d3e3e3@gmail.com

Expiration and File Name

This draft expires January 2009.

Its file name is [draft-ietf-dnsext-2929bis-07.txt](#).

Disclaimer

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY, THE IETF TRUST AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

