

DNS Extensions Working Group
Internet-Draft
Intended status: Standards Track
Expires: December 16, 2012

S. Crocker
Shinkuro Inc.
S. Rose
NIST
June 14, 2012

Signaling Cryptographic Algorithm Understanding in DNSSEC
draft-ietf-dnsexp-dnssec-algo-signal-07

Abstract

The DNS Security Extensions (DNSSEC) were developed to provide origin authentication and integrity protection for DNS data by using digital signatures. These digital signatures can be generated using different algorithms. This draft sets out to specify a way for validating end-system resolvers to signal to a server which digital signature and hash algorithms they support.

Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on December 16, 2012.

Copyright Notice

Copyright (c) 2012 IETF Trust and the persons identified as the document authors. All rights reserved.

Internet-Draft

Algorithm-Signal

June 2012

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	3
2.	Signaling DNSSEC Algorithm Understood (DAU), DS Hash Understood (DHU) and NSEC3 Hash Understood (N3U) Using EDNS . .	3
3.	Client Considerations	5
3.1.	Stub Resolvers	5
3.1.1.	Validating Stub Resolvers	5
3.1.2.	Non-Validating Stub Resolvers	5
3.2.	Recursive Resolvers	5
3.2.1.	Validating Recursive Resolvers	5
3.2.2.	Non-validating Recursive Resolvers	6
4.	Intermediate System Considerations	6
5.	Server Considerations	6
6.	Traffic Analysis Considerations	6
7.	IANA Considerations	7
8.	Security Considerations	7
9.	Normative References	7

1. Introduction

The DNS Security Extensions (DNSSEC) [[RFC4033](#)], [[RFC4034](#)] and [[RFC4035](#)] were developed to provide origin authentication and integrity protection for DNS data by using digital signatures. Each digital signature RR (RRSIG) contains an algorithm code number. These algorithm codes tell validators which cryptographic algorithm was used to generate the digital signature.

Likewise, Delegation Signer (DS) RRs and NSEC3 RRs use a hashed value as part of their RDATA and, like digital signature algorithms, these hash algorithms have code numbers. All three algorithm codes (RRSIG/DNSKEY, DS and NSEC3) are maintained in unique IANA registries.

This draft sets out to specify a way for validating end-system resolvers to tell a server in a DNS query which digital signature and/or hash algorithms they support. This is done using the new EDNS options specified below in [Section 2](#) for use in the OPT meta-RR [[I-D.ietf-dnsext-rfc2671bis-edns0](#)].

These proposed EDNS options serve to measure the acceptance and use of new digital signing algorithms. These signaling options can be used by zone administrators as a gauge to measure the successful deployment of code that implements newly deployed digital signature algorithm, DS hash and NSEC3 hash algorithm used with DNSSEC. A zone administrator is able to determine when to stop signing with a superseded algorithm when the server sees that a significant number of its clients signal that they are able to accept the new algorithm. Note that this survey may be conducted over the period of years before a tipping point is seen.

This draft does not seek to introduce another process for including new algorithms for use with DNSSEC. It also does not address the question of which algorithms are to be included in any official list of mandatory or recommended cryptographic algorithms for use with DNSSEC. Rather, this document specifies a means by which a client


query can signal the set of algorithms and hashes which it implements.

2. Signaling DNSSEC Algorithm Understood (DAU), DS Hash Understood (DHU) and NSEC3 Hash Understood (N3U) Using EDNS

The EDNS0 specification outlined in [\[I-D.ietf-dnsext-rfc2671bis-edns0\]](#) defines a way to include new options using a standardized mechanism. These options are contained in the RDATA of the OPT meta-RR. This document defines three new EDNS options for a client to signal which digital signature and/or hash algorithms the client supports. These options can be used

independently of each other and MAY appear in any order in the OPT RR.

The figure below shows how each option is defined in the RDATA of the OPT RR specified in [\[I-D.ietf-dnsext-rfc2671bis-edns0\]](#):

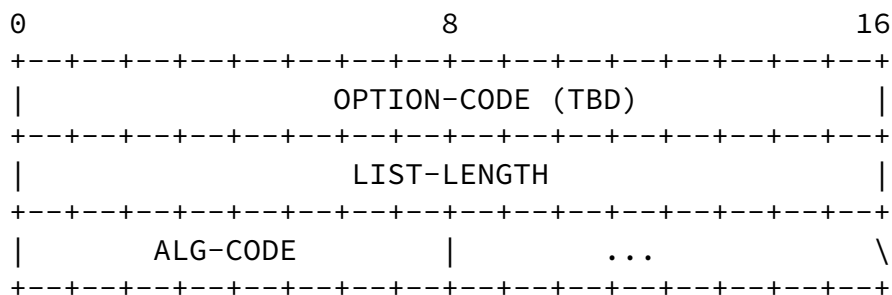

OPTION-CODE is the code for the given signaling option. They are:

- o DNSSEC Algorithm Understood (DAU) option for DNSSEC digital signing algorithms. Its value is fixed at TBD1.
- o DS Hash Understood (DHU) option for DS RR hash algorithms. Its value is fixed at TBD2.
- o NSEC3 Hash Understood (N3U) option for NSEC3 hash algorithms. Its value is fixed at TBD3.

LIST-LENGTH is the length of the list of digital signature or hash algorithm codes in octets. Each algorithm code occupies a single

octet.

ALG-CODE is the list of assigned values of DNSSEC zone signing algorithms, DS hash algorithms, or NSEC3 hash algorithms (depending on the OPTION-CODE in use) that the client declares to be supported. The values are listed in descending order of preference, with the most preferred algorithm first. For example, if a validating client signals the DAU option and RSA/SHA-1, RSA/SHA-256 and prefers the latter, the values of ALG-CODE would be: 8 (RSA/SHA-256), 5 (RSA/SHA-1).

If all three options are included in the OPT RR, there is a potential for the OPT RR to take up considerable size in the DNS message. However, in practical terms, including all three options is likely to take up 22-32 octets (average of 6-10 digital signature algorithms, 3-5 DS hash algorithms and 1-5 NSEC3 hash algorithms) including the EDNS option codes and option lengths in a potential future example.

[3.](#) Client Considerations

A validating end-system resolver sets the DAU, DHU and/or N3U option, or combination thereof in the OPT meta-RR when sending a query. The validating end-system resolver sets the value(s) in the order of preference, with the most preferred algorithm(s) first as described in [section 2](#). The validating end-system resolver MUST also set the DNSSEC-OK bit [[RFC4035](#)] to indicate that it wishes to receive DNSSEC RRs in the response.

Note that the PRIVATEDNS (253) and/or the PRIVATEOID (254) digital signature codes both cover a potentially wide range of algorithms and are likely not useful to a server. There is no compelling reason for a client to include these codes in its list of the DAU. Likewise, clients MUST NOT include RESERVED codes in any of the options.

[3.1.](#) Stub Resolvers

Typically, stub resolvers rely on an upstream recursive server (or cache) to provide a response. So optimal setting of the DAU, DSU and N3U options depends on whether the stub resolver elects to perform its own validation.

[3.1.1.](#) Validating Stub Resolvers

A validating stub resolver already (usually) sets the DO bit [[RFC4035](#)] to indicate that it wishes to receive additional DNSSEC RRs (i.e. RRSIG RRs) in the response. Such validating resolvers SHOULD include the DAU, DHU and/or the N3U option(s) in the OPT RR when sending a query. The way the validating stub resolver indicates which cryptographic algorithm(s) it supports by setting the values in the order of preference, with the most preferred algorithm first as described in [Section 2](#).

[3.1.2.](#) Non-Validating Stub Resolvers

The DAU, DHU and N3U EDNS options are NOT RECOMMENDED for non-validating stub resolvers.

[3.2.](#) Recursive Resolvers

[3.2.1.](#) Validating Recursive Resolvers

A validating recursive resolver sets the DAU, DHU and/or N3U option(s) when performing recursion based on the DO and CD flags in the client request [[RFC4035](#)]. If the client of the recursive resolver did not include the DO bit in the query the recursive resolver MAY include the option(s) according to its own local policy.

If the client did include the DO and CD bits, but did not include the DAU, DHU and/or N3U option(s) in the query, the validating recursive resolver MUST NOT include the option(s) to avoid conflicts.

If the client did set the DO bit and the option(s) in the query, the validating recursive resolver MUST include the option(s) based on the setting of the CD bit. If the CD bit is set, the validating recursive resolver MUST include the option(s) based on the client query or a superset of the client option(s) list and the validator's own list (if different). If the CD bit is not set, the validating recursive resolver MAY copy the client option(s) or substitute its own option list.

[3.2.2.](#) Non-validating Recursive Resolvers

Recursive resolvers that do not do validation MUST copy the DAU, DHU and/or N3U option(s) seen in received queries as they represent the wishes of the validating downstream resolver that issued the original query.

4. Intermediate System Considerations

Intermediate proxies [[RFC5625](#)] that understand DNS are RECOMMENDED to behave like a comparable recursive resolver when dealing with the DAU, DHU and N3U options.

5. Server Considerations

When an authoritative server sees the DAU, DHU and/or N3U option(s) in the OPT meta-RR in a request the normal algorithm for servicing requests is followed. The options MUST NOT trigger any special processing (e.g. RRSIG filtering in responses) on the server side.

If the options are present but the DNSSEC-OK (OK) bit is not set, the server does not do any DNSSEC processing, including any recording of the option(s).

6. Traffic Analysis Considerations

Zone administrators that are planning or are in the process of a cryptographic algorithm rollover operation should monitor DNS query traffic and record the number of queries, the presence of the OPT RR in queries and the values of the DAU/DHU/N3U option(s) (if present). This monitoring can be used to measure the deployment of client code that implements (and signals) specific algorithms. Description of the techniques used to capture DNS traffic and measure new algorithm adoption is beyond the scope of this document.

Zone administrators that need to comply with changes to their organization's security policy (with regards to cryptographic algorithm use) can use this data to set milestone dates for performing an algorithm rollover. For example, zone administrators can use the data to determine when older algorithms can be phased out without disrupting a significant number of clients. In order to keep this disruption to a minimum, zone administrators should wait to complete an algorithm rollover until a large majority of clients

signal that they recognize the new algorithm. This may be in the order of years rather than months.

Note that clients that do not implement these options are likely to be older implementations which would also not implement any newly deployed algorithm.

[7.](#) IANA Considerations

The algorithm codes used to identify DNSSEC algorithms, DS RR hash algorithms and NSEC3 hash algorithms have already been established by IANA. This document does not seek to alter that registry in any way.

This draft seeks to update the "DNS EDNS Options" registry by adding the DAU, DHU and N3U options and referencing this document. The code for these options are TBD1, TBD2 and TBD3 respectively.

[8.](#) Security Considerations

This document specifies a way for a client to signal its digital signature and hash algorithm knowledge to a cache or server. It is not meant to be a discussion on algorithm superiority. The signals are optional codes contained in the OPT meta-RR used with EDNS. The goal of these options are to signal new algorithm uptake in client code to allow zone administrators to know when it is possible to complete an algorithm rollover in a DNSSEC signed zone.

[9.](#) Normative References

- [I-D.ietf-dnsext-rfc2671bis-edns0] Damas, J., Graff, M., and P. Vixie, "Extension Mechanisms for DNS (EDNS0)", [draft-ietf-dnsext-rfc2671bis-edns0-08](#) (work in progress), February 2012.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.

M., Massey, D., and S. Rose, "DNS Security Introduction and Requirements", [RFC 4033](#), March 2005.

[RFC4034]

Arends, R., Austein, R., Larson, M., Massey, D., and S. Rose, "Resource Records for the DNS Security Extensions", [RFC 4034](#), March 2005.

[RFC4035]

Arends, R., Austein, R., Larson, M., Massey, D., and S. Rose, "Protocol Modifications for the DNS Security Extensions", [RFC 4035](#), March 2005.

[RFC5625]

Bellis, R., "DNS Proxy Implementation Guidelines", [BCP 152](#), [RFC 5625](#), August 2009.

Authors' Addresses

Steve Crocker
Shinkuro Inc.
5110 Edgemoor Lane
Bethesda, MD 20814
USA

E-Mail: steve@shinkuro.com

Scott Rose
NIST
100 Bureau Dr.
Gaithersburg, MD 20899
USA

Phone: +1-301-975-8439
E-Mail: scottr.nist@gmail.com