

**RTP Payload Format for 1-D Interleaved Parity FEC**  
**draft-ietf-fecframe-interleaved-fec-scheme-03**

Status of this Memo

This Internet-Draft is submitted to IETF in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on October 20, 2009.

Copyright Notice

Copyright (c) 2009 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents in effect on the date of publication of this document (<http://trustee.ietf.org/license-info>). Please review these documents carefully, as they describe your rights and restrictions with respect to this document.

Abstract

This document defines a new RTP payload format for the Forward Error Correction (FEC) that is generated by the 1-D interleaved parity code from a source media encapsulated in RTP. The 1-D interleaved parity

code is a systematic code, where a number of repair symbols are generated from a set of source symbols and sent in a repair flow separate from the source flow that carries the source symbols. The 1-D interleaved parity code offers a good protection against bursty packet losses at a cost of decent complexity. The new payload format defined in this document is used (with some exceptions) as a part of the DVB Application-layer FEC specification.

## Table of Contents

<a href="#">1.</a>	<a href="#">Introduction</a>	<a href="#">4</a>
<a href="#">1.1.</a>	<a href="#">Use Cases</a>	<a href="#">6</a>
<a href="#">1.2.</a>	<a href="#">Overhead Computation</a>	<a href="#">8</a>
<a href="#">1.3.</a>	<a href="#">Relation to Existing Specifications</a>	<a href="#">8</a>
<a href="#">1.3.1.</a>	<a href="#">RFC 2733 and RFC 3009</a>	<a href="#">8</a>
<a href="#">1.3.2.</a>	<a href="#">SMPTE 2022-1</a>	<a href="#">8</a>
<a href="#">1.3.3.</a>	<a href="#">ETSI TS 102 034</a>	<a href="#">9</a>
<a href="#">2.</a>	<a href="#">Requirements Notation</a>	<a href="#">10</a>
<a href="#">3.</a>	<a href="#">Definitions, Notations and Abbreviations</a>	<a href="#">10</a>
<a href="#">3.1.</a>	<a href="#">Definitions</a>	<a href="#">10</a>
<a href="#">3.2.</a>	<a href="#">Notations</a>	<a href="#">10</a>
<a href="#">3.3.</a>	<a href="#">Abbreviations</a>	<a href="#">11</a>
<a href="#">4.</a>	<a href="#">Packet Formats</a>	<a href="#">11</a>
<a href="#">4.1.</a>	<a href="#">Source Packets</a>	<a href="#">11</a>
<a href="#">4.2.</a>	<a href="#">Repair Packets</a>	<a href="#">11</a>
<a href="#">5.</a>	<a href="#">Payload Format Parameters</a>	<a href="#">15</a>
<a href="#">5.1.</a>	<a href="#">Media Type Registration</a>	<a href="#">15</a>
<a href="#">5.1.1.</a>	<a href="#">Registration of audio/1d-interleaved-parityfec</a>	<a href="#">15</a>
<a href="#">5.1.2.</a>	<a href="#">Registration of video/1d-interleaved-parityfec</a>	<a href="#">16</a>
<a href="#">5.1.3.</a>	<a href="#">Registration of text/1d-interleaved-parityfec</a>	<a href="#">18</a>
<a href="#">5.1.4.</a>	<a href="#">Registration of application/1d-interleaved-parityfec</a>	<a href="#">19</a>
<a href="#">5.2.</a>	<a href="#">Mapping to SDP Parameters</a>	<a href="#">20</a>
<a href="#">5.2.1.</a>	<a href="#">Offer-Answer Model Considerations</a>	<a href="#">21</a>
<a href="#">5.2.2.</a>	<a href="#">Declarative Considerations</a>	<a href="#">21</a>
<a href="#">6.</a>	<a href="#">Protection and Recovery Procedures</a>	<a href="#">22</a>
<a href="#">6.1.</a>	<a href="#">Overview</a>	<a href="#">22</a>
<a href="#">6.2.</a>	<a href="#">Repair Packet Construction</a>	<a href="#">22</a>
<a href="#">6.3.</a>	<a href="#">Source Packet Reconstruction</a>	<a href="#">24</a>
<a href="#">6.3.1.</a>	<a href="#">Associating the Source and Repair Packets</a>	<a href="#">24</a>
<a href="#">6.3.2.</a>	<a href="#">Recovering the RTP Header and Payload</a>	<a href="#">25</a>
<a href="#">7.</a>	<a href="#">Session Description Protocol (SDP) Signaling</a>	<a href="#">26</a>
<a href="#">8.</a>	<a href="#">Congestion Control Considerations</a>	<a href="#">27</a>
<a href="#">9.</a>	<a href="#">Security Considerations</a>	<a href="#">28</a>
<a href="#">10.</a>	<a href="#">IANA Considerations</a>	<a href="#">28</a>
<a href="#">11.</a>	<a href="#">Acknowledgments</a>	<a href="#">28</a>
<a href="#">12.</a>	<a href="#">Change Log</a>	<a href="#">28</a>
<a href="#">12.1.</a>	<a href="#">draft-ietf-fecframe-interleaved-fec-scheme-03</a>	<a href="#">28</a>
<a href="#">12.2.</a>	<a href="#">draft-ietf-fecframe-interleaved-fec-scheme-02</a>	<a href="#">29</a>
<a href="#">12.3.</a>	<a href="#">draft-ietf-fecframe-interleaved-fec-scheme-01</a>	<a href="#">29</a>
<a href="#">12.4.</a>	<a href="#">draft-ietf-fecframe-interleaved-fec-scheme-00</a>	<a href="#">29</a>
<a href="#">13.</a>	<a href="#">References</a>	<a href="#">29</a>
<a href="#">13.1.</a>	<a href="#">Normative References</a>	<a href="#">29</a>
<a href="#">13.2.</a>	<a href="#">Informative References</a>	<a href="#">30</a>
	<a href="#">Author's Address</a>	<a href="#">31</a>

Begen

Expires October 20, 2009

[Page 3]

## **1. Introduction**

This document extends the Forward Error Correction (FEC) header defined in [[RFC2733](#)] and uses this new FEC header for the FEC that is generated by the 1-D interleaved parity code from a source media encapsulated in RTP [[RFC3550](#)]. The resulting new RTP payload format is registered by this document.

The type of the source media protected by the 1-D interleaved parity code can be audio, video, text or application. The FEC data are generated according to the media type parameters that are communicated through out-of-band means. The associations/relationships between the source and repair flows are also communicated through out-of-band means.

The 1-D interleaved parity FEC uses the exclusive OR (XOR) operation to generate the repair symbols. In a nutshell, the following steps take place:

1. The sender determines a set of source packets to be protected together based on the media type parameters.
2. The sender applies the XOR operation on the source symbols to generate the required number of repair symbols.
3. The sender packetizes the repair symbols and sends the repair packet(s) along with the source packets to the receiver(s) (in different flows). The repair packets MAY be sent proactively or on-demand.

Note that the sender MUST transmit the source and repair packets in different source and repair flows, respectively to offer backward compatibility (See [Section 4](#)). At the receiver side, if all of the source packets are successfully received, there is no need for FEC recovery and the repair packets are discarded. However, if there are missing source packets, the repair packets can be used to recover the missing information. Block diagrams for the systematic parity FEC encoder and decoder are sketched in Figure 1 and Figure 2, respectively.

Begen

Expires October 20, 2009

[Page 4]

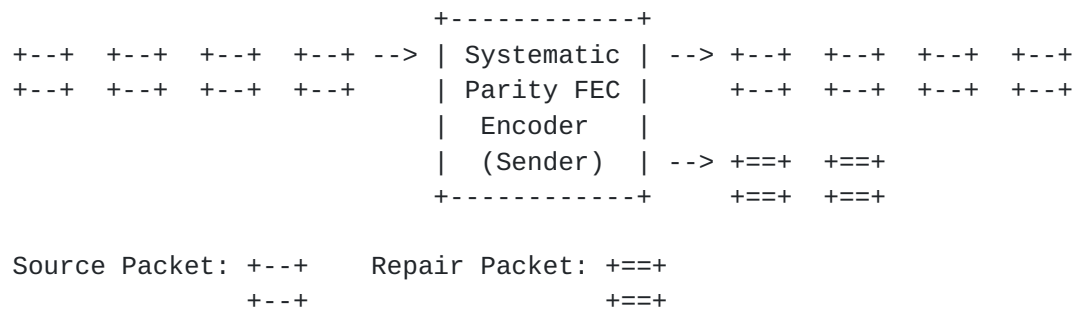


Figure 1: Block diagram for systematic parity FEC encoder

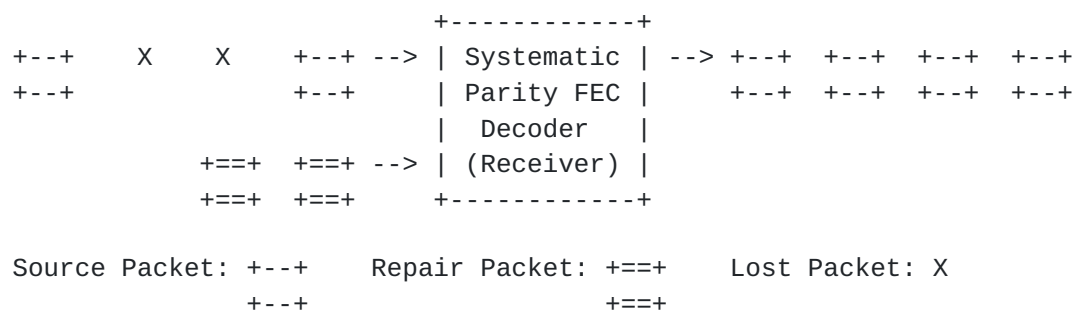


Figure 2: Block diagram for systematic parity FEC decoder

Suppose that we have a group of  $D \times L$  source packets that have sequence numbers starting from 1 running to  $D \times L$ . If we apply the XOR operation to the group of the source packets whose sequence numbers are  $L$  apart from each other as sketched in Figure 3, we generate  $L$  repair packets. This process is referred to as 1-D interleaved FEC protection, and the resulting  $L$  repair packets are referred to as interleaved (or column) FEC packets.





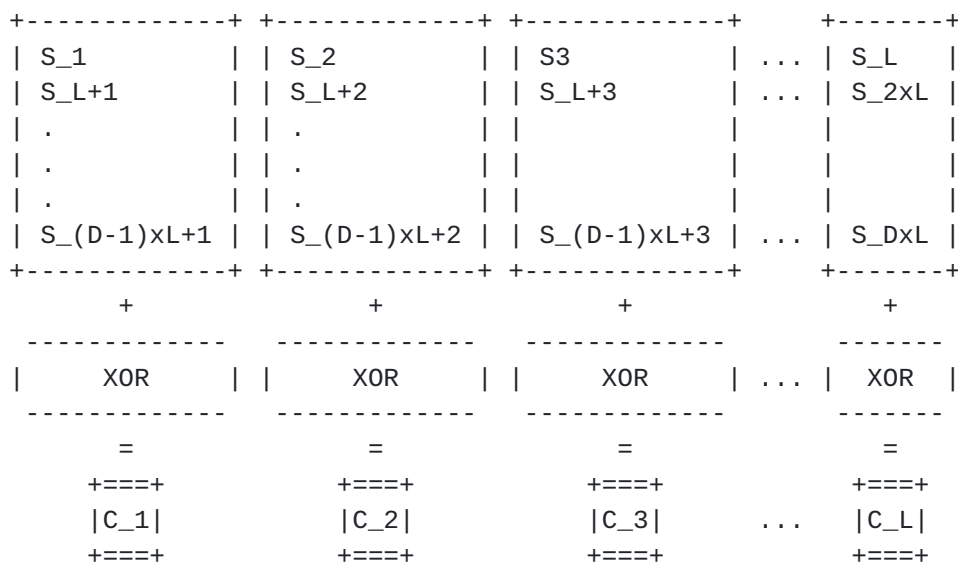


Figure 3: Generating interleaved (column) FEC packets

In Figure 3,  $S_n$  and  $C_m$  denote the source packet with a sequence number  $n$  and the interleaved (column) FEC packet with a sequence number  $m$ , respectively.

### 1.1. Use Cases

We generate one interleaved FEC packet out of  $D$  non-consecutive source packets. This repair packet can provide a full recovery of the missing information if there is only one packet missing among the corresponding source packets. This implies that 1- $D$  interleaved FEC protection performs well under bursty loss conditions provided that  $L$  is chosen large enough, i.e.,  $L$ -packet duration SHOULD NOT be shorter than the duration of the burst that is intended to be repaired.

For example, consider the scenario depicted in Figure 4 where the sender generates interleaved FEC packets and a bursty loss hits the source packets. Since the number of columns is larger than the number of packets lost due to the bursty loss, the repair operation succeeds.

Begen

Expires October 20, 2009

[Page 6]

```

+---+
| 1 |   X       X       X
+---+

+---+ +---+ +---+ +---+
| 5 | | 6 | | 7 | | 8 |
+---+ +---+ +---+ +---+

+---+ +---+ +---+ +---+
| 9 | | 10| | 11| | 12|
+---+ +---+ +---+ +---+

+====+ +====+ +====+ +====+
|C_1| |C_2| |C_3| |C_4|
+====+ +====+ +====+ +====+

```

Figure 4: Example scenario where 1-D interleaved FEC protection succeeds error recovery

The sender may generate interleaved FEC packets to combat with the bursty packet losses. However, two or more random packet losses may hit the source and repair packets in the same column. In that case, the repair operation fails. This is illustrated in Figure 5. Note that it is possible that two or more bursty losses may occur in the same source block, in which case interleaved FEC packets may still fail to recover the lost data.

```

+---+      +---+ +---+
| 1 |   X   | 3 | | 4 |
+---+      +---+ +---+

+---+      +---+ +---+
| 5 |   X   | 7 | | 8 |
+---+      +---+ +---+

+---+ +---+ +---+ +---+
| 9 | | 10| | 11| | 12|
+---+ +---+ +---+ +---+

+====+ +====+ +====+ +====+
|C_1| |C_2| |C_3| |C_4|
+====+ +====+ +====+ +====+

```

Figure 5: Example scenario where 1-D interleaved FEC protection fails error recovery



## **1.2.    Overhead Computation**

The overhead is defined as the ratio of the number of bytes belonging to the repair packets to the number of bytes belonging to the protected source packets.

Assuming that each repair packet carries an equal number of bytes carried by a source packet, we can compute the overhead as follows:

$$\text{Overhead} = 1/D$$

where D is the number of rows in the source block.

## **1.3.    Relation to Existing Specifications**

This section discusses the relation of the current specification to other existing specifications.

### **1.3.1.    [RFC 2733](#) and [RFC 3009](#)**

The current specification extends the FEC header defined in [[RFC2733](#)] and registers a new RTP payload format. This new payload format is not backward compatible with the payload format that was registered by [[RFC3009](#)].

### **1.3.2.    SMPTE 2022-1**

In 2007, the Society of Motion Picture and Television Engineers (SMPTE) - Technology Committee N26 on File Management and Networking Technology - decided to revise the Pro-MPEG Code of Practice (CoP) #3 Release 2 specification, which (was initially produced by the Pro-MPEG Forum in 2004) discussed the several aspects of the transmission of MPEG-2 transport streams over IP networks. The new SMPTE specification is referred to as [[SMPTE2022-1](#)].

The Pro-MPEG CoP #3 r2 document was originally based on [[RFC2733](#)]. SMPTE revised the document by extending the FEC header (by setting the E bit) proposed in [[RFC2733](#)]. This extended header offers some improvements.

For example, instead of utilizing the bitmap field used in [[RFC2733](#)], [[SMPTE2022-1](#)] introduces separate fields to convey the number of rows (D) and columns (L) of the source block as well as the type of the repair packet (i.e., whether the repair packet is an interleaved FEC packet computed over a column or a non-interleaved FEC packet computed over a row). These fields plus the base sequence number allow the receiver side to establish the associations between the source and repair packets. Note that although the bitmap field is



not utilized, the FEC header of [[SMPTE2022-1](#)] inherently carries over the bitmap field from [[RFC2733](#)].

On the other hand, some parts of [[SMPTE2022-1](#)] are not in compliant with RTP [[RFC3550](#)]. For example, [[SMPTE2022-1](#)] sets the SSRC field to zero and does not use the timestamp field in the RTP headers of the repair packets (Receivers ignore the timestamps of the repair packets). Furthermore, [[SMPTE2022-1](#)] also sets the CC field in the RTP header to zero and does not allow any Contributing Source (CSRC) entry in the RTP header.

The current document adopts the extended FEC header of [[SMPTE2022-1](#)] and registers a new RTP payload format. At the same time, this document fixes the parts of [[SMPTE2022-1](#)] that are not compliant with RTP [[RFC3550](#)], except the one discussed below.

The baseline header format first proposed in [[RFC2733](#)] does not have fields to protect the P and X bits and the CC fields of the source packets associated with a repair packet. Rather, the P bit, X bit and CC field in the RTP header of the repair packet are used to protect those bits and fields. This, however, may sometimes result in failures when doing the RTP header validity checks as specified in [[RFC3550](#)]. While this behavior has been fixed in [[RFC5109](#)] that obsoleted [[RFC2733](#)], the RTP payload format defined in this document still allows for this behavior for legacy purposes. Implementations following this specification MUST be aware of this potential issue when RTP header validity checks are applied.

### **1.3.3.    ETSI TS 102 034**

In 2007, the Digital Video Broadcasting (DVB) consortium published a technical specification [[ETSI-TS-102-034](#)] through European Telecommunications Standards Institute (ETSI). This specification covers several areas related to the transmission of MPEG-2 transport stream-based services over IP networks.

The Annex E of [[ETSI-TS-102-034](#)] defines an optional protocol for Application-layer FEC (AL-FEC) protection of streaming media for DVB-IP services carried over RTP [[RFC3550](#)] transport. AL-FEC protocol uses two layers for protection: a base layer that is produced by a packet-based interleaved parity code, and an enhancement layer that is produced by a Raptor code. While the use of the enhancement layer is optional, the use of the base layer is mandatory wherever AL-FEC is used. The DVB AL-FEC protocol is also described in [[I-D.ietf-fecframe-dvb-al-fec](#)].

The interleaved parity code that is used in the base layer is a subset of [[SMPTE2022-1](#)]. In particular, AL-FEC base layer uses only





the 1-D interleaved FEC protection from [[SMPTE2022-1](#)]. The new RTP payload format that is defined and registered in this document (with some exceptions listed in [[I-D.ietf-fecframe-dvb-al-fec](#)]) is used as the AL-FEC base layer.

## **[2.](#) Requirements Notation**

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

## **[3.](#) Definitions, Notations and Abbreviations**

The definitions, notations and abbreviations commonly used in this document are summarized in this section.

### **[3.1.](#) Definitions**

This document uses the following definitions:

Source Flow: The packet flow(s) carrying the source data and to which FEC protection is to be applied.

Repair Flow: The packet flow(s) carrying the repair data.

Symbol: A unit of data. Its size, in bytes, is referred to as the symbol size.

Source Symbol: The smallest unit of data used during the encoding process.

Repair Symbol: Repair symbols are generated from the source symbols.

Source Packet: Data packets that contain only source symbols.

Repair Packet: Data packets that contain only repair symbols.

Source Block: A block of source symbols that are considered together in the encoding process.

### **[3.2.](#) Notations**

- o L: Number of columns of the source block.
- o D: Number of rows of the source block.



### **3.3. Abbreviations**

- o XOR: Bitwise exclusive OR operation.
  - 0 XOR 0 = 0
  - 0 XOR 1 = 1
  - 1 XOR 0 = 1
  - 1 XOR 1 = 0

## **4. Packet Formats**

This section defines the formats of the source and repair packets.

### **4.1. Source Packets**

The source packets MUST contain the information that identifies the source block and the position within the source block occupied by the packet. Since the source packets that are carried within an RTP stream already contain unique sequence numbers in their RTP headers [[RFC3550](#)], we can identify the source packets in a straightforward manner and there is no need to append additional field(s). The primary advantage of not modifying the source packets in any way is that it provides backward compatibility for the receivers that do not support FEC at all. In multicast scenarios, this backward compatibility becomes quite useful as it allows the non-FEC-capable and FEC-capable receivers to receive and interpret the same source packets sent in the same multicast session.

### **4.2. Repair Packets**

The repair packets MUST contain information that identifies the source block they pertain to and the relationship between the contained repair symbols and the original source block. For this purpose, we use the RTP header of the repair packets as well as another header within the RTP payload, which we refer to as the FEC header, as shown in Figure 6.



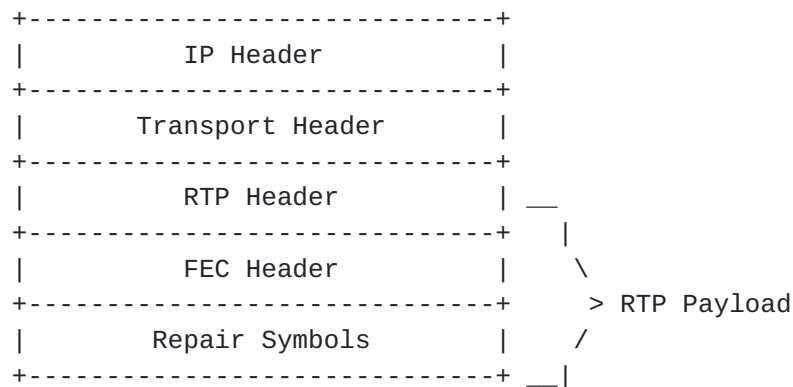


Figure 6: Format of repair packets

The RTP header is formatted according to [\[RFC3550\]](#) with some further clarifications listed below:

- o Version: The version field is set to 2.
- o Padding (P) Bit: This bit is obtained by applying protection to the corresponding P bits from the RTP headers of the source packets protected by this repair packet. However, padding octets are never present in a repair packet, independent of the value of the P bit.
- o Extension (X) Bit: This bit is obtained by applying protection to the corresponding X bits from the RTP headers of the source packets protected by this repair packet. However, an RTP header extension is never present in a repair packet, independent of the value of the X bit.
- o CSRC Count (CC): This field is obtained by applying protection to the corresponding CC values from the RTP headers of the source packets protected by this repair packet. However, a CSRC list is never present in a repair packet, independent of the value of the CC field.
- o Marker (M) Bit: This bit is obtained by applying protection to the corresponding M bits from the RTP headers of the source packets protected by this repair packet.
- o Payload Type: The (dynamic) payload type for the repair packets is determined through out-of-band means. Note that this document registers a new payload format for the repair packets (Refer to [Section 5](#) for details). According to [\[RFC3550\]](#), an RTP receiver that cannot recognize a payload type must discard it. This provides backward compatibility. The FEC mechanisms can then be used in a multicast group with mixed FEC-capable and non-FEC-

Begen

Expires October 20, 2009

[Page 12]

capable receivers. If a non-FEC-capable receiver receives a repair packet, it will not recognize the payload type, and hence, discards the repair packet.

- o Sequence Number (SN): The sequence number has the standard definition. It MUST be one higher than the sequence number in the previously transmitted repair packet. The initial value of the sequence number SHOULD be random (unpredictable) [[RFC3550](#)].
- o Timestamp (TS): The timestamp SHALL be set to a time corresponding to the repair packet's transmission time. Note that the timestamp value has no use in the actual FEC protection process and is usually useful for jitter calculations.
- o Synchronization Source (SSRC): The SSRC value SHALL be randomly assigned as suggested by [[RFC3550](#)]. This allows the sender to multiplex the source and repair flows on the same port, or multiplex multiple repair flows on a single port. The repair flows SHOULD use the RTCP CNAME field to associate themselves with the source flow.

In some networks, the RTP Source, which produces the source packets and the FEC Source, which generates the repair packets from the source packets may not be the same host. In such scenarios, using the same CNAME for the source and repair flows means that the RTP Source and the FEC Source MUST share the same CNAME (for this specific source-repair flow association). A common CNAME may be produced based on an algorithm that is known both to the RTP and FEC Source. This usage is compliant with [[RFC3550](#)].

Note that due to the randomness of the SSRC assignments, there is a possibility of SSRC collision. In such cases, the collisions MUST be resolved as described in [[RFC3550](#)].

Note that the P bit, X bit, CC field and M bit of the source packets are protected by the corresponding bits/fields in the RTP header of the repair packet. On the other hand, the payload of a repair packet protects the concatenation of (if present) the CSRC list, RTP extension, payload and padding of the source RTP packets associated with this repair packet.

The FEC header is 16 octets. The format of the FEC header is shown in Figure 7.





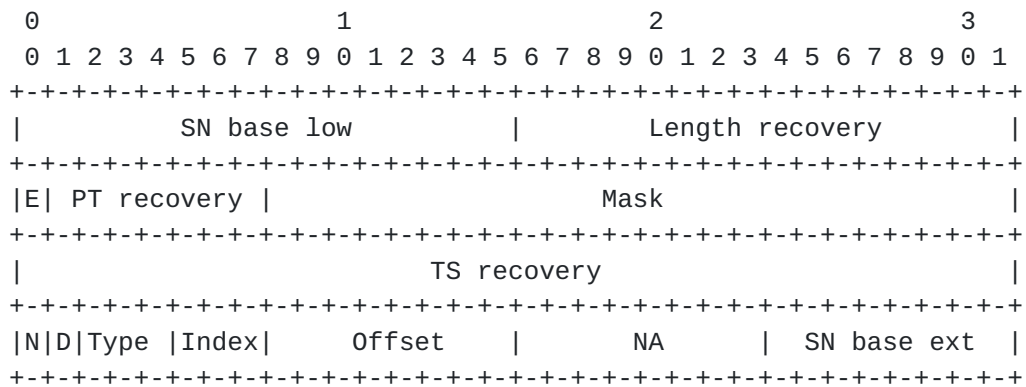


Figure 7: Format of the FEC header

The FEC header consists of the following fields:

- o The SN base low field is used to indicate the lowest sequence number, taking wrap around into account, of those source packets protected by this repair packet.
- o The Length recovery field is used to determine the length of any recovered packets.
- o The E bit is the extension flag introduced in [[RFC2733](#)] and used to extend the [[RFC2733](#)] FEC header.
- o The PT recovery field is used to determine the payload type of the recovered packets.
- o The Mask field is not used.
- o The TS recovery field is used to determine the timestamp of the recovered packets.
- o The N bit is the extension flag that is reserved for future uses.
- o The D bit is not used.
- o The Type field indicates the type of the error-correcting code used. This document defines only one error-correcting code.
- o The Index field is not used.
- o The Offset and NA fields are used to indicate the number of columns (L) and rows (D) of the source block, respectively.
- o The SN base ext field is not used.



The details on setting the fields in the FEC header are provided in [Section 6.2](#).

It should be noted that a mask-based approach (similar to the one specified in [\[RFC2733\]](#)) may not be very efficient to indicate which source packets in the current source block are associated with a given repair packet. In particular, for the applications that would like to use large source block sizes, the size of the mask that is required to describe the source-repair packet associations may be prohibitively large. Instead, a systematic approach is inherently more efficient.

## **5. Payload Format Parameters**

This section provides the media subtype registration for the 1-D interleaved parity FEC. The parameters that are required to configure the FEC encoding and decoding operations are also defined in this section.

### **5.1. Media Type Registration**

This registration is done using the template defined in [\[RFC4288\]](#) and following the guidance provided in [\[RFC3555\]](#).

#### **5.1.1. Registration of audio/1d-interleaved-parityfec**

Type name:    audio

Subtype name: 1d-interleaved-parityfec

Required parameters:

- o rate: The RTP timestamp (clock) rate. The rate SHALL be larger than 1000 Hz to provide sufficient resolution to RTCP operations. However, it is RECOMMENDED to select the rate that matches the rate of the protected source RTP stream.
- o L: Number of columns of the source block. L is a positive integer that is less than or equal to 255.
- o D: Number of rows of the source block. D is a positive integer that is less than or equal to 255.
- o repair-window: The time that spans the source packets and the corresponding repair packets. An FEC encoder processes a block of source packets and generates a number of repair packets, which are then transmitted within a certain duration. At the receiver, the



FEC decoder tries to decode all the packets received within the repair window to recover the missing packets. Assuming that there is no issue of delay variation, the FEC decoder SHOULD NOT wait longer than the repair window since additional waiting would not help the recovery process. The size of the repair window is specified in microseconds.

Optional parameters: None.

Encoding considerations: This media type is framed (See [Section 4.8](#) in the template document [[RFC4288](#)]) and contains binary data.

Security considerations: See [Section 9](#) of this document.

Interoperability considerations: None.

Published specification: This document.

Applications that use this media type: Multimedia applications that want to improve resiliency against packet loss by sending redundant data in addition to the source media.

Additional information: None.

Person & email address to contact for further information: Ali Begen <[abegen@cisco.com](mailto:abegen@cisco.com)> and IETF Audio/Video Transport Working Group.

Intended usage: COMMON.

Restriction on usage: None.

Author: Ali Begen <[abegen@cisco.com](mailto:abegen@cisco.com)>.

Change controller: IETF Audio/Video Transport Working Group delegated from the IESG.

#### **[5.1.2.](#) Registration of video/1d-interleaved-parityfec**

Type name: video

Subtype name: 1d-interleaved-parityfec

Required parameters:

- o rate: The RTP timestamp (clock) rate. The rate SHALL be larger than 1000 Hz to provide sufficient resolution to RTCP operations. However, it is RECOMMENDED to select the rate that matches the rate of the protected source RTP stream.



- o L: Number of columns of the source block. L is a positive integer that is less than or equal to 255.
- o D: Number of rows of the source block. D is a positive integer that is less than or equal to 255.
- o repair-window: The time that spans the source packets and the corresponding repair packets. An FEC encoder processes a block of source packets and generates a number of repair packets, which are then transmitted within a certain duration. At the receiver, the FEC decoder tries to decode all the packets received within the repair window to recover the missing packets. Assuming that there is no issue of delay variation, the FEC decoder SHOULD NOT wait longer than the repair window since additional waiting would not help the recovery process. The size of the repair window is specified in microseconds.

Optional parameters: None.

Encoding considerations: This media type is framed (See [Section 4.8](#) in the template document [[RFC4288](#)]) and contains binary data.

Security considerations: See [Section 9](#) of this document.

Interoperability considerations: None.

Published specification: This document.

Applications that use this media type: Multimedia applications that want to improve resiliency against packet loss by sending redundant data in addition to the source media.

Additional information: None.

Person & email address to contact for further information: Ali Begen <[abegen@cisco.com](mailto:abegen@cisco.com)> and IETF Audio/Video Transport Working Group.

Intended usage: COMMON.

Restriction on usage: None.

Author: Ali Begen <[abegen@cisco.com](mailto:abegen@cisco.com)>.

Change controller: IETF Audio/Video Transport Working Group delegated from the IESG.





### **5.1.3. Registration of text/1d-interleaved-parityfec**

Type name: text

Subtype name: 1d-interleaved-parityfec

Required parameters:

- o rate: The RTP timestamp (clock) rate. The rate SHALL be larger than 1000 Hz to provide sufficient resolution to RTCP operations. However, it is RECOMMENDED to select the rate that matches the rate of the protected source RTP stream.
- o L: Number of columns of the source block. L is a positive integer that is less than or equal to 255.
- o D: Number of rows of the source block. D is a positive integer that is less than or equal to 255.
- o repair-window: The time that spans the source packets and the corresponding repair packets. An FEC encoder processes a block of source packets and generates a number of repair packets, which are then transmitted within a certain duration. At the receiver, the FEC decoder tries to decode all the packets received within the repair window to recover the missing packets. Assuming that there is no issue of delay variation, the FEC decoder SHOULD NOT wait longer than the repair window since additional waiting would not help the recovery process. The size of the repair window is specified in microseconds.

Optional parameters: None.

Encoding considerations: This media type is framed (See [Section 4.8](#) in the template document [[RFC4288](#)]) and contains binary data.

Security considerations: See [Section 9](#) of this document.

Interoperability considerations: None.

Published specification: This document.

Applications that use this media type: Multimedia applications that want to improve resiliency against packet loss by sending redundant data in addition to the source media.

Additional information: None.

Person & email address to contact for further information: Ali Begen



<abegen@cisco.com> and IETF Audio/Video Transport Working Group.

Intended usage:   COMMON.

Restriction on usage:   None.

Author:   Ali Begen <abegen@cisco.com>.

Change controller:   IETF Audio/Video Transport Working Group  
delegated from the IESG.

#### **5.1.4.   Registration of application/1d-interleaved-parityfec**

Type name:   application

Subtype name:   1d-interleaved-parityfec

Required parameters:

- o   rate:   The RTP timestamp (clock) rate.   The rate SHALL be larger than 1000 Hz to provide sufficient resolution to RTCP operations. However, it is RECOMMENDED to select the rate that matches the rate of the protected source RTP stream.
- o   L:   Number of columns of the source block.   L is a positive integer that is less than or equal to 255.
- o   D:   Number of rows of the source block.   D is a positive integer that is less than or equal to 255.
- o   repair-window:   The time that spans the source packets and the corresponding repair packets.   An FEC encoder processes a block of source packets and generates a number of repair packets, which are then transmitted within a certain duration.   At the receiver, the FEC decoder tries to decode all the packets received within the repair window to recover the missing packets.   Assuming that there is no issue of delay variation, the FEC decoder SHOULD NOT wait longer than the repair window since additional waiting would not help the recovery process.   The size of the repair window is specified in microseconds.

Optional parameters:   None.

Encoding considerations:   This media type is framed (See [Section 4.8](#) in the template document [[RFC4288](#)]) and contains binary data.

Security considerations:   See [Section 9](#) of this document.



Interoperability considerations:   None.

Published specification:   This document.

Applications that use this media type:   Multimedia applications that want to improve resiliency against packet loss by sending redundant data in addition to the source media.

Additional information:   None.

Person & email address to contact for further information:   Ali Begen <abegen@cisco.com> and IETF Audio/Video Transport Working Group.

Intended usage:   COMMON.

Restriction on usage:   None.

Author:   Ali Begen <abegen@cisco.com>.

Change controller:   IETF Audio/Video Transport Working Group delegated from the IESG.

## **5.2. Mapping to SDP Parameters**

Applications that are using RTP transport commonly use Session Description Protocol (SDP) [[RFC4566](#)] to describe their RTP sessions. The information that is used to specify the media types in an RTP session has specific mappings to the fields in an SDP description. In this section, we provide these mappings for the media subtype registered by this document ("1d-interleaved-parityfec"). Note that if an application does not use SDP to describe the RTP sessions, an appropriate mapping must be defined and used to specify the media types and their parameters for the control/description protocol employed by the application.

The mapping of the media type specification for "1d-interleaved-parityfec" and its parameters in SDP is as follows:

- o The media type (e.g., "application") goes into the "m=" line as the media name.
- o The media subtype ("1d-interleaved-parityfec") goes into the "a=rtpmap" line as the encoding name. The RTP clock rate parameter ("rate") also goes into the "a=rtpmap" line as the clock rate.
- o The remaining required payload-format-specific parameters go into the "a=fmtp" line by copying them directly from the media type



string as a semicolon-separated list of parameter=value pairs.

SDP examples are provided in [Section 7](#).

#### **5.2.1. Offer-Answer Model Considerations**

When offering 1-D interleaved parity FEC over RTP using SDP in an Offer/Answer model [[RFC3264](#)], the following considerations apply:

- o Each combination of the L and D parameters produces a different FEC data and is not compatible with any other combination. A sender application may desire to offer multiple offers with different sets of L and D values as long as the parameter values are valid. The receiver SHOULD normally choose the offer that has a sufficient amount of interleaving. If multiple such offers exist, the receiver may choose the offer that has the lowest overhead or the one that requires the smallest amount of buffering. The selection depends on the application requirements.
- o The value for the repair-window parameter depends on the L and D values and cannot be chosen arbitrarily. More specifically, L and D values determine the lower limit for the repair-window size. The upper limit of the repair-window size does not depend on the L and D values.
- o Although combinations with the same L and D values but with different repair-window sizes produce the same FEC data, such combinations are still considered different offers. The size of the repair-window is related to how fast the sender will send the repair packets. This directly impacts the buffering requirement on the receiver side and the receiver must consider this when choosing an offer.
- o There are no optional format parameters defined for this payload. Any unknown option in the offer MUST be ignored and deleted from the answer.

#### **5.2.2. Declarative Considerations**

In declarative usage, like SDP in the Real-time Streaming Protocol (RTSP) [[RFC2326](#)] or the Session Announcement Protocol (SAP) [[RFC2974](#)], the following considerations apply:

- o The payload format configuration parameters are all declarative and a participant MUST use the configuration that is provided for the session.





- o More than one configuration may be provided (if desired) by declaring multiple RTP payload types. In that case, the receivers should choose the repair flow that is best for them.

## **6. Protection and Recovery Procedures**

This section provides a complete specification of the 1-D interleaved parity code.

### **6.1. Overview**

The following sections specify the steps involved in generating the repair packets and reconstructing the missing source packets from the repair packets.

### **6.2. Repair Packet Construction**

The RTP header of a repair packet is formed based on the guidelines given in [Section 4.2](#).

The FEC header includes 16 octets. It is constructed by applying the XOR operation on the bit strings that are generated from the individual source packets protected by this particular repair packet. The set of the source packets that are associated with a given repair packet can be computed by the formula given in [Section 6.3.1](#).

The bit string is formed for each source packet by concatenating the following fields together in the order specified:

- o Padding bit (1 bit) (This is the most significant bit of the bit string)
- o Extension bit (1 bit)
- o CC field (4 bits)
- o Marker bit (1 bit)
- o PT field (7 bits)
- o Timestamp (32 bits)
- o Unsigned network-ordered 16-bit representation of the source packet length in bytes minus 12 (for the fixed RTP header), i.e., the sum of the lengths of all the following if present: the CSRC list, header extension, RTP payload and RTP padding (16 bits)



- o If CC is nonzero, the CSRC list (variable length)
- o If X is 1, the header extension (variable length)
- o Payload (variable length)
- o Padding, if present (variable length)

Note that if the payload lengths of the source packets are not equal, each shorter packet MUST be padded to the length of the longest packet by adding octet 0's at the end. Due to this possible padding and mandatory FEC header, a repair packet usually has a larger size than the source packets it protects. This may cause problems if the resulting repair packet size exceeds the Maximum Transmission Unit (MTU) size of the path over which the repair flow is sent.

By applying the parity operation on the bit strings produced from the source packets, we generate the FEC bit string. Some parts of the RTP header and the FEC header of the repair packet are generated from the FEC bit string as follows:

- o The first (most significant) bit in the FEC bit string is written into the Padding bit in the RTP header of the repair packet.
- o The next bit in the FEC bit string is written into the Extension bit in the RTP header of the repair packet.
- o The next 4 bits of the FEC bit string are written into the CC field in the RTP header of the repair packet.
- o The next bit of the FEC bit string is written into the Marker bit in the RTP header of the repair packet.
- o The next 7 bits of the FEC bit string are written into the PT recovery field in the FEC header.
- o The next 32 bits of the FEC bit string are written into the TS recovery field in the FEC header.
- o The next 16 bits are written into the Length recovery field in the FEC header. This allows the FEC procedure to be applied even when the lengths of the protected source packets are not identical.
- o The remaining bits are set to be the payload of the repair packet.

The remaining parts of the FEC header are set as follows:



- o The SN base low field MUST be set to the lowest sequence number, taking wrap around into account, of those source packets protected by this repair packet.
- o The E bit MUST be set to 1 to extend the [[RFC2733](#)] FEC header.
- o The Mask field SHALL be set to 0 and ignored by the receiver.
- o The N bit SHALL be set to 0 and ignored by the receiver.
- o The D bit SHALL be set to 0 and ignored by the receiver.
- o The Type field MUST be set to 0.
- o The Index field SHALL be set to 0 and ignored by the receiver.
- o The Offset field MUST be set to the number of columns of the source block (L).
- o The NA field MUST be set to the number of rows of the source block (D).
- o The SN base ext field SHALL be set to 0 and ignored by the receiver.

### **[6.3.](#) Source Packet Reconstruction**

This section describes the recovery procedures that are required to reconstruct the missing packets. The recovery process has two steps. In the first step, the FEC decoder determines which source and repair packets should be used in order to recover a missing packet. In the second step, the decoder recovers the missing packet, which consists of an RTP header and RTP payload.

In the following, we describe the RECOMMENDED algorithms for the first and second steps. Based on the implementation, different algorithms MAY be adopted. However, the end result MUST be identical to the one produced by the algorithms described below.

#### **[6.3.1.](#) Associating the Source and Repair Packets**

The first step is to associate the source and repair packets. The SN base low field in the FEC header shows the lowest sequence number of the source packets that form the particular column. In addition, the information of how many source packets are available in each column and row is available from the media type parameters specified in the SDP description. This set of information uniquely identifies all of the source packets associated with a given repair packet.



Mathematically, for any received repair packet,  $p^*$ , we can determine the sequence numbers of the source packets that are protected by this repair packet as follows:

$$p^*_{\text{snb}} + i * L$$

where  $p^*_{\text{snb}}$  denotes the value in the SN base low field of  $p^*$ 's FEC header,  $L$  is the number of columns of the source block and

$$0 \leq i < D$$

where  $D$  is the number of rows of the source block.

We denote the set of the source packets associated with repair packet  $p^*$  by set  $T(p^*)$ . Note that in a source block whose size is  $L$  columns by  $D$  rows, set  $T$  includes  $D$  source packets. Recall that 1- $D$  interleaved FEC protection can fully recover the missing information if there is only one source packet is missing in set  $T$ . If the repair packet that protects the source packets in set  $T$  is missing, or the repair packet is available but two or more source packets are missing, then missing source packets in set  $T$  cannot be recovered by 1- $D$  interleaved FEC protection.

### **6.3.2. Recovering the RTP Header and Payload**

For a given set  $T$ , the procedure for the recovery of the RTP header of the missing packet, whose sequence number is denoted by  $\text{SEQNUM}$ , is as follows:

1. For each of the source packets that are successfully received in set  $T$ , compute the bit string as described in [Section 6.2](#).
2. For the repair packet associated with set  $T$ , compute the bit string in the same fashion except use the PT recovery field instead of the PT field and TS recovery field instead of the Timestamp field, and set the CSRC list, header extension and padding to null regardless of the values of the CC field, X bit and P bit.
3. If any of the bit strings generated from the source packets are shorter than the bit string generated from the repair packet, pad them to be the same length as the bit string generated from the repair packet. For padding, the padding of octet 0 MUST be added at the end of the bit string.
4. Calculate the recovered bit string as the XOR of the bit strings generated from all source packets in set  $T$  and the FEC bit string generated from the repair packet associated with set  $T$ .





5. Create a new packet with the standard 12-byte RTP header and no payload.
6. Set the version of the new packet to 2.
7. Set the Padding bit in the new packet to the first bit in the recovered bit string.
8. Set the Extension bit in the new packet to the next bit in the recovered bit string.
9. Set the CC field to the next 4 bits in the recovered bit string.
10. Set the Marker bit in the new packet to the next bit in the recovered bit string.
11. Set the Payload type in the new packet to the next 7 bits in the recovered bit string.
12. Set the SN field in the new packet to SEQNUM.
13. Set the TS field in the new packet to the next 32 bits in the recovered bit string.
14. Take the next 16 bits of the recovered bit string and set Y to whatever unsigned integer this represents (assuming network-order). Take Y bytes from the recovered bit string and append them to the new packet. Y represents the length of the new packet in bytes minus 12 (for the fixed RTP header), i.e., the sum of the lengths of all the following if present: the CSRC list, header extension, RTP payload and RTP padding.
15. Set the SSRC of the new packet to the SSRC of the source RTP stream.

This procedure completely recovers both the header and payload of an RTP packet.

## **7. Session Description Protocol (SDP) Signaling**

This section provides an SDP [[RFC4566](#)] example. The following example uses the FEC grouping semantics [[RFC4756](#)].

In this example, we have one source video stream (mid:S1) and one FEC repair stream (mid:R1). We form one FEC group with the "a=group:FEC S1 R1" line. The source and repair streams are sent to the same port on different multicast groups. The repair window is set to 200 ms.



```
v=0
o=ali 1122334455 1122334466 IN IP4 fec.example.com
s=Interleaved Parity FEC Example
t=0 0
a=group:FEC S1 R1
m=video 30000 RTP/AVP 100
c=IN IP4 224.1.1.1/127
a=rtpmap:100 MP2T/90000
a=mid:S1
m=application 30000 RTP/AVP 110
c=IN IP4 224.1.2.1/127
a=rtpmap:110 1d-interleaved-parityfec/90000
a=fmtp:110 L:5; D:10; repair-window: 200000
a=mid:R1
```

## **8. Congestion Control Considerations**

FEC is an effective approach to provide applications resiliency against packet losses. However, in networks where the congestion is a major contributor to the packet loss, the potential impacts of using FEC SHOULD be considered carefully before injecting the repair flows into the network. In particular, in bandwidth-limited networks, FEC repair flows may consume most or all of the available bandwidth and may consequently congest the network. In such cases, the applications MUST NOT arbitrarily increase the amount of FEC protection since doing so may lead to a congestion collapse. If desired, stronger FEC protection MAY be applied only after the source rate has been reduced.

In a network-friendly implementation, an application SHOULD NOT send/receive FEC repair flows if it knows that sending/receiving those FEC repair flows would not help at all in recovering the missing packets. Such a practice helps reduce the amount of wasted bandwidth. It is RECOMMENDED that the amount of FEC protection is adjusted dynamically based on the packet loss rate observed by the applications.

In multicast scenarios, it may be difficult to optimize the FEC protection per receiver. If there is a large variation among the levels of FEC protection needed by different receivers, it is RECOMMENDED that the sender offers multiple repair flows with different levels of FEC protection and the receivers join the corresponding multicast sessions to receive the repair flow(s) that is best for them.



## **9.    Security Considerations**

RTP packets using the payload format defined in this specification are subject to the security considerations discussed in the RTP specification [[RFC3550](#)] and in any applicable RTP profile. The main security considerations for the RTP packet carrying the RTP payload format defined within this memo are confidentiality, integrity and source authenticity. Confidentiality is achieved by encrypting the RTP payload. Integrity of the RTP packets is achieved through a suitable cryptographic integrity protection mechanism. Such a cryptographic system may also allow the authentication of the source of the payload. A suitable security mechanism for this RTP payload format should provide confidentiality, integrity protection, and at least source authentication capable of determining if an RTP packet is from a member of the RTP session.

Note that the appropriate mechanism to provide security to RTP and payloads following this memo may vary. It is dependent on the application, transport and signaling protocol employed. Therefore, a single mechanism is not sufficient, although if suitable, using the Secure Real-time Transport Protocol (SRTP) [[RFC3711](#)] is recommended. Other mechanisms that may be used are IPsec [[RFC4301](#)] and Transport Layer Security (TLS) [[RFC5246](#)] (RTP over TCP); other alternatives may exist.

## **10.    IANA Considerations**

New media subtypes are subject to IANA registration. For the registration of the payload format and its parameters introduced in this document, refer to [Section 5](#).

## **11.    Acknowledgments**

A major part of this document is borrowed from [[RFC2733](#)] and [[SMPTE2022-1](#)]. Thus, the author would like to thank the authors and editors of these earlier specifications. The author also thanks Colin Perkins for his constructive suggestions for this document.

## **12.    Change Log**

### **12.1.    [draft-ietf-fecframe-interleaved-fec-scheme-03](#)**

The following are the major changes compared to version 02:



- o Comments from WGLC have been addressed.

## **12.2. [draft-ietf-fecframe-interleaved-fec-scheme-02](#)**

The following are the major changes compared to version 01:

- o Some details were added regarding the use of CNAME field.
- o Offer-Answer and Declarative Considerations sections have been completed.
- o Security Considerations section has been completed.

## **12.3. [draft-ietf-fecframe-interleaved-fec-scheme-01](#)**

The following are the major changes compared to version 00:

- o The timestamp field definition has changed.

## **12.4. [draft-ietf-fecframe-interleaved-fec-scheme-00](#)**

This is the initial version, which is based on an earlier individual submission. The following are the major changes compared to that document:

- o Per the discussion in the WG, references to the FEC Framework have been removed and the document has been turned into a pure RTP payload format specification.
- o A new section is added for congestion control considerations.
- o Editorial changes to clarify a few points.

## **13. References**

### **13.1. Normative References**

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC3550] Schulzrinne, H., Casner, S., Frederick, R., and V. Jacobson, "RTP: A Transport Protocol for Real-Time Applications", STD 64, [RFC 3550](#), July 2003.
- [RFC4566] Handley, M., Jacobson, V., and C. Perkins, "SDP: Session Description Protocol", [RFC 4566](#), July 2006.





- [RFC4756] Li, A., "Forward Error Correction Grouping Semantics in Session Description Protocol", [RFC 4756](#), November 2006.
- [RFC4288] Freed, N. and J. Klensin, "Media Type Specifications and Registration Procedures", [BCP 13](#), [RFC 4288](#), December 2005.
- [RFC3555] Casner, S. and P. Hoschka, "MIME Type Registration of RTP Payload Formats", [RFC 3555](#), July 2003.
- [RFC3264] Rosenberg, J. and H. Schulzrinne, "An Offer/Answer Model with Session Description Protocol (SDP)", [RFC 3264](#), June 2002.

### **13.2. Informative References**

- [I-D.ietf-fecframe-dvb-al-fec]  
Begen, A. and T. Stockhammer, "DVB Application-Layer Hybrid FEC Protection", [draft-ietf-fecframe-dvb-al-fec-01](#) (work in progress), January 2009.
- [RFC2733] Rosenberg, J. and H. Schulzrinne, "An RTP Payload Format for Generic Forward Error Correction", [RFC 2733](#), December 1999.
- [RFC3009] Rosenberg, J. and H. Schulzrinne, "Registration of parityfec MIME types", [RFC 3009](#), November 2000.
- [RFC5109] Li, A., "RTP Payload Format for Generic Forward Error Correction", [RFC 5109](#), December 2007.
- [ETSI-TS-102-034]  
ETSI TS 102 034 V1.3.1, "Transport of MPEG 2 TS Based DVB Services over IP Based Networks", October 2007.
- [RFC2326] Schulzrinne, H., Rao, A., and R. Lanphier, "Real Time Streaming Protocol (RTSP)", [RFC 2326](#), April 1998.
- [RFC2974] Handley, M., Perkins, C., and E. Whelan, "Session Announcement Protocol", [RFC 2974](#), October 2000.
- [SMPTE2022-1]  
SMPTE 2022-1-2007, "Forward Error Correction for Real-Time Video/Audio Transport over IP Networks", 2007.
- [RFC3711] Baugher, M., McGrew, D., Naslund, M., Carrara, E., and K. Norrman, "The Secure Real-time Transport Protocol (SRTP)", [RFC 3711](#), March 2004.



[RFC4301] Kent, S. and K. Seo, "Security Architecture for the Internet Protocol", [RFC 4301](#), December 2005.

[RFC5246] Dierks, T. and E. Rescorla, "The Transport Layer Security (TLS) Protocol Version 1.2", [RFC 5246](#), August 2008.

Author's Address

Ali Begen  
Cisco Systems  
170 West Tasman Drive  
San Jose, CA 95134  
USA

Email: [abegen@cisco.com](mailto:abegen@cisco.com)

