

Internet Draft  
Expiration: August 2002  
File: [draft-ietf-forces-requirements-02.txt](#)  
Working Group: ForCES

T. Anderson  
Intel  
E. Bowen  
IBM  
R. Dantu  
Netrake Inc.  
A. Doria  
LTU  
R. Gopal  
Nokia  
J. Hadi Salim  
Znyx Networks  
H. Khosravi  
Intel  
M. Minhazuddin  
Avaya Inc.  
M. Wasserman  
Wind River  
February 2002

## Requirements for Separation of IP Control and Forwarding

[draft-ietf-forces-requirements-02.txt](#)

### Status of this Memo

This document is an Internet-Draft and is in full conformance with all provisions of [Section 10 of RFC2026](#). Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as ``work in progress.''

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

Conventions used in this document



The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC-2119](#)].

## **1. Abstract**

This document introduces the ForCES architecture and defines a set of associated terminology. This document also defines a set of architectural, modeling, and protocol requirements to logically separate the control and data forwarding planes of an IP networking device.

## **2. Definitions**

Addressable Entity (AE) - A physical device that is directly addressable given some interconnect technology. For example, on Ethernet, an AE is a device to which we can communicate using an Ethernet MAC address; on IP networks, it is a device to which we can communicate using an IP address; and on a switch fabric, it is a device to which we can communicate using a switch fabric port number.

Physical Forwarding Element (PFE) - An AE that includes hardware used to provide per-packet processing and handling. This hardware may consist of (but is not limited to) network processors, ASIC's, or general-purpose processors. For example, line cards in a backplane are PFEs.

PFE Partition - A logical partition of a PFE consisting of some subset of each of the resources (e.g., ports, memory, forwarding table entries) available on the PFE. This concept is analogous to that of the resources assigned to a virtual router [[REQ-PART](#)].

Physical Control Element (PCE) - An AE that includes hardware used to provide control functionality. This hardware typically includes a general-purpose processor.

PCE Partition - A logical partition of a PCE consisting of some subset of each of the resources available on the PCE.

Forwarding Element (FE) - A logical entity that implements the ForCES protocol. FEs use the underlying hardware to provide per-packet processing and handling as directed by a CE via the ForCES protocol. FEs may use PFE partitions, whole PFEs, or multiple PFEs.

Proxy FE - A name for a type of FE that cannot directly modify its underlying hardware but instead manipulates that hardware using some intermediate form of communication (e.g., a non-ForCES protocol or



DMA). A proxy FE will typically be used in the case where a PFE cannot implement the ForCES protocol directly (e.g., due to the lack of a general purpose CPU).

Control Element (CE) - A logical entity that implements the ForCES protocol and uses it to instruct one or more FEs how to process packets. CEs handle functionality such as the execution of control and signaling protocols. CEs may consist of PCE partitions or whole PCEs.

Pre-association Phase - The period of time during which a FE Manager (see below) and a CE Manager (see below) are determining which FE and CE should be part of the same network element.

Post-association Phase - The period of time during which a FE does know which CE is to control it and vice versa, including the time during which the CE and FE are establishing communication with one another.

ForCES Protocol - While there may be multiple protocols used within the overall ForCES architecture, the term "ForCES protocol" refers only to the ForCES post-association phase protocol (see below).

ForCES Post-Association Phase Protocol - The protocol used for post-association phase communication between CEs and FEs. This protocol does not apply to CE-to-CE communication, FE-to-FE communication, or to communication between FE and CE managers. The ForCES protocol is a master-slave protocol in which FEs are slaves and CEs are masters. This protocol includes both the management of the communication channel (e.g., connection establishment, heartbeats) and the control messages themselves.

FE Model - A model that describes the logical processing functions of a FE.

FE Manager - A logical entity that operates in the pre-association phase and is responsible for determining to which CE(s) a FE should communicate. This process is called CE discovery and may involve the FE manager learning the capabilities of available CEs. A FE manager may use anything from a static configuration to a pre-association phase protocol (see below) to determine which CE(s) to use. Being a logical entity, a FE manager might be physically combined with any of the other logical entities mentioned in this section.

CE Manager - A logical entity that operates in the pre-association phase and is responsible for determining to which FE(s) a CE should communicate. This process is called FE discovery and may involve the CE manager learning the capabilities of available FEs. A CE



manager may use anything from a static configuration to a pre-association phase protocol (see below) to determine which FE to use. Being a logical entity, a CE manager might be physically combined with any of the other logical entities mentioned in this section.

**Pre-association Phase Protocol** - A protocol between FE managers and CE managers that is used to determine which CEs or FEs to use. A pre-association phase protocol may include a CE and/or FE capability discovery mechanism. Note that this capability discovery process is wholly separate from (and does not replace) that used within the ForCES protocol (see [Section 7](#), requirement #1). However, the two capability discovery mechanisms may utilize the same FE model (see [Section 6](#)). Pre-association phase protocols are not discussed further in this document (see [Section 11.3](#)).

**ForCES Network Element (NE)** - An entity composed of one or more CEs and one or more FEs. To entities outside a NE, the NE represents a single point of management. Similarly, a NE usually hides its internal organization from external entities.

**ForCES Protocol Element** - A FE or CE.

**High Touch Capability** - This term will be used to apply to the capabilities found in some forwarders to take action on the contents or headers of a packet based on content other than what is found in the IP header. Examples of these capabilities include NAT-PT, firewall, and L7 content recognition.

### **3. Introduction**

An IP network element is composed of numerous logically separate entities that cooperate to provide a given functionality (such as a routing or IP switching) and yet appear as a normal integrated network element to external entities. Two primary types of network element components exist: control-plane components and forwarding-plane components. In general, forwarding-plane components are ASIC, network-processor, or general-purpose processor-based devices that handle all data path operations. Conversely, control-plane components are typically based on general-purpose processors that provide control functionality such as the processing of routing or signaling protocols. A standard set of mechanisms for connecting these components provides increased scalability and allows the control and forwarding planes to evolve independently, thus promoting faster innovation.

For the purpose of illustration, let us consider the architecture of a router to illustrate the concept and value of separate control and forwarding planes. The architecture of a router is composed of two main parts. These components, while inter-related, perform





functions that are largely independent of each other. At the bottom is the forwarding path that operates in the data-forwarding plane and is responsible for per-packet processing and forwarding. Above the forwarding plane is the network operating system that is responsible for operations in the control plane. In the case of a router or switch, the network operating system runs routing, signaling and control protocols (e.g., RIP, OSPF and RSVP) and dictates the forwarding behavior by manipulating forwarding tables, per-flow QoS tables and access control lists. Typically, the architecture of these devices combines all of this functionality into a single functional whole with respect to external entities.


#### **4. Architecture**

The chief components of a NE architecture are the CE, the FE, and the interconnect protocol. The CE is responsible for operations such as signaling and control protocol processing and the implementation of management protocols. Based on the information acquired through control processing, the CE(s) dictates the packet-forwarding behavior of the FE(s) via the interconnect protocol. For example, the CE might control a FE by manipulating its forwarding tables, the state of its interfaces, or by adding or removing a NAT binding.

The FE operates in the forwarding plane and is responsible for per-packet processing and handling. By allowing the control and forwarding planes to evolve independently, different types of FEs can be developed - some general purpose and others more specialized. Some functions that FEs could perform include layer 3 forwarding, metering, shaping, firewall, NAT, encapsulation (e.g., tunneling), decapsulation, encryption, accounting, etc. Nearly all combinations of these functions may be present in practical FEs.

Below is a diagram illustrating an example NE composed of a CE and two FEs. Both FEs and CE require minimal configuration as part of the pre-configuration process and this may be done by FE Manager and CE Manager respectively. Apart from this, there is no defined role for FE Manager and CE Manager. The Proxy FE has also been defined for clarification purpose. These components are out of scope of the architecture and requirements for ForCES protocol, which only involves CEs and FEs.



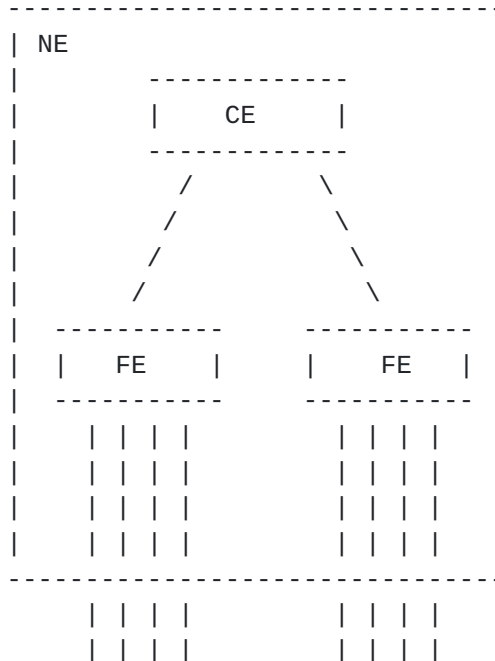

## 5. Architectural Requirements

The following are the architectural requirements:

- 1) CEs and FEs MUST be able to connect by a variety of interconnect technologies. Examples of interconnect technologies used in current architectures include Ethernet, bus backplanes, and ATM (cell) fabrics. FEs MAY be connected to each other via a different technology than that used for CE/FE communication.
- 2) FEs MUST support a minimal set of capabilities necessary for establishing network connectivity (e.g., interface discovery, port up/down functions). Beyond this minimal set, the ForCES architecture MUST NOT restrict the types or numbers of capabilities that FEs may contain.
- 3) Packets MUST be able to arrive at the NE by one FE and leave the NE via a different FE.
- 4) A NE MUST support the appearance of a single functional device. For example, in a router, the TTL of the packet should be decremented only once as it traverses the NE regardless of how many FEs through which it passes. However, external entities (e.g., FE managers and CE managers) MAY have direct access to individual ForCES protocol elements for providing information to transition them from the pre-association to post-association phase.



- 5) The architecture MUST provide a way to prevent unauthorized ForCES protocol elements from joining a NE. (For more protocol details, refer to [section 7](#) requirement# 2)
- 6) A FE MUST be able to asynchronously inform the CE of an increase/decrease in available resources or capabilities on the FE. (Since there is not a strict 1-to-1 mapping between FEs and PFEs, it is possible for the relationship between a FE and its physical resources to change over time). For example, the number of physical ports or the amount of memory allocated to a FE may vary over time. The CE needs to be informed of such changes so that it can control the FE in an accurate way.
- 7) The architecture MUST support mechanisms for high availability. This includes the ability for CEs and FEs to determine when there is a loss of association between them, ability to restore association and efficient state (re)synchronization mechanisms. High Availability also includes the ability to preset the actions an FE will take in reaction to loss of association to its CE e.g., whether the FE will continue to forward packets or whether it will halt operations.
- 8) FEs MUST redirect packets addressed to their interfaces to their CE for further processing. Furthermore, FEs MUST redirect other required packets (e.g., such as those with the router alert option set) to their CE as well. (FEs MAY provide any other classification/redirection capabilities that they desire as described in [Section 6.5](#) requirement #4.) Similarly, CEs MUST be able to create packets and have its FEs deliver them.
- 9) Any proposed ForCES architectures MUST explain how that architecture supports all of the router functions as defined in [\[RFC1812\]](#).
- 10) In a ForCES NE, the FEs MUST be able to provide their topology information (topology by which the FEs in the NE are connected) to the CE(s).
- 11) The ForCES NE architecture MUST be capable of supporting (i.e., must scale to) at least hundreds of FEs and tens of thousands of ports.
- 12) The ForCES architecture MUST allow FEs AND CEs to join and leave NEs dynamically.
- 13) The ForCES NE architecture MUST support multiple CEs and FEs.
- 14) For pre-association phase setup, monitoring, configuration issues, it MAY be useful to use standard management mechanisms for



CEs and FEs. The ForCES architecture and requirements do not preclude this. In general, for post-association phase, most management tasks SHOULD be done through interaction with the CE. In certain conditions (e.g. CE/FE disconnection), it may be useful to allow management tools (e.g. SNMP) to be used to diagnose and repair problems. The following guidelines MUST be observed:

1. The ability for a management tool (e.g. SNMP) to be used to read (but not change) the state of FE SHOULD NOT be precluded.
2. It MUST NOT be possible for management tools (e.g. SNMP, etc) to change the state of a FE in a manner that affects overall NE behavior without the CE being notified.

## **6. FE Model Requirements**

The variety of FE functionality that the ForCES architecture allows poses a potential problem for CEs. In order for a CE to effectively control a FE, the CE must understand how the FE processes packets. We therefore REQUIRE that a FE model be created that can express the logical packet processing capabilities of a FE. This model will be used in the ForCES protocol to describe FE capabilities (see [Section 7](#), requirement #1).

### **6.1. Types of Logical Functions**

The FE model MUST express what logical functions can be applied to packets as they pass through a FE.

Logical functions are the packet processing functions that are applied to the packets as they are forwarded through a FE. Examples of logical functions are layer 3 forwarding, firewall, NAT, shaping. [Section 6.5](#) defines the minimal set of logical functions that the FE Model MUST support.

### **6.2. Variations of Logical Functions**

**The FE model MUST be capable of supporting/allowing variations in** the way logical functions are implemented on a FE. For example, on a certain FE the forwarding logical function might have information about both the next hop IP address and the next hop MAC address, while on another FE these might be implemented as separate logical functions. Another example would be NAT functionality that can have several flavors such as Traditional/Outbound NAT, Bi-directional NAT, Twice NAT, Multihomed NAT [[RFC2663](#)]. The model must be flexible enough to allow such variations in functions.

### **6.3. Ordering of Logical Functions**

**The model MUST be capable of describing the order in which these** logical functions are applied in a FE. The ordering of logical functions is important in many cases. For example, a NAT function may change a packet's source or destination IP address. Any number of other logical functions (e.g., layer 3 forwarding, ingress/egress





firewall, shaping, accounting) may make use of the source or destination IP address when making decisions. The CE needs to know whether to configure these logical functions with the pre-NAT or post-NAT IP address. Furthermore, the model **MUST** be capable of expressing multiple instances of the same logical function in a FE's processing path. Using NAT again as an example, one NAT function is typically performed before the forwarding decision (packets arriving externally have their public addresses replaced with private addresses) and one NAT function is performed after the forwarding decision (for packets exiting the domain, their private addresses are replaced by public ones).

#### **6.4. Flexibility**

Finally, the FE model **SHOULD** provide a flexible infrastructure in which new logical functions and new classification, action, and parameterization data can be easily added. Also, the FE model **MUST** be capable of describing the types of statistics gathered by each logical function.

#### **6.5. Minimal Set of Logical Functions**

The rest of this section defines a minimal set of logical functions that any FE model **MUST** support. This minimal set **DOES NOT** imply that all FEs must provide this functionality. Instead, these requirements only specify that the model must be capable of expressing the capabilities that FEs may choose to provide.

##### **1)Port Functions**

The FE model **MUST** be capable of expressing the number of ports on the device, the static attributes of each port (e.g., port type, link speed), and the configurable attributes of each port (e.g., IP address, administrative status).

##### **2)Forwarding Functions**

The FE model **MUST** be capable of expressing the data that can be used by the forwarding function to make a forwarding decision.

##### **3)QoS Functions**

The FE model **MUST** allow a FE to express its QoS capabilities in terms of, e.g., metering, policing, shaping, and queuing functions. The FE model **MUST** be capable of expressing the use of these functions to provide IntServ or DiffServ functionality as described in [[RFC2211](#)], [[RFC2212](#)], [[RFC2215](#)], [[RFC2475](#)], and [[DS-MODEL](#)].

##### **4)Generic Filtering Functions**

The FE model **MUST** be capable of expressing complex sets of filtering functions. The model **MUST** be able to express the existence of these functions at arbitrary points in the sequence of a FE's packet



processing functions. The FE model MUST be capable of expressing a wide range of classification abilities from single fields (e.g., destination address) to arbitrary n-tuples. Similarly, the FE model MUST be capable of expressing what actions these filtering functions can perform on packets that the classifier matches.

#### 5)Vendor-Specific Functions

The FE model SHOULD be extensible so that vendor-specific FE functionality can be expressed.

#### 6)High-Touch Functions

The FE model MUST be capable of expressing the encapsulation and tunneling capabilities of a FE. The FE model MUST support functions that mark the IPv4 header TOS octet or the IPv6 Traffic Class octet. The FE model MAY support other high touch functions (e.g., NAT, ALG).

#### 7)Security Functions

The FE model MUST be capable of expressing the types of encryption that may be applied to packets in the forwarding path.

## **7. ForCES Protocol Requirements**

This section specifies some of the requirements that the ForCES protocol MUST meet.

#### 1)Configuration of Modeled Elements

The ForCES protocol MUST allow the CEs to determine the capabilities of each FE. These capabilities SHALL be expressed using the FE model whose requirements are defined in [Section 6](#). Furthermore, the protocol MUST provide a means for the CEs to control all the FE capabilities that are discovered through the FE model. The protocol MUST be able to add/remove classification/action entries, set/delete parameters, query statistics, and register for and receive events.

#### 2)Support for Secure Communication

- a) FE configuration will contain information critical to the functioning of a network (e.g. IP Forwarding Tables). As such, it MUST be possible to ensure the authentication and integrity of ForCES protocol messages.
- b) FE configuration information may also contain information derived from business relationships (e.g. service level agreements). Therefore, it MUST be possible to secure (make private) ForCES protocol messages.
- c) In order to provide authentication, integrity and privacy for a proposed ForCES protocol, existing security mechanisms such as IPSec/IKE, TLS, etc. MUST be used/leveraged if applicable.

#### 3)Scalability



The ForCES protocol MUST be capable of supporting (i.e., must scale to) at least hundreds of FEs and tens of thousands of ports. For example, the ForCES protocol field sizes corresponding to FE or port numbers SHALL be large enough to support the minimum required numbers. This requirement does not relate to the performance of a NE as the number of FEs or ports in the NE grows.

#### 4)Multihop

When the CEs and FEs are separated beyond a single hop, the ForCES protocol will make use of an existing [RFC2914](#) compliant L4 protocol with adequate reliability, security and congestion control (e.g. TCP, SCTP) for transport purposes.

#### 5)Message Priority

The ForCES protocol MUST provide a means to express the protocol message priorities.

#### 6)Reliability

The ForCES protocol SHALL assume that it runs on top of an unreliable, datagram service. For IP networks, an encapsulation of the ForCES protocol SHALL be defined that uses a [[RFC2914](#)]-compliant transport protocol and provides a datagram service (that could be unreliable). For non-IP networks, additional encapsulations MAY be defined so long as they provide a datagram service to the ForCES protocol. However, since some messages will need to be reliably delivered to FEs, the ForCES protocol MUST provide internal support for reliability mechanisms such as message acknowledgements and/or state change confirmations.

#### 7)Interconnect Independence

The ForCES protocol MUST support a variety of interconnect technologies. (refer to [section 5](#), requirement# 1)

#### 8)High Availability

The ForCES protocol MUST support mechanisms for high availability. This includes the ability for CEs and FEs to determine when there is a loss of association between them, ability to restore association and efficient state (re)synchronization mechanisms. High Availability also includes the ability to preset the actions an FE will take in reaction to loss of association to its CE e.g., whether the FE will continue to forward packets or whether it will halt operations. (refer to [section 5](#), requirement# 7)

#### 9)Packet Redirection

The ForCES protocol MUST support the redirection of packets from FEs to their CEs. It MUST also support CEs to send packets to FEs for delivery.(refer to [section 5](#), requirement# 8)

#### 10)Topology Exchange



The ForCES protocol MUST allow the FEs to provide their topology information (topology by which the FEs in the NE are connected) to the CE(s). (refer to [section 5](#), requirement# 10)

#### 11)Dynamic Association

The ForCES protocol MUST allow CEs and FEs to join and leave a NE dynamically. (refer to [section 5](#), requirement# 12)

#### 12)Command Bundling

The ForCES protocol MUST be able to group an ordered set of commands to a FE. Each such group of commands SHOULD be sent to the FE in as few messages as possible. Furthermore, the protocol MUST support the ability to specify if a command group MUST have all-or-nothing semantics.

#### 13)Asynchronous Event Notification

The ForCES protocol MUST be able to asynchronously notify the CE of events on the FE such as change in available resources or capabilities. (refer to [section 5](#), requirement# 6)

## 8. Security Considerations

See architecture requirement #5 and protocol requirement #2.

## 9. Normative References

[DS-MODEL] Y. Bernet, et. al., "An Informal Management Model for DiffServ Routers", work in progress, September 2001, <[draft-ietf-diffserv-model-06.txt](#)>.

[RFC1812] F. Baker, "Requirements for IP Version 4 Routers", [RFC1812](#), June 1995.

[RFC2211] J. Wroclawski, "Specification of the Controlled-Load Network Element Service", [RFC2211](#), September 1997.

[RFC2212] S. Shenker, C. Partridge, R. Guerin, "Specification of Guaranteed Quality of Service", [RFC2212](#), September 1997.

[RFC2212] S. Shenker, J. Wroclawski, "General Characterization Parameters for Integrated Service Network Elements", [RFC2215](#), September 1997.

[RFC2475] S. Blake, et. Al., "An Architecture for Differentiated Service", [RFC2475](#), December 1998.

[RFC2914] S. Floyd, "Congestion Control Principles", [RFC2914](#), September 2000.





[[RFC2663](#)] P. Srisuresh & M. Holdrege, "IP Network Address Translator (NAT) Terminology and Considerations", [RFC2663](#), August 1999.

## **10. Informative References**

[REQ-PART] T. Anderson, C. Wang, J. Buerkle, "Requirements for the Dynamic Partitioning of Network Elements", work in progress, August 2001, <[draft-ietf-gsmp-dyn-part-reqs-00.txt](#)>.

## **11. Acknowledgments**

The authors would like to thank Vip Sharma and Lily Yang for their valuable contributions.

## **12. Authors' Addresses**

Todd A. Anderson  
Intel  
2111 NE 25th Avenue  
Hillsboro, OR 97124 USA  
Phone: +1 503 712 1760  
Email: [todd.a.anderson@intel.com](mailto:todd.a.anderson@intel.com)

Ed Bowen  
IBM Zurich Research Laboratory  
Saumerstrasse 4  
CH-8803 Rueschlikon Switzerland  
Phone: +41 1 724 83 68  
Email: [edbowen@us.ibm.com](mailto:edbowen@us.ibm.com)

Ram Dantu  
Netrake Corporation  
3000 Technology Drive, #100,  
Plano, Texas, 75074  
Email: [rdantu@netrake.com](mailto:rdantu@netrake.com)  
Phone: 214 291 1111

Avri Doria  
Institute for System Technology  
Lulea University of Technology  
SE-971 87, Lulea, Sweden  
Phone: +46 (0)920 49 3030  
Email: [avri@sm.luth.se](mailto:avri@sm.luth.se)

Ram Gopal  
Nokia Research Center  
5, Wayside Road,  
Burlington, MA 01803  
Phone: 1-781-993-3685



Email: ram.gopal@nokia.com

Jamal Hadi Salim  
Znyx Networks  
Ottawa, Ontario  
Canada  
Email: hadi@znyx.com

Hormuzd Khosravi  
Intel  
2111 NE 25th Avenue  
Hillsboro, OR 97124 USA  
Phone: +1 503 264 0334  
Email: hormuzd.m.khosravi@intel.com

Muneyb Minhazuddin  
Avaya Inc.  
123, Epping road,  
North Ryde, NSW 2113, Australia  
Phone: +61 2 9352 8620  
email: muneyb@avaya.com

Margaret Wasserman  
Wind River  
10 Tara Blvd., Suite 330  
Nashua, NH 03062  
Phone: +1 603 897 2067  
Email: mrw@windriver.com

<a href="#">1.</a>	<a href="#">Abstract.....</a>	<a href="#">2</a>
<a href="#">2.</a>	<a href="#">Definitions.....</a>	<a href="#">2</a>
<a href="#">3.</a>	<a href="#">Introduction.....</a>	<a href="#">4</a>
<a href="#">4.</a>	<a href="#">Architecture.....</a>	<a href="#">5</a>
<a href="#">5.</a>	<a href="#">Architectural Requirements.....</a>	<a href="#">6</a>
<a href="#">6.</a>	<a href="#">FE Model Requirements.....</a>	<a href="#">8</a>
<a href="#">6.1.</a>	<a href="#">Types of Logical Functions.....</a>	<a href="#">8</a>
<a href="#">6.2.</a>	<a href="#">Variations of Logical Functions.....</a>	<a href="#">8</a>
<a href="#">6.3.</a>	<a href="#">Ordering of Logical Functions.....</a>	<a href="#">8</a>
<a href="#">6.4.</a>	<a href="#">Flexibility.....</a>	<a href="#">9</a>
<a href="#">6.5.</a>	<a href="#">Minimal Set of Logical Functions.....</a>	<a href="#">9</a>
<a href="#">7.</a>	<a href="#">ForCES Protocol Requirements.....</a>	<a href="#">10</a>
<a href="#">8.</a>	<a href="#">Security Considerations.....</a>	<a href="#">12</a>
<a href="#">9.</a>	<a href="#">Normative References.....</a>	<a href="#">12</a>
<a href="#">10.</a>	<a href="#">Informative References.....</a>	<a href="#">13</a>
<a href="#">11.</a>	<a href="#">Acknowledgments.....</a>	<a href="#">13</a>
<a href="#">12.</a>	<a href="#">Authors' Addresses.....</a>	<a href="#">13</a>

