

Network Working Group	J. Hadi Salim	
Internet-Draft	Mojatatu Networks	
Intended status: Standards Track	K. Ogawa	
Expires: May 27, 2010	NTT Corporation	
	November 23, 2009	

[TOC](#)

SCTP based TML (Transport Mapping Layer) for ForCES protocol draft-ietf-forces-sctptml-07

Abstract

This document defines the SCTP based TML (Transport Mapping Layer) for the ForCES protocol. It explains the rationale for choosing the SCTP (Stream Control Transmission Protocol) and also describes how this TML addresses all the requirements required by and the ForCES protocol.

Status of this Memo

This Internet-Draft is submitted to IETF in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on May 27, 2010.

Copyright Notice

Copyright (c) 2009 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted

from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the BSD License.

This document may contain material from IETF Documents or IETF Contributions published or made publicly available before November 10, 2008. The person(s) controlling the copyright in some of this material may not have granted the IETF Trust the right to allow modifications of such material outside the IETF Standards Process. Without obtaining an adequate license from the person(s) controlling the copyright in such materials, this document may not be modified outside the IETF Standards Process, and derivative works of it may not be created outside the IETF Standards Process, except to format it for publication as an RFC or to translate it into languages other than English.

Table of Contents

1.	Definitions
2.	Introduction
3.	Protocol Framework Overview
3.1.	The PL
3.2.	The TML
3.2.1.	TML and PL Interfaces
3.2.2.	TML Parameterization
4.	SCTP TML overview
4.1.	Rationale for using SCTP for TML
4.2.	Meeting TML requirements
4.2.1.	SCTP TML Channels
4.2.2.	Satisfying TML Requirements
5.	SCTP TML Channel Work
6.	IANA Considerations
7.	Security Considerations
7.1.	IPsec Usage
7.1.1.	SAD and SPD setup
8.	Acknowledgements
9.	References
9.1.	Normative References
9.2.	Informative References
Appendix A.	Suggested SCTP TML Channel Work Implementation
A.1.	SCTP TML Channel Initialization
A.2.	Channel work scheduling
A.2.1.	FE Channel work scheduling
A.2.2.	CE Channel work scheduling
A.3.	SCTP TML Channel Termination
A.4.	SCTP TML NE level channel scheduling
Appendix B.	Suggested Service Interface
B.1.	TML Boot-strapping
B.2.	TML Shutdown

1. Definitions

[TOC](#)

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in RFC 2119.

The following definitions are taken from [\[RFC3654\] \(Khosravi, H. and T. Anderson, "Requirements for Separation of IP Control and Forwarding," November 2003.\)](#) and [\[RFC3746\] \(Yang, L., Dantu, R., Anderson, T., and R. Gopal, "Forwarding and Control Element Separation \(ForCES\) Framework," April 2004.\)](#):

Logical Functional Block (LFB) -- A template that represents a fine-grained, logically separate aspects of FE processing.

ForCES Protocol -- The protocol used at the Fp reference point in the ForCES Framework in [\[RFC3746\] \(Yang, L., Dantu, R., Anderson, T., and R. Gopal, "Forwarding and Control Element Separation \(ForCES\) Framework," April 2004.\)](#).

ForCES Protocol Layer (ForCES PL) -- A layer in the ForCES architecture that embodies the ForCES protocol and the state transfer mechanisms as defined in [\[I-D.ietf-forces-protocol\] \(Dong, L., Doria, A., Gopal, R., HAAS, R., Salim, J., Khosravi, H., and W. Wang, "ForCES Protocol Specification," March 2009.\)](#).

ForCES Protocol Transport Mapping Layer (ForCES TML) -- A layer in ForCES protocol architecture that specifically addresses the protocol message transportation issues, such as how the protocol messages are mapped to different transport media (like SCTP, IP, TCP, UDP, ATM, Ethernet, etc), and how to achieve and implement reliability, security, etc.

2. Introduction

[TOC](#)

The ForCES (Forwarding and Control Element Separation) working group in the IETF defines the architecture and protocol for separation of Control Elements(CE) and Forwarding Elements(FE) in Network Elements(NE) such as routers. [\[RFC3654\] \(Khosravi, H. and T. Anderson, "Requirements for Separation of IP Control and Forwarding," November 2003.\)](#) and [\[RFC3746\] \(Yang, L., Dantu, R., Anderson, T., and R. Gopal, "Forwarding and Control Element Separation \(ForCES\) Framework," April 2004.\)](#) respectively define architectural and protocol requirements for the communication between CE and FE. The ForCES protocol layer specification [\[I-D.ietf-forces-protocol\] \(Dong, L.,](#)

[Doria, A., Gopal, R., HAAS, R., Salim, J., Khosravi, H., and W. Wang, "ForCES Protocol Specification," March 2009.](#)) describes the protocol semantics and workings. The ForCES protocol layer operates on top of an inter-connect hiding layer known as the TML. The relationship is illustrated in [Figure 1 \(Message exchange between CE and FE to establish an NE association\)](#).

This document defines the SCTP based TML for the ForCES protocol layer. It also addresses all the requirements for the TML including security, reliability, etc as defined in [\[I-D.ietf-forces-protocol\] \(Dong, L., Doria, A., Gopal, R., HAAS, R., Salim, J., Khosravi, H., and W. Wang, "ForCES Protocol Specification," March 2009.\)](#).

3. Protocol Framework Overview

[TOC](#)

The reader is referred to the Framework document [\[RFC3746\] \(Yang, L., Dantu, R., Anderson, T., and R. Gopal, "Forwarding and Control Element Separation \(ForCES\) Framework," April 2004.\)](#), and in particular sections 3 and 4, for an architectural overview and explanation of where and how the ForCES protocol fits in.

There is some content overlap between the ForCES protocol specification [\[I-D.ietf-forces-protocol\] \(Dong, L., Doria, A., Gopal, R., HAAS, R., Salim, J., Khosravi, H., and W. Wang, "ForCES Protocol Specification," March 2009.\)](#) and this section ([Section 3 \(Protocol Framework Overview\)](#)) in order to provide basic context to the reader of this document. The ForCES protocol layering constitutes two pieces: the PL and TML. This is depicted in [Figure 1 \(Message exchange between CE and FE to establish an NE association\)](#).

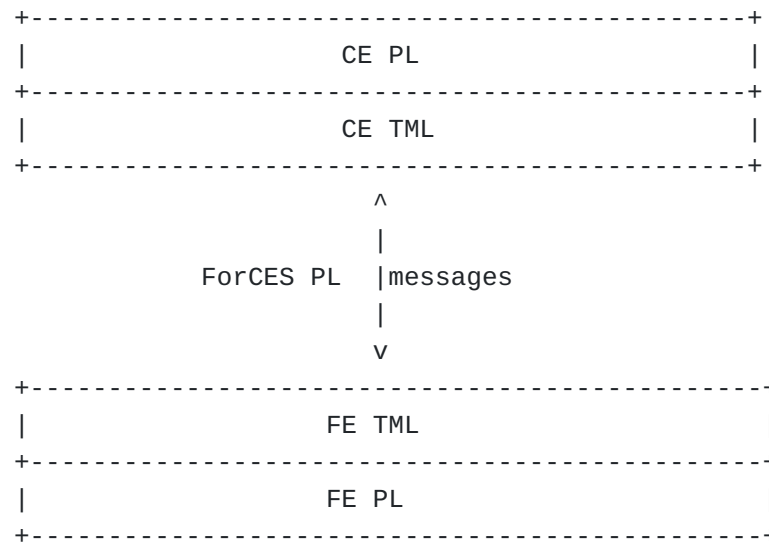


Figure 1: Message exchange between CE and FE to establish an NE association

The PL is in charge of the ForCES protocol. Its semantics and message layout are defined in [\[I-D.ietf-forces-protocol\]](#) (Dong, L., Doria, A., Gopal, R., HAAS, R., Salim, J., Khosravi, H., and W. Wang, "ForCES Protocol Specification," March 2009.). The TML is necessary to connect two ForCES end-points as shown in [Figure 1 \(Message exchange between CE and FE to establish an NE association\)](#).

Both the PL and TML are standardized by the IETF. While only one PL is defined, different TMLs are expected to be standardized. The TML at each of the nodes (CE and FE) is expected to be of the same definition in order to inter-operate.

When transmitting from a ForCES end-point, the PL delivers its messages to the TML. The TML then delivers the PL message to the destination TML(s).

On reception of a message, the TML delivers the message to its destination PL (as described in the ForCES header).

3.1. The PL

[TOC](#)

The PL is common to all implementations of ForCES and is standardized by the IETF [\[I-D.ietf-forces-protocol\]](#) (Dong, L., Doria, A., Gopal, R., HAAS, R., Salim, J., Khosravi, H., and W. Wang, "ForCES Protocol Specification," March 2009.). The PL is responsible for associating an

FE or CE to an NE. It is also responsible for tearing down such associations.

An FE may use the PL to asynchronously send packets to the CE. The FE may redirect via the PL (from outside the NE) various control protocol packets (e.g. OSPF, etc) to the CE. Additionally, the FE delivers various events that CE has subscribed-to via PL [\[I-D.ietf-forces-model\] \(Halpern, J. and J. Salim, "ForCES Forwarding Element Model," October 2008.\)](#).

The CE and FE may interact synchronously via the PL. The CE issues status requests to the FE and receives responses via the PL. The CE also configures the associated FE's LFBs' components using the PL [\[I-D.ietf-forces-model\] \(Halpern, J. and J. Salim, "ForCES Forwarding Element Model," October 2008.\)](#).

3.2. The TML

[TOC](#)

The TML is responsible for transport of the PL messages. [\[I-D.ietf-forces-protocol\] \(Dong, L., Doria, A., Gopal, R., HAAS, R., Salim, J., Khosravi, H., and W. Wang, "ForCES Protocol Specification," March 2009.\)](#) section 5 defines the requirements that need to be met by a TML specification. The SCTP TML specified in this document meets all the requirements specified in [\[I-D.ietf-forces-protocol\] \(Dong, L., Doria, A., Gopal, R., HAAS, R., Salim, J., Khosravi, H., and W. Wang, "ForCES Protocol Specification," March 2009.\)](#) section 5. [Section 4.2.2 \(Satisfying TML Requirements\)](#) describes how the TML requirements are met.

3.2.1. TML and PL Interfaces

[TOC](#)

There are two interfaces to the PL and TML. The specification of these interfaces is out of scope for this document, but the interfaces are introduced to show how they fit into the architecture and summarize the function provided at the interfaces. The first interface is between the PL and TML and the other is the CE Manager (CEM)/FE Manager (FEM) [\[RFC3746\] \(Yang, L., Dantu, R., Anderson, T., and R. Gopal, "Forwarding and Control Element Separation \(ForCES\) Framework," April 2004.\)](#) interface to both the PL and TML. Both interfaces are shown in [Figure 2 \(The TML-PL interface\)](#).

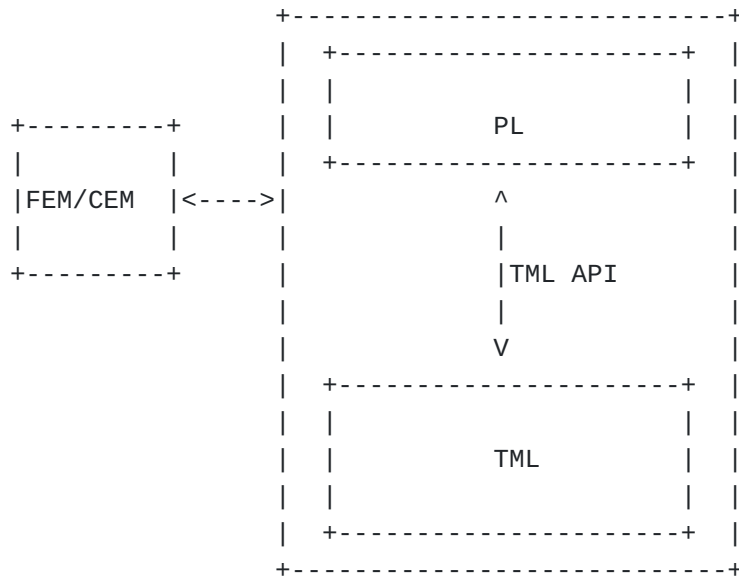


Figure 2: The TML-PL interface

The CEM/FEM[\[RFC3746\]](#) (Yang, L., Dantu, R., Anderson, T., and R. Gopal, "Forwarding and Control Element Separation (ForCES) Framework," April 2004.) interface is responsible for bootstrapping and parameterization of the TML. In its most basic form the CEM/FEM interface takes the form of a simple static config file which is read on startup in the pre-association phase. [Appendix B \(Suggested Service Interface\)](#) discusses in more details the service interfaces.

3.2.2. TML Parameterization

[TOC](#)

It is expected that it should be possible to use a configuration reference point, such as the FEM or the CEM, to configure the TML. Some of the configured parameters may include:

- *PL ID

- *Connection Type and associated data. For example if a TML uses IP/SCTP then parameters such as SCTP ports and IP addresses need to be configured.

- *Number of transport connections

*Connection Capability, such as bandwidth, etc.

*Allowed/Supported Connection QoS policy (or Congestion Control Policy)

4. SCTP TML overview

[TOC](#)

SCTP [[RFC4960](#)] ([Stewart, R., "Stream Control Transmission Protocol," September 2007.](#)) is an end-to-end transport protocol that is equivalent to TCP, UDP, or DCCP in many aspects. With a few exceptions, SCTP can do most of what UDP, TCP, or DCCP can achieve. SCTP as well can do most of what a combination of the other transport protocols can achieve (e.g. TCP and DCCP or TCP and UDP).

Like TCP, it provides ordered, reliable, connection-oriented, flow-controlled, congestion controlled data exchange. Unlike TCP, it does not provide byte streaming and instead provides message boundaries.

Like UDP, it can provide unreliable, unordered data exchange. Unlike UDP, it does not provide multicast support

Like DCCP, it can provide unreliable, ordered, congestion controlled, connection-oriented data exchange.

SCTP also provides other services that none of the 3 transport protocols mentioned above provide that we found attractive. These include:

- *Multi-homing

- *Runtime IP address binding

- *A range of reliability shades with congestion control

- *Built-in heartbeats

- *Multi-streaming

- *Message boundaries with reliability

- *Improved SYN DOS protection

- *Simpler transport events

- *Simplified replicasting

[TOC](#)

4.1. Rationale for using SCTP for TML

SCTP has all the features required to provide a robust TML. As a transport that is all-encompassing, it negates the need for having multiple transport protocols in order to satisfy the TML requirements ([\[I-D.ietf-forces-protocol\]](#) (Dong, L., Doria, A., Gopal, R., HAAS, R., Salim, J., Khosravi, H., and W. Wang, "ForCES Protocol Specification," March 2009.) section 5). As a result it allows for simpler coding and therefore reduces a lot of the interoperability concerns. SCTP is also very mature and widely used, making it a good choice for ubiquitous deployment.

4.2. Meeting TML requirements

[TOC](#)

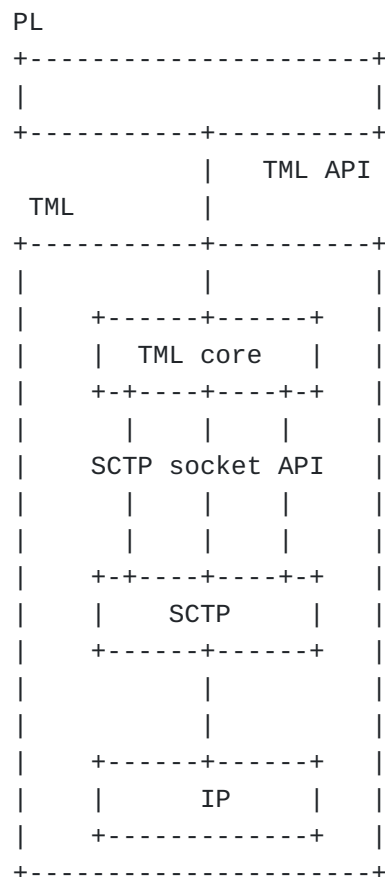


Figure 3: The TML-SCTP interface

[Figure 3 \(The TML-SCTP interface\)](#) details the interfacing between the PL and SCTP TML and the internals of the SCTP TML. The core of the TML interacts on its north-bound interface to the PL (utilizing the TML API). On the south-bound interface, the TML core interfaces to the SCTP layer utilizing the standard socket interface [\[I-D.ietf-tsvwg-sctpsocket\]](#) (Stewart, R., Poon, K., Tuexen, M., Yasevich, V., and P. Lei, "Sockets API Extensions for Stream Control Transmission Protocol (SCTP)," March 2010.). There are three SCTP socket connections opened between any two PL endpoints (whether FE or CE).

4.2.1. SCTP TML Channels

[TOC](#)

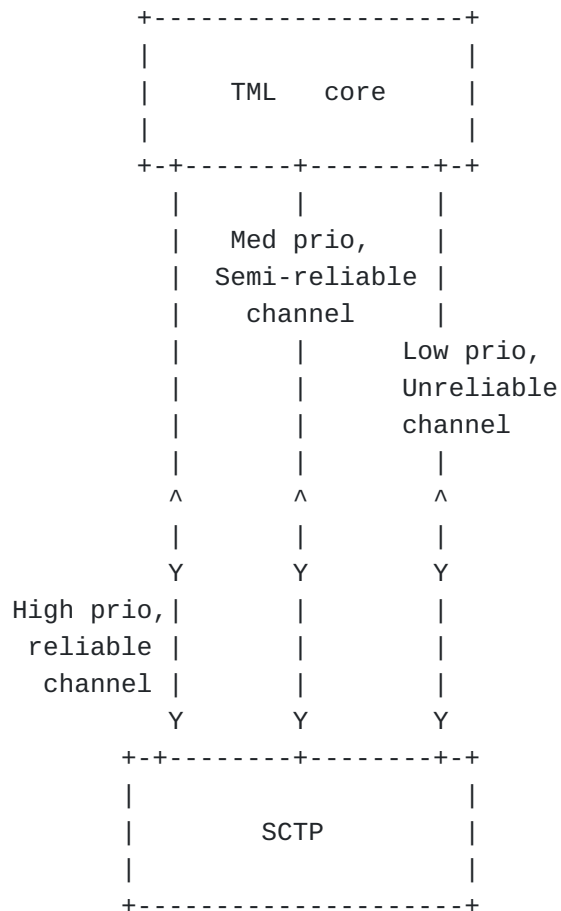


Figure 4: The TML-SCTP channels

[Figure 4 \(The TML-SCTP channels\)](#) details further the interfacing between the TML core and SCTP layers. There are 3 channels used to separate and prioritize the different types of ForCES traffic. Each channel constitutes a socket interface. It should be noted that all SCTP channels are congestion aware (and for that reason that detail is left out of the description of the 3 channels). SCTP port 6704, 6705, 6706 are used for the higher, medium and lower priority channels respectively. SCTP Payload Protocol ID (PPID) values of 21, 22, and 23 are used for the higher, medium and lower priority channels respectively.

4.2.1.1. Justifying Choice of 3 Sockets

[TOC](#)

SCTP allows up to 64K streams to be sent over a single socket interface. The authors initially envisioned using a single socket for all three channels (mapping a channel to an SCTP stream). This simplifies programming of the TML as well as conserves use of SCTP ports.

Further analysis revealed head of line blocking issues with this initial approach. Lower priority packets not needing reliable delivery could block higher priority packets (needing reliable delivery) under congestion situation for an indeterminate period of time (depending on how many outstanding lower priority packets are pending). For this reason, we elected to go with mapping each of the three channels to a different SCTP socket (instead of a different stream within a single socket).

4.2.1.2. Higher Priority, Reliable channel

[TOC](#)

The higher priority (HP) channel uses a standard SCTP reliable socket on port 6704. SCTP PPID 21 is used for all messages on the HP channel. The HP channel is used for CE solicited messages and their responses:

1. ForCES configuration messages flowing from CE to FE and responses from the FE to CE.
2. ForCES query messages flowing from CE to FE and responses from the FE to the CE.

PL priorities 4-7 MUST be used for all PL messages using this channel. The following PL messages MUST use the HP channel for transport:

- *Association Setup (default priority: 7)
- *Association Setup Response (default priority: 7)
- *Association Teardown (default priority: 7)
- *Config (default priority: 4)
- *Config Response (default priority: 4)
- *Query (default priority: 4)
- *Query Response (default priority: 4)

If PL priorities outside of the specified range (4-7) priority, PPID or PL message types other than the above are received on the HP channel, then the PL message MUST be dropped.

Although an implementation may choose different values from the defined range (4-7), it is RECOMMENDED that default priorities be used. A response to a ForCES message MUST contain the same priority as the request. Example, a config sent by the CE with priority 5 MUST have a config-response from the FE with priority 5.

4.2.1.3. Medium Priority, Semi-Reliable channel

[TOC](#)

The medium priority (MP) channel uses SCTP-PR on port 6705. SCTP PPID 22 MUST be used for all messages on the MP channel. Time limits on how long a message is valid are set on each outgoing message. This channel is used for events from the FE to the CE that are obsoleted over time. Events that are accumulative in nature and are recoverable by the CE (by issuing a query to the FE) can tolerate lost events and therefore should use this channel. For example, a generated event which carries the value of a counter that is monotonically incrementing fits to use this channel.

PL priority 3 MUST be used for PL messages on this channel. The following PL messages MUST use the MP channel for transport:

- *Event Notification (default priority: 3)

If PL priority outside of the specified priority, PPID or PL message type other than the above are received on the MP channel, then the PL message MUST be dropped.

4.2.1.4. Lower Priority, Unreliable channel

[TOC](#)

The lower priority (LP) channel uses SCTP port 6706. SCTP PPID 23 is used for all messages on the LP channel. The LP channel also MUST use SCTP-PR with lower timeout values than the MP channel. The reason an unreliable channel is used for redirect messages is to allow the control protocol at both the CE and its peer-endpoint to take charge of how the end-to-end semantics of the said control protocol's operations. For example:

1. Some control protocols are reliable in nature, therefore making this channel reliable introduces an extra layer of reliability which could be harmful. So any end-to-end retransmits will happen from remote.
2. Some control protocols may desire to have obsolescence of messages over retransmissions; making this channel reliable contradicts that desire.

Given ForCES PL heartbeats are traffic sensitive, sending them over the LP channel also makes sense. If the other end is not processing other channels it will eventually get heartbeats; and if it is busy processing other channels heartbeats will be obsoleted locally over time (and it does not matter if they did not make it). PL priorities 1-2 MUST be used for PL messages on this channel. PL messages that MUST use the MP channel for transport are:

*Packet Redirect (default priority: 2)

*Heartbeats (default priority: 1)

If PL priorities outside of the specified priority range, PPID or PL message types other than the above are received on the LP channel, then the PL message MUST be dropped.

4.2.1.5. Scheduling of The 3 Channels

[TOC](#)

Strict priority work-conserving scheduling is used to process both on sending and receiving (of the PL messages) by the TML Core as shown in [Figure 5 \(SCTP TML Strict Priority Scheduling\)](#).

This means that the HP messages are always processed first until there are no more left. The LP channel is processed only if channels that are a higher priority than itself has no more messages left to process. This means that under congestion situation, a higher priority channel with sufficient messages that occupy the available bandwidth would starve lower priority channel(s).

4.2.1.6. SCTP TML Parameterization

[TOC](#)

The following is a list of parameters needed for booting the TML. It is expected these parameters will be extracted via the FEM/CEM interface for each PL ID.

1. The IP address(es) or a resolvable DNS/hostname(s) of the CE/FE.
2. Whether to use IPsec or not. If IPsec is used, how to parameterize the different required ciphers, keys etc as described in [Section 7.1 \(IPsec Usage\)](#)
3. The HP SCTP port, as discussed in [Section 4.2.1.2 \(Higher Priority, Reliable channel\)](#). The default HP port value is 6704 ([Section 6 \(IANA Considerations\)](#)).
4. The MP SCTP port, as discussed in [Section 4.2.1.3 \(Medium Priority, Semi-Reliable channel\)](#). The default MP port value is 6705 ([Section 6 \(IANA Considerations\)](#)).
5. The LP SCTP port, as discussed in [Section 4.2.1.4 \(Lower Priority, Unreliable channel\)](#). The default LP port value is 6706 ([Section 6 \(IANA Considerations\)](#)).

4.2.2. Satisfying TML Requirements

[TOC](#)

[\[I-D.ietf-forces-protocol\]](#) (Dong, L., Doria, A., Gopal, R., HAAS, R., Salim, J., Khosravi, H., and W. Wang, "ForCES Protocol Specification," [March 2009.](#)) section 5 lists requirements that a TML needs to meet. This section describes how the SCTP TML satisfies those requirements.

4.2.2.1. Satisfying Reliability Requirement

[TOC](#)

As mentioned earlier, a shade of reliability ranges is possible in SCTP. Therefore this requirement is met.

[TOC](#)

4.2.2.2. Satisfying Congestion Control Requirement

Congestion control is built into SCTP. Therefore, this requirement is met.

4.2.2.3. Satisfying Timeliness and Prioritization Requirement

[TOC](#)

By using 3 sockets in conjunction with the partial-reliability feature, both timeliness and prioritization requirements are addressed.

4.2.2.4. Satisfying Addressing Requirement

[TOC](#)

There are no extra headers required for SCTP to fulfil this requirement. SCTP can be told to replicast packets to multiple destinations. The TML implementation will need to translate PL addresses, to a variety of unicast IP addresses in order to emulate multicast and broadcast PL addresses.

4.2.2.5. Satisfying High Availability Requirement

[TOC](#)

Transport link resiliency is one of SCTP's strongest point. Failure detection and recovery is built in, as mentioned earlier.

*The SCTP multi-homing feature is used to provide path diversity. Should one of the peer IP addresses become unreachable, the other(s) are used without needing lower layer convergence (routing, for example) or even the TML becoming aware.

*SCTP heartbeats and data transmission thresholds are used on a per peer IP address to detect reachability faults. The faults could be a result of an unreachable address or peer, which may be caused by a variety of reasons, like interface, network, or endpoint failures. The cause of the fault is noted.

*With the ADDIP feature, one can migrate IP addresses to other nodes at runtime. This is not unlike the VRRP[\[RFC3768\] \(Hinden, R., "Virtual Router Redundancy Protocol \(VRRP\)," April 2004.\)](#) protocol use. This feature is used in addition to multi-homing in a planned migration of activity from one FE/CE to another. In such a case, part of the provisioning recipe at the CE for replacing an FE involves migrating activity of one FE to another.

4.2.2.6. Satisfying Node Overload Prevention Requirement

[TOC](#)

The architecture of this TML defines three separate channels, one per socket, to be used within any FE-CE setup. The scheduling design for processing the TML channels ([Section 4.2.1.5 \(Scheduling of The 3 Channels\)](#)) is strict priority. A fundamental desire of the strict prioritization is to ensure that more important processing work always gets node resources over lesser important work.

When a ForCES node CPU is overwhelmed because the incoming packet rate is higher than it can keep up with, the channel queues grow and transport congestion subsequently follows. By virtue of using SCTP, the congestion is propagated back to the source of the incoming packets and eventually alleviated.

The HP channel work gets prioritized at the expense of the MP which gets prioritized over LP channels. The preferential scheduling only kicks in when there is node overload regardless of whether there is transport congestion. As a result of the preferential work treatment, the ForCES node achieves a robust steady processing capacity. Refer to [Appendix A.2 \(Channel work scheduling\)](#) for details on scheduling.

For an example of how the overload prevention works: consider a scenario where an overwhelming amount redirected packets (from outside the NE) coming into the NE may overload the FE while it has outstanding config work from the CE. In such a case, the FE, while it is busy processing config requests from the CE essentially ignores processing the redirect packets on the LP channel. If enough redirect packets accumulate, they are dropped either because the LP channel threshold is exceeded or because they are obsoleted. If on the other hand, the FE has successfully processed the higher priority channels and their related work, then it can proceed and process the LP channel. So as demonstrated in this case, the TML ties transport congestion and node overload implicitly together.

4.2.2.7. Satisfying Encapsulation Requirement

[TOC](#)

The SCTP TML sets SCTP PPIDs to identify channels used as described in [Section 4.2.1.1 \(Justifying Choice of 3 Sockets\)](#).

[TOC](#)

5. SCTP TML Channel Work

There are two levels of TML channel work within an NE when a ForCES node (CE or FE) is connected to multiple other ForCES nodes:

1. NE-level I/O work where a ForCES node (CE or FE) needs to choose which of the peer nodes to process.
2. Node-level I/O work where a ForCES node, handles the three SCTP TML channels separately for each single ForCES endpoint.

NE-level scheduling definition is left up to the implementation and is considered out of scope for this document. [Appendix A.4 \(SCTP TML NE level channel scheduling\)](#) discuss briefly some constraints that an implementer needs to worry about.

This document provides suggestions on SCTP channel work implementation in [Appendix A \(Suggested SCTP TML Channel Work Implementation\)](#).

The FE SHOULD do channel connections to the CE in the order of incrementing priorities i.e. LP socket first, followed by MP and ending with HP socket connection. The CE, however, MUST NOT assume that there is ordering of socket connections from any FE.

6. IANA Considerations

[TOC](#)

Following the policies outlined in "Guidelines for Writing an IANA Considerations Section in RFCs" [\[RFC5226\] \(Narten, T. and H. Alvestrand, "Guidelines for Writing an IANA Considerations Section in RFCs," May 2008.\)](#), the following name spaces are defined in ForCES SCTP TML.

*SCTP port 6704 for the HP channel, 6705 for the MP channel, and 6706 for the LP channel.

*SCTP Payload Protocol ID (PPID) 21 for the HP channel, 22 for the MP channel, and 23 for the LP channel.

XXX [Note to IANA]: Port allocations(SCTP 6700-6702) were made in August 2009. We have been asked by IESG to change these as prescribed above.

[TOC](#)

7. Security Considerations

The SCTP TML provides the following security services to the PL:

- *A mechanism to authenticate ForCES CEs and FEs at transport level in order to prevent the participation of unauthorized CEs and unauthorized FEs in the control and data path processing of a ForCES NE.
- *A mechanism to ensure message authentication of PL data and headers transferred from the CE to FE (and vice-versa) in order to prevent the injection of incorrect data into PL messages.
- *A mechanism to ensure the confidentiality of PL data and headers transferred from the CE to FE (and vice-versa), in order to prevent disclosure of PL information transported via the TML.

Security choices provided by the TML are made by the operator and take effect during the pre-association phase of the ForCES protocol. An operator may choose to use all, some or none of the security services provided by the TML in a CE-FE connection.

When operating under a secured environment, or for other operational concerns (in some cases performance issues) the operator may turn off all the security functions between CE and FE.

IP Security Protocol (IPsec) [\[RFC4301\] \(Kent, S. and K. Seo, "Security Architecture for the Internet Protocol," December 2005.\)](#) is used to provide needed security mechanisms.

IPsec is an IP level security scheme transparent to the higher-layer applications and therefore can provide security for any transport layer protocol. This gives IPsec the advantage that it can be used to secure everything between the CE and FE without expecting the TML implementation to be aware of the details.

The IPsec architecture is designed to provide message integrity and message confidentiality outlined in the TML security requirements [\[I-D.ietf-forces-protocol\] \(Dong, L., Doria, A., Gopal, R., HAAS, R., Salim, J., Khosravi, H., and W. Wang, "ForCES Protocol Specification," March 2009.\)](#). Mutual authentication and key exchange protocol are provided by Internet Key Exchange (IKE) [\[RFC2409\] \(Harkins, D. and D. Carrel, "The Internet Key Exchange \(IKE\)," November 1998.\)](#).

7.1. IPsec Usage

[TOC](#)

A ForCES FE or CE MUST support the following:

- *Internet Key Exchange (IKE) [\[RFC2409\] \(Harkins, D. and D. Carrel, "The Internet Key Exchange \(IKE\)," November 1998.\)](#) with certificates for endpoint authentication.

*Transport Mode Encapsulating Security Payload (ESP)[\[RFC4303\]](#) ([Kent, S., "IP Encapsulating Security Payload \(ESP\)," December 2005.](#)).

*HMAC-SHA1-96 [\[RFC2404\]](#) ([Madson, C. and R. Glenn, "The Use of HMAC-SHA-1-96 within ESP and AH," November 1998.](#)) for message integrity protection

*AES-CBC with 128-bit keys [\[RFC3602\]](#) ([Frankel, S., Glenn, R., and S. Kelly, "The AES-CBC Cipher Algorithm and Its Use with IPsec," September 2003.](#)) for message confidentiality.

*Replay protection[\[RFC4301\]](#) ([Kent, S. and K. Seo, "Security Architecture for the Internet Protocol," December 2005.](#)).

It is expected to be possible for the CE or FE to be operationally configured to negotiate other cipher suites and even use manual keying.

7.1.1. SAD and SPD setup

[TOC](#)

To minimize the operational configuration it is recommended that only the IANA issued SCTP protocol number(132) be used as a selector in the Security Policy Database (SPD) for ForCES. In such a case only a single SPD and SAD entry is needed.

It should be straightforward to extend such a policy to alternatively use the 3 SCTP TML port numbers as SPD selectors. But as noted above this choice will require increased number of SPD entries.

In scenarios where multiple IP addresses are used within a single association, and there is desire to configure different policies on a per IP address, then it is recommended to follow [\[RFC3554\]](#) ([Bellovin, S., Ioannidis, J., Keromytis, A., and R. Stewart, "On the Use of Stream Control Transmission Protocol \(SCTP\) with IPsec," July 2003.](#))

8. Acknowledgements

[TOC](#)

The authors would like to thank Joel Halpern, Michael Tuxen, Randy Stewart, Evangelos Haleplidis, Chuanhuang Li, Lars Eggert, Avshalom Houri, Adrian Farrel, Juergen Quittek, Magnus Westerlund, and Pasi Eronen for engaging us in discussions that have made this document better.

Ross Callon was an excellent manager who persevered in providing us guidance and Joel Halpern was an excellent document shepherd without whom this document would have taken longer to publish.

9. References

[TOC](#)

9.1. Normative References

[TOC](#)

[I-D.ietf-forces-protocol]	Dong, L., Doria, A., Gopal, R., HAAS, R., Salim, J., Khosravi, H., and W. Wang, " ForCES Protocol Specification ," draft-ietf-forces-protocol-22 (work in progress), March 2009 (TXT).
[RFC2404]	Madson, C. and R. Glenn , " The Use of HMAC-SHA-1-96 within ESP and AH ," RFC 2404, November 1998 (TXT , HTML , XML).
[RFC2409]	Harkins, D. and D. Carrel , " The Internet Key Exchange (IKE) ," RFC 2409, November 1998 (TXT , HTML , XML).
[RFC3554]	Bellovin, S., Ioannidis, J., Keromytis, A., and R. Stewart, " On the Use of Stream Control Transmission Protocol (SCTP) with IPsec ," RFC 3554, July 2003 (TXT).
[RFC3602]	Frankel, S., Glenn, R., and S. Kelly, " The AES-CBC Cipher Algorithm and Its Use with IPsec ," RFC 3602, September 2003 (TXT).
[RFC4301]	Kent, S. and K. Seo, " Security Architecture for the Internet Protocol ," RFC 4301, December 2005 (TXT).
[RFC4303]	Kent, S., " IP Encapsulating Security Payload (ESP) ," RFC 4303, December 2005 (TXT).
[RFC4960]	Stewart, R., " Stream Control Transmission Protocol ," RFC 4960, September 2007 (TXT).
[RFC5226]	Narten, T. and H. Alvestrand, " Guidelines for Writing an IANA Considerations Section in RFCs ," BCP 26, RFC 5226, May 2008 (TXT).

9.2. Informative References

[TOC](#)

[I-D.ietf-forces-model]	Halpern, J. and J. Salim, " ForCES Forwarding Element Model ," draft-ietf-forces-model-16 (work in progress), October 2008 (TXT).
[I-D.ietf-tsvwg-sctpsocket]	Stewart, R., Poon, K., Tuexen, M., Yasevich, V., and P. Lei, " Sockets API Extensions for Stream Control Transmission Protocol (SCTP) ," draft-ietf-tsvwg-sctpsocket-22 (work in progress), March 2010 (TXT).
[RFC3654]	Khosravi, H. and T. Anderson, " Requirements for Separation of IP Control and Forwarding ," RFC 3654, November 2003 (TXT).

[RFC3746]	Yang, L., Dantu, R., Anderson, T., and R. Gopal, " Forwarding and Control Element Separation (ForCES) Framework ," RFC 3746, April 2004 (TXT).
[RFC3768]	Hinden, R., " Virtual Router Redundancy Protocol (VRRP) ," RFC 3768, April 2004 (TXT).

Appendix A. Suggested SCTP TML Channel Work Implementation

[TOC](#)

As mentioned in [Section 5 \(SCTP TML Channel Work\)](#), there are two levels of TML channel work within an NE when a ForCES node (CE or FE) is connected to multiple other ForCES nodes:

1. NE-level I/O work where a ForCES node (CE or FE) needs to choose which of the peer nodes to process.
2. Node-level I/O work where a ForCES node, handles the three SCTP TML channels separately for each single ForCES endpoint.

NE-level scheduling definition is left up to the implementation and is considered out of scope for this document. [Appendix A.4 \(SCTP TML NE level channel scheduling\)](#) discusses briefly some constraints that an implementer needs to worry about.

This document and in particular [Appendix A.1 \(SCTP TML Channel Initialization\)](#), [Appendix A.2 \(Channel work scheduling\)](#) and [Appendix A.3 \(SCTP TML Channel Termination\)](#) discuss details of node-level I/O work.

A.1. SCTP TML Channel Initialization

[TOC](#)

As discussed in [Section 5 \(SCTP TML Channel Work\)](#), it is recommended that the FE SHOULD do socket connections to the CE in the order of incrementing priorities i.e. LP socket first, followed by MP and ending with HP socket connection. The CE, however, MUST NOT assume that there is ordering of socket connections from any FE. [Appendix B.1 \(TML Bootstrapping\)](#) has more details on the expected initialization of SCTP channel work.

A.2. Channel work scheduling

[TOC](#)

This section provides high level details of the scheduling view of the SCTP TML core ([Section 4.2.1 \(SCTP TML Channels\)](#)). A practical

scheduler implementation takes care of many little details (such as timers, work quanta, etc) not described in this document. It is left to the implementer to take care of those details.

The CE(s) and FE(s) are coupled together in the principles of the scheduling scheme described here to tie together node overload with transport congestion. The design intent is to provide the highest possible robust work throughput for the NE under any network or processing congestion.

A.2.1. FE Channel work scheduling

[TOC](#)

The FE scheduling, in priority order, needs to I/O process:

1. The HP channel I/O in the following priority order:
 1. Transmitting back to the CE any outstanding result of executed work via the HP channel transmit path.
 2. Taking new incoming work from the CE which creates ForCES work to be executed by the FE.
2. ForCES events which result in transmission of unsolicited ForCES packets to the CE via the MP channel.
3. Incoming Redirect work in the form of control packets that come from the CE via LP channel. After redirect processing, these packets get sent out on external (to the NE) interface.
4. Incoming Redirect work in the form of control packets that come from other NEs via external (to the NE) interfaces. After some processing, such packets are sent to the CE.

It is worth emphasizing at this point again that the SCTP TML processes the channel work in strict priority. For example, as long as there are messages to send to the CE on the HP channel, they will be processed first until there are no more left before processing the next priority work (which is to read new messages on the HP channel incoming from the CE).

[TOC](#)

A.2.2. CE Channel work scheduling

The CE scheduling, in priority order, needs to deal with:

1. The HP channel I/O in the following priority order:
 1. Process incoming responses to requests of work it made to the FE(s).
 2. Transmitting any outstanding HP work it needs for the FE(s) to complete.
2. Incoming ForCES events from the FE(s) via the MP channel.
3. Outgoing Redirect work in the form of control packets that get sent from the CE via LP channel destined to external (to the NE) interface on FE(s).
4. Incoming Redirect work in the form of control packets that come from other NEs via external (to the NE) interfaces on the FE(s).

It is worth to repeat for emphasis again that the SCTP TML processes the channel work in strict priority. For example, if there are messages incoming from an FE on the HP channel, they will be processed first until there are no more left before processing the next priority work which is to transmit any outstanding HP channel messages going to the FE.

A.3. SCTP TML Channel Termination

[TOC](#)

[Appendix B.2 \(TML Shutdown\)](#) describes a controlled disassociation of the FE from the NE.

It is also possible for connectivity to be lost between the FE and CE on one or more sockets. In cases where SCTP multi-homing features are used for path availability, the disconnection of a socket will only occur if all paths are unreachable; otherwise, SCTP will ensure reachability. In the situation of a total connectivity loss of even one SCTP socket, it is recommended that the FE and CE SHOULD assume a state equivalent to ForCES Association Teardown being issued and follow the sequence described in [Appendix B.2 \(TML Shutdown\)](#).

A CE could also disconnect sockets to an FE to indicate an "emergency teardown". The "emergency teardown" may be necessary in cases when a CE needs to disconnect an FE but knows that an FE is busy processing a lot of outstanding commands (some of which the FE hasn't got around to processing yet). By virtue of the CE closing the connections, the FE

will immediately be asynchronously notified and will not have to process any outstanding commands from the CE.

A.4. SCTP TML NE level channel scheduling

[TOC](#)

In handling NE-level I/O work, an implementation needs to worry about being both fair and robust across peer ForCES nodes.

Fairness is desired so that each peer node makes progress across the NE. For the sake of illustration consider two FEs connected to a CE; whereas one FE has a few HP messages that need to be processed by the CE, another may have infinite HP messages. The scheduling scheme may decide to use a quota scheduling system to ensure that the second FE does not hog the CE cycles.

Robustness is desired so that the NE does not succumb to a DoS attack from hostile entities and always achieves a maximum stable workload processing level. For the sake of illustration consider again two FEs connected to a CE. Consider FE1 as having a large number of HP and MP messages and FE2 having a large number of MP and LP messages. The scheduling scheme needs to ensure that while FE1 always gets its messages processed, at some point we allow FE2 messages to be processed. A promotion and preemption based scheduling could be used by the CE to resolve this issue.

Appendix B. Suggested Service Interface

[TOC](#)

This section outlines high level service interface between FEM/CEM and TML, the PL and TML, and between local and remote TMLs. The intent of this interface discussion is to provide general guidelines. The implementer is expected to care of details and even follow a different approach if needed.

The theory of operation for the PL-TML service is as follows:

1. The PL starts up and bootstraps the TML. The end result of a successful TML bootstrap is that the CE TML and the FE TML connect to each other at the transport level.
2. Transmission and reception of the PL messages commences after a successful TML bootstrap. The PL uses send and receive PL-TML interfaces to communicate to its peers. The TML is agnostic to the nature of the messages being sent or received. The first message exchanges that happen are to establish ForCES association. Subsequent messages maybe either unsolicited events from the FE PL, control message redirects from/to the CE

to/from FE, and configuration from the CE to the FE and their responses flowing from the FE to the CE.

3. The PL does a shutdown of the TML after terminating ForCES association.

B.1. TML Boot-strapping

[TOC](#)

[Figure 6 \(SCTP TML Bootstrapping\)](#) illustrates a flow for the TML bootstrapped by the PL.

When the PL starts up (possibly after some internal initialization), it boots up the TML. The TML first interacts with the FEM/CEM and acquires the necessary TML parameterization ([Section 4.2.1.6 \(SCTP TML Parameterization\)](#)). Next the TML uses the information it retrieved from the FEM/CEM interface to initialize itself.

The TML on the FE proceeds to connect the 3 channels to the CE. The socket interface is used for each of the channels. The TML continues to re-try the connections to the CE until all 3 channels are connected. It is advisable that the number of connection retry attempts and the time between each retry is also configurable via the FEM. On failure to connect one or more channels, and after the configured number of retry thresholds is exceeded, the TML will return an appropriate failure indicator to the PL. On success (as shown in [Figure 6 \(SCTP TML Bootstrapping\)](#)), a success indication is presented to the PL.

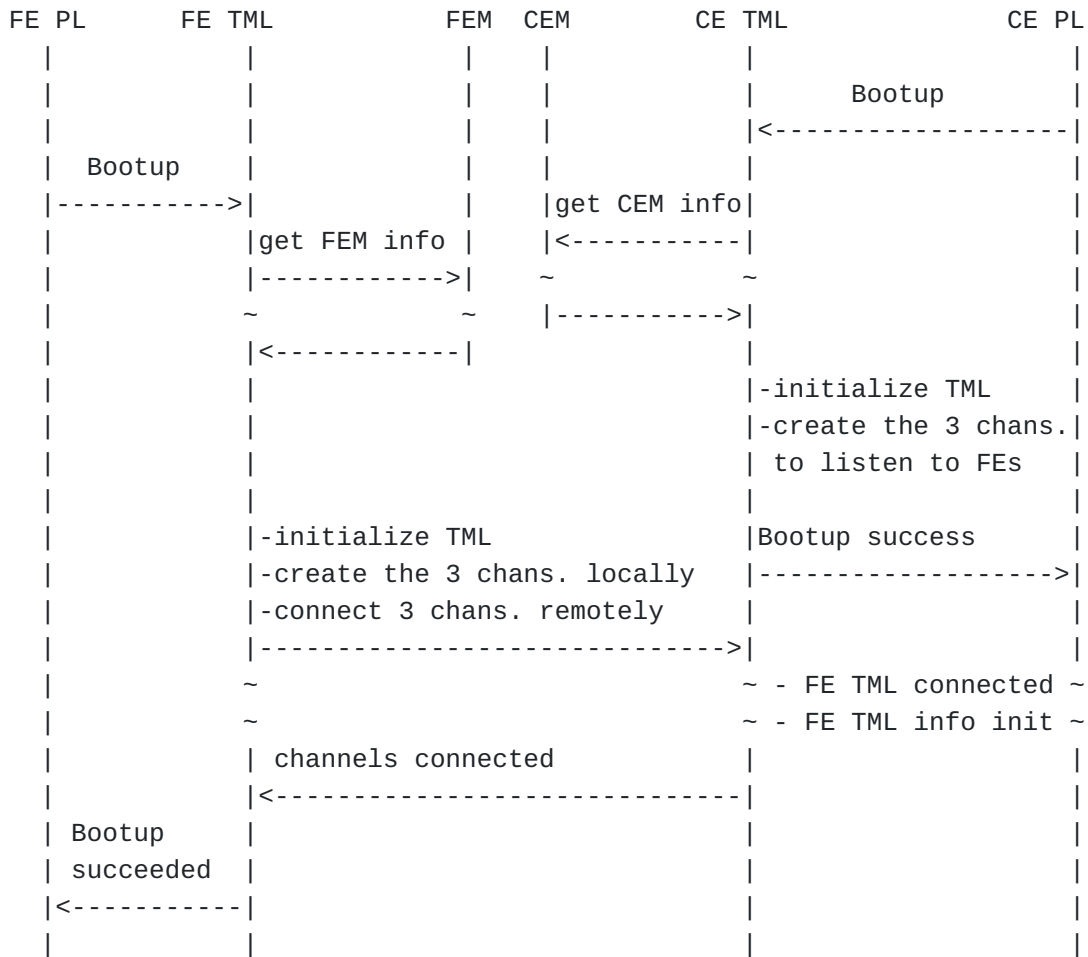


Figure 6: SCTP TML Bootstrapping

On the CE things are slightly different. After initializing from the CEM, the TML on the CE side proceeds to initialize the 3 channels to listen to remote connections from the FEs. The success or failure indication is passed on to the CE PL (in the same manner as was done in the FE).

Post boot-up, the CE TML waits for connections from the FEs. Upon a successful connection by an FE, the CE TML level keeps track of the transport level details of the FE. Note, at this stage only transport level connection has been established; ForCES level association follows using send/receive PL-TML interfaces (refer to [Appendix B.3 \(TML Sending and Receiving\)](#) and [Figure 8 \(Send and Recv Flow\)](#)).

B.2. TML Shutdown

[Figure 7 \(FE Shutting down\)](#) shows an example of an FE shutting down the TML. It is assumed at this point that the ForCES Association Teardown has been issued by the CE. It should also be noted that different implementations may have different procedures for cleaning up state etc.

When the FE PL issues a shutdown to its TML for a specific PL ID, the TML releases all the channel connections to the CE. This is achieved by closing the sockets used to communicate to the CE. This results in the stack sending a SCTP shutdown which is received on the CE.

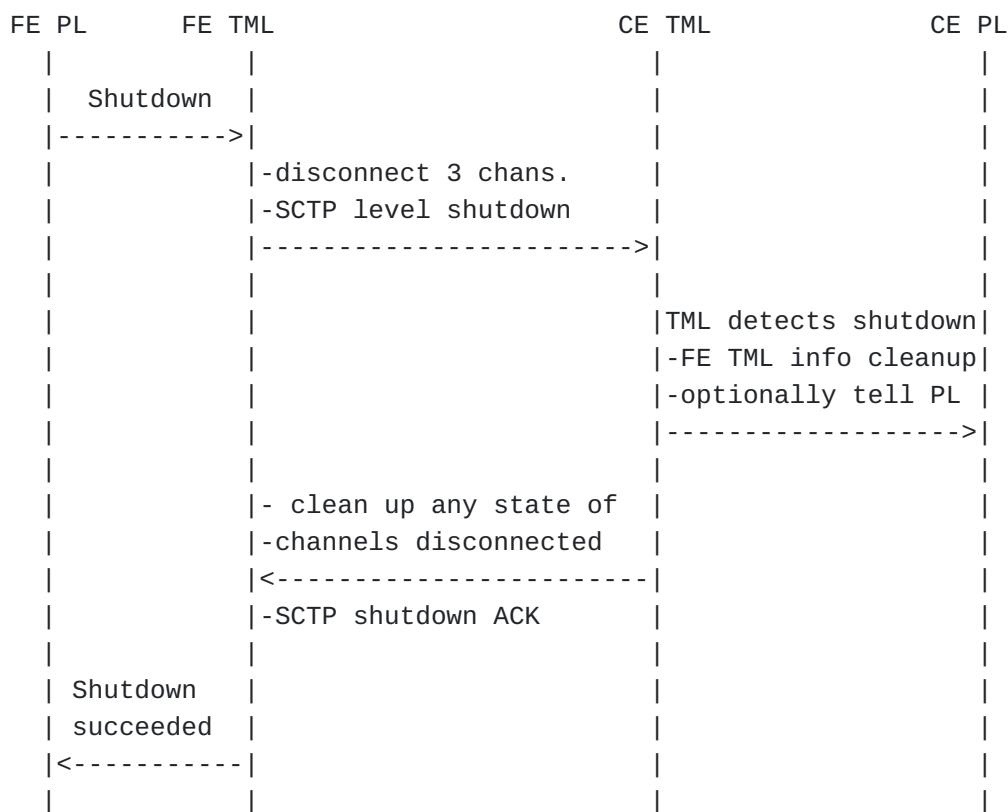


Figure 7: FE Shutting down

On the CE side, a TML disconnection would result in possible cleanup of the FE state. Optionally, depending on the implementation, there may be need to inform the PL about the TML disconnection. The CE stack level SCTP sends an acknowledgement to the FE TML in response to the earlier SCTP shutdown.

B.3. TML Sending and Receiving

[TOC](#)

The TML should be agnostic to the content of the PL messages, or their operations. The PL should provide enough information to the TML for it to assign an appropriate priority and loss behavior to the message.

[Figure 8 \(Send and Recv Flow\)](#) shows an example of a message exchange originated at the FE and sent to the CE (such as a ForCES association message) which illustrates all the necessary service interfaces for sending and receiving.

When the FE PL sends a message to the TML, the TML is expected to pick one of HP/MP/LP channels and send out the ForCES message.

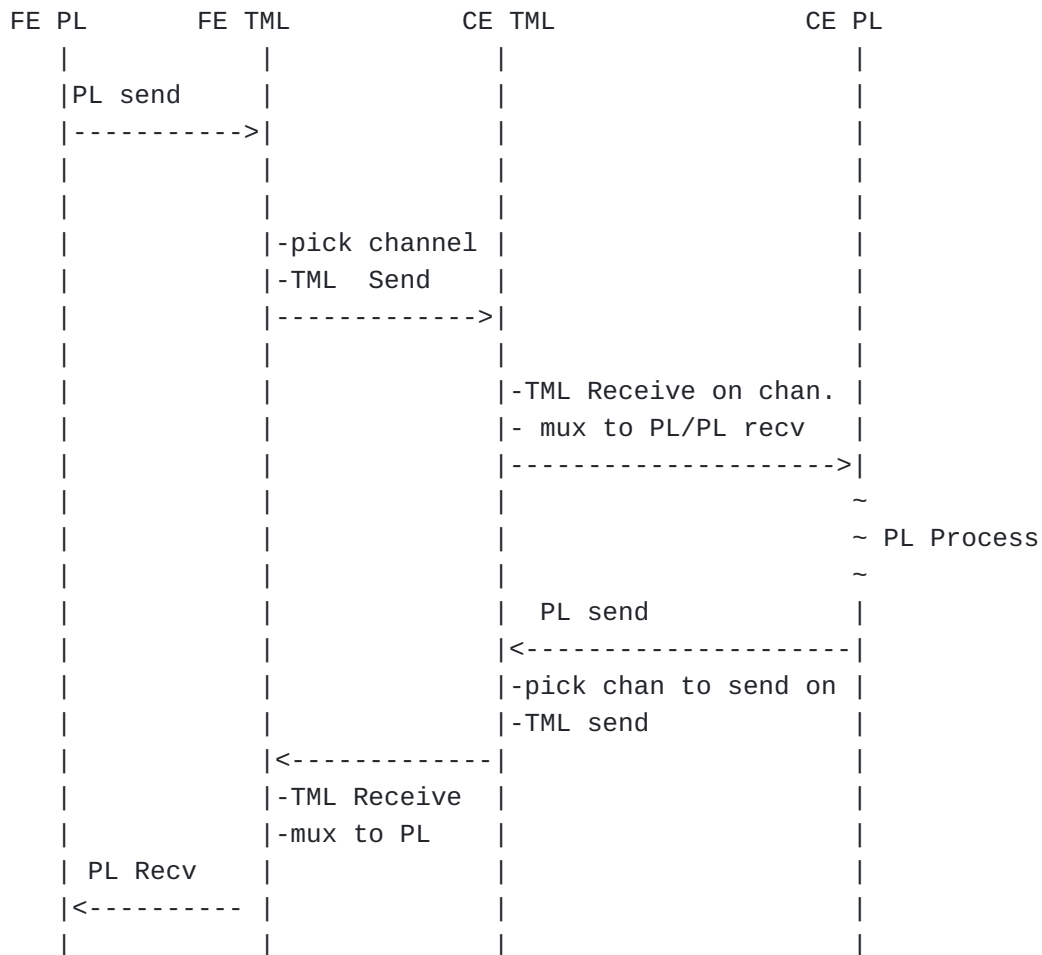


Figure 8: Send and Recv Flow

When the CE TML receives the ForCES message on the channel it was sent on, it demultiplexes the message to the CE PL. The CE PL, after some processing (in this example dealing with the FE's association), sends to the TML the response. And as in the case of FE PL, the CE TML picks the channel to send on before sending. The processing of the ForCES message upon arriving at the FE TML and delivery to the FE PL is similar to the CE side equivalent as shown above in [Appendix B.3 \(TML Sending and Receiving\)](#).

Authors' Addresses

[TOC](#)

	Jamal Hadi Salim
	Mojatatu Networks
	Ottawa, Ontario
	Canada
Email:	hadi@mojatatu.com
	Kentaro Ogawa
	NTT Corporation
	3-9-11 Midori-cho
	Musashino-shi, Tokyo 180-8585
	Japan
Email:	ogawa.kentaro@lab.ntt.co.jp