

Network Working Group  
Internet-Draft  
Intended status: Informational  
Expires: February 27, 2008

H. Tschofenig  
Nokia Siemens Networks  
H. Schulzrinne  
Columbia U.  
August 26, 2007

**GEOPRIV Layer 7 Location Configuration Protocol; Problem Statement and  
Requirements  
draft-ietf-geopriv-l7-lcp-ps-04.txt**

Status of this Memo

By submitting this Internet-Draft, each author represents that any applicable patent or other IPR claims of which he or she is aware have been or will be disclosed, and any of which he or she becomes aware will be disclosed, in accordance with [Section 6 of BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on February 27, 2008.

Copyright Notice

Copyright (C) The IETF Trust (2007).

## Abstract

This document provides a problem statement, lists requirements and captures design aspects for a Geopriv Layer 7 Location Configuration Protocol L7 (LCP). This protocol aims to allow an end host to obtain location information, by value or by reference, from a Location Information Server (LIS) that is located in the access network. The obtained location information can then be used for a variety of different protocols and purposes. For example, it can be used as input to the Location-to-Service Translation Protocol (LoST) or to convey location within SIP to other entities.

## Table of Contents

<a href="#">1.</a>	Introduction . . . . .	<a href="#">3</a>
<a href="#">2.</a>	Terminology . . . . .	<a href="#">4</a>
<a href="#">3.</a>	Scenarios . . . . .	<a href="#">5</a>
<a href="#">3.1.</a>	Fixed Wired Environment . . . . .	<a href="#">5</a>
<a href="#">3.2.</a>	Moving Network . . . . .	<a href="#">7</a>
<a href="#">3.3.</a>	Wireless Access . . . . .	<a href="#">9</a>
<a href="#">4.</a>	Discovery of the Location Information Server . . . . .	<a href="#">11</a>
<a href="#">5.</a>	Identifier for Location Determination . . . . .	<a href="#">13</a>
<a href="#">6.</a>	Requirements . . . . .	<a href="#">16</a>
<a href="#">7.</a>	Security Considerations . . . . .	<a href="#">18</a>
<a href="#">8.</a>	IANA Considerations . . . . .	<a href="#">19</a>
<a href="#">9.</a>	Contributors . . . . .	<a href="#">20</a>
<a href="#">10.</a>	Acknowledgements . . . . .	<a href="#">21</a>
<a href="#">11.</a>	References . . . . .	<a href="#">22</a>
<a href="#">11.1.</a>	Normative References . . . . .	<a href="#">22</a>
<a href="#">11.2.</a>	Informative References . . . . .	<a href="#">22</a>
	Authors' Addresses . . . . .	<a href="#">24</a>
	Intellectual Property and Copyright Statements . . . . .	<a href="#">25</a>



## **1. Introduction**

This document provides a problem statement, lists requirements and captures design aspects for a Geopriv Layer 7 Location Configuration Protocol L7 (LCP). The protocol has two purposes:

- o It is used to obtain location information (referred as "Location by Value" or LbyV) from a dedicated node, called the Location Information Server (LIS).
- o It enables the Target to obtain a reference to location information (referred as "Location by Reference" or LbyR). This reference can take the form of a subscription URI, such as a SIP presence URI, a HTTP/HTTPS URI, or another URI. The requirements related to the task of obtaining a LbyR are described in a separate document, see [\[4\]](#).

The need for these two functions can be derived from the scenarios presented in [Section 3](#).

For this document we assume that the GEOPRIV Layer 7 LCP runs between the end host (i.e., the Target in [\[1\]](#) terminology) and the LIS.

This document is structured as follows. [Section 4](#) discusses the challenge of discovering the LIS in the access network. [Section 5](#) compares different types of identifiers that can be used to retrieve location information. A list of requirements for the L7 LCP can be found in [Section 6](#).

This document does not describe how the access network provider determines the location of the end host since this is largely a matter of the capabilities of specific link layer technologies or certain deployment environments.



## **2. Terminology**

In this document, the key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" are to be interpreted as described in [RFC 2119](#) [2], with the qualification that unless otherwise stated these words apply to the design of the GEOPRIV Layer 7 Location Configuration Protocol.

The term Location Information Server (LIS) refers to an entity capable of determining the location of a Target and of providing that location information, a reference to it, or both via the Location Configuration Protocol (LCP) to the requesting party. In most cases the requesting party is the Target itself but it may also be an authorized entity that acts on behalf of it, such as a SIP proxy or another LIS.

This document also uses terminology from [1] (such as Target) and [3] (such as Internet Access Provider (IAP), Internet Service Provider (ISP), and Application Service Provider (ASP)).

With the term "Access Network Provider" we refer to the Internet Access Provider (IAP) and the Internet Service Provider (ISP) without further distinguishing these two entities as it is not relevant for the purpose of this document. An additional requirements document on LIS-to-LIS [5] shows scenario where the separation between IAP and ISP is important.



### **3. Scenarios**

This section describes a few network scenarios where the L7 LCP may be used. Note that this section does not aim to exhaustively list all possible deployment environments. Instead we focus on the following environments:

- o DSL/Cable networks, WiMax-like fixed access
- o Airport, City, Campus Wireless Networks, such as 802.11a/b/g, 802.16e/Wimax
- o 3G networks
- o Enterprise networks

We illustrate a few examples below.

#### **3.1. Fixed Wired Environment**

Figure 1 shows a DSL network scenario with the Access Network Provider and the customer premises. The Access Network Provider operates link and network layer devices (represented as Node) and the LIS.





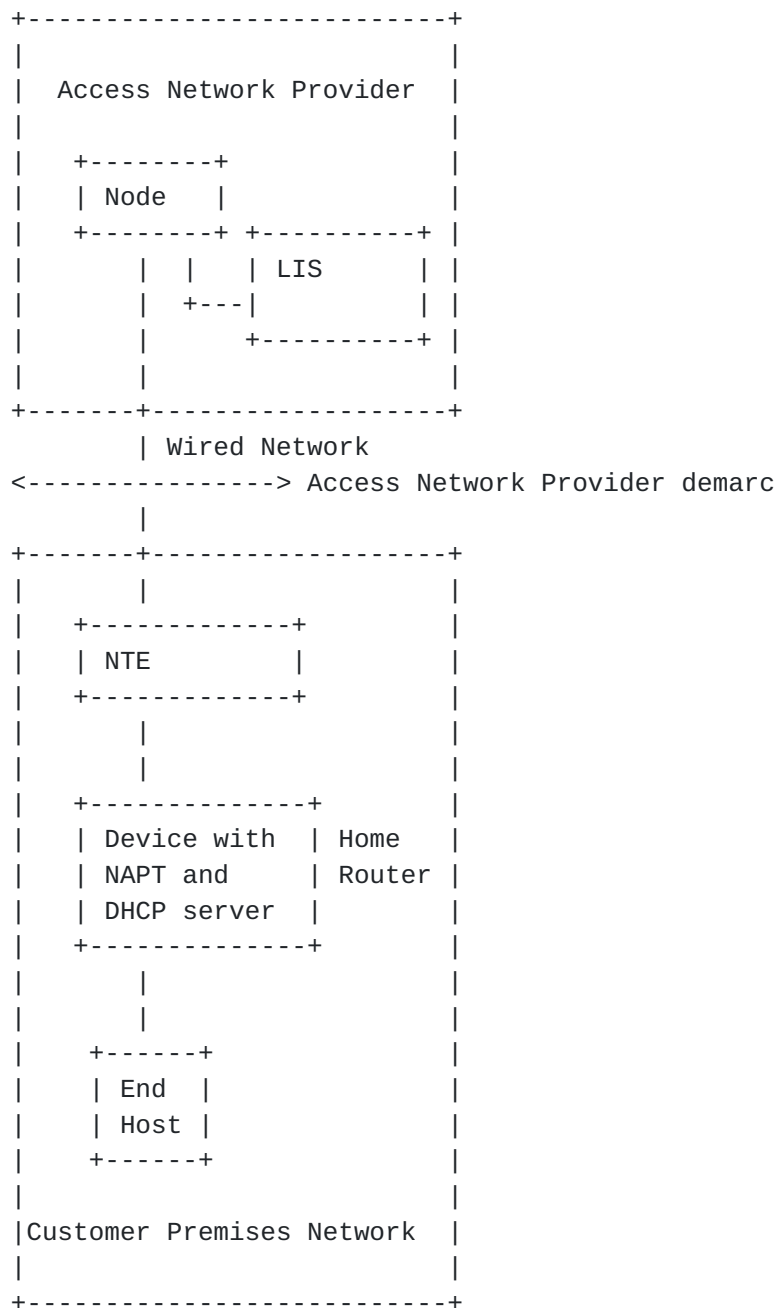


Figure 1: DSL Scenario

The customer premises consists of a router with a Network Address Translator with Port Address Translation (NAPT) and a DHCP server as used in most Customer Premises Networks (CPN) and the Network Termination Equipment (NTE) where Layer 1 and sometimes Layer 2 protocols are terminated. The router in the home network (e.g., broadband router, cable or DSL router) typically runs a NAPT and a DHCP server. The NTE is a legacy device and in many cases cannot be modified for the purpose of delivering location information to the



end host. The same is true of the device with the NAPT and DHCP server.

It is possible for the NTE and the home router to physically be in the same box, or for there to be no home router, or for the NTE and end host to be in the same physical box (with no home router). An example of this last case is where Ethernet service is delivered to customers' homes, and the Ethernet NIC in their PC serves as the NTE.

Current Customer Premises Network (CPN) deployments frequently show the following characteristics:

1. CPE = Single PC

1. with Ethernet NIC (PPPoE or DHCP on PC); there may be a bridged DSL or cable modem as NTE, or the Ethernet NIC might be the NTE
2. with USB DSL or cable modem [PPPoA, PPPoE, or DHCP on PC]

Note that the device with NAPT and DHCP of Figure 1 is not present in such a scenario.

2. One or more hosts with at least one router (DHCP Client or PPPoE, DHCP server in router; VoIP can be soft client on PC, stand-alone VoIP device, or Analog Terminal Adaptor (ATA) function embedded in router)
  1. combined router and NTE
  2. separate router with NTE in bridged mode
  3. separate router with NTE (NTE/router does PPPoE or DHCP to WAN, router provides DHCP server for hosts in LAN; double NAT)

The majority of fixed access broadband customers use a router. The placement of the VoIP client is mentioned to describe what sorts of hosts may need to be able to request location information. Soft clients on PCs are frequently not launched until long after bootstrap is complete, and are not able to control any options that may be specified during bootstrap. They also cannot control whether a VPN client is running on the end host.

### **3.2. Moving Network**

An example of a moving network is a "WIMAX-like fixed wireless" scenario that is offered in several cities, like New Orleans, Biloxi,



etc., where much of the communications infrastructure was destroyed due to a natural disaster. The customer-side antenna for this service is rather small (about the size of a mass market paperback book) and can be run off battery power. The output of this little antenna is a RJ-45 Ethernet jack. A laptop can be plugged into this Ethernet jack. The user would then run a PPPoE client to connect to the network. Once the network connection is established, the user can run a SIP client on the laptop.

The network-side antenna is, for example, connected through ATM to the core network, and from there to the same BRASs that serve regular DSL customers. These Broadband Remote Access Servers (BRASs) terminate the PPPoE sessions, just like they do for regular DSL.

The laptop and SIP client are, in this case, unaware that they are "mobile". All they see is an Ethernet connection, and the IP address they get from PPPoE does not change over the coverage area. Only the user and the network are aware of the laptop's mobility.

Further examples of moving networks can be found in busses, trains, and airplanes.

Figure 2 shows an example topology for a moving network.



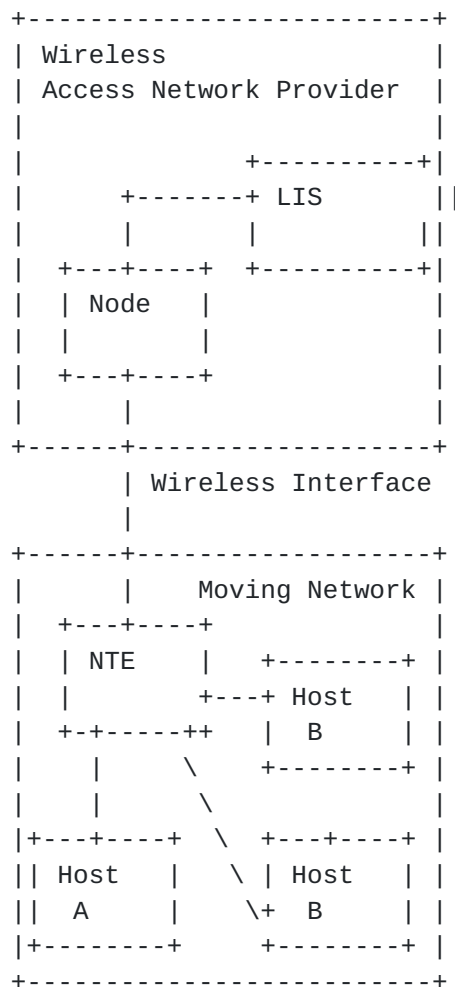


Figure 2: Moving Network

### 3.3. Wireless Access

Figure 3 shows a wireless access network where a moving end host obtains location information or references to location information from the LIS. The access equipment uses, in many cases, link layer devices. Figure 3 represents a hotspot network found, for example, in hotels, airports, and coffee shops. For editorial reasons we only describe a single access point and do not depict how the LIS obtains location information since this is very deployment specific.





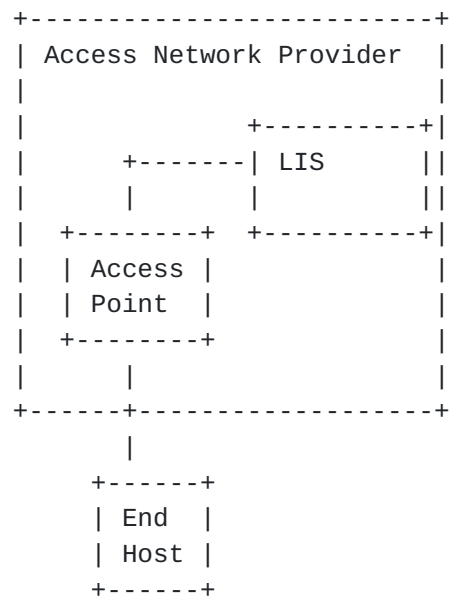


Figure 3: Wireless Access Scenario



#### **4. Discovery of the Location Information Server**

When a Target wants to retrieve location information from the LIS it first needs to discover it. Based on the problem statement of determining the location of the Target, which is known best by entities close to the Target itself, we assume that the LIS is located in the access network. Several procedures have been investigated that aim to discover the LIS in such an access network.

##### DHCP-based Discovery:

In some environments the Dynamic Host Configuration Protocol (DHCP) might be a good choice for discovering the FQDN or the IP address of the LIS. In environments where DHCP can be used it is also possible to use the already defined location extensions. In environments with legacy devices, such as the one shown in [Section 3.1](#), a DHCP based discovery solution may not be possible.

##### DNS-based Discovery:

With this idea the end host obtains its public IP address (e.g., via STUN [\[6\]](#)) in order to obtain its domain name (via the usual reverse DNS lookup). Then, the SRV or NAPTR record for that domain is retrieved. This relies on the user's public IP address having a DNS entry.

##### Redirect Rule:

A redirect rule at a device in the access network, for example at the AAA client, will be used to redirect the L7 LCP signalling messages (destined to a specific port) to the LIS. The end host could then discover the LIS by sending a packet to almost any address (as long it is not in the user's home network behind a NAT). The packet would be redirected to the respective LIS being configured. The same procedure is used by captive portals whereby any HTTP traffic is intercepted and redirected.

##### Multicast Query:

An end node could also discover a LIS by sending a multicast request to a well-known address. An example of such a mechanism is multicast DNS (see [\[7\]](#) and [\[8\]](#)).

The LIS discovery procedure raises deployment and security issues. When an end host discovers a LIS it must be ensured that



1. it does not talk to a man-in-the-middle, and
2. that the discovered entity is indeed an authorized LIS.

## 5. Identifier for Location Determination

The LIS returns location information to the end host when it receives a request. Some form of identifier is therefore needed to allow the LIS to retrieve the Target's current location (or a good approximation of it) from a database.

The chosen identifier needs to have the following properties:

Ability for Target to learn or know the identifier:

The Target MUST know or MUST be able to learn the identifier (explicitly or implicitly) in order to send it to the LIS. Implicitly refers to the situation where a device along the path between the end host and the LIS modifies the identifier, as it is done by a NAT when an IP address based identifier is used.

Ability to use the identifier for location determination:

The LIS MUST be able to use the identifier (directly or indirectly) for location determination. Indirectly refers to the case where the LIS uses other identifiers internally for location determination, in addition to the one provided by the Target.

Security properties of the identifier:

Misuse needs to be minimized whereby off-path adversary MUST NOT be able to obtain location information of other Targets. A on-path adversary in the same subnet SHOULD NOT be able to spoof the identifier of another Target in the same subnet.

The following list discusses frequently mentioned identifiers and their properties:

Host MAC Address:

The Target's MAC address is known to the end host, but not carried over an IP hop and therefore not accessible to the LIS in most deployment environments (unless carried in the L7 LCP itself).

ATM VCI/VPI:

The VPI/VCI is generally only seen by the DSL modem. Almost all routers in the US use 1 of 2 VPI/VCI value pairs: 0/35 and 8/35. This VC is terminated at the DSLAM, which uses a different VPI/VCI





(per end customer) to connect to the ATM switch. Only the network provider is able to map VPI/VCI values through its network. With the arrival of VDSL, ATM will slowly be phased out in favor of Ethernet.

#### Switch/Port Number:

This identifier is available only in certain networks, such as enterprise networks, typically available via proprietary protocols like CDP or, in the future, 802.1ab.

#### Cell ID:

This identifier is available in cellular data networks and the cell ID may not be visible to the end host.

#### Host Identifier:

The Host Identifier introduced by the Host Identity Protocol [9] allows identification of a particular host. Unfortunately, the network can only use this identifier for location determination if the operator already stores a mapping of host identities to location information. Furthermore, there is a deployment problem since the host identities are not used in today's networks.

#### Cryptographically Generated Address (CGA):

The concept of a Cryptographically Generated Address (CGA) was introduced by [10]. The basic idea is to put the truncated hash of a public key into the interface identifier part of an IPv6 address. In addition to the properties of an IP address it allows a proof of ownership. Hence, a return routability check can be omitted. It is only available for IPv6 addresses.

#### Network Access Identifiers:

A Network Access Identifier [11] is used during the network access authentication procedure, for example in RADIUS [12] and Diameter [13]. In DSL networks the user credentials are, in many cases, only known by the home router and not configured at the Target itself. To the network, the authenticated user identity is only available if a network access authentication procedure is executed. In case of roaming the user's identity might not be



available to the access network since security protocols might offer user identity confidentiality and thereby hiding the real identity of the user allowing the access network to only see a pseudonym or a randomized string.

#### Unique Client Identifier

The DSL Forum has defined that all devices that expect to be managed by the TR-069 interface be able to generate an identifier as described in [Section 3.4.4](#) of the TR-069v2 DSL Forum document. It also has a requirement that routers that use DHCP to the WAN use [RFC 4361](#) [14] to provide the DHCP server with a unique client identifier. This identifier is, however, not visible to the Target when legacy NTE device are used.

#### IP Address:

The Target's IP address may be used for location determination. This IP address is not visible to the LIS if the end host is behind one or multiple NATs. This may not be a problem since the location of a host that is located behind a NAT cannot be determined by the access network. The LIS would in this case only see the public IP address of the NAT binding allocated by the NAT, which is the expected behavior. The property of the IP address for a return routability check is attractive to return location information only to the address that submitted the request. If an adversary wants to learn the location of a Target (as identified by a particular IP address) then it does not see the response message (unless he is on the subnetwork or at a router along the path towards the LIS).

On a shared medium an adversary could ask for location information of another Target. The adversary would be able to see the response message since it is sniffing on the shared medium unless security mechanisms, such as link layer encryption, are in place. With a network deployment as shown in [Section 3.1](#) with multiple hosts in the Customer Premise being behind a NAT the LIS is unable to differentiate the individual end points. For WLAN deployments as found in hotels, as shown in [Section 3.3](#), it is possible for an adversary to eavesdrop data traffic and subsequently to spoof the IP address in a query to the LIS to learn more detailed location information (e.g., specific room numbers). Such an attack might, for example, compromise the privacy of hotel guests.



## **6. Requirements**

The following requirements and assumptions have been identified:

### **Requirement L7-1: Identifier Choice**

The L7 LCP MUST be able to carry different identifiers or MUST define an identifier that is mandatory to implement. Regarding the latter aspect, such an identifier is only appropriate if it is from the same realm as the one for which the location information service maintains identifier to location mapping.

### **Requirement L7-2: Mobility Support**

The L7 LCP MUST support a broad range of mobility from devices that can only move between reboots, to devices that can change attachment points with the impact that their IP address is changed, to devices that do not change their IP address while roaming, to devices that continuously move by being attached to the same network attachment point.

### **Requirement L7-3: ASP and Access Network Provider Relationship**

The design of the L7 LCP MUST NOT assume a business or trust relationship between the Application Service Provider (ASP) and the Access Network Provider. Requirements for resolving a reference to location information are not discussed in this document.

### **Requirement L7-4: Layer 2 and Layer 3 Provider Relationship**

The design of the L7 LCP MUST assume that there is a trust and business relationship between the L2 and the L3 provider. The L3 provider operates the LIS and needs to obtain location information from the L2 provider since this one is closest to the end host. If the L2 and L3 provider for the same host are different entities, they cooperate for the purposes needed to determine end system locations.

### **Requirement L7-5: Legacy Device Considerations**

The design of the L7 LCP MUST consider legacy devices, such as residential NAT devices and NTEs in an DSL environment, that cannot be upgraded to support additional protocols, for example,



to pass additional information towards the Target.

#### Requirement L7-6: VPN Awareness

The design of the L7 LCP MUST assume that at least one end of a VPN is aware of the VPN functionality. In an enterprise scenario, the enterprise side will provide the LIS used by the client and can thereby detect whether the LIS request was initiated through a VPN tunnel.

#### Requirement L7-7: Network Access Authentication

The design of the L7 LCP MUST NOT assume prior network access authentication.

#### Requirement L7-8: Network Topology Unawareness

The design of the L7 LCP MUST NOT assume end systems being aware of the access network topology. End systems are, however, able to determine their public IP address(es) via mechanisms, such as STUN [[6](#)] or NSIS NATFW NSLP [[15](#)] .

#### Requirement L7-9: Discovery Mechanism

The L7 LCP MUST define a mandatory-to-implement LIS discovery mechanism.





## **7. Security Considerations**

This document contains security related requirements. A discussion about security aspects of the HELD protocol when used in the GEOPRIV architecture when applied to certain usage environments, such as emergency services, can be found in [[16](#)].

## **8. IANA Considerations**

This document does not require actions by IANA.

## **9. Contributors**

This contribution is a joint effort of the GEOPRIV Layer 7 Location Configuration Requirements Design Team of the IETF GEOPRIV Working Group. The contributors include Henning Schulzrinne, Barbara Stark, Marc Linsner, Andrew Newton, James Winterbottom, Martin Thomson, Rohan Mahy, Brian Rosen, Jon Peterson and Hannes Tschofenig.

We would like to thank the GEOPRIV working group chairs, Andy Newton, Randy Gellens and Allison Mankin, for creating the design team.

The design team members can be reached at:

Marc Linsner: [mlinsner@cisco.com](mailto:mlinsner@cisco.com)

Rohan Mahy: [rohan@ekabal.com](mailto:rohan@ekabal.com)

Andrew Newton: [andy@hxr.us](mailto:andy@hxr.us)

Jon Peterson: [jon.peterson@neustar.biz](mailto:jon.peterson@neustar.biz)

Brian Rosen: [br@brianrosen.net](mailto:br@brianrosen.net)

Henning Schulzrinne: [hgs@cs.columbia.edu](mailto:hgs@cs.columbia.edu)

Barbara Stark: [Barbara.Stark@bellsouth.com](mailto:Barbara.Stark@bellsouth.com)

Martin Thomson: [Martin.Thomson@andrew.com](mailto:Martin.Thomson@andrew.com)

Hannes Tschofenig: [Hannes.Tschofenig@nsn.com](mailto:Hannes.Tschofenig@nsn.com)

James Winterbottom: [James.Winterbottom@andrew.com](mailto:James.Winterbottom@andrew.com)



## **10. Acknowledgements**

We would like to thank the IETF GEOPRIV working group chairs, Andy Newton, Allison Mankin and Randall Gellens, for creating this design team. Furthermore, we would like thank Andy Newton for his support during the design team mailing list, for setting up Jabber chat conferences and for participating in the phone conference discussions.

We would also like to thank Murugaraj Shanmugam, Ted Hardie, Martin Dawson, Richard Barnes, James Winterbottom, Tom Taylor, Otmar Lendl, Marc Linsner, Brian Rosen, Roger Marshall, Guy Caron, Doug Stuard, Eric Arolick, Dan Romascanu, Jerome Grenier, Martin Thomson, Barbara Stark, Michael Haberler, and Mary Barnes for their WGLC review comments.



## **11. References**

### **11.1. Normative References**

- [1] Cuellar, J., Morris, J., Mulligan, D., Peterson, J., and J. Polk, "Geopriv Requirements", [RFC 3693](#), February 2004.
- [2] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [RFC 2119](#), [BCP 14](#), March 1997.
- [3] Schulzrinne, H. and R. Marshall, "Requirements for Emergency Context Resolution with Internet Technologies", [draft-ietf-ecrit-requirements-13](#) (work in progress), March 2007.

### **11.2. Informative References**

- [4] Marshall, R., "Requirements for a Location-by-Reference Mechanism used in Location Configuration and Conveyance", [draft-marshall-geopriv-lbyr-requirements-02](#) (work in progress), July 2007.
- [5] Winterbottom, J. and S. Norreys, "LIS to LIS Protocol Requirements", [draft-winterbottom-geopriv-lis2lis-req-00](#) (work in progress), June 2007.
- [6] Rosenberg, J., Weinberger, J., Huitema, C., and R. Mahy, "STUN - Simple Traversal of User Datagram Protocol (UDP) Through Network Address Translators (NATs)", [RFC 3489](#), March 2003.
- [7] Aboba, B., Thaler, D., and L. Esibov, "Link-local Multicast Name Resolution (LLMNR)", [RFC 4795](#), January 2007.
- [8] Cheshire, S. and M. Krochmal, "Multicast DNS", [draft-cheshire-dnsext-multicastdns-06](#) (work in progress), August 2006.
- [9] Moskowitz, R., "Host Identity Protocol", [draft-ietf-hip-base-08](#) (work in progress), June 2007.
- [10] Aura, T., "Cryptographically Generated Addresses (CGA)", [RFC 3972](#), March 2005.
- [11] Aboba, B., Beadles, M., Arkko, J., and P. Eronen, "The Network Access Identifier", [RFC 4282](#), December 2005.
- [12] Rigney, C., Willens, S., Rubens, A., and W. Simpson, "Remote Authentication Dial In User Service (RADIUS)", [RFC 2865](#),





June 2000.

- [13] Calhoun, P., Loughney, J., Guttman, E., Zorn, G., and J. Arkko, "Diameter Base Protocol", [RFC 3588](#), September 2003.
- [14] Lemon, T. and B. Sommerfeld, "Node-specific Client Identifiers for Dynamic Host Configuration Protocol Version Four (DHCPv4)", [RFC 4361](#), February 2006.
- [15] Stiernerling, M., "NAT/Firewall NSIS Signaling Layer Protocol (NSLP)", [draft-ietf-nsis-nslp-natfw-15](#) (work in progress), July 2007.
- [16] Barnes, R., "Threats to GEOPRIV Location Objects", [draft-barnes-geopriv-lo-sec-00](#) (work in progress), July 2007.



## Authors' Addresses

Hannes Tschofenig  
Nokia Siemens Networks  
Otto-Hahn-Ring 6  
Munich, Bavaria 81739  
Germany

Phone: +49 89 636 40390  
Email: [Hannes.Tschofenig@nsn.com](mailto:Hannes.Tschofenig@nsn.com)  
URI: <http://www.tschofenig.com>

Henning Schulzrinne  
Columbia University  
Department of Computer Science  
450 Computer Science Building  
New York, NY 10027  
US

Phone: +1 212 939 7004  
Email: [hgs+ecrit@cs.columbia.edu](mailto:hgs+ecrit@cs.columbia.edu)  
URI: <http://www.cs.columbia.edu>



## Full Copyright Statement

Copyright (C) The IETF Trust (2007).

This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY, THE IETF TRUST AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

## Intellectual Property

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at [ietf-ipr@ietf.org](mailto:ietf-ipr@ietf.org).

## Acknowledgment

Funding for the RFC Editor function is provided by the IETF Administrative Support Activity (IASA).

