

Global Routing Operations
Internet-Draft
Intended status: Informational
Expires: September 14, 2017

J. Snijders
J. Heasley
NTT
M. Schmidt
i3D.net
March 13, 2017

Use of BGP Large Communities
draft-ietf-grow-large-communities-usage-04

Abstract

Examples and inspiration for operators to use BGP Large Communities.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on September 14, 2017.

Copyright Notice

Copyright (c) 2017 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	2
2.	The Design Overview	2
2.1.	Informational Communities	4
2.2.	Action Communities	4
3.	Examples of Informational Communities	5
3.1.	Location	5
3.1.1.	An ISO 3166-1 Numeric Function	5
3.1.2.	A UN M.49 Region Function	5
3.2.	Relation Function	6
3.3.	Combining Informational Communities	6
4.	Examples of Action Communities	7
4.1.	Selective NO_EXPORT	7
4.1.1.	ASN Based Selective NO_EXPORT	7
4.1.2.	Location Based Selective NO_EXPORT	7
4.2.	Selective AS_PATH Prepending	8
4.2.1.	ASN Based Selective AS_PATH Prepending	8
4.2.2.	Location Based Selective AS_PATH Prepending	9
4.3.	Manipulation of the LOCAL_PREF Attribute	9
4.3.1.	Global Manipulation of LOCAL_PREF	10
4.3.2.	Location Based Manipulation of LOCAL_PREF	10
4.3.3.	Note of Caution for LOCAL_PREF Functions	11
4.4.	Route Server Prefix Distribution Control	11
5.	Security Considerations	12
6.	IANA Considerations	12
7.	Acknowledgments	12
8.	References	13
8.1.	Normative References	13
8.2.	Informative References	13
8.3.	URIs	13
	Authors' Addresses	13

[1.](#) Introduction

BGP Large Communities [[RFC8092](#)] provide a mechanism to signal opaque information between Autonomous Systems (ASs). This document presents examples of how operators might utilize BGP Large Communities to achieve various goals. This document draws on the experience of operator communities such as NANOG [[1](#)] and NLNOG [[2](#)].

[2.](#) The Design Overview

BGP Large Communities are composed of three 4-octet fields. The first is the Global Administrator (GA) field, whose value is the Autonomous System Number (ASN) of the AS that has defined the meaning of the remaining two 4-octet fields, known as "Local Data Part 1" and "Local Data Part 2". This document describes an approach where the

"Local Data Part 1" field contains a function identifier and the "Local Data Part 2" contains a parameter value. Using the canonical notation this format can be summarized as "ASN:Function:Parameter".

+-----+-----+	
RFC 8092	this document
+-----+-----+	
Global Administrator	ASN
Local Data Part 1	Function
Local Data Part 2	Parameter
+-----+-----+	


A mapping table on the use of fields in BGP Large Communities between [\[RFC8092\]](#) and this document.

Table 1: Field Mapping

In contemporary deployments of both BGP Communities [\[RFC1997\]](#) and BGP Large Communities, the function of a community can be divided into two categories:

- o Informational Communities
- o Action Communities

Throughout the document a topology of four ASs is used to illustrate the use of communities in the following configuration:

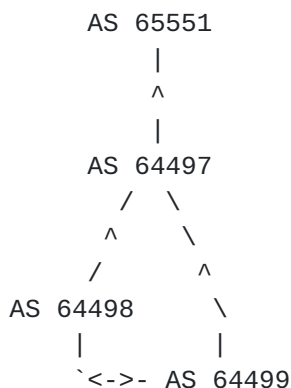

AS 64497 obtains transit services from (is a customer of) AS 65551, a 4-octet ASN. AS 64497 provides transit services to both AS 64498 and AS 64499. AS 64498 and AS 64499 maintain a peering relationship in which they only exchange their customer routes.

The opaque nature of BGP Large Communities allows for rapid deployment of new features or changes to their routing policy that perform an action. Operators are encouraged to publicly publish and

maintain documentation on the purpose of each BGP Large Community, both informational and action, that they support or are visible in BGP RIBs.

2.1. Informational Communities

Informational Communities are labels for attributes such as the origin of the route announcement, the nature of the relation with an EBGp neighbor or the intended propagation audience. Informational Communities can also assist in providing valuable information for day-to-day network operations such as debugging or capacity planning.

The Global Administrator field is set to the ASN which labels the routes with the Informational Communities. For example, AS 64497 might add a community with the GA 64497 to a route accepted from an IBGP or EBGp neighbor as a means of signaling that it was imported in a certain geographical region.

In general, the intended audiences of Informational Communities are downstream networks and the Global Administrator itself, but any AS could benefit from receiving these communities.

2.2. Action Communities

Action Communities are added as a label to request that a route be treated in a particular way within an AS. The operator of the AS defines a routing policy that adjusts path attributes based on the community. For example, the route's propagation characteristics, the LOCAL_PREF (local preference), the next-hop, or the number of AS_PATH prepends to be added when it is received or propagated can be changed.

The Global Administrator field is set to the ASN which has defined the functionality of that BGP Large Community and is the ASN that is expected to perform the action. For example, AS 64499 might label a route with a BGP Large Community containing GA 64497 to request that AS 64497 perform a pre-defined action on that route.

In general, the intended audience of Action Communities are transit providers taking action on behalf of a customer or the Global Administrator itself, but any AS could take action if they choose and any AS could add an Action Community with the GA of a non-adjacent ASN. However, note that an Action Community could also be informational. Its presence is an indicator that the GA may have performed the action and that an AS in the AS_PATH requested it.

Operators are recommended to publish the relative order in which Action Communities (both BGP Communities and BGP Large Communities) are processed in their routing policy.

3. Examples of Informational Communities

3.1. Location

An AS, AS 64497 in these examples, may inform other networks about the geographical region where AS 64497 imported a route by labeling it with BGP Large Communities following one of the following schemes or a combination of them.

3.1.1. An ISO 3166-1 Numeric Function

AS 64497 could assign a value of 1 to the Function field to designate the content of the Parameter field as an ISO-3166-1 [3] numeric country identifier.

+-----+-----+	
BGP Large Community	Description
+-----+-----+	
64497:1:528	Route learned in the Netherlands
64497:1:392	Route learned in Japan
64497:1:840	Route learned in the United States of
	America
+-----+-----+	

Example documentation for Informational Communities deployed by AS 64497 to describe the location where a route was imported using ISO 3166-1 numeric identifiers.

Table 2: Information: ISO 3166-1

3.1.2. A UN M.49 Region Function

AS 64497 could assign a value of 2 to the Function field to designate the content of the Parameter field as the M.49 numeric code published by the United Nations Statistics Division (UNSD) [4] for macro geographical (continental) regions, geographical sub-regions, or selected economic and other groupings.

+-----+-----+	
BGP Large Community	Description
+-----+-----+	
64497:2:2	Route learned in Africa
64497:2:9	Route learned in Oceania
64497:2:145	Route learned in Western Asia
64497:2:150	Route learned in Europe
+-----+-----+	

Example documentation for Informational Communities deployed by AS 64497 to describe the location where a route was imported using M.49 numeric codes published by the United Nations Statistics Division.

Table 3: Information: UNSD Regions

3.2. Relation Function

An AS, AS 64497 in this example, could assign a value of 3 to the Function field to designate the content of the Parameter field as a number indicating whether the route originated inside its own network or was learned externally, and if learned externally, it might simultaneously characterize the nature of the relation with that specific EBGp neighbor.

+-----+-----+	
BGP Large Community	Description
+-----+-----+	
64497:3:1	Route originated internally
64497:3:2	Route learned from a customer
64497:3:3	Route learned from a peering partner
64497:3:4	Route learned from a transit provider
+-----+-----+	

Example documentation for Informational Communities deployed by AS 64497 to describe the relation to the ASN from which the route was learned.

Table 4: Information: Relation

3.3. Combining Informational Communities

A route may be labeled with multiple Informational Communities. For example, a route learned in the Netherlands from a customer might be labeled with communities 64497:1:528, 64497:2:150 and 64497:3:2 at the same time.

4. Examples of Action Communities

4.1. Selective NO_EXPORT

As part of an agreement, often a commercial transit agreement, between AS 64497 and AS 64498, AS 64497 might expose BGP traffic engineering functions to AS 64498. One such BGP traffic engineering function could be selective NO_EXPORT, which is the selective filtering of a route learned from one AS, AS 64498, to certain EBGp neighbors of the GA, AS 64497.

4.1.1. ASN Based Selective NO_EXPORT

AS 64497 could assign a value of 4 to the Function field to designate the content of the Parameter field as a neighboring ASN to which a route should not be propagated.

+-----+-----+	
BGP Large Community	Description
+-----+-----+	
64497:4:64498	Do not export route to AS 64498
64497:4:64499	Do not export route to AS 64499
64497:4:65551	Do not export route to AS 65551
+-----+-----+	

Example documentation for Action Communities deployed by AS 64497 to expose a BGP traffic engineering function which selectively prevents the propagation of routes to the neighboring ASN specified in the Parameter field.

Table 5: Action: ASN NO_EXPORT

4.1.2. Location Based Selective NO_EXPORT

AS 64497 could assign a value of 5 to the Function field to designate the content of the Parameter field as an ISO 3166-1 numeric country identifier within which a labeled route is not propagated to EBGp neighbors. However, this might not prevent one of those EBGp neighbors from learning that route in another country and making it available in the country specified by the BGP Large Community.

BGP Large Community	Description
64497:5:528	Do not export to EBGp neighbors in the Netherlands
64497:5:392	Do not export to EBGp neighbors in Japan
64497:5:840	Do not export to EBGp neighbors in the United States of America

Example documentation for Action Communities deployed by AS 64497 to expose a BGP traffic engineering function which selectively prevents the propagation of routes to all EBGp neighbors in the geographical region specified in the Parameter field.

Table 6: Action: NO_EXPORT in Region

4.2. Selective AS_PATH Prepending

As part of an agreement between AS 64497 and AS 64498, AS 64497 might expose BGP traffic engineering functions to AS 64498. One such BGP traffic engineering function could be selective prepending of the AS_PATH with AS 64497 to certain certain EBGp neighbors of AS 64497.

4.2.1. ASN Based Selective AS_PATH Prepending

AS 64497 could assign a value of 6 to the Function field to designate the content of the Parameter field as a neighboring ASN to which prepending of the AS_PATH with AS 64497 is requested on propagation of the route. Additional AS_PATH prepending functions might also be defined to support multiples of prepending, that is two, three or more prepends of AS 64497.

BGP Large Community	Description
64497:6:64498	Prepend 64497 once on export to AS 64498
64497:6:64499	Prepend 64497 once on export to AS 64499
64497:6:65551	Prepend 64497 once on export to AS 65551

Example documentation for Action Communities deployed by AS 64497 to expose a BGP traffic engineering function which selectively prepends the AS_PATH with AS 64497 when propagating the route to the specified EBGp neighbor.

Table 7: Action: Prepend to ASN

4.2.2. Location Based Selective AS_PATH Prepending

AS 64497 could assign a value of 7 to the Function field to designate the content of the Parameter field as an ISO 3166-1 numeric country identifier to which the prepending of the AS_PATH with AS 64497 is requested on propagation of the route to all EBGp neighbors in that region.

BGP Large Community	Description
64497:7:528	Prepend once to EBGp neighbors in the Netherlands
64497:7:392	Prepend once to EBGp neighbors in Japan
64497:7:840	Prepend once to EBGp neighbors in United States of America

Example documentation for Action Communities deployed by AS 64497 to expose a BGP traffic engineering function which selectively prepends the AS_PATH with AS 64497 when propagating the route to all EBGp neighbors in the geographical region specified in the Parameter field.

Table 8: Action: Prepend in Region

4.3. Manipulation of the LOCAL_PREF Attribute

As part of an agreement between AS 64497 and AS 64498, AS 64497 might expose BGP traffic engineering functions to AS 64498. One such BGP traffic engineering function might allow AS 64498 to manipulate the value of the LOCAL_PREF attribute of routes learned from AS 64498 within AS 64497, even though the LOCAL_PREF attribute is non-transitive and is not propagated to EBGp neighbors.

The LOCAL_PREF value of routes are locally significant within each AS and are impossible to list in this document. Instead, the typical LOCAL_PREF values could be classified as a hierarchy and a BGP Large Community function exposed allowing an EBGp neighbor to affect the LOCAL_PREF value within the specified GA. The following example list defines the classes of routes in the order of descending LOCAL_PREF value and assigns a function identifier which could be used in the Function field of a BGP Large Community.

Function	Preference Class
8	Normal customer route
9	Backup customer route
10	Peering route
11	Upstream transit route
12	Fallback route, to be installed if no other path is available

Table 9: Action: Preference Function Identifiers

4.3.1. Global Manipulation of LOCAL_PREF

AS 64497 could place one of the previously defined Preference Function Identifiers in the Function field and set the value 0 in the Parameter field to designate that the LOCAL_PREF associated with that function identifier should be applied for that route throughout the whole AS.

BGP Large Community	Description
64497:9:0	Assign LOCAL_PREF for a customer backup route
64497:10:0	Assign LOCAL_PREF for a peering route
64497:12:0	Assign LOCAL_PREF for a fallback route

Example documentation for Action Communities deployed by AS 64497 to expose a BGP traffic engineering function which allows a BGP neighbor to globally manipulate the LOCAL_PREF attribute for the route within AS 64497.

Table 10: Action: Global LOCAL_PREF Manipulation

4.3.2. Location Based Manipulation of LOCAL_PREF

AS 64497 could place one of the previously defined Preference Function Identifiers in the Function field and use an ISO 3166-1 numeric country identifier in the Parameter field to designate the geographical region within which the non-default LOCAL_PREF associated with that function identifier should be applied to the route. The value of the LOCAL_PREF attribute should not deviate from the default for that route class in any region not specified by one or more of these Action Communities.

BGP Large Community	Description
64497:9:528	Assign LOCAL_PREF for a customer backup route on BGP speakers in the Netherlands
64497:10:392	Assign LOCAL_PREF for a peering route on BGP speakers in Japan
64497:12:840	Assign LOCAL_PREF for a fallback route on BGP speakers in United States of America

Example documentation for Action Communities deployed by AS 64497 to expose a BGP traffic engineering function which allows a BGP neighbor to selectively manipulate the LOCAL_PREF attribute within AS 64497 in the geographical region specified in the Parameter field.

Table 11: Action: Regional LOCAL_PREF Manipulation

4.3.3. Note of Caution for LOCAL_PREF Functions

The LOCAL_PREF attribute strongly influences the BGP Decision Process, which in turn affects the scope of route propagation. Operators should take special care when using Action Communities that decrease the LOCAL_PREF value, and the degree of preference, to a value below that of another route class. Some of the unintended BGP states that might arise as a result of these traffic engineering decisions are described as "BGP Wedgies" in [\[RFC4264\]](#).

4.4. Route Server Prefix Distribution Control

Route Servers [\[RFC7947\]](#) use BGP to broker network reachability information among their clients. As not all route server clients may wish to interconnect with each other, the route server operator will usually implement a mechanism to allow each client to control the route server's export routing policy, as described in [Section 4.6 of \[RFC7948\]](#). One widely-used mechanism is a route server specific adaption of "ASN Based Selective NO_EXPORT" ([Section 4.1.1](#)).

An example BGP Large Communities policy which enables client-controlled prefix distribution for a route server operating as AS 64497, is outlined as follows:

+-----+-----+	
BGP Large Community	Description
+-----+-----+	
64497:0:peer-as	Explicitly prevent announcement of route to peer-as
64497:1:peer-as	Explicitly announce route to peer-as
64497:0:0	Do not announce route to any peers by default
64497:1:0	Announce route to all peers by default
+-----+-----+	

Table 12: Action: Route Server Prefix Distribution Control

Multiple BGP Large Community values can be used together to implement fine-grained route distribution control. For example, route server client AS 64500 might wish to use a route server for interconnecting to all other clients except AS 64510. In this case, they would label all their outbound routes to the route server with 64497:1:0 (to announce to all clients by default) and 64497:1:64510 (to prevent announcement to AS 64510).

Alternatively, route server client AS 64501 may have a selective routing policy and may wish to interconnect with only AS 64505 and AS 64506. This could be implemented by announcing routes labeled with 64497:0:0 (blocking all distribution by default) and 64497:1:64505, 64497:1:64506 to instruct the route server to force announcement to those two ASNs.

5. Security Considerations

Operators should note the recommendations in [Section 11](#) of BGP Operations and Security [[RFC7454](#)].

6. IANA Considerations

None.

7. Acknowledgments

The authors would like to gratefully acknowledge the insightful comments, contributions, critique and support from Adam Chappell, Jonathan Stewart, Greg Hankins, Nick Hilliard, Will Hargrave, and Randy Bush.

8. References

8.1. Normative References

- [RFC1997] Chandra, R., Traina, P., and T. Li, "BGP Communities Attribute", [RFC 1997](#), DOI 10.17487/RFC1997, August 1996, <<http://www.rfc-editor.org/info/rfc1997>>.
- [RFC7454] Durand, J., Pepelnjak, I., and G. Doering, "BGP Operations and Security", [BCP 194](#), [RFC 7454](#), DOI 10.17487/RFC7454, February 2015, <<http://www.rfc-editor.org/info/rfc7454>>.
- [RFC8092] Heitz, J., Ed., Snijders, J., Ed., Patel, K., Bagdonas, I., and N. Hilliard, "BGP Large Communities Attribute", [RFC 8092](#), DOI 10.17487/RFC8092, February 2017, <<http://www.rfc-editor.org/info/rfc8092>>.

8.2. Informative References

- [RFC4264] Griffin, T. and G. Huston, "BGP Wedgies", [RFC 4264](#), DOI 10.17487/RFC4264, November 2005, <<http://www.rfc-editor.org/info/rfc4264>>.
- [RFC7947] Jasinska, E., Hilliard, N., Raszuk, R., and N. Bakker, "Internet Exchange BGP Route Server", [RFC 7947](#), DOI 10.17487/RFC7947, September 2016, <<http://www.rfc-editor.org/info/rfc7947>>.
- [RFC7948] Hilliard, N., Jasinska, E., Raszuk, R., and N. Bakker, "Internet Exchange BGP Route Server Operations", [RFC 7948](#), DOI 10.17487/RFC7948, September 2016, <<http://www.rfc-editor.org/info/rfc7948>>.

8.3. URIs

- [1] <https://www.nanog.org>
- [2] <https://nlnog.net>
- [3] <https://www.iso.org/iso-3166-country-codes.html>
- [4] <https://unstats.un.org/unsd/methodology/m49/>

Authors' Addresses

Job Snijders
NTT Communications
Theodorus Majofskistraat 100
Amsterdam 1065 SZ
The Netherlands

Email: job@ntt.net

John Heasley
NTT Communications
1111 NW 53rd Drive
Portland, OR 97210
United States of America

Email: heas@shrubbery.net

Martijn Schmidt
i3D.net
Rivium 1e Straat 1
Capelle aan den IJssel 2909 LE
NL

Email: martijnschmidt@i3d.net

