

## **GSMP Packet Encapsulations for ATM, Ethernet and TCP**

<[draft-ietf-gsmp-encaps-03.txt](#)>

This document is an Internet-Draft and is in full conformance with all provisions of [Section 10 of RFC2026](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

### Abstract

This memo specifies the encapsulation of GSMP packets in ATM, Ethernet and TCP.

(The convention in the documentation of Internet Protocols [5] is to express numbers in decimal. Numbers in hexadecimal format are specified by prefacing them with the characters "0x". Numbers in binary format are specified by prefacing them with the characters "0b". Data is pictured in "big-endian" order. That is, fields are described left to right, with the most significant byte on the left and the least significant byte on the right. Whenever a diagram shows a group of bytes, the order of transmission of those bytes is the normal order in which they are read in English. Whenever an byte represents a numeric quantity the left most bit in the diagram is the high order or most significant bit. That is, the bit labelled 0 is the most significant bit. Similarly, whenever a multi-byte field represents a numeric

Worster, Doria

Expires Jan 2001

[Page 2]

quantity the left most bit of the whole field is the most significant bit. When a multi-byte quantity is transmitted, the most significant byte is transmitted first. This is the same coding convention as is used in the ATM layer [2] and AAL-5 [3][4].)

The LLC/SNAP header contains the bytes: 0xAA 0xAA 0x03 0x00 0x00 0x00 0x88 0x0C. (0x880C is the assigned Ethertype for GSMP.)


The maximum transmission unit (MTU) of the GSMP Message field is 1492 bytes.

The virtual channel over which a GSMP session is established between a controller and the switch it is controlling is called the GSMP control channel. The default VPI and VCI of the GSMP control channel for LLC/SNAP encapsulated GSMP messages on an ATM data link layer is:

VPI = 0  
VCI = 15.

### **3. Ethernet Encapsulation**

GSMP packets may be encapsulated on an Ethernet data link as illustrated:

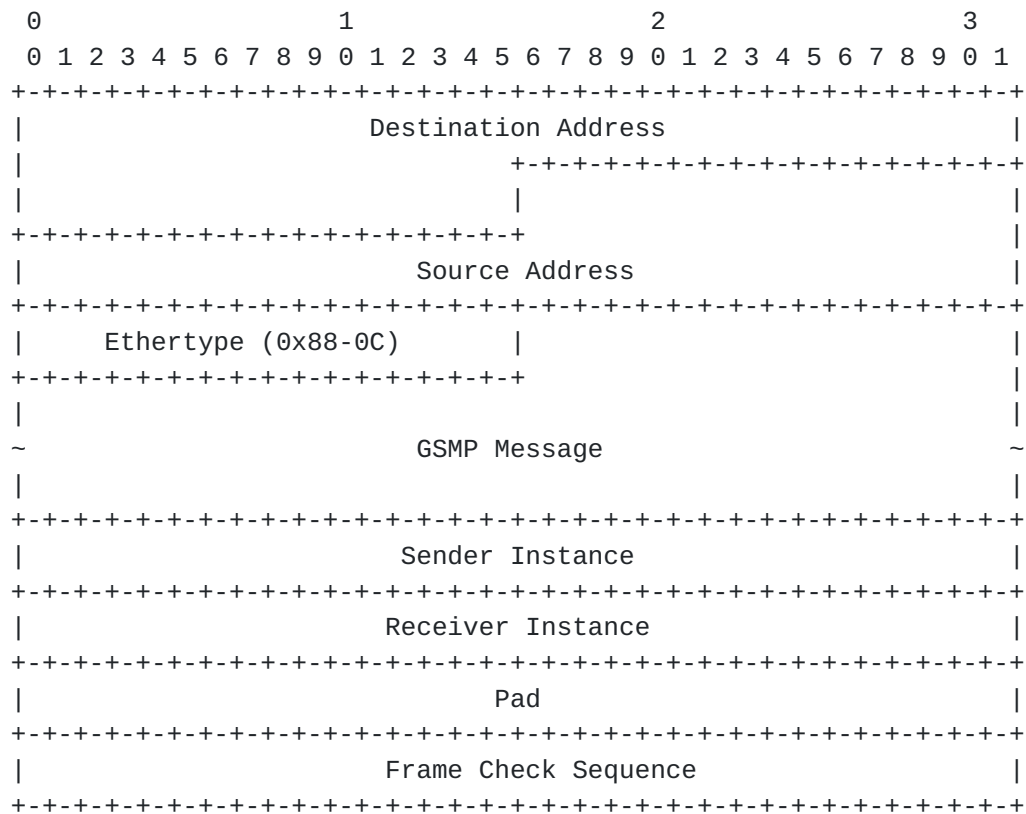

## Destination Address

For the SYN message of the adjacency protocol the Destination Address is the broadcast address 0xFFFFFFFFFFFFFFF. (Alternatively, it is also valid to configure the node with the unicast 48-bit IEEE MAC address of the destination. In this case the configured unicast Destination Address is used in the SYN message.) For all other messages the Destination Address is the unicast 48-bit IEEE MAC address of the destination. This address may be discovered from the Source Address field of messages received during synchronisation of the adjacency protocol.

## Source Address

For all messages the Source Address is the 48-bit IEEE MAC address of the sender.

## Ether type

The assigned Ethertype for GSMP is 0x880C.

## GSMP Message

The maximum transmission unit (MTU) of the GSMP Message field is 1492 bytes.

Worster

Expires Jan 2001

[Page 4]

#### Sender Instance

The Sender Instance number for the link obtained from the adjacency protocol. This field is already present in the adjacency protocol message. It is appended to all non-adjacency GSMP messages in the Ethernet encapsulation to offer additional protection against the introduction of corrupt state.

#### Receiver Instance

The Receiver Instance number is what the sender believes is the current instance number for the link, allocated by the entity at the far end of the link. This field is already present in the adjacency protocol message. It is appended to all non-adjacency GSMP messages in the Ethernet encapsulation to offer additional protection against the introduction of corrupt state.

#### Pad

After adjacency has been established the minimum length of the data field of an Ethernet packet is 46 bytes. If necessary, padding should be added such that it meets the minimum Ethernet frame size. This padding should be bytes of zero and it is not considered to be part of the GSMP message.

#### Frame Check Sequence

The Frame Check Sequence (FCS) is defined in IEEE 802.3 [6] as follows:

"A cyclic redundancy check (CRC) is used by the transmit and receive algorithms to generate a CRC value for the FCS field.

The frame check sequence (FCS) field contains a 4-byte (32-bit) cyclic redundancy check (CRC) value.

This value is computed as a function of the contents of the source address, destination address, length, LLC data and pad (that is, all fields except the preamble, SFD, FCS and extension).

The encoding is defined by the following generating polynomial.

$$G(x)=x^{32}+x^{26}+x^{23}+x^{22}+x^{16}+x^{12}+x^{11}+x^{10}+x^8+x^7+x^5+x^4+x^2+x^1."$$

The procedure for the CRC calculation can be found in [6].

After the adjacency protocol has achieved synchronisation, for every GSMP message received with an Ethernet encapsulation, the receiver must check the Source Address from the Ethernet MAC header, the Sender Instance, and the Receiver Instance. The incoming GSMP message must be discarded if the Sender Instance and





the Source Address do not match the values of Sender Instance and Sender Name stored by the "Update Peer Verifier" operation of the GSMP adjacency protocol. The incoming GSMP message must also be discarded if it arrives over any port other than the port over which the adjacency protocol has achieved synchronisation. In addition, the incoming message must also be discarded if the Receiver Instance field does not match the current value for the Sender Instance of the GSMP adjacency protocol.

#### **4. TCP/IP Encapsulation**

GSMP messages may be transported over an IP network using the TCP encapsulation. TCP provides reliable transport, network flow control, and end-system flow control suitable for networks that may have high loss and variable or unpredictable delay. The GSMP encapsulation in TCP/IP also provides sender authentication using an MD5 digest.

For TCP encapsulations of GSMP messages, the controller runs the client code and the switch runs the server code. Upon initialisation, the server is listening on GSMP's TCP port number: 6068. The controller establishes a TCP connection with each switch it manages. The switch under control must be a multi-connection server (PORT 6068) to allow creation of multiple control sessions from N GSMP controller instances. Adjacency protocol messages, which are used to synchronise the controller and switch and maintain handshakes, are sent by the controller to the switch after the TCP connection is established. GSMP messages other than adjacency protocol messages may be sent only after the adjacency protocol has achieved synchronisation. The actual GSMP message flow will occur on other ports.

##### **4.1 Message Formats**

GSMP messages are sent over a TCP connection. A GSMP message is processed only after it is entirely received. A four-byte TLV header field is prepended to the GSMP message to provide delineation of GSMP messages within the TCP stream.



- [1] A. Doria, "General Switch Management Protocol," Internet-Draft [draft-ietf-gsmp-07](#), November 2000. Work in Progress
- [2] "B-ISDN ATM Layer Specification," International Telecommunication Union, ITU-T Recommendation I.361, Feb. 1999.



- [3] "B-ISDN ATM Adaptation Layer (AAL) Specification,"  
International Telecommunication Union, ITU-T  
Recommendation I.363, Mar. 1993.
- [4] "B-ISDN ATM Adaptation Layer specification: Type 5 AAL",  
International Telecommunication Union, ITU-T  
Recommendation I.363.5, Aug. 1996.
- [5] Reynolds, J., and J. Postal, "Assigned Numbers", STD 2, [RFC 1700](http://www.isi.edu/in-notes/iana/assignments/port-numbers), October 1994. For the current numbers refer to  
<http://www.isi.edu/in-notes/iana/assignments/port-numbers>
- [6] IEEE Std 802.3, 1998 Edition  
"Information technology-Telecommunications and information  
exchange between systems - Local and metropolitan area  
networks - Specific requirements - Part 3: Carrier sense  
multiple access with collision detection (CSMA/CD) access  
method and physical layer specifications"

#### Authors' Addresses

Tom Worster  
Ennovate Networks  
60 Codman Hill Rd  
Boxboro MA 01719 USA  
Tel +1 978-263-2002  
fsb@thefsb.org

Avri Doria  
Nortel Networks  
600 Technology Park Drive  
Billerica MA 01821 USA  
Tel: +1 401 663 5024  
avri@nortelnetworks.com

Joachim Buerkle  
Nortel Networks Germany GmbH & Co. KG  
Hahnstr. 37-39  
60528 Frankfurt am Main  
Germany  
Joachim.Buerkle@nortelnetworks.com

