

Network Working Group  
Internet-Draft  
Updates: [6790](#) (if approved)  
Intended status: Standards Track  
Expires: December 18, 2017

B. Decraene  
Orange  
K. Kompella  
Juniper Networks, Inc.  
W. Henderickx  
Nokia  
June 16, 2017

**BGP Next-Hop dependant capabilities**  
**draft-ietf-idr-next-hop-capability-00**

Abstract

[RFC 5492](#) defines capabilities advertisement for the BGP peer. In addition, it is useful to be able to advertise BGP Next-Hop dependant capabilities, in particular for forwarding plane features. [RFC 5492](#) is not applicable because the BGP peer may be different from the BGP Next-Hop, in particular when BGP Route Reflection is used. This document defines a mechanism to advertise such BGP Next Hop dependant Capabilities.

This document defines a new BGP non-transitive attribute to carry Next-Hop Capabilities. This attribute is deleted or possibly modified when the BGP Next Hop is changed.

This document also defines a Next-Hop capability to advertise the ability to handle the MPLS Entropy Label defined in [RFC 6790](#). It updates [RFC 6790](#) with regard to this BGP signaling.

Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any

time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on December 18, 2017.

## Copyright Notice

Copyright (c) 2017 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	Introduction . . . . .	<a href="#">2</a>
<a href="#">2.</a>	BGP Next-Hop dependant Capabilities Attribute . . . . .	<a href="#">3</a>
<a href="#">2.1.</a>	Encoding . . . . .	<a href="#">3</a>
<a href="#">2.2.</a>	Attribute Operation . . . . .	<a href="#">4</a>
<a href="#">2.3.</a>	Capability Code Operation . . . . .	<a href="#">5</a>
<a href="#">2.4.</a>	Attribute Error Handling . . . . .	<a href="#">5</a>
<a href="#">3.</a>	Entropy Label Next-Hop dependant Capability . . . . .	<a href="#">6</a>
<a href="#">3.1.</a>	Entropy Label Next-Hop Capability error handling . . . . .	<a href="#">7</a>
<a href="#">4.</a>	IANA Considerations . . . . .	<a href="#">7</a>
<a href="#">4.1.</a>	Next-Hop Capabilities Attribute . . . . .	<a href="#">7</a>
<a href="#">4.2.</a>	Next-Hop Capability registry . . . . .	<a href="#">7</a>
<a href="#">5.</a>	Security Considerations . . . . .	<a href="#">8</a>
<a href="#">6.</a>	Acknowledgement . . . . .	<a href="#">8</a>
<a href="#">7.</a>	References . . . . .	<a href="#">8</a>
<a href="#">7.1.</a>	Normative References . . . . .	<a href="#">8</a>
<a href="#">7.2.</a>	Informative References . . . . .	<a href="#">9</a>
	Authors' Addresses . . . . .	<a href="#">9</a>

## [1.](#) Introduction

[RFC5492] defines capabilities advertisement for the BGP peer. In addition, it is useful to be able to advertise BGP Next-Hop dependant capabilities, in particular for forwarding plane features. [RFC 5492](#) is not applicable because the BGP peer may be different from the BGP Next-Hop, in particular when BGP Route Reflection is used. This



document defines a mechanism to advertise such BGP Next Hop Capabilities.

This document defines a new BGP non-transitive attribute to carry Next-Hop Capabilities. When the BGP Next Hop is changed, this attribute is deleted or possibly modified to take into account the capabilities of the new BGP Next-Hop. Hence it allows advertising capabilities which are dependent of the BGP Next-Hop.

This attribute advertises the capabilities of the BGP Next-Hop for the NLRI advertised in the same BGP update. A BGP Next-Hop may advertise different capabilities for different set of NLRI.

This document also defines a first application to advertise the capability to handle the MPLS Entropy Label defined in [[RFC6790](#)]. Note that [RFC 6790](#) had originally defined a BGP attribute for this but it has been latter deprecated in [[RFC7447](#)].

## **[2.](#) BGP Next-Hop dependant Capabilities Attribute**

### **[2.1.](#) Encoding**

The BGP Next-Hop dependant Capabilities Attribute is an optional, non-transitive BGP Attribute, of value TBD1. The attribute consists of a set of Next-Hop Capabilities.

The inclusion of a Next-Hop Capability "X" in a BGP UPDATE message, indicates that the BGP Next-Hop, encoded in either the NEXT\_HOP attribute defined in [[RFC4271](#)] or the Network Address of Next Hop field of the MP\_REACH\_NLRI attribute defined in [[RFC4760](#)], supports the capability "X" for the NLRI advertised in this BGP UPDATE.

This document does not make a distinction between these two Next-Hop fields and uses the term 'BGP Next-Hop' to refer to whichever one is used in a given BGP UPDATE message.

A Next-Hop Capability is a triple (Capability Code, Capability Length, Capability Value) aka a TLV:



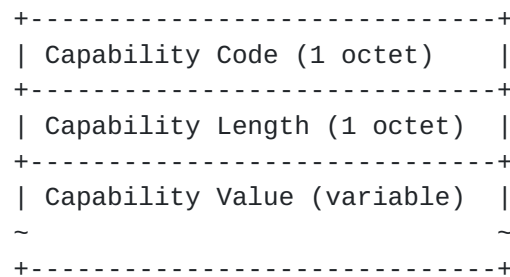


Figure 1: BGP Next-Hop Capability

**Capability Code:** a one-octet unsigned binary integer which indicates the type of "Next-Hop Capability" advertised and unambiguously identifies an individual capability.

**Capability Length:** a one-octet unsigned binary integer which indicates the length, in octets, of the Capability Value field. A length of 0 indicates that no Capability Value Field is present.

**Capability Value:** a variable-length field from 0 to 255 octets. It is interpreted according to the value of the Capability Code.

BGP speakers SHOULD NOT include more than one instance of a Next-Hop capability with the same Capability Code, Capability Length, and Capability Value. Note, however, that processing of multiple instances of such capability does not require special handling, as additional instances do not change the meaning of the announced capability; thus, a BGP speaker MUST be prepared to accept such multiple instances.

BGP speakers MAY include more than one instance of a capability (as identified by the Capability Code) with non-zero Capability Length field, but with different Capability Value and either the same or different Capability Length. Processing of these capability instances is specific to the Capability Code and MUST be described in the document introducing the new capability.

## 2.2. Attribute Operation

The BGP Next-Hop dependant Capabilities attribute being non-transitive, as per [[RFC4271](#)], a BGP speaker which does not understand it will quietly ignore it and not pass it along to other BGP peers.

A BGP speaker that understands the BGP Next-Hop dependant Capabilities Attribute and does not change the BGP Next-Hop, SHOULD NOT change the BGP Next-Hop dependant Capabilities Attribute and SHOULD pass the attribute unchanged along to other BGP peers.



A BGP speaker that understands the BGP Next-Hop dependant Capabilities Attribute and changes the BGP Next-Hop, MUST remove the received BGP Next-Hop dependant Capabilities Attribute before propagating the BGP UPDATE to other BGP peers. It MAY attach a new BGP Next-Hop dependant Capabilities attribute describing the capabilities of the new BGP Next-Hop for these NLRIs.

### **2.3. Capability Code Operation**

A BGP speaker receiving a BGP Next-Hop Capability Code that it supports behave as defined in the document defining this Capability Code. A BGP speaker receiving a BGP Next-Hop Capability Code that it does not support MUST ignore this BGP Next-Hop Capability Code. In particular, this MUST NOT be handled as an error. In both cases, the BGP speaker MUST examine the remaining BGP Next-Hop Capability Code(s) that may be present in the BGP Next-Hop Capabilities Attribute.

The BGP Next-Hop Capability Code MUST reflect the capability of the router indicated in the BGP Next-Hop, for the NLRI advertised in the BGP UPDATE. If a BGP speaker sets the BGP Next-Hop to an address of a different router (e.g. R), it MUST NOT advertise BGP Next-Hop Capabilities not supported by this router R for these NLRI.

The presence of a Next-Hop Capability SHOULD NOT influence route selection or route preference of a route, unless tunneling is used to reach the BGP Next-Hop or the selected route has been learnt from EBGP (i.e. the Next-Hop is in a different AS). Indeed, it is in general impossible for a node to know that all BGP routers of the Autonomous System (AS) will understand a given Next-Hop Capability; and having different routers, within an AS, use a different preference for a route, may result in forwarding loops if tunnelling is not used to reach the BGP Next-Hop.

An implementations MAY allow, by configuration, removing this attribute or specific Next-Hop capabilities when advertising the routes over EBGP.

### **2.4. Attribute Error Handling**

A BGP Next-Hop dependant Capabilities Attribute is considered malformed if the length of the Attribute is not equal to the sum of all (BGP Next-Hop dependant Capability Length +2) of the capabilities carried in this attribute. Note that "2" is the length of the fields "Type" and "Length" of each BGP Next Hop dependant Capability, as the capability length only account for the length of the Value field.





A document that specifies a new Next-Hop Capability SHOULD provide specifics regarding what constitutes an error for that Next-Hop Capability.

A BGP UPDATE message with a malformed BGP Next-Hop dependant Capabilities Attribute SHALL be handled using the approach of "attribute discard" defined in [\[RFC7606\]](#).

Unknown Next-Hop Capabilities Codes MUST NOT be considered as an error. They MUST be silently ignored.

If a Next-Hop dependant Capability is malformed, this Next-Hop Capability Type MUST be ignored. Others Next-Hop Capabilities MUST be processed as usual.

### **3. Entropy Label Next-Hop dependant Capability**

The Entropy Label Next-Hop Capability has type code 1 and a length of 0 or 1 octet.

The inclusion of the "Entropy Label" Next-Hop Capability indicates that the BGP Next-Hop can be sent packets, for all routes indicated in the NLRI, with a MPLS entropy label (ELI, EL) added immediately after the label stack advertised with the NLRI.

On the receiving side, suppose BGP speaker S has determined that packet P is to be forwarded according to BGP route R, where R is a route of one of the labeled address families. And suppose that L is the label stack embedded in the NLRI of route R. Then to forward packet P according to route R, S either replaces P's top label with L, or else pushes L onto the MPLS label stack. If the EL-Capability is advertised in the BGP UPDATE advertising this route R, S knows that it may safely place the ELI and an EL on the label stack immediately beneath L.

A BGP speaker S that sends an UPDATE with the BGP Next-Hop "NH" MAY include the Entropy Label Next-Hop Capability only if the NLRI are labelled and for all the NLRI in the BGP UPDATE, either of the following is true:

- o Egress case: NH is the egress of the LSP advertised with the NLRI and its capable of handling the ELI during the lookup of the MPLS top label.
- o Transit LSR case: NH is a transit LSR for the LSP advertised with the NLRI (i.e. NH swaps one of the label advertised in the NLRI) and next downstream BGP Next-Hop(s) has(have) advertised the Entropy Label Next-Hop Capability (or a similar capability



signalled by protocol P if the route is redistributed, by NH, from protocol P to BGP).

### **3.1. Entropy Label Next-Hop Capability error handling**

If the Entropy Label Next-Hop Capability is present more than once, it MUST be considered as received once with a length of 0.

If the Entropy Label Next-Hop Capability is received with a length other than 0 or 1, it is not considered malformed, but its semantics are exactly the same as if it had a length of 1. In other words, additional octets MUST be ignored. This is to allow for graceful future extension.

## **4. IANA Considerations**

### **4.1. Next-Hop Capabilities Attribute**

IANA is requested to allocate a new Path Attribute, called "Next-Hop Capabilities", type Code TBD1, from the "BGP Path Attributes" registry.

### **4.2. Next-Hop Capability registry**

The IANA is requested to create and maintain a registry entitled "Next-Hop Capabilities".

The registration policies [[RFC5226](#)] for this registry are:

1-63	IETF Review
64-127	First Come First Served
128-250	Standards Action
251-254	Experimental Use
255	Reserved

IANA is requested to make the following initial assignments:

Registry Name: Next-Hop Capability.

Value	Meaning	Reference
0	Reserved (not to be allocated)	This document
1	Entropy Label	This document
2-250	Unassigned	
251-254	Experimental	This document
255	Reserved (for futur registry extension)	This document



## 5. Security Considerations

This document does not introduce new security vulnerabilities in BGP. Specifically, an operator who is relying on the information carried in BGP must have a transitive trust relationship back to the source of the information. Specifying the mechanism(s) to provide such a relationship is beyond the scope of this document. Please refer to the Security Considerations section of [RFC4271] for security mechanisms applicable to BGP.

## 6. Acknowledgement

The Entropy Label Next-Hop Capability defined in this document is based on the ELC BGP attribute defined in [section 5.2 of \[RFC6790\]](#).

The authors wish to thank John Scudder for the discussions on this topic and Eric Rosen for his in-depth review of this document.

The authors wish to thank Jie Dong for his review and comments.

## 7. References

### 7.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<http://www.rfc-editor.org/info/rfc2119>>.
- [RFC4271] Rekhter, Y., Ed., Li, T., Ed., and S. Hares, Ed., "A Border Gateway Protocol 4 (BGP-4)", [RFC 4271](#), DOI 10.17487/RFC4271, January 2006, <<http://www.rfc-editor.org/info/rfc4271>>.
- [RFC4760] Bates, T., Chandra, R., Katz, D., and Y. Rekhter, "Multiprotocol Extensions for BGP-4", [RFC 4760](#), DOI 10.17487/RFC4760, January 2007, <<http://www.rfc-editor.org/info/rfc4760>>.
- [RFC5226] Narten, T. and H. Alvestrand, "Guidelines for Writing an IANA Considerations Section in RFCs", [BCP 26](#), [RFC 5226](#), DOI 10.17487/RFC5226, May 2008, <<http://www.rfc-editor.org/info/rfc5226>>.
- [RFC6790] Kompella, K., Drake, J., Amante, S., Henderickx, W., and L. Yong, "The Use of Entropy Labels in MPLS Forwarding", [RFC 6790](#), DOI 10.17487/RFC6790, November 2012, <<http://www.rfc-editor.org/info/rfc6790>>.



- [RFC7606] Chen, E., Ed., Scudder, J., Ed., Mohapatra, P., and K. Patel, "Revised Error Handling for BGP UPDATE Messages", [RFC 7606](#), DOI 10.17487/RFC7606, August 2015, <<http://www.rfc-editor.org/info/rfc7606>>.

## **7.2. Informative References**

- [RFC5492] Scudder, J. and R. Chandra, "Capabilities Advertisement with BGP-4", [RFC 5492](#), DOI 10.17487/RFC5492, February 2009, <<http://www.rfc-editor.org/info/rfc5492>>.
- [RFC7447] Scudder, J. and K. Kompella, "Deprecation of BGP Entropy Label Capability Attribute", [RFC 7447](#), DOI 10.17487/RFC7447, February 2015, <<http://www.rfc-editor.org/info/rfc7447>>.

### Authors' Addresses

Bruno Decraene  
Orange

Email: [bruno.decraene@orange.com](mailto:bruno.decraene@orange.com)

Kireeti Kompella  
Juniper Networks, Inc.  
1194 N. Mathilda Avenue  
Sunnyvale, CA 94089  
USA

Email: [kireeti.kompella@gmail.com](mailto:kireeti.kompella@gmail.com)

Wim Henderickx  
Nokia  
Copernicuslaan 50  
Antwerp 2018, CA 95134  
Belgium

Email: [wim.henderickx@nokia.com](mailto:wim.henderickx@nokia.com)



