

Internet Draft  
Expires April 28, 1997  
[draft-ietf-idr-rdc-config-01.txt](#)

Ramesh Govindan  
USC/ISI  
October 28, 1996

## Configuring IDRP Confederations

### Status of this Memo

This document is an Internet Draft, and can be found as [draft-ietf-idr-rdc-config-00.txt](#) in any standard internet drafts repository. Internet Drafts are working documents of the Internet Engineering Task Force (IETF), its Areas, and its Working Groups. Note that other groups may also distribute working documents as Internet Drafts.

Internet Drafts are draft documents valid for a maximum of six months. Internet Drafts may be updated, replaced, or obsoleted by other documents at any time. It is not appropriate to use Internet Drafts as reference material, or to cite them other than as a ``working draft'' or ``work in progress.''

Please check the I-D abstract listing contained in each Internet Draft directory to learn the current status of this or any other Internet Draft.

### Abstract

In the Inter-Domain Routing Protocol (IDRP), all border routers (border intermediate systems (BISs) in ISO terminology) of a routing domain confederation (RDC) must be configured with the identity of all RDCs that overlap or enclose that RDC. This draft describes some minor modifications to IDRP specification that removes this requirement.

### 1 The Inter-Domain Routing Protocol

In the Inter-Domain Routing Protocol (IDRP, [[1](#)]), border intermediate systems (BISs) of routing domains (RDs) exchange route updates. A

route update advertises reachability to one or more address prefixes (Network Layer Reachability Information, or NLRI, in ISO terminology). Each IDRP route update also contains an RD\_PATH attribute; the RD\_PATH is a list of Routing Domain Identifiers (RDIs) of RDs traversed by a route update. The RD\_PATH is used to detect routing loops.

In a large internet, a routing update's RD\_PATH may contain a large number of RDIs. To allow shorter RD\_PATHs, two or more topologically adjacent RDs may be combined into a single IDRP Routing Domain Confederation (RDC). In turn, two or more topologically adjacent RDCs may be combined into a single, larger, RDC. RDCs may also overlap. An RD outside an RDC A sees only the A's RDI in RD\_PATHs of route updates from A; that is, RDIs of RDs completely enclosed by A are not visible outside A.

## 2 RDC Configuration

Section 7.13.2 of [1] specifies that a border router (or Border Intermediate System (BIS)) that participates in one or more RDCs must:

be aware of the RDIs of all confederations of which it is a member, and it must know the partial order which prevails between these confederations: that is, it must know the nesting and overlap relationships between all confederations to which it belongs.

Such configuration is undesirable because changing an RDC's boundaries may require significant coordination between that RDC and all other RDCs that it contains or overlaps.

To understand the need for such configuration, we briefly describe RD\_PATH formation in IDRP (the interested reader is referred to Section 7.12.3 of [1] for details). When a routing update message enters an RDC, the RDC's BIS inserts an ``entry'' marker in the RD\_PATH. Thus, the RD\_PATH of a route update that has entered three RDCs A, B and C looks like this:

...Enter(A)....Enter(B)....Enter(C)....

The ellipses indicate RDIs of other RDs or RDCs traversed by the route.



### 3 Solution

With the following modification to the RD\_PATH formation rules of [Section 7.12.3](#) ([1]), the configuration rule of the previous section is no longer necessary:

In the absence of configured information, a BIS for an RDC B (say) shall assume that B is nested within RDCs whose ENTRY\_SEQs and ENTRY\_SETs appear to the ``left'' of B's ENTRY\_SEQ or ENTRY\_SET.

Ramesh Govindan

Expires April 28, 1997

[Page 3]

---

Internet Draft

Configuring IDRP Confederations

October 28, 1996

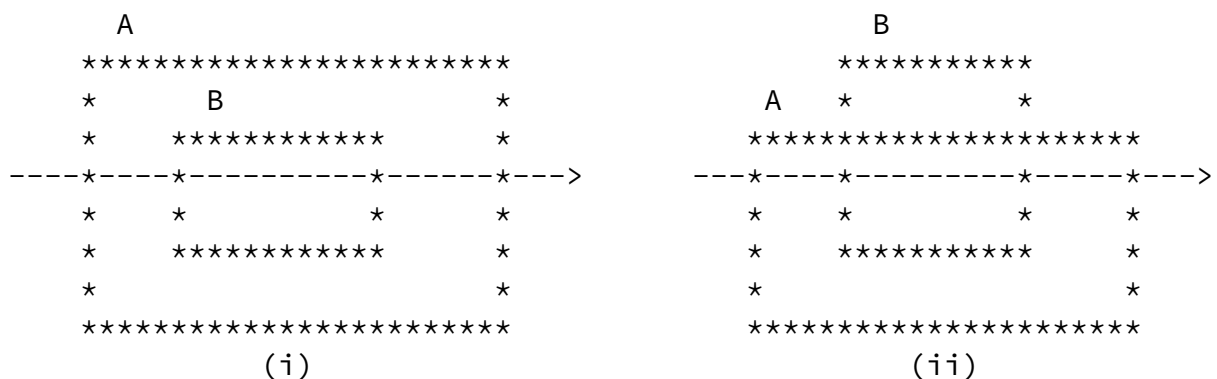


Figure 2: Suppose a route's RD\_PATH contains an ``entry'' marker for RD A followed by an ``entry'' marker for RD B. If the route exits B before exiting A, (i) A may completely enclose B, or (ii) B may overlap A.

Instead, [Section 7.13.2](#) now requires the following configuration information:

Each BIS must be aware of the RDCs entered by UPDATE PDUs received from each of its neighbors. Each BIS must also be aware of the RDCs exited by UPDATE PDUs sent from the BIS to each of its neighbors.

That is, a BIS need know only about RDCs which it borders, not all the RDCs in which it participates. Two related modifications to [1] are

necessary. [Section 7.13.3](#) is now redundant; in our proposed solution, confederation boundaries are configured. For the same reason, the OPEN PDU ([Section 6.2](#)) need no longer carry RDC IDs.

This solution has one important consequence. Consider the case when A overlaps with B in the RD\_PATH shown in the previous section (Figure 2(ii)). If B's BIS were configured with this information, both A and B's RDIs would appear in the route's RD\_PATH, when seen at any RD outside A. With our proposed solution, only A's RDI would appear in the RD\_PATH, when seen at any RD outside A. This is because our solution treats B as if it were nested within A. Thus, the fact that the route traverses RDC B is not visible outside RDC A. This does not violate loop detection. If, for policy reasons, it is desirable to have B's RDI appear in the RD\_PATH, B's network administrator can configure nesting and overlap relationships according to the configuration rule of [Section 2](#).

Finally, an equally correct solution would have been to always assume that A overlaps B. This solution provides no reduction, however, in

the length of RD\_PATHs, a primary motivation for introducing RDCs.

#### Acknowledgements

Yakov Rekhter motivated the study of this problem and provided valuable feedback on earlier versions of the draft. Cengiz Alaettinoglu, Rusty Eddy, Deborah Estrin, and Kannan Varadhan also influenced the contents of this draft.

#### References

- [1] Protocol for exchange of inter-domain routing information among intermediate systems to support forwarding of iso 8473 pdus. ISO/IEC 10747: Information Processing Systems Telecommunications and Information Exchange between Systems, October 1993.

Ramesh Govindan

Expires April 28, 1997

[Page 5]