

IDR Working Group  
Internet-Draft  
Intended status: Standards Track  
Expires: December 2, 2016

R. Raszuk, Ed.  
Bloomberg LP  
J. Haas, Ed.  
Juniper Networks  
A. Lange, Ed.  
Alcatel-Lucent  
S. Amante  
Apple, Inc.  
B. Decraene  
Orange  
P. Jakma  
Uni. of Glasgow  
R. Steenbergen  
nLayer Communications, Inc.  
May 31, 2016

Wide BGP Communities Attribute  
draft-ietf-idr-wide-bgp-communities-02

## Abstract

Route tagging plays an important role in external BGP [[RFC4271](#)] relations, in communicating various routing policies between peers. It is also a very common best practice among operators to propagate various additional information about routes intra-domain. The most common tool used today to attach various information about routes is through the use of BGP communities [[RFC1997](#)].

Such information is important to allow BGP speakers to perform some mutually agreed actions without the need to maintain a separate offline database for each tuple of prefix and associated set of action entries.

This document defines a new encoding which will enhance and simplify what can be accomplished today with the use of BGP communities. The most important addition this specification makes over currently defined BGP communities is the ability to specify, carry as well as use for execution an operator's defined set of parameters. It also provides an extensible platform for any new community encoding needs in the future.

## Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

Internet-Draft

wide-bgp-communities

May 2016

## Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on December 2, 2016.

## Copyright Notice

Copyright (c) 2016 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	Introduction . . . . .	<a href="#">3</a>
<a href="#">1.1.</a>	Protocol Summary . . . . .	<a href="#">4</a>
<a href="#">2.</a>	Wide Community Atoms . . . . .	<a href="#">5</a>
<a href="#">2.1.</a>	The Autonomous System number list atom . . . . .	<a href="#">6</a>
<a href="#">2.2.</a>	The IPv4 and IPv6 prefix list atoms . . . . .	<a href="#">6</a>
<a href="#">2.3.</a>	The Integer list atom . . . . .	<a href="#">6</a>
<a href="#">2.4.</a>	The IEEE Floating Point Number list atom . . . . .	<a href="#">7</a>
<a href="#">2.5.</a>	The Neighbor Class list atom . . . . .	<a href="#">7</a>
<a href="#">2.6.</a>	The User-defined Class list atom . . . . .	<a href="#">7</a>

2.7.	The UTF-8 String atom . . . . .	8
3.	Wide BGP Community Attribute . . . . .	8
3.1.	Wide BGP Community Attribute Container Header . . . . .	8
4.	Container Type 1: Wide Community . . . . .	10
4.1.	Community Value . . . . .	10

4.2.	Source AS Number . . . . .	10
4.3.	Context AS Number . . . . .	10
4.4.	Wide Community Target(s) TLV . . . . .	11
4.5.	Wide Community Exclude Target(s) TLV . . . . .	12
4.6.	Wide Community Parameter(s) TLV . . . . .	12
4.7.	Usage . . . . .	13
5.	The AS-4 List Generic Wide BGP Community . . . . .	13
5.1.	Definition . . . . .	13
6.	Well Known Standard BGP Communities . . . . .	13
7.	Operational Considerations . . . . .	14
8.	Error Handling . . . . .	14
9.	Example . . . . .	14
9.1.	Example Wide Community Definition . . . . .	14
9.2.	Example Wide Community Encoding . . . . .	15
10.	Security considerations . . . . .	17
11.	IANA Considerations . . . . .	17
12.	Change History . . . . .	18
13.	Outstanding Issues . . . . .	19
14.	Contributors . . . . .	20
15.	Acknowledgments . . . . .	20
16.	References . . . . .	20
16.1.	Normative References . . . . .	20
16.2.	Informative References . . . . .	21
	Authors' Addresses . . . . .	22

## 1. Introduction

[RFC 1997](#) [[RFC1997](#)] defines the BGP Community Attribute. This attribute is used as a tool to carry additional information in BGP routes which may help to automate peering administration. The BGP Communities Attribute consists of one or more sets of four octet values, where each specifies a different community. Except for two reserved ranges, the encoding of community values mandates that the first two octets are to contain the Autonomous System number, with the next two octets containing some locally defined value.

With the introduction of 4-octet Autonomous System numbers by [RFC 4893](#) [[RFC4893](#)] it became obvious that BGP Communities as specified in [RFC 1997](#) will not be able to accommodate new AS encoding. In fact [RFC 4893](#) explicitly recommends use of four octets AS specific [[RFC5668](#)] extended communities [[RFC4360](#)] as a way to encode new 4 octet AS numbers.

While the encoding of 4 octet AS numbers is being addressed by [[I-D.ietf-idr-as4octet-extcomm-generic-subtype](#)], neither the base BGP communities (standard or extended) nor [as4octet-extcomm-generic](#) document define a sufficient level of encoding freedom which could be of practical use. The authors believe that defining a new BGP Path

Raszuk, et al.

Expires December 2, 2016

[Page 3]

---

Internet-Draft

wide-bgp-communities

May 2016

Attribute, with the ability to contain locally defined parameters will enhance the current level of network policies, as well as simplify BGP policy management. The proposed simple encoding will also facilitate the delivery of new network services without a need to define a new BGP extension each time.

When defining any new type of tool there is always a unique opportunity to specify a subset of well recognized behaviors. Lists of the current most commonly used BGP communities, as well as provision for a new registry for future definitions will be contained in a separate document.

## [1.1](#). Protocol Summary

Each Wide BGP Community consists of three main parts:


1. A Container Header. This header is defined in [Section 4](#). The Container Header encodes:
  - \* Container Type. One Type is defined in this document.
  - \* Flags to control behavior.
  - \* Hop Count to control the degree of Community propagation
  - \* Length
2. The Community itself, defined as a type of Container. The Type 1 Wide Community is defined in [Section 4](#). The Type 1 Wide Community contains:

- \* Community Value: This section defines the action that an operator wishes a router to take.
- \* Source AS: This is the AS originating the community.
- \* Context AS: This is the AS context from which community should be interpreted.
- \* Target(s): This is an optional list that encodes where the community's action should be taken.
- \* Exclude Target(s): This is an optional list that encodes where the community's actions should not be taken.
- \* Parameters: This is an optional list that encodes additional information that the community's action needs to execute properly.

3. Community Atoms. These are values and lists of values that are common across community actions. They are defined in [Section 2](#).

## [2](#). Wide Community Atoms

Wide BGP communities will act on and hence need to encode some distinct atoms of data. These are encoded as TLVs, where each TLV has the following format:

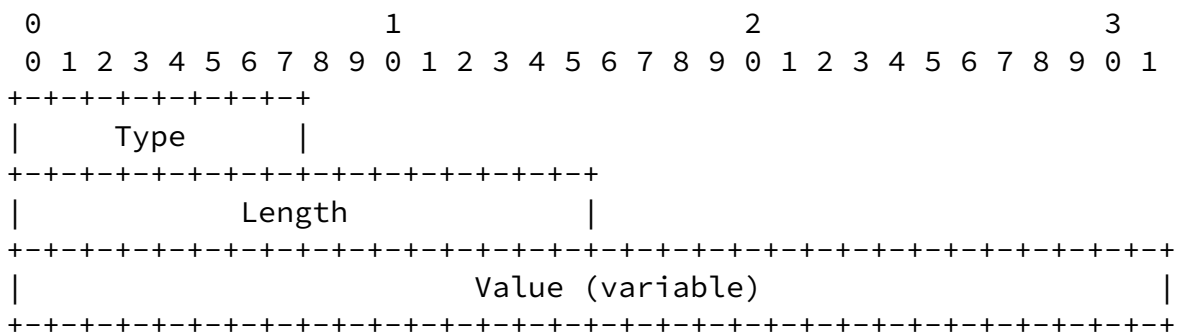

The Type field contains a value of 1-254. The values 0 and 255 are reserved for future use. The TLV types are to be assigned and maintained by IANA registry.

The Length represents the total length of a given TLV's value field in octets.

The Value field contains the TLV value.

Supported format of the TLVs can be:

- Type 1: Autonomous System number list
- Type 2: IPv4 prefix (1 octet prefix length + prefix) list
- Type 3: IPv6 prefix (1 octet prefix length + prefix) list
- Type 4: Integer list
- Type 5: IEEE Floating Point Number list
- Type 6: Neighbor Class list
- Type 7: User-defined Class list
- Type 8: UTF-8 String

The semantics of a given atom will depend upon the context in which it is used, as defined by the containing wide community.

In the following sections defining the different atoms, validation rules for the Length of the atom will be presented. If the Length of the atom does not match the rules for that atom, it SHALL be considered malformed. (See [Section 8.](#))

### [2.1.](#) The Autonomous System number list atom

This atom represents a list of Autonomous System numbers, each 4 octets in size. The minimum Length of this atom is 4 octets. The Length MUST be a multiple of 4.

For consistent treatment, all AS numbers MUST be encoded as 4 octet values. When encoding two octet ASes, the first two octets of this four octet value MUST be filled with zeros.

Two special values are reserved for the Autonomous System atoms:

- 0x00000000 - to indicate "No Autonomous Systems".
- 0xFFFFFFFF - to indicate "All Autonomous Systems".

## 2.2. The IPv4 and IPv6 prefix list atoms

This atom represents a list of IPv4 or IPv6 prefix. IPv4 and IPv6 prefix atom values are encoded in the same format used by BGP NLRI in [Section 4.3 of \[RFC4271\]](#).

```
+-----+
| Prefix Length (1 octet) |
+-----+
| Prefix (variable)      |
+-----+
```

The Prefix Length for IPv4 prefixes must be in the range of 0..32.

The Prefix Length for IPv6 prefixes must be in the range of 0..128.

The Length field must be able to accommodate the list of prefixes according to the encoding rules. If the Length cannot fully accommodate the required number of octets to encode the Prefix Length and the Prefix, the atom is considered malformed.

## 2.3. The Integer list atom

This atom represents a list of Integers. Integers are a fixed Length of 4 octets and are stored in network byte order.

The minimum Length of the Integer list atom is 4 octets. The Length MUST be a multiple of 4.

## 2.4. The IEEE Floating Point Number list atom

This atom represents a list of floating point numbers. Floating point numbers are a fixed Length of 4 octets and are stored in [\[IEEE.754.1985\]](#) format.

This atom represents a list of floating point numbers.

The minimum Length of the Floating Point Number list atom is 4 octets. The Length MUST be a multiple of 4.

## [2.5.](#) The Neighbor Class list atom

The Neighbor Class list atom represents a classification of a BGP peering session, each 4 octets in size. This class currently can contain three values:

- 1 - Peer: This class is typically applied to sessions where a transit-free relationship exists between two providers.
- 2 - Customer: This class is typically applied to sessions where the remote end of the session is operated by a customer.
- 3 - Upstream: This class is typically applied to sessions where the remote end of the session is operated by a network from which you receive transit routes.

The Neighbor Class list atom represents a classification of a BGP peering session.

The minimum Length of the Neighbor Class list atom is 4 octets. The Length MUST be a multiple of 4.

## [2.6.](#) The User-defined Class list atom

Similar to the Neighbor Class atom, the User-defined Class list atom represents a classification of a network property. The exact property definition is up to the semantics of the defining Autonomous System. The semantics governing a given User-defined Class list are defined by the Context AS Number.

Examples of User-defined Class properties include geography (East, West), continent (North America, Asia, Europe), etc. Similar to the [\[RFC1997\]](#) BGP Communities, it is necessary that the Context AS provide a registry of the value and the semantics of a given community.

The minimum Length of the User-defined Class list atom is 4 octets.



The Length of this atom MUST be a multiple of 4.

### 2.7. The UTF-8 String atom

The UTF-8 String atom represents an arbitrary Unicode string in UTF-8 [[RFC3629](#)] format. The Length is required to be of sufficient size to carry the UTF-8 string in the Value field.

Implementations MUST be prepared for truncated/improperly formed UTF-8 strings. When detecting such a string, the implementation should remove trailing octets of a multi-octet sequence in order to have a well-formed string.

Implementations MUST be prepared to receive empty (zero-Length) UTF-8 String atoms as they may be used as Parameters.

## 3. Wide BGP Community Attribute


This document defines a new BGP Path Attribute, the Wide BGP Community. The attribute type code is (TBA by IANA).

The Wide BGP Community Attribute is an optional, transitive BGP attribute, and may be present only once in the BGP UPDATE message.

The attribute contains a number of typed containers. Any given container type may appear multiple times, unless that container type's definition specifies otherwise.

### 3.1. Wide BGP Community Attribute Container Header

Containers always start with the following header:

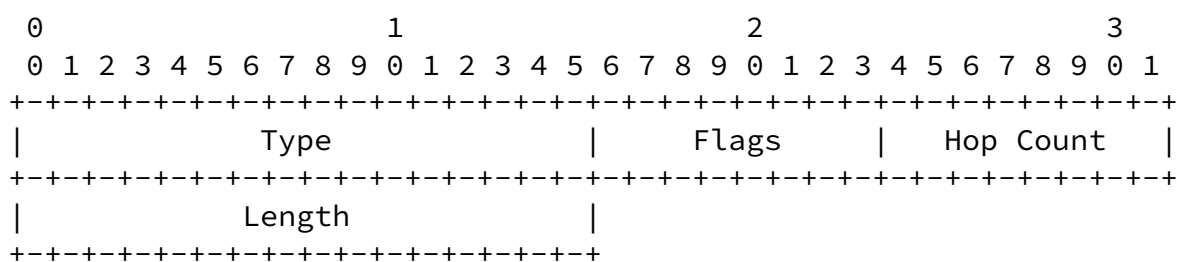

This document defines one Type code - Type 1. See the [Section 11](#) for information on additional type registration policies.

Bit	Value	Meaning
0	0	Local community value.
	1	Registered community value.
1	0	Do not decrement Hop Count field across confederation boundaries.
	1	Decrement Hop Count field across confederation boundaries.
2..7	-	MUST be zero when sent and ignored upon receipt.

Flags are defined globally, to apply to all wide community container types.

Table 1: Flags

Bit 0 (aka R bit) set (value 1) indicates that the given container carries a Wide BGP Community which is registered with IANA. When not set (value 0) it indicates that community value which follows is locally assigned with a local meaning.

Bit 1 (aka C bit) is used to manage the propagation scope of a given Wide BGP Community across confederation boundaries. When not set (value of 0), the Hop Count field is not considered at the sub-AS boundaries. When set (value of 1), sub-AS border router follows the same procedure regarding the handling of the Hop Count field as applicable to ASBR at the domain boundary.

The Hop Count field represents the forwarding radius, in units of AS hops, for the given Wide BGP Community. A Hop Count value of zero indicates that this wide community must not cross any further AS boundaries. At each AS boundary, when propagating a given wide community over an EBGP session, the Hop Count field MUST be decremented by the sending EBGP speaker.

The exact same decrement procedures described above apply also to sub-confederation boundaries when the bit 1's flag is set to 1.

The special value of 0xFF indicates that the enclosed community may always be propagated over an EBGP boundary. A Hop Count value of 0xFF MUST NOT be decremented during propagation.

The Length field represents the total length of a given container in octets.

#### 4. Container Type 1: Wide Community

The Wide BGP Community Type 1 container is of variable size (but minimum length 12) and is encoded as follows:

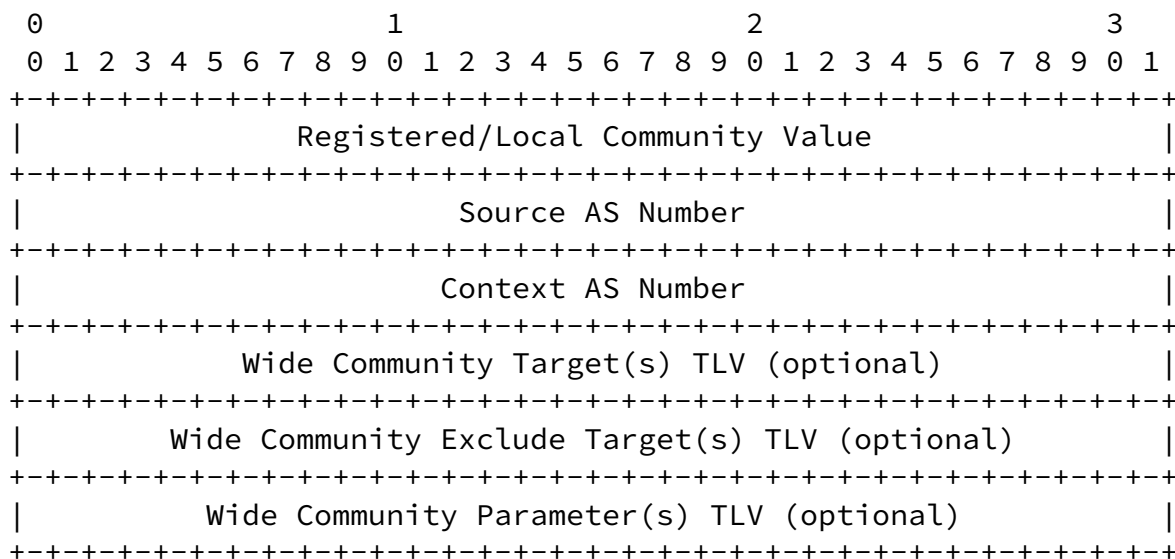


Figure 4: Wide BGP Community Type 1

##### 4.1. Community Value

Community Value: 4 octets

The Wide BGP Community value indicates what set of actions a router is requested to take upon reception of a route containing this community. The semantics of this value depend on whether this is a private/local community or registered.

##### 4.2. Source AS Number

Source Autonomous System Number: 4 octets

The Autonomous System number which indicates the originator of this Wide BGP Community.

When the Autonomous System is a two octet number the first two octets of this 4 octet value MUST be filled with zeros.

#### [4.3.](#) Context AS Number

Context Autonomous System Number: 4 octets

Raszuk, et al.

Expires December 2, 2016

[Page 10]

---

Internet-Draft

wide-bgp-communities

May 2016

The Autonomous System number that indicates the context of the Registered/Local Value. For Wide Community Containers that are Locally defined, the Context Autonomous System number provides the context for the Community Value and thus the meaning of the community as well as any User-defined Classes for that Context AS.

For Registered Community Containers, the Context Autonomous System number MAY be utilized to provide specific meaning for that Registered community. When no such context is implied, this field MUST be 0.

When the wide community is locally registered, the Context Autonomous System Number indicates the AS that defines the format of this wide community for the given Local Value. (In other words, value 1 will likely refer to different formats for AS 1 vs. AS 2.)

#### [4.4.](#) Wide Community Target(s) TLV

The Wide Community Target(s) TLV (Type 1) contains a list of a Wide Community atoms.

Wide Community Targets define the matching criteria for the community. A given wide community may have a number of targets that it applies to. The semantics of these targets will vary on a per community basis. Depending on the definition of the community, targets may be optional.

The value field of the Wide Community Target(s) TLV is a series of Wide Community Atom TLVs. The semantics of any given atom TLV MUST be part of the definition of a given Wide Community.

Typically, Wide Community Targets consist of a series of atoms that

have "match any" semantics. Thus, if any given target matches per the semantics of that atom for the community, the community is considered to match and the action defined by the community should be executed.

When no Target(s) TLV is specified, it is considered "match all".

If the semantics of a given atom is undefined for the community in question, it MUST be ignored.

When no targets are required by the definition of a given Wide Community, the Wide Community Target(s) TLV SHOULD NOT be encoded in the community. Implementations MUST be prepared to accept a Wide Community Target(s) TLV with an empty value field.

#### [4.5.](#) Wide Community Exclude Target(s) TLV

The Wide Community Exclude Target(s) TLV (Type 2) contains a list of a Wide Community atoms.

Wide Community Exclude Targets define criteria by which the community is considered to NOT match. Depending on the semantics of the Wide Community, Exclude Target(s) may be optional.

The semantic of the Wide Community Exclude Target(s) is to match all specified Target(s) with the exception of those listed in this TLV.

The value field of the Wide Community Exclude Target(s) TLV is a series of Wide Community Atom TLVs. The semantics of any given atom TLV MUST be part of the definition of a given Wide Community.

If the semantics of a given atom is undefined for the community in question, it MUST be ignored.

If the Wide Community Target(s) TLV and the Wide Community Exclude Target(s) TLV have conflicting semantics, priority MUST be given to the Wide Community Exclude Target(s) TLV.

When no exclude targets are required by the definition of a given Wide Community, the Wide Community Exclude Target(s) TLV SHOULD NOT

be encoded in the community. Implementations MUST be prepared to accept a Wide Community Exclude Target(s) TLV with an empty value field.

#### [4.6.](#) Wide Community Parameter(s) TLV

The Wide Community Parameter(s) TLV (Type 3) contains a list of a Wide Community atoms.

A given wide community may have parameters which are used as inputs for executing actions defined for that community. These parameters, and any constraints implied by the parameters, MUST be defined by the wide community definition. Parameters consist of an ordered set of atom sub-TLVs. The semantics of any specific positional instance of an atom MUST be defined by the wide community.

If it is the case that a parameter for a given community is of an unexpected type or length, the community MUST be ignored.

If it is the case that there are too many or too few parameters for a given community, the community MUST be ignored.

When no parameters are required by the definition of a given Wide Community, the Wide Community Parameters TLV SHOULD NOT be encoded in the community. Implementations MUST be prepared to accept a Wide Community Parameter TLV with an empty value field.

#### [4.7.](#) Usage

The detailed interpretation of the targets or parameters SHALL be provided when describing given community type in a separate document or when locally defined by an operator.

### [5.](#) The AS-4 List Generic Wide BGP Community

In standard [[RFC1997](#)] BGP Communities, a commonly deployed format is AS:0x0000-0xFFFF. The left-hand-side AS is the context AS while the right-hand-side represents an action intended to be taken upon that AS. While the [[I-D.ietf-idr-as4octet-extcomm-generic-subtype](#)] Extended Community format is intended to address the use cases where

the right-hand-side represents a semi-opaque integer value, operators that desire to utilize the right-hand-side as an Autonomous System Number have been unable to do so.

In the AS:0x0000-0xFFFF format, there are no explicit semantics on the action for a given right-hand-side. The semantics are implicit to the Autonomous System number itself. While such a format doesn't take advantage of the more flexible semantics of Wide BGP Communities, the format is capable of addressing this operational need.

This document defines a Registered Wide BGP Community to address that need.

### [5.1.](#) Definition

Community Value: 1 - AS-4 List Generic Wide BGP Community  
Source AS Number: <Your AS number>  
Context AS Number: <Targeted AS number>  
Wide Community Target(s): <MUST BE ABSENT>  
Wide Community Exclude Target(s): <MUST BE ABSENT>  
Wide Community Parameter(s): <Wide Community Atom Type 4>

## [6.](#) Well Known Standard BGP Communities

According to [RFC 1997](#), as well as IANA's Well-Known BGP Communities registry, the following BGP communities are defined to have global significance:

Raszuk, et al.

Expires December 2, 2016

[Page 13]

---

Internet-Draft

wide-bgp-communities

May 2016

0xFFFF0000	planned-shut	<a href="#">[draft-francois-bgp-gshut]</a>
0FFFFFFF01	NO_EXPORT	<a href="#">[RFC1997]</a>
0FFFFFFF02	NO_ADVERTISE	<a href="#">[RFC1997]</a>
0FFFFFFF03	NO_EXPORT_SUBCONFED	<a href="#">[RFC1997]</a>
0FFFFFFF04	NOPEER	<a href="#">[RFC3765]</a>

This document recommends for simplicity as well as for avoidance of backward compatibility issues the continued use of BGP Standard Community Attribute type 8 as defined in [RFC 1997](#) to distribute non Autonomous System specific Well-Known BGP Communities.

For the same reason, this document does not intended to obsolete the currently defined and deployed BGP Extended Communities.

## [7.](#) Operational Considerations

Having two different ways to propagate locally assigned BGP communities, one via the use of Standard BGP Communities and the other one via the use of Wide BGP Communities, may seem to potentially cause problems when considering propagation of conflicting actions. However, even at present, an operator may append Standard BGP Communities with conflicting information. It is therefore recommended that any implementation, in supporting both standard and Wide BGP communities, allow for their easy inbound and outbound processing. The actual execution of all communities should be treated as a union and, if supported by an implementation, their execution permissions are to be a local configuration matter.

## [8.](#) Error Handling

If any atom in a Wide Community container's Exclude Targets TLV is unrecognized, no actions should be taken for that Wide Community. While the Targets TLV is meant to be inclusive, the Exclude Targets TLV is meant to be proscriptive of applying the action.

If any Wide Community container or atoms contained therein are determined to be malformed, the Wide Community Path attribute must be considered malformed. BGP implementations should use "treat-as-withdraw" semantics as defined in [[I-D.ietf-idr-error-handling](#)].

## [9.](#) Example

### [9.1.](#) Example Wide Community Definition

An operator of an AS 64496, wishes to locally define a Wide Community with the semantics of permitting AS\_PATH prepending with targets that include AS numbers of peer ASes and peers who have been marked with a set of enumerated city locations.

AS 64496 has established a registered set of values to use for its User-defined Class:



101 - New York  
102 - San Francisco  
103 - Tokyo  
104 - Moscow

#### Target semantics:

The Autonomous System Number list atom refers to the target peer AS Numbers.

The User-defined Class for AS 64496 has been defined elsewhere and the values 100..104 may be used for this locally defined Wide Community.

The Targets TLV MUST contain at least one entry.

The Exclude Targets TLV MAY contain entries of the above supported atoms.

The semantics of all other atoms are undefined for this community.

#### Parameter semantics:

The parameter TLV shall consist of exactly one Integer atom value that is constrained to have a value of 2..8.

### [9.2.](#) Example Wide Community Encoding

AS\_PATH prepend 4 TIMES TO AS 2424, AS 8888, to peers marked as Amsterdam (100) or to peers marked Moscow (104), but not to peers in New York (101).

Use Hop Count 0 to request the receiving router to not propagate this wide community.

Locally community value (flag bit 0 = 0).

Do not decrement Hop Count field across confederation boundaries (0)

Local community 1 for sample AS 64496.

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|   Container Type 1 (1)   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|0 0 0 0 0 0 0 0|
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Hop Count: 0 |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Length:                57 |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Community: LOCAL PREPEND ACTION CATEGORY                1 |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Own ASN                64496 |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Context ASN#          64496 |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Target TLV (1) | Length:                22 |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| ASN List (2) | Length:                8 |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Target ASN#                2424 |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Target ASN#                8888 |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| User List(7) | Length:                8 |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Amsterdam                100 |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Moscow                104 |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|ExcTargetTLV(2) | Length:                7 |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| User List(7) | Length:                4 |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| New York                101 |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Param TLV (3) | Length:                7 |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Integer (4) | Length:                4 |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Prepend #                4 |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Internet-Draft

wide-bgp-communities

May 2016

## 10. Security considerations

All the security considerations for BGP Communities as well as for BGP RFCs apply here.

Given the flexibility and power offered by Wide BGP communities, it is important to consider the additional possibilities allowed by their definition. In particular, for locally defined Wide BGP Communities, it may be wise to restrict the range of parameters. For registered Wide BGP Communities, the security considerations of the document defining them MUST address issues specific to those newly defined Wide Communities.

Security considerations specific to Wide BGP Communities will be discussed in a later revision of this draft.

## 11. IANA Considerations

This document defines a new BGP Path Attribute called Wide BGP Community Attribute. For this new type IANA is to allocate a new value in the corresponding registry:

Registry Name: BGP Path Attributes

This document makes the following assignments for the optional, transitive Wide BGP Communities Attribute:

Name	Type Value
----	-----
Wide BGP Community Attribute	TBA

This document requests IANA to define and maintain a new registry named: "Wide BGP Communities Attribute Container Types".

The pool of: 0x0000-0xFFFF has been defined for its allocations. The allocation policy is on a first come, first served basis.

This document makes the following assignments for the Wide BGP Communities Container Types values:

Name	Type Value
----	-----
Reserved	0x0000
Type 1, Wide BGP Community	0x0001
Types 2-1023 to be allocated using IETF Consensus	
Types 1024-64511 to be allocated first come, first served	
Types 64512-65534 are reserved for experimental use	
Reserved	0xFFFF

Raszuk, et al.

Expires December 2, 2016

[Page 17]

Internet-Draft

wide-bgp-communities

May 2016

This document requests IANA to define and maintain a new registry named: "Wide BGP Communities Atom Types". The pool of 0x0000-0xFFFF has been defined for its allocations.

This document makes the following assignments for the Wide BGP Communities Atom Type values:

Name	Type Value
----	-----
Reserved	0x00
Autonomous System Number List	0x01
IPv4 Prefix list	0x02
IPv6 Prefix list	0x03
Integer list	0x04
IEEE Floating Point Number list	0x05
Neighbor Class list	0x06
User-defined Class list	0x07
UTF-8 string	0x08
Reserved	0xFF

This document requests IANA to define and maintain a new registry named: "Registered Wide BGP Communities". The pool of 0x00000000-0FFFFFFFFF has ben defined for its allocation.

This document makes the following assignments for the Registered Wide BGP Communities:

Name	Type Value
----	-----
Reserved	0x00
AS-4 List Generic Wide BGP Community	0x01
Reserved	0xFFFFFFFF

Values 2-1023 are to be allocated using IETF Consensus. Values 64512-65534 are reserved for experimental use. All other values are available on a first-come, first served basis.

## [12.](#) Change History

Changes from -03 via -04 to -05:

Update the Introduction.

Substantial re-work of atom types removing proposed Group container and moving atoms to be lists.

Raszuk, et al.

Expires December 2, 2016

[Page 18]

---

Internet-Draft

wide-bgp-communities

May 2016

Added the Exclude Targets TLV to the Wide Community container.

Added a section on error handling.

Updated the example.

Changes from -02 to -03:

Removed C and R named bit fields originally from -00.

Rename Target AS field to Context AS.

Make Integer Atom a fixed 4 octets in length.

Add Neighbor Class Atom

Rename TTL to Hop Count

Changes from -01 to -02:

The Type field has been expanded to 2 octets.

The Length field has been moved to the common header.

Changed format to use TLVs.

Added atom TLV to define well defined syntactic items.

Added TLVs to distinguish targets from parameters.

Various editorial changes to language.

### 13. Outstanding Issues

The following are known issues that have yet to be resolved in this draft:

- o The interaction of the Container TTL field with VPN peers.
- o The name Wide Communities is overloaded in this document. The scope of this feature has evolved since the initial -00 of the draft. The general feature of a containerized BGP Community extension and the Type 1 container, the Wide community, currently share names. "There are only two hard things in Computer Science: cache invalidation and naming things."

Raszuk, et al.

Expires December 2, 2016

[Page 19]

---

Internet-Draft

wide-bgp-communities

May 2016

### 14. Contributors

The following people contributed significantly to the content of the document:

Shintaro Kojima  
OTEMACHI 1st. SQUARE EAST TOWER, 3F  
1-5-1, Otemachi,  
Chiyoda-ku, Tokyo 100-0004  
Japan  
Email: koji@mfeed.ad.jp

Juan Alcaide  
Cisco Systems  
Research Triangle Park, NC  
United States  
Email: jalcaide@cisco.com

Burjiz Pithawala

Cisco Systems  
170 West Tasman Dr  
San Jose, CA  
United States  
Email: bpithaw@cisco.com

Saku Ytti  
TDC Oy  
Mechelininkatu 1a  
00094 TDC  
Finland  
Email: ytti@tdc.net

## 15. Acknowledgments

This document owes [draft-lange-flexible-bgp-communities](#) a debt for the inspiration of many features contained herein.

The authors would like to thank Enke Chen, Pedro Marques and Alton Lo for their valuable input.

## 16. References

### 16.1. Normative References

Raszuk, et al. Expires December 2, 2016 [Page 20]

---

Internet-Draft wide-bgp-communities May 2016

[I-D.ietf-idr-error-handling]

Scudder, J., Chen, E., Mohapatra, P., and K. Patel,  
"Revised Error Handling for BGP UPDATE Messages", [draft-ietf-idr-error-handling-05](#) (work in progress), February 2014.

[IEEE.754.1985]

Institute of Electrical and Electronics Engineers,  
"Standard for Binary Floating-Point Arithmetic",  
IEEE Standard 754, August 1985.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate

Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<http://www.rfc-editor.org/info/rfc2119>>.

[RFC3629] Yergeau, F., "UTF-8, a transformation format of ISO 10646", STD 63, [RFC 3629](#), DOI 10.17487/RFC3629, November 2003, <<http://www.rfc-editor.org/info/rfc3629>>.

[RFC4271] Rekhter, Y., Ed., Li, T., Ed., and S. Hares, Ed., "A Border Gateway Protocol 4 (BGP-4)", [RFC 4271](#), DOI 10.17487/RFC4271, January 2006, <<http://www.rfc-editor.org/info/rfc4271>>.

## 16.2. Informative References

[I-D.ietf-idr-as4octet-extcomm-generic-subtype] Rao, D., Mohapatra, P., and J. Haas, "Generic Subtype for BGP Four-octet AS specific extended community", [draft-ietf-idr-as4octet-extcomm-generic-subtype-06](#) (work in progress), October 2012.

[RFC1997] Chandra, R., Traina, P., and T. Li, "BGP Communities Attribute", [RFC 1997](#), DOI 10.17487/RFC1997, August 1996, <<http://www.rfc-editor.org/info/rfc1997>>.

[RFC4360] Sangli, S., Tappan, D., and Y. Rekhter, "BGP Extended Communities Attribute", [RFC 4360](#), DOI 10.17487/RFC4360, February 2006, <<http://www.rfc-editor.org/info/rfc4360>>.

[RFC4893] Vohra, Q. and E. Chen, "BGP Support for Four-octet AS Number Space", [RFC 4893](#), DOI 10.17487/RFC4893, May 2007, <<http://www.rfc-editor.org/info/rfc4893>>.

[RFC5668] Rekhter, Y., Sangli, S., and D. Tappan, "4-Octet AS Specific BGP Extended Community", [RFC 5668](#), DOI 10.17487/RFC5668, October 2009, <<http://www.rfc-editor.org/info/rfc5668>>.



## Authors' Addresses

Robert Raszuk (editor)  
Bloomberg LP  
731 Lexington Ave  
New York City, NY 10022  
USA

Email: robert@raszuk.net

Jeffrey Haas (editor)  
Juniper Networks  
1194 N.Mathilda Ave  
Sunnyvale, CA 94089  
US

Email: jhaas@juniper.net

Andrew Lange (editor)  
Alcatel-Lucent  
777 E. Middlefield Road  
Mountain View, CA 94043  
US

Email: andrew.lange@alcatel-lucent.com

Shane Amante  
Apple, Inc.  
1 Infinite Loop  
Cupertino, CA 95014  
US

Email: amante@apple.com

Bruno Decraene  
Orange  
38-40 rue du General Leclerc  
Issy Moulineaux cedex 9 92794  
France

Email: [bruno.decraene@orange.com](mailto:bruno.decraene@orange.com)

Paul Jakma  
University of Glasgow  
School of Computing Science  
Sir Alwyn Williams Building  
University of Glasgow  
Glasgow G12 8QQ  
UK

Email: [paulj@dcs.gla.ac.uk](mailto:paulj@dcs.gla.ac.uk)

Richard A Steenbergen  
nLayer Communications, Inc.  
209 W Jackson Blvd  
Chicago, IL 60606  
US

Email: [ras@nlayer.net](mailto:ras@nlayer.net)

