

Network Working Group  
Internet Draft  
Intended status: Informational  
Expires: December 12, 2013

Paul E. Jones  
Gonzalo Salgueiro  
James Polk  
Cisco Systems  
Laura Liess  
Deutsche Telekom  
Hadriel Kaplan  
Acme Packet  
June 12, 2013

**Requirements for an End-to-End Session Identification in  
IP-Based Multimedia Communication Networks  
draft-ietf-insipid-session-id-reqts-07.txt**

Abstract

This document specifies the requirements for an end-to-end session identifier in IP-based multimedia communication networks. This identifier would enable endpoints, intermediate devices, and management and monitoring systems to identify a session end-to-end across multiple SIP devices, hops, and administrative domains.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on December 12, 2013.

Copyright Notice

Copyright (c) 2013 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must

include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	<a href="#">Introduction.....</a>	<a href="#">2</a>
<a href="#">2.</a>	<a href="#">Conventions used in this document.....</a>	<a href="#">3</a>
<a href="#">3.</a>	<a href="#">Terminology.....</a>	<a href="#">3</a>
	<a href="#">3.1. What does the Session-ID Identify?.....</a>	<a href="#">3</a>
	<a href="#">3.2. Communication Session.....</a>	<a href="#">4</a>
	<a href="#">3.3. End-to-End.....</a>	<a href="#">5</a>
<a href="#">4.</a>	<a href="#">Session Identifier Use Cases.....</a>	<a href="#">5</a>
	<a href="#">4.1. End-to-end identification of a communication session.....</a>	<a href="#">5</a>
	<a href="#">4.2. Protocol Interworking.....</a>	<a href="#">5</a>
	<a href="#">4.3. Traffic Monitoring.....</a>	<a href="#">6</a>
	<a href="#">4.4. Tracking transferred sessions.....</a>	<a href="#">6</a>
	<a href="#">4.5. Session Signal Logging.....</a>	<a href="#">6</a>
	<a href="#">4.6. Identifier Syntax.....</a>	<a href="#">7</a>
	<a href="#">4.7. 3PCC Use Case.....</a>	<a href="#">7</a>
<a href="#">5.</a>	<a href="#">Requirements for the End-to-End Session Identifier.....</a>	<a href="#">7</a>
<a href="#">6.</a>	<a href="#">Related Work in other Standards Organizations.....</a>	<a href="#">8</a>
	<a href="#">6.1. Coordination with the ITU-T.....</a>	<a href="#">8</a>
	<a href="#">6.2. Requirements within 3GPP.....</a>	<a href="#">9</a>
<a href="#">7.</a>	<a href="#">Security Considerations.....</a>	<a href="#">9</a>
<a href="#">8.</a>	<a href="#">IANA Considerations.....</a>	<a href="#">10</a>
<a href="#">9.</a>	<a href="#">Acknowledgments.....</a>	<a href="#">10</a>
<a href="#">10.</a>	<a href="#">Contributors.....</a>	<a href="#">10</a>
<a href="#">11.</a>	<a href="#">References.....</a>	<a href="#">10</a>
	<a href="#">11.1. Normative References.....</a>	<a href="#">10</a>
	<a href="#">11.2. Informative References.....</a>	<a href="#">10</a>
	<a href="#">Author's Addresses.....</a>	<a href="#">11</a>

## [1. Introduction](#)

IP-based multimedia communication systems like SIP [[1](#)] and H.323 [[2](#)] have the concept of a "call identifier" that is globally unique. The identifier is intended to represent an end-to-end communication session from the originating device to the terminating device. Such an identifier is useful for troubleshooting, session tracking, and so forth.

Unfortunately, there are a number of factors that contribute to the fact that the current call identifiers defined in SIP and H.323 are not suitable for end-to-end session identification. Perhaps most significant is the fact that the syntax for the call identifier in SIP and H.323 is different between the two protocols. This important fact makes it impossible for call identifiers to be exchanged end-to-end when a network utilizes one or more session protocols.

Another reason why the current call identifiers are not suitable to identify the session end-to-end is that in real-world deployments



devices like Back-to-Back User Agents often change the values as the session signaling passes through. This is true even when a single session protocol is employed and not a byproduct of protocol interworking.

Lastly, identifiers that might have been used to identify a session end-to-end fail to meet that need when sessions are manipulated through supplementary service interactions. For example, when a session is transferred or if a PBX joins or merges two communication sessions together locally, the end-to-end properties of currently-defined identifiers are lost.

## **2. Conventions used in this document**

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [3] when they appear in ALL CAPS. These words may also appear in this document in lower case as plain English words, absent their normative meanings.

## **3. Terminology**

### **3.1. What does the Session-ID Identify?**

The identifier this document places requirements on, the Session Identifier, identifies a set of signaling messages associated with exactly two endpoints that, from each endpoint's perspective, are related to a single invocation of a communication application.

How the endpoints determine which signaling messages share a given identifier (that is, what constitutes a single invocation of a communication application) is intentionally left loosely defined.

The term "call" is often used as an example of such an invocation for voice and video communication, but different protocols and deployments define the scope of a "call" in different ways. For instance, some systems would associate all of the activity between all three parties involved in a transfer a single "call".

Similarly, the term "session" is often used as an example of such an invocation, but this term is overloaded to describe both signaling and media level interaction. A single invocation of the communication application, as described above, may involve multiple RTP "sessions" as described by [RFC 3550](#), possibly even multiple concurrent sessions.

In this document, unless otherwise qualified, the term "communication session", or simply "session", will refer only to the set of signaling messages identified by the common Session-ID identifier. That is, a "session" is a set of signaling messages associated with exactly two endpoints that, from each endpoint's perspective, are related to a single invocation of a communication application.



The requirements in this document put some constraint on what an endpoint will consider the same, or a different, invocation of a communication session. They also ensure that related sessions (as this document is using the term) can be correlated using only the session identifiers for each session. Again, what constitutes a "related" session is intentionally left loosely defined.

The definition speaks of messages associated with exactly two endpoints instead of messages sent between two endpoints to allow for intermediaries that create messages on an endpoint's behalf. It is possible that an endpoint may not see all of the messages in a session (as this document is using the term) associated with it.

This definition, and the requirements in this document that put some constraint on what an endpoint should consider the same, or a different, invocation of a communication session facilitates specifying an identifier that allows the two endpoints to use two entirely different protocols (hence potentially have different ideas of what a single invocation means) or use two applications that have a different idea of what a single invocation means.

**3.2. Communication Session**

A communication session may exist between two SIP user agents and that may pass through one or more intermediary devices, including B2BUAs or SIP proxies. For example:




Figure 1 - Communication Session through Middlebox(es)

The following are examples of acceptable communication sessions:

- o A call directly between two user agents
- o A call between two user agents with one or more SIP middleboxes in the signaling path
- o A call between two user agents that was initiated using third-party call control (3PCC)
- o A call between two user agents (e.g., Alice and Carol) that results from a different communication session (e.g., Alice and Bob) wherein one of those user agents (Alice) is transferred to another user agent (Carol) using REFER or re-INVITE

The following are not considered communication sessions:

- o A call between any two user agents wherein two or more user agents are engaged in a conference call via a conference focus



- o Each call between the user agent and the conference focus would be a communication session
- o Each communication session is a distinct communication session
- o A call between three user agents (e.g., Alice, Bob, and Carol) wherein the first user agent (Alice) ad hoc conferences the other two user agents (Bob and Carol)
  - o The call between Alice and Bob would be one communication session
  - o The call between Alice and Carol would be a different communication session

### **3.3. End-to-End**

The term "end-to-end" in this document means the communication session from the point of origin, passing through any number of intermediaries, to the ultimate point of termination. It is recognized that legacy devices may not support the end-to-end session identifier, though an identifier might be created by an intermediary when it is absent from the session signaling.

## **4. Session Identifier Use Cases**

### **4.1. End-to-end identification of a communication session**

For SIP messaging that either does not involve SIP servers or only involves SIP proxies, the Call-ID header value sufficiently identifies each SIP message within a transaction or dialog. This is not the case when either B2BUAs or SBCs are in the signaling path between UAs. Therefore, we need the ability to identify each communication session through a single SIP header-value regardless of which type of SIP servers are in the signaling path between UAs. For messages that create a dialog, each message within the same dialog MUST use the same session identifier.

Derived Requirements: All Requirements in [Section 5](#)

### **4.2. Protocol Interworking**

A communication session might originate in an H.323 endpoint and pass through a Session Border Controller before ultimately reaching a terminating SIP user agent. Likewise, a call might originate on a SIP user agent and terminate on an H.323 endpoint. It MUST be possible to identify such sessions end-to-end across the plurality of devices, networks, or administrative domains.

It is expected that the ITU-T will define protocol elements for H.323 to make the end-to-end signaling possible.





Derived Requirements: REQ5, REQ7

### **4.3. Traffic Monitoring**

UA A and UA B communicate using SIP messaging with a SIP B2BUA acting as a middlebox which belongs to a SIP service provider. For privacy reasons, the B2BUA changes the SIP headers that reveal information related to the SIP users, device or domain identity. The service provider uses an external device to monitor and log all SIP traffic coming to and from the B2BUA. In the case of failures reported by the customer or when security issue arise (e.g. theft of service), the service provider has to analyze the logs from the past several days or weeks and correlates those messages which were messages for a single end-to-end SIP session.

For this scenario, we must consider three particular use cases:

- a) The UAs A and B support the end-to-end Session Identifier.

Derived Requirements: REQ1, REQ3, REQ4, REQ6.

- b) Only the UA A supports the end-to-end Session Identifier, the UA B does not.

Derived Requirements: REQ1, REQ3, REQ4, REQ5, REQ6.

- c) UA A and UA B do not support the end-to-end Session Identifier.

Derived Requirements: REQ1, REQ3, REQ4, REQ5, REQ6

### **4.4. Tracking transferred sessions**

It is difficult to track which SIP messages were involved in the same call across transactions, especially when invoking supplementary services such as call transfer or call join. There exists a need for the ability to track communication sessions as they are transferred, one side at a time, until completion of the session (i.e., until a BYE is sent).

Derived Requirements: REQ1, REQ2, REQ9

### **4.5. Session Signal Logging**

An after-the-fact search of SIP messages to determine which messages were part of the same transaction or call is difficult when B2BUAs and SBCs are involved in the signaling between UAs. Mapping more than one Call-ID together can be challenging because all of the values in SIP headers on one side of the B2BUA or SBC will likely be different than those on the other side. If multiple B2BUAs and/or SBCs are in the signaling path, more than two sets of header values will exist, creating more of a challenge. Creating a common header value through all SIP entities will greatly reduce any challenge for



the purposes of debugging, communication tracking (such as for security purposes in case of theft of service), etc.

Derived Requirements: REQ1, REQ3, REQ5, REQ6

**4.6. Identifier Syntax**

A syntax that is too restrictive (e.g., one that allows special characters or a very long identifier) would make it difficult to encode the identifier in other protocols. Therefore, the syntax of the identifier should be reasonably restrictive.

Derived Requirements: REQ8

**4.7. 3PCC Use Case**

Third party call control refers to the ability of an entity to create a call in which communication is actually between two or more parties. For example, a B2BUA acting as a third party controller could establish a call between two SIP UA's using 3PCC procedures as described in [section 4.1 of RFC 3725](#) [7], the flow for which is reproduced below.

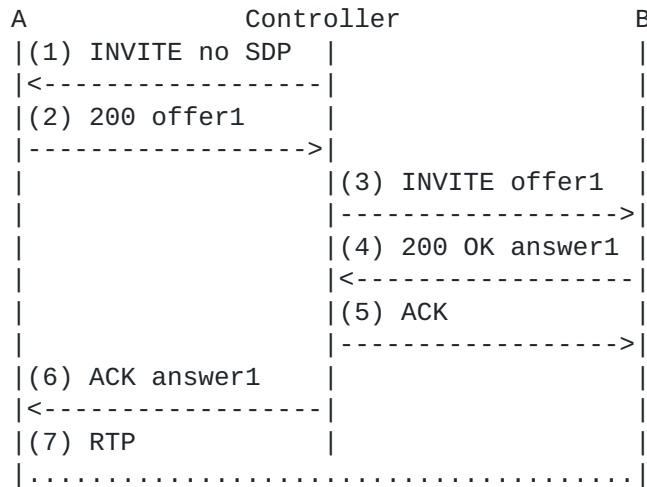


Figure 2 - Session-ID 3PCC Scenario

Such a flow must result in a single session identifier being used for the communication session between UA A and UA B. This use case does not extend to three SIP UAs.

Derived Requirements: REQ9

**5. Requirements for the End-to-End Session Identifier**

The following requirements are derived from the use cases and additional constraints regarding the construction of the identifier.



REQ1: It must be possible for an administrator or an external device which monitors the SIP-traffic to use the identifier to identify those dialogs, transactions and messages which were at some point in time components of a single end-to-end SIP session (e.g., parts of the same call).

REQ2: It must be possible to correlate two end-to-end sessions when a session is transferred or if two different sessions are joined together via an intermediary (e.g., a PBX).

REQ3: The solution must require that the identifier, if present, pass unchanged through SIP B2BUAs or other intermediaries.

REQ4: The identifier must not reveal any information related to any SIP user, device or domain identity. This includes any IP Address, port, hostname, domain name, username, Address-of-Record, MAC address, IP address family, transport type, subscriber ID, Call-ID, tags, or other SIP header or body parts.

REQ5: It must be possible to identify SIP traffic with an end-to-end session identifier from and to end devices that do not support this new identifier, such as by allowing an intermediary to inject an identifier into the session signaling.

REQ6: The identifier should be unique in time and space, similar to the Call-ID.

REQ7: The identifier should be constructed in such a way as to make it suitable for transmission in SIP and H.323.

REQ8: The identifier should use a restricted syntax and length so as to allow the identifier to be used in other protocols.

REQ9: It must be possible to correlate two end-to-end sessions when the sessions are created by a third party controller using 3PCC procedures shown in Figure 1 of [RFC 3725](#) [7].

## **6. Related Work in other Standards Organizations**

### **6.1. Coordination with the ITU-T**

IP multimedia networks are often comprised of a mix of session protocols like SIP and H.323. A benefit of the Session Identifier is that it uniquely identifies a communication session end-to-end across session protocol boundaries. Therefore, the need for coordinated standardization activities across Standards Development Organizations (SDOs) is imperative.

To facilitate this, a parallel effort is underway in the ITU-T to introduce the Session Identifier for the H.323 protocol. The ITU-T SG16 has approved contribution C.552 [5] as a work item with the



intent that it be a coordinated and synchronized effort between the ITU-T and the IETF.

## **6.2. Requirements within 3GPP**

3GPP identified in their Release 9 the need for a Session Identifier for O&M purposes to correlate flows in an end-to-end communication session. TS24.229 (IP multimedia call control protocol based on Session Initiation Protocol (SIP) and Session Description Protocol (SDP)) [6] points to the fact that the Session Identifier can be used to correlate SIP messages belonging to the same session. In the case where signaling passes through SIP entities like B2BUAs, the end-to-end session identifier indicates that these dialogs belong to the same end-to-end SIP communication session.

## **7. Security Considerations**

The security vulnerabilities, attacks, and threat models affecting other similar SIP identifiers are well documented in [RFC 3261](#) and are equally applicable to the end-to-end session identifier and subject to the same mitigating security best practices.

An end-to-end identifier, if not properly constructed, could provide confidential information that would allow one to identify the individual, device, or domain initiating or terminating a communication session. In adherence with REQ4, the solution produced in accordance with these requirements MUST take appropriate measures to properly secure and obfuscate sensitive or private information that might allow one to identify a person, device, or domain. This means that information elements such as the MAC address or IP address MUST NOT be used when constructing the end-to-end session identifier. It is outside the scope of this document to specify the implementation details of such security and privacy measures. Those details may vary with the specific construction mechanism selected for the end-to-end session identifier and, therefore, will be discussed in suitable detail in the solution document specifying the actual end-to-end identifier.

A key security consideration is to ensure that an attacker cannot surreptitiously spoof the identifier and effectively render it useless to diagnostic equipment that cannot properly correlate signaling messages due to the duplicate session identifiers that exist in the same space and time. In accordance with REQ6, this end-to-end identifier MUST be sufficiently long and random to prevent it from being guessable as well as avoid collision with another identifier. There should also be sufficient verification by any application utilizing the end-to-end session identifier to ensure its integrity. The secure transport of the identifier, need for authentication, encryption, etc. should be appropriately evaluated based on the network infrastructure, transport domain and usage scenarios for the end-to-end session identifier.





## **8. IANA Considerations**

There are no IANA considerations associated with this document.

## **9. Acknowledgments**

The authors would like to acknowledge Paul Kyzivat, Christer Holmberg, Charles Eckel, Andy Hutton, Salvatore Loreto, Keith Drage, Chris Pearce for their contribution and collaboration in developing this document.

This document was prepared using 2-Word-v2.0.template.dot.

## **10. Contributors**

Two other people originally participated as co-authors and provided substantial contributions to this document, namely Roland Jesske, Parthasarathi Ravindran.

## **11. References**

### **11.1. Normative References**

- [1] Rosenberg, J., et al., "SIP: Session Initiation Protocol", [RFC 3261](#), June 2002.
- [2] Recommendation ITU-T H.323, "Packet-based multimedia communications systems", December 2009.
- [3] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.

### **11.2. Informative References**

- [4] Schulzrinne, H., et al., "RTP: A Transport Protocol for Real-Time Applications", [RFC 3550](#), July 2003.
- [5] International Telecommunications Union, "End-to-End Session Identifier for IP-based Multimedia Communication Systems", March 2011, ITU-T Contribution C.552, [http://ftp3.itu.int/av-arch/avc-site/2009-2012/1103\\_Gen/SessionID.zip](http://ftp3.itu.int/av-arch/avc-site/2009-2012/1103_Gen/SessionID.zip).
- [6] 3GPP, "IP multimedia call control protocol based on Session Initiation Protocol (SIP) and Session Description Protocol (SDP); Stage 3", 3GPP TS 24.229 10.3.0, April 2011.
- [7] Rosenberg, J., Peterson, J., Schulzrinne, H., Camarillo, G., "Best Current Practices for Third Party Call Control (3pcc) in the Session Initiation Protocol (SIP)", [RFC 3725](#), April 2004.



Author's Addresses

Paul E. Jones  
Cisco Systems, Inc.  
7025 Kit Creek Rd.  
Research Triangle Park, NC 27709  
USA

Phone: +1 919 476 2048  
Email: paulej@packetizer.com  
IM: xmpp:paulej@packetizer.com

Hadriel Kaplan  
Acme Packet  
71 Third Ave.  
Burlington, MA 01803, USA

Email: hkaplan@acmepacket.com

Laura Liess  
Deutsche Telekom NP  
64295 Darmstadt  
Heinrich-Hertz-Str. 3-7  
Germany

Phone: +49 6151 268 2761  
Email: laura.liess.dt@gmail.com

James Polk  
Cisco Systems, Inc.  
3913 Treemont Circle  
Colleyville, Texas,  
USA

Phone: +1 817 271 3552  
Email: jmpolk@cisco.com  
IM: xmpp:jmpolk@cisco.com

Gonzalo Salgueiro  
Cisco Systems, Inc.  
7025 Kit Creek Rd.  
Research Triangle Park, NC 27709  
USA

Phone: +1 919 392 3266  
Email: gsalguei@cisco.com  
IM: xmpp:gsalguei@cisco.com

