

INTERNET-DRAFT
IPCDN Working Group
<[draft-ietf-ipcdn-qos-mib-12.txt](#)>

Michael Patrick
William Murwin
Motorola BCS

Expires: August 2005

February 2005

**Data Over Cable System Interface Specification
Quality of Service
Management Information Base (DOCSIS-QOS MIB)**

Status of this Memo

By submitting this Internet-Draft, we certify that any applicable patent or other IPR claims of which we are aware have been disclosed, or will be disclosed, and any of which we become aware will be disclosed, in accordance with [RFC 3668](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>. The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

Abstract

This document defines a basic set of managed objects for SNMP-based management of extended QOS features of Cable Modems (CMs) and Cable Modem Termination Systems (CMTSS) conforming to the Data over Cable System (DOCSIS) specifications version 1.1 and 2.0.

Expires August 2005

[Page 1]

Table of Contents

Status of this Memo.....	1
Abstract.....	1
1. Introduction.....	3
1.1 The Internet-Standard Management Framework...	3
1.2 Glossary.....	3
2. Overview.....	5
2.1 Textual Conventions.....	5
2.2 MIB Organization.....	5
2.2.1 docsIetfQosPktClassTable.....	9
2.2.2 docsIetfQosParamSetTable.....	9
2.2.2.1 Interoperation with DOCSIS 1.0.....	11
2.2.3 docsIetfQosServiceFlowTable.....	12
2.2.4 docsIetfQosServiceFlowStatsTable.....	13
2.2.5 docsIetfQosUpstreamStatsTable.....	14
2.2.6 docsIetfQosDynamicServiceStatsTable..	14
2.2.7 docsIetfQosServiceFlowLogTable.....	14
2.2.8 docsIetfQosServiceClassTable.....	15
2.2.9 docsIetfQosServiceClassPolicyTable...	15
2.2.10 docsIetfQosPHSTable.....	15
2.2.11 docsIetfQosCmtsMacToSrvFlowTable.....	16
3. Externally Administered Classification.....	16
4. DOCSIS and IPv4 Type-of-Service(ToS) Field.....	19
5. Definitions.....	21
6. Security Considerations.....	82
7. IANA Considerations.....	84
8. Acknowledgement.....	84
9. Normative References.....	84
10. Informative References.....	86
11. Author's Address.....	87
12. Disclaimer of Validity.....	88
13. Intellectual Property.....	88

[14.](#) Copyright Statement..... [88](#)

Expires August 2005

[Page 2]

1. Introduction

This memo is a product of the IP over Cable Data Network (IPCDN) working group within the Internet Engineering Task Force (IETF).

1.1 The Internet-Standard Management Framework

For a detailed overview of the documents that describe the current Internet-Standard Management Framework, please refer to [section 7 of RFC 3410](#) [15].

Managed objects are accessed via a virtual information store, termed the Management Information Base or MIB. MIB objects are generally accessed through the Simple Network Management Protocol (SNMP). Objects in the MIB are defined using the mechanisms defined in the Structure of Management Information (SMI). This memo specifies a MIB module that is compliant to the SMIV2, which is described in STD 58, [RFC 2578](#) [1], STD 58, [RFC 2579](#) [2] and STD 58, [RFC 2580](#) [3].

1.2 Glossary

Active QPS	Active QoS Parameter Set (QPS). The set of QoS parameters that describe the current level service provided to a Service Flow (SF).
Active SF	Active Service Flow. An SF with a non-empty Active QPS.
Admitted QPS	Admitted QoS Parameter Set. The set of QoS parameters that describe a level of service which the Service Flow is not currently using, but which it is guaranteed to receive upon the SF's request to make the set Active.
Admitted SF	A Service Flow with a non-empty Admitted QPS.
CATV	Cable Television
CM	Cable Modem, a modem connecting a subscriber's LAN to the Cable Television(CATV) Radio Frequency(RF) network. DOCSIS CMs operate as a MAC layer bridge between the home LAN and the Cable Television(CATV) Radio Frequency(RF) network.
CMTS	Cable Modem Termination System, the "head-end" device

providing connectivity between the RF network and the Internet.

Expires August 2005

[Page 3]

Downstream	The direction from the head-end towards the subscriber.
DSA	Dynamic Service Addition, a DOCSIS MAC management message requesting the dynamic creation of a new Service Flow. New SFs are created with a three-message exchange of a DSA-REQ, DSA-RSP, and DSA-ACK.
DSC	Dynamic Service Change, a DOCSIS MAC management message requesting a change to the attributes of a Service Flow. SFs are changed with a three-message exchange of a DSC-REQ, DSC-RSP, and DSC-ACK.
DSD	Dynamic Service Delete, a DOCSIS MAC management message requesting the deletion of a Service Flow. SFs are deleted with a two-message exchange of a DSD-REQ and DSD-ACK.
Head-end	The origination point in most cable systems of the subscriber video signals. It is generally also the location of the CMTS.
PHS	Payload Header Suppression, a feature of DOCSIS 1.1 and 2.0 in which header bytes that are common in a sequence of packets of a Service Flow are replaced by a one-byte PHSI Index (PHSI) when transmitting the packet on the RF network.
primary SF	Primary Service Flow. All CMs have a Primary Upstream Service Flow and a Primary Downstream Service Flow. They provide a default path for forwarded packets that are not classified to any other Service Flow.
Provisioned QPS	A QoS Parameter Set describing an envelope of service within which a Service Flow is authorized to request admission. All existing Service Flows must have a non-empty Provisioned QPS, hence all SFs are considered to be "Provisioned".
RF	Radio Frequency. In particular, this abbreviation refers to the radio frequencies for Cable Television (CATV).
SCN	Service Class Name -- a named set of QoS parameters. A Service Flow may or may not be associated with a single named Service Class. A Service Class has as an attribute a QoS Parameter Set that is used as the default set of values for all Service Flows belonging

to the Service Class.

Expires August 2005

[Page 4]

SID	Service ID. A 16-bit unsigned integer assigned by the CMTS for an Upstream Service Flow with a non-empty Active QoS Parameter Set.
SF	Service Flow. A unidirectional stream of packets between the CM and CMTS. SFs are characterized as upstream or downstream. The SF is the fundamental unit of service provided on a DOCSIS CATV network.
SFID	Service Flow ID. A 32-bit unsigned integer assigned by the CMTS to each Service Flows
Upstream	The direction from a subscriber CM to the head-end CMTS.

2. Overview

This MIB module provides a set of objects required for the management of DOCSIS 1.1 and 2.0 compliant Cable Modems (CM) and Cable Modem Termination Systems (CMTS). The specification is derived from the DOCSIS 2.0 Radio Frequency Interface specification [\[4\]](#). Please note that the referenced DOCSIS specifications only requires Cable Modems to process IPv4 customer traffic. Design choices in this MIB module reflect those requirements. Future versions of the DOCSIS standard are expected to require support for IPv6 as well.

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [\[5\]](#).

2.1 Textual Conventions

The textual convention "DocsIetfQoSRfMacIfDirection" is defined to indicate the direction of a packet classifier relative to an interface. It takes the values of either downstream(1) or upstream(2).

The textual convention "DocsIetfQoSBitRate" corresponds to the bits per second as defined for QoS Parameter Sets in DOCSIS 1.1 and 2.0. This definition includes all bits of the Ethernet MAC frame as transmitted on the RF network, starting with the Destination Address and ending with the Ethernet Frame Check Sequence (FCS). It does NOT include bits in the DOCSIS MAC header.

Expires August 2005

[Page 5]

[2.2](#) MIB Organization

The structure of the IPCDN QoS MIB module (DOCS-IETF-QOS-MIB) is summarized below:

```
docsIetfQosMIB
  docsIetfQosMIBObjects
    docsIetfQosPktClassTable
      docsIetfQosPktClassEntry
        docsIetfQosPktClassId
        docsIetfQosPktClassDirection
        docsIetfQosPktClassPriority
        docsIetfQosPktClassIpTosLow
        docsIetfQosPktClassIpTosHigh
        docsIetfQosPktClassIpTosMask
        docsIetfQosPktClassIpProtocol
        docsIetfQosPktClassInetAddressType
        docsIetfQosPktClassInetAddressSourceAddr
        docsIetfQosPktClassInetAddressSourceMask
        docsIetfQosPktClassInetAddressDestAddr
        docsIetfQosPktClassInetAddressDestMask
        docsIetfQosPktClassSourcePortStart
        docsIetfQosPktClassSourcePortEnd
        docsIetfQosPktClassDestPortStart
        docsIetfQosPktClassDestPortEnd
        docsIetfQosPktClassDestMacAddr
        docsIetfQosPktClassDestMacMask
        docsIetfQosPktClassSourceMacAddr
        docsIetfQosPktClassEnetProtocolType
        docsIetfQosPktClassEnetProtocol
        docsIetfQosPktClassUserPriLow
        docsIetfQosPktClassUserPriHigh
        docsIetfQosPktClassVlanId
        docsIetfQosPktClassStateActive
        docsIetfQosPktClassPkts
        docsIetfQosPktClassBitMap
    docsIetfQosParamSetTable
      docsIetfQosParamSetEntry
        docsIetfQosParamSetServiceClassName
        docsIetfQosParamSetPriority
        docsIetfQosParamSetMaxTrafficRate
        docsIetfQosParamSetMaxTrafficBurst
        docsIetfQosParamSetMinReservedRate
        docsIetfQosParamSetMinReservedPkt
        docsIetfQosParamSetActiveTimeout
```

docsIetfQosParamSetAdmittedTimeout
docsIetfQosParamSetMaxConcatBurst
docsIetfQosParamSetSchedulingType
docsIetfQosParamSetNomPollInterval

- docsIetfQosParamSetTolPollJitter
- docsIetfQosParamSetUnsolicitGrantSize
- docsIetfQosParamSetNomGrantInterval
- docsIetfQosParamSetTolGrantJitter
- docsIetfQosParamSetGrantsPerInterval
- docsIetfQosParamSetTosAndMask
- docsIetfQosParamSetTosOrMask
- docsIetfQosParamSetMaxLatency
- docsIetfQosParamSetType
- docsIetfQosParamSetRequestPolicyOct
- docsIetfQosParamSetBitMap
- docsIetfQosServiceFlowTable
 - docsIetfQosServiceFlowEntry
 - docsIetfQosServiceFlowId
 - docsIetfQosServiceFlowSID
 - docsIetfQosServiceFlowDirection
 - docsIetfQosServiceFlowPrimary
- docsIetfQosServiceFlowStatsTable
 - docsIetfQosServiceFlowStatsEntry
 - docsIetfQosServiceFlowPkts
 - docsIetfQosServiceFlowOctets
 - docsIetfQosServiceFlowTimeCreated
 - docsIetfQosServiceFlowTimeActive
 - docsIetfQosServiceFlowPHSUnknowns
 - docsIetfQosServiceFlowPolicedDropPkts
 - docsIetfQosServiceFlowPolicedDelayPkts
- docsIetfQosUpstreamStatsTable
 - docsIetfQosUpstreamStatsEntry
 - docsIetfQosSID
 - docsIetfQosUpstreamFragments
 - docsIetfQosUpstreamFragDiscards
 - docsIetfQosUpstreamConcatBursts
- docsIetfQosDynamicServiceStatsTable
 - docsIetfQosDynamicServiceStatsEntry
 - docsIetfQosIfDirection
 - docsIetfQosDSAReqs
 - docsIetfQosDSARsps
 - docsIetfQosDSAACKs
 - docsIetfQosDSCReq
 - docsIetfQosDSCRsps
 - docsIetfQosDSCACKs
 - docsIetfQosDSDReq
 - docsIetfQosDSDRsps
 - docsIetfQosDynamicAdd
 - docsIetfQosDynamicAddFails
 - docsIetfQosDynamicChange
 - docsIetfQosDynamicChangeFails

docsIetfQosDynamicDeletes
docsIetfQosDynamicDeleteFails
docsIetfQosDCCReqs
docsIetfQosDCCRsp

Expires August 2005

[Page 7]

- docsIetfQosDCCAcks
- docsIetfQosDCCs
- docsIetfQosDCCFails
- docsIetfQosServiceFlowLogTable
 - docsIetfQosServiceFlowLogEntry
 - docsIetfQosServiceFlowLogIndex
 - docsIetfQosServiceFlowLogIfIndex
 - docsIetfQosServiceFlowLogSFID
 - docsIetfQosServiceFlowLogCmMac
 - docsIetfQosServiceFlowLogPkts
 - docsIetfQosServiceFlowLogOctets
 - docsIetfQosServiceFlowLogTimeDeleted
 - docsIetfQosServiceFlowLogTimeCreated
 - docsIetfQosServiceFlowLogTimeActive
 - docsIetfQosServiceFlowLogDirection
 - docsIetfQosServiceFlowLogPrimary
 - docsIetfQosServiceFlowLogServiceClassName
 - docsIetfQosServiceFlowLogPolicedDropPkts
 - docsIetfQosServiceFlowLogPolicedDelayPkts
 - docsIetfQosServiceFlowLogControl
- docsIetfQosServiceClassTable
 - docsIetfQosServiceClassEntry
 - docsIetfQosServiceClassName
 - docsIetfQosServiceClassStatus
 - docsIetfQosServiceClassMaxTrafficRate
 - docsIetfQosServiceClassMaxTrafficBurst
 - docsIetfQosServiceClassMinReservedRate
 - docsIetfQosServiceClassMinReservedPkt
 - docsIetfQosServiceClassMaxConcatBurst
 - docsIetfQosServiceClassNomPollInterval
 - docsIetfQosServiceClassTolPollJitter
 - docsIetfQosServiceClassUnsolicitGrantSize
 - docsIetfQosServiceClassNomGrantInterval
 - docsIetfQosServiceClassTolGrantJitter
 - docsIetfQosServiceClassGrantsPerInterval
 - docsIetfQosServiceClassMaxLatency
 - docsIetfQosServiceClassActiveTimeout
 - docsIetfQosServiceClassAdmittedTimeout
 - docsIetfQosServiceClassSchedulingType
 - docsIetfQosServiceClassRequestPolicy
 - docsIetfQosServiceClassTosAndMask
 - docsIetfQosServiceClassTosOrMask
 - docsIetfQosServiceClassDirection
 - docsIetfQosServiceClassStorageType
 - docsIetfQosServiceClassDSCPOverwrite
- docsIetfQosServiceClassPolicyTable
 - docsIetfQosServiceClassPolicyEntry

docsIetfQosServiceClassPolicyIndex
docsIetfQosServiceClassPolicyName
docsIetfQosServiceClassPolicyRulePriority
docsIetfQosServiceClassPolicyStatus

```
docsIetfQosServiceClassPolicyStorageType
docsIetfQosPHSTable
docsIetfQosPHSEntry
docsIetfQosPHSField
docsIetfQosPHSMask
docsIetfQosPHSSize
docsIetfQosPHSVerify
docsIetfQosPHSIndex
docsIetfQosCmtsMacToSrvFlowTable
docsIetfQosCmtsMacToSrvFlowEntry
docsIetfQosCmtsCmMac
docsIetfQosCmtsServiceFlowId
docsIetfQosCmtsIfIndex
```

This MIB module is organized as 11 tables. Most tables are implemented in both the CM and CMTS; the docsIetfQosUpstreamStatsTable and docsIetfQosServiceFlowLogTable are implemented on the CMTS only.

2.2.1 docsIetfQosPktClassTable

The docsIetfQosPktClassTable reports the Service Flow Classifiers implemented by the managed device. The table is indexed by the tuple { ifIndex, docsIetfQosServiceFlowId, docsIetfQosPktClassId }. The ifIndex corresponds to a CATV MAC interface. Each CATV MAC interface has a set of Service Flows, identified with a docsIetfQosServiceFlowId value that is unique for that interface. Each Service Flow may have a number of packet classifiers that map packets to the flow. The ClassifierId for the classifier is unique only within a particular Service Flow.

The semantics of packet classification are provided in [4]. Briefly, the DOCSIS MAC interface calls for matching packets based on values within the 802.2 (LLC), 802.3, IP, and/or UDP/TCP headers. Packets which map more than one classifier are prioritized according to their docsIetfQosPktClassPriority value. The docsIetfQosServiceFlowId (an index object) indicates to which Service Flow the packet is classified.

The docsIetfQosPktClassTable is distinct from the docsDevIpFilterTable of [6] in that docsIetfQosPktClassTable is intended only to reflect the state of the Service Flow Classifiers. Service Flow Classifiers may be created only via a CM configuration file or from the Dynamic Service Addition (DSA) messages. For this reason, docsIetfQosPktClassTable is read-only.

The docsDevIpFilterTable is intended for external policy-based administration of packet classifiers. See the section "Externally

Expires August 2005

[Page 9]

Administered Classification", below.

[2.2.2](#) docsIetfQosParamSetTable

The docsIetfQosParamSetTable reports the values of Qos Parameter Set as defined in Section C.2.2 of [\[4\]](#).

In general, a Service Flow is associated with three different QoS Parameter Sets (QPSs): an "active" QPS, an "admitted" QPS, and a "provisioned" or "authorized" QPS. The relationship of these three sets is represented below:

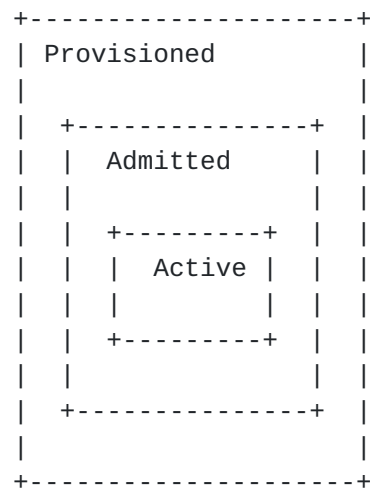


Figure 1: QoS Parameter Sets

The Provisioned QPS describes the maximum service envelope for which the SF is authorized. The Admitted QPS is the set of services for which a Service Flow has requested admission to the DOCSIS RF network, but which is not yet active. The Admitted QPS is used during the two-phase process of IP Telephony/PacketCable Service Flow admission to admit the bandwidth for a bidirectional voice call when the far end is ringing. Since ringing may occur for up to four minutes, this permits the bandwidth to be reserved but not actually consumed during this interval. The Active QPS is the set of services actually being used by the Service Flow. The DOCSIS v1.1 specification [\[4\]](#) defines what it means for a QPS envelope to be "within" another. In general, an inner QPS is considered to be

"within" an outer QPS when all QoS parameters represent demands of equal or fewer resources of the network.

Expires August 2005

[Page 10]

In addition to their use as attributes of a Service Flow, a QPS is also an attribute of a Service Class. A DOCSIS CM configuration file or DSA message may request the creation of a new SF and give only the Service Class Name. The CMTS "expands the macro" of a Service Class Name creation by populating the Provisioned, Admitted, and/or Active QPSs of the Service Flow with the QPS of the Service Class Name. All of the QPSs of a Service Flow must be expansions of the same Service Class, and in this case the SF is said to "belong" to the Service Class. Changing the contents of a Service Class' QPS does not affect the QPS of any Service Flow earlier expanded from that Service Class name. Only the CMTS implements docsIetfQosServiceClassTable.

See [\[4\] section 8](#) for a full description and the theory of operation of DOCSIS 1.1 QoS operation.

The docsIetfQosParamSetTable sets are indexed by { ifIndex, docsIetfQosServiceFlowId, docsIetfQosParamSetType}. ifIndex indicates a particular "DOCSIS MAC Domain". docsIetfQosServiceFlowId uniquely identifies a Service Flow on that MAC domain. The docsIetfQosParamSetType indicates whether the row describes an active, admitted, or provisioned QoS Parameter Set.

The docsIetfQosParamSetTable is read-only, because it indicates the QoS Parameter Set contents as defined by DOCSIS signaling. The docsIetfQosServiceClassTable is read-create to permit managers to define a template of QoS Parameters that can be referenced by DOCSIS modems when creating their QoS Parameter Sets.

2.2.2.1 Interoperation with DOCSIS 1.0

The DOCS-IF-MIB [\[7\]](#) specifies a docsIfQosProfileTable to describe the set of Class Of Service (COS) parameters associated with a COS "profile". The docsIfCmServiceTable, which contains one entry per SID, references this table with a docsIfCmServiceQosProfile number.

The DOCSIS 1.1 and 2.0 CM registration process allows a modem to register as operating either with DOCSIS 1.0, DOCSIS 1.1, or DOCSIS 2.0 functionality. For ease of expression, we call a modem registering with DOCSIS 1.0 functionality a "DOCSIS 1.0 modem", regardless of the modem's capabilities.

A CMTS or CM supporting DOCSIS 1.0, as well as DOCSIS 1.1 and/or DOCSIS 2.0 implements both the tables of [\[7\]](#) and the tables of this MIB module. The interoperation goal is that before modem registration, the DOCSIS 1.0 MIB [\[7\]](#) applies. After registration, either the DOCSIS 1.0 or DOCSIS 1.1/2.0 MIB applies, depending on the mode with which the modem registered. The specific interoperation

rules are:

Expires August 2005

[Page 11]

1. When a CM initially ranges, the CM implements a row in the DOCS-IF-MIB docsIfCmServiceTable and the CMTS implements a row in the DOCS-IF-MIB docsIfCmtsServiceTable corresponding to the default upstream Service ID (SID) used for pre-registration upstream traffic. For historical compatibility a row may be created for the docsIfQosProfileTable with default values, which may be referenced by the docsIfCmServiceTable entries.
2. Both a CMTS and CM implementing this MIB MUST NOT implement docsIetfQosParamSetTable or docsIetfQosServiceFlowTable rows until after the CM registers with DOCSIS 1.1 or 2.0 modem operation.
3. When a modem registers with the CMTS as a "DOCSIS 1.1" or "DOCSIS 2.0" modem, any exclusively-referenced row in DOCS-IF-MIB docsIfQosProfileTable representing the modems upstream QoS profile for pre-registration traffic MUST be removed. Multiply-referenced rows may remain. The docsIfCmServiceQosProfile object in the CM's row of docsIfCmServiceTable MUST be set to zero. The docsIfCmServiceTable row for the DOCSIS 1.1 or DOCSIS 2.0 modem continues to exist, and the various statistic objects in that row are incremented. The CMTS should retain a docsIfCmtsServiceTable entry for the DOCSIS 1.1 or DOCSIS 2.0 CM.
4. When a DOCSIS 1.1 or DOCSIS 2.0 modem registers, both the CMTS and CM represent all Service Flows described in the modem configuration file in docsIetfQosParamSetTable and docsIetfQosServiceFlowTable.
5. DOCSIS 1.0 modems do not have entries in the DOCS-IETF-QOS-MIB.

2.2.3 docsIetfQosServiceFlowTable

The docsIetfQosServiceFlowTable provides read-only information about all of the Service Flows known by the device. It is indexed by the combination of { ifIndex, dosQosServiceFlowId }, where ifIndex corresponds to a CATV MAC interface and docsIetfQosServiceFlowId is the 32-bit integer assigned by the CMTS controlling the MAC domain. A CM typically has only a single CATV MAC interface, while a CMTS may have several. See [7] for a description of the ifIndex numbering for

DOCSIS devices.

The table indicates whether a given SF is in the upstream or

Expires August 2005

[Page 12]


downstream direction, and whether it is the "primary" SF in that direction. The primary SF carries traffic that is not otherwise classified to any other SF in that direction.

2.2.4 docsIetfQosServiceFlowStatsTable

The docsIetfQosServiceFlowStatsTable provides statistics for all currently existing SFs known by the managed device. It provides basic packet and octet counters, as well as certain other SF-specific stats such as the time at which the flow was created and how many seconds it has been active.

The table also provides objects which can be used to fine-tune admission control decisions, namely the number of packets dropped or delayed due to QoS policing decisions enforced by the managed device.

The model of the Service Flows stats table is that there exists a Service Flow Classification function followed by a Service Flow maximum rate Policing function for packets transmitted onto the DOCSIS RF network, as depicted below

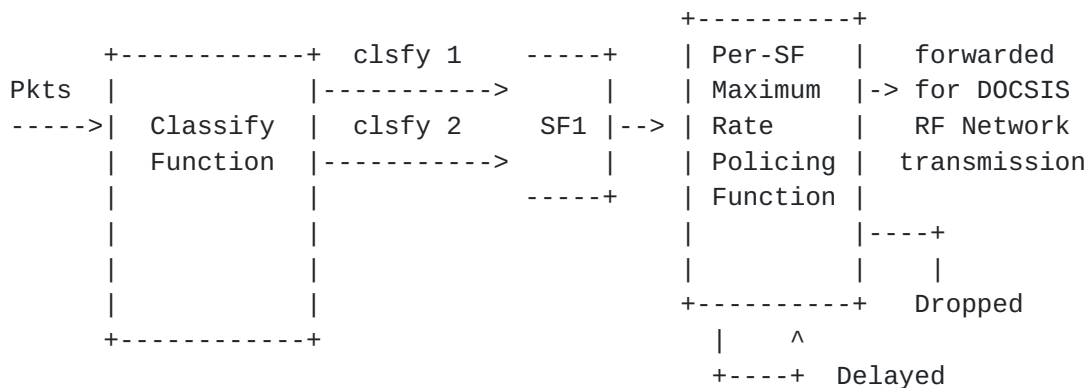

Packets intended for transmission onto the DOCSIS RF network (upstream or downstream) are first classified to a Service Flow by matching one of several possible classifiers associated with that Service Flow. The docsIetfQosPktClassPkts count includes the number of packets that match the classifier, regardless of the eventual disposition of the packet.

DOCSIS requires that each Service Flow be policed to maintain a maximum rate of transmission. This is performed by either dropping or delaying a packet on that Service Flow. The `docsIetfQosServiceFlowPolicedDropPkts` object counts the number of Service Flow packets dropped by the policing function. The `docsIetfQosServiceFlowPolicedDelayPkts` counts the number of packets

delayed but still forwarded. The docsIetfQosServiceFlowPkts object counts the total number of packets forwarded beyond the policing function intended for eventual transmission onto the DOCSIS RF

Expires August 2005

[Page 13]

network. Although packets may be latter dropped by other functions (e.g. a transmit queue overflow on a DOCSIS hardware transmitter), the docsIetfQos MIB per service-flow counters are not affected in this case.

[2.2.5](#) docsIetfQosUpstreamStatsTable

This table provides statistics that are measured only at the CMTS in the upstream direction. These include a count of the number of fragmentation headers received, fragments discarded, and the number of concatenation headers received.

[2.2.6](#) docsIetfQosDynamicServiceStatsTable

This table provides read-only stats on the operation of the Dynamic Service state machines as specified in section 9.4 of [\[4\]](#). It provides a set of 14 counters *in each direction* for a DOCSIS MAC layer interface. That is, each DOCSIS MAC layer interface has one row for downstream stats, and a second row for upstream stats.

Eight of the counters are DSx packet type counts, one counter for each of the eight DSx packet types. For example, the docsIetfQosDSAREqs object in the upstream row at the CMTS counts the number of DSA-REQ messages received by the CMTS from that interface. The docsIetfQosDSAREqs object in the downstream row at the CMTS counts the number of DSA-REQ messages transmitted by the CMTS on that interface.

The remaining six counters per (interface, direction) combination count the number of successful and unsuccessful *transactions* that were initiated on the interface and direction. For example, the upstream docsIetfQosDynamicAdds on a CMTS is the number of successfully completed CM-initiated dynamic additions, because at the CMTS a CM-initiated DSA starts in the upstream direction. The downstream docsIetfQosDynamicAdds at a CMTS is the number of successful CMTS-initiated DSA transactions.

Dynamic service transactions can fail for a number of reasons, as listed in the state machines of [section 9.4](#). Rather than include still more counters for each different failure reason, they are grouped into a single count, e.g docsIetfQosDynamicAddFails. Again, this object exists in both directions, so that locally originated vs remotely originated transaction failures are counted separately. Further troubleshooting of transaction failures will require vendor-specific queries and operation.

Expires August 2005

[Page 14]

2.2.7 docsIetfQosServiceFlowLogTable

This table contains a log of the Service Flows no longer existing in the docsIetfQosServiceFlowTable. It is intended to be periodically polled by traffic monitoring and billing agents. It is implemented only at the CMTS.

It contains a chronological log of SF session statistics, including a total count of packets and octets transferred on the SF. It includes time stamps of the SF creation and deletion time, as well as its number of active seconds. The active second count is the count of seconds that the SF had a non-empty Active QoS Parameter Set, i.e. it was eligible to pass data. For unicast SFs, it includes the CM MAC address associated with the flow for billing reference purposes.

The maximum number of log records kept by a CMTS, and the duration that a log record is maintained in the table is vendor-specific. An explicit control object is provided so that the monitoring application can explicitly delete records it has read.

2.2.8 docsIetfQosServiceClassTable

This table defines the Service Class Name and references a QoS Parameter Set for each Service Class defined in a CMTS. It is indexed by the Service Class Name string itself. The table is read-create on a CMTS, and is not implemented in a CM. Each entry of the docsIetfQosServiceClassTable should define a template for flows in a given direction (upstream or downstream). Some parameters of the docsIetfQosServiceClassTable are specific to a particular direction, and so their values are not-applicable when used as a template for flows in the other direction.

2.2.9 docsIetfQosServiceClassPolicyTable

The docsIetfQosServiceClassPolicyTable can be referenced by the docsDevFilterPolicyTable of [6] in order to have a "policy" that classifies packets to a named Service Class. This is one mechanism by which "external" entities (like an SNMP manager) may control the classification of packet for QoS purposes. Entries are indexed by a small integer docsIetfQosServiceClassPolicyIndex. They provide a Service Class Name and a Rule Priority. A policy referencing a row of this table intends the packet to be forwarded on a Service Flow "belonging" to the named Service Class. See the section "Externally Administered Classification", below.

This table is implemented on both the CM and CMTS, and is read-create on both.

Expires August 2005

[Page 15]

2.2.10 docsIetfQosPHSTable

The Payload Header Suppression (PHS) feature of DOCSIS 1.1 and 2.0 permits packets to replace the unchanging bytes of the Ethernet, IP, and UDP headers with a one-byte index when transmitting on the cable network. This is especially useful for IP Telephony packets, where such suppression can result in almost twice the number of calls supported within the same upstream channel.

Each entry of the table corresponds to a PHS Rule as described in section 8.4 of [4]. The rules are identified by their corresponding Service Flow ID and docsIetfQosPktClassId. A PHS rule is associated with exactly one classifier. The table is therefore indexed by the tuple { ifIndex, docsIetfQosServiceFlowId, docsIetfQosPktClassId}.

This table is read-only, and MUST be implemented on both the CM and CMTS when PHS is supported.

2.2.11 docsIetfQosCmtsMacToSrvFlowTable

The docsIetfQosCmtsMacToSrvFlowTable describes the mapping of CM MAC addresses to the Service Flow Ids that are uniquely identified with that CM. External applications may collect statistics on all packets flowing through a CM by determining the SFID of all of its flows, and then collecting the statistics of packets and bytes for each flow.

Downstream multicast Service Flows are not indicated in the docsIetfQosCmtsMacToSrvFlowTable because they are not associated with only one CM.

3. Externally Administered Classification

DOCSIS 1.1 and 2.0 provide rich semantics for the classification of packets to Service Flows with its Service Flow Classifier table. Service Flow Classifiers may be created statically in the DOCSIS CM configuration file, or may be created dynamically with Dynamic Service Addition (DSA) and Dynamic Service Change (DSC) DOCSIS MAC messages.

Several major issues arose with the concept of externally administered classification, i.e. should an external SNMP manager be permitted to create classification rows? One problem was the coordination of classifier IDs, since such an approach would require either separate classifier ID number spaces or objects to coordinate

both internal and external classifier ID assignments. A more serious problem, however, was the requirement that external creation of SF Classifiers would require "knowledge" of the individual Service Flow

Expires August 2005

[Page 16]

ID for Service Flows by external applications. It was strongly felt by the committee that SFIDs should remain an internal DOCSIS object, and not be transmitted as part of protocol flows, e.g. for IP packet telephony signaling. DOCSIS 1.1 introduced the concept of named Service Classes for ease of administration within a domain of CMs and CMTSSs. What was desired was to permit external classification of packets to a Service Class, not a particular Service Flow.

The DOCSIS committee therefore decided to use the already-defined IP Packet Filter Table [\[6\]](#) for the external classification of packets for QoS purposes. The docsDevIpPacketFilterTable defines similar packet matching criteria as docsIetfQosPktClassTable, but it matches a packet to an arbitrary "policy set" instead of a particular Service Flow. One of the policies in the policy set then selects the Service Class of the SF on which to forward the packet. The docsIetfQosServiceClassPolicyTable of this MIB module defines the Service Class Name to which a packet is classified.

The interaction of external and internal packet classification is depicted below.

Expires August 2005

[Page 17]

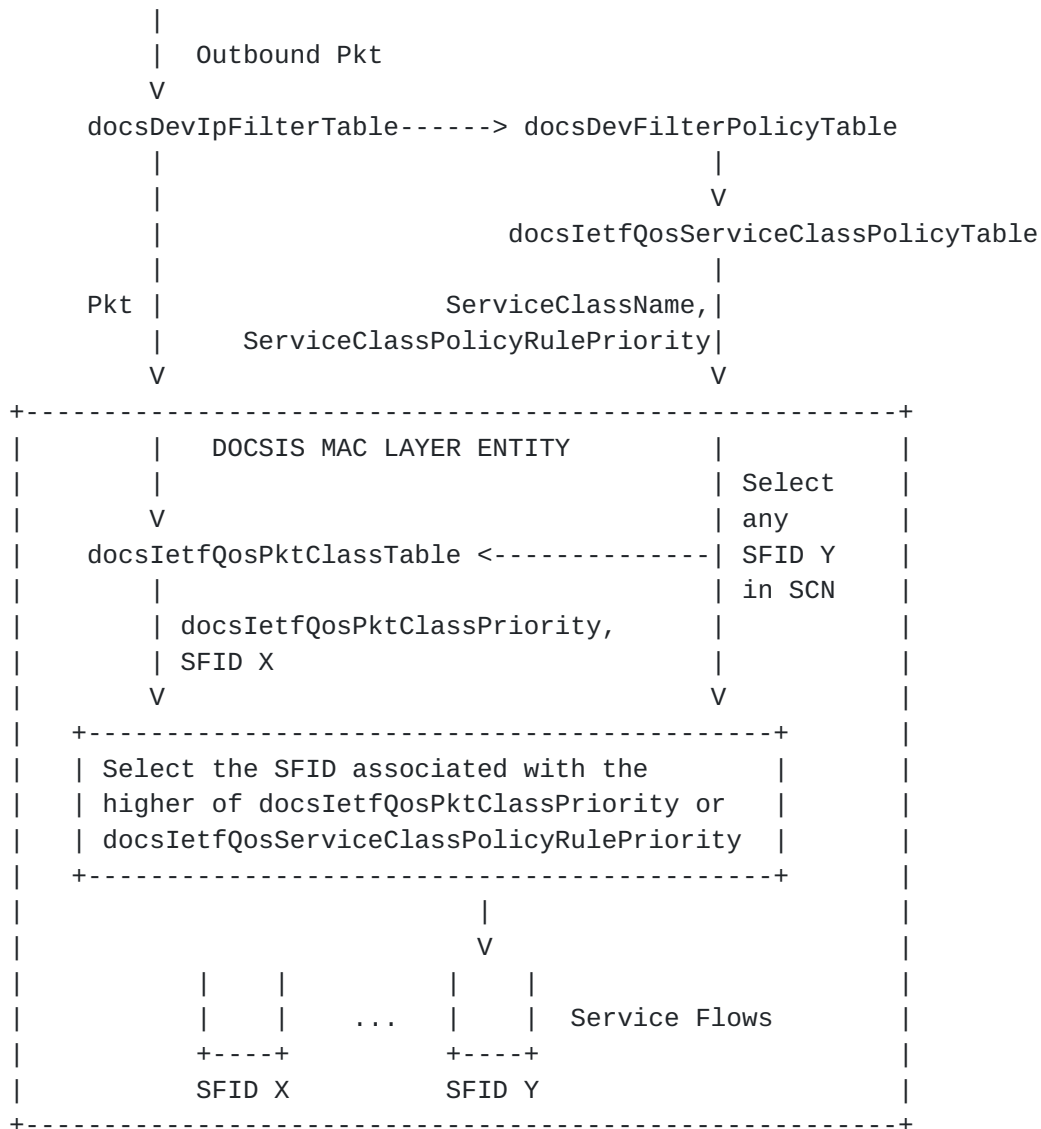


Figure 2: DOCSIS Packet Classification

The processing of an outgoing packet proceeds as follows:

1. The packet is first checked for matches with rows of the `docsDevIpFilterTable`. If it matches, the matching row provides a `docsDevFilterPolicyId` integer.
2. The `docsDevFilterPolicyId` indexes into one (or more) rows of `docsDevFilterPolicyTable`. Each row provides an arbitrary RowPointer (`docsDevFilterPolicyPtr`), corresponding to a policy to be applied to the packet.

3. This MIB module defines a
docsIetfQosServiceClassPolicyTable whose entries may be

pointed to by docsDevFilterPolicyPtr in order to administratively classify packets to a named DOCSIS Service Class. The docsIetfQosServiceClassPolicyEntry provides a Service Class Name (SCN) as docsIetfQosServiceClassName and a classification rule priority as docsIetfQosServiceClassPolicyRulePriority. These are submitted to the device's DOCSIS MAC Layer entity as a special form of the MAC_DATA.request primitive, as described in Section E.2.1 of [4].

4. The MAC Layer selects an SFID ("Y") of an active Service Flow belonging to the named class, choosing an SF arbitrarily if there is more than one.
5. The packet is then classified according to the docsIetfQosPktClassTable, which may classify the packet to a different SFID "X". Associated with the classifier is a docsIetfQosPktClassPriority.
6. In the event of a conflict between the SCN-determined SFID and the classified SFID, the greater of docsIetfQosPktClassPriority and docsIetfQosServiceClassPolicyRulePriority determines which SFID is selected to forward the packet.

A packet which does not match a docsIetfQosServiceClassPolicyEntry is directly submitted to the DOCSIS MAC layer, where the docsIetfQosPktClassTable selects the SID on which it is to be forwarded.

By convention (in [4]), the "internal" docsIetfQosPktClassPriority values should be in the range of 64-191, while the "external" priorities may be either in the range 192-255 to override the internal classification or the range 0-63 to be overridden by internal classification.

This classification mechanism applies both upstream from the CM and downstream from the CMTS.

4. DOCSIS and IPv4 Type-of-Service(ToS) Field

The DOCSIS-IETF-QOS-MIB MIB module relies on the DOCSIS MAC layer protocols and uses objects that reflect the IPv4 Type-of-Service (ToS) octet as defined in [14]. The applicability of these objects is limited to the DOCSIS access network. The past and current versions

of the DOCSIS specifications for which this MIB module is defined do not reflect Differentiated Services [\[9\]](#) on the DOCSIS access network. However, with proper selection of values for these objects, the

network operator can enforce Differentiated Services Per-hop Behaviors (PHBs) on the DOCSIS Access Network, and can configure the modification of the DSCP for certain packet flows as they enter the metro network from the access network, essentially making the DOCSIS access network TOS marking compatible with the wider use of DSCP outside DOCSIS networks. It should be noted that because the entire IPv4 TOS octet may be available for modification via the latter mechanism (due to the current MAC level DOCSIS protocols and CLI interface configuration), there is the possibility that the DOCSIS network could be configured to modify the Explicit Congestion Notification (ECN) bits [[10](#)] of certain packets. This modification of the ECN bits is prevented by the MIB module's design. The MIB module prohibits the modification of the TOS octet (read-only objects: docsIetfQosPktClassIpTosLow, docsIetfQosPktClassIpTosHigh docsIetfQosPktClassIpTosMask, docsIetfQosParamSetTosAndMask, docsIetfQosParamSetTosOrMask) and allows the DSCP field to be modified (read-create object: docsIetfQosServiceClassDSCPOverwrite).

Expires August 2005

[Page 20]

5. Definitions

This MIB module refers to the SNMPv2-SMI [\[1\]](#) MIB module, SNMPv2-TC [\[2\]](#) MIB module, SNMPv2-CONF [\[3\]](#) MIB Module, the DOCSIS RFI Specification SP-RFiv2.0-I06-040804 [\[4\]](#), INET-ADDRESS-MIB [\[8\]](#) MIB module, IF-MIB [\[11\]](#) MIB module, SNMP-FRAMEWORK-MIB [\[12\]](#) MIB module, and the DIFFSERV-DSCP-TC [\[13\]](#) MIB module.

DOCS-IETF-QOS-MIB DEFINITIONS ::= BEGIN

IMPORTS

MODULE-IDENTITY,
OBJECT-TYPE,
Integer32,
Counter32,
Unsigned32,
Counter64,
mib-2
FROM SNMPv2-SMI

TEXTUAL-CONVENTION,
MacAddress,
RowStatus,
TruthValue,
TimeStamp,
StorageType
FROM SNMPv2-TC

OBJECT-GROUP,
MODULE-COMPLIANCE
FROM SNMPv2-CONF

ifIndex,
InterfaceIndex
FROM IF-MIB

InetAddressType,
InetAddress,
InetPortNumber
FROM INET-ADDRESS-MIB

DscpOrAny
FROM DIFFSERV-DSCP-TC

SnmpAdminString
FROM SNMP-FRAMEWORK-MIB;

docsIetfQosMIB MODULE-IDENTITY

LAST-UPDATED "200502070000Z" -- February 7, 2005
ORGANIZATION "IETF IP over Cable Data Network (IPCDN)
Working Group"

Expires August 2005

[Page 21]

CONTACT-INFO

"

Co-Author: Michael Patrick
Postal: Motorola BCS
111 Locke Drive
Marlborough, MA 01752-7214
U.S.A.
Phone: +1 508 786 7563
E-mail: michael.patrick@motorola.com

Co-Author: William Murwin
Postal: Motorola BCS
111 Locke Drive
Marlborough, MA 01752-7214
U.S.A.
Phone: +1 508 786 7594
E-mail: w.murwin@motorola.com

IETF IPCDN Working Group
General Discussion: ipcdn@ietf.org
Subscribe: <http://www.ietf.org/mailman/listinfo/ipcdn>
Archive: <ftp://ftp.ietf.org/ietf-mail-archive/ipcdn>
Co-chairs: Richard Woundy, Richard_Woundy@cable.comcast.com
Jean-Francois Mule, jfm@cablelabs.com"

DESCRIPTION

"This is the management information for
Quality Of Service (QoS) for DOCSIS 1.1 and 2.0."

REVISION "200502070000Z" -- February 7, 2005

DESCRIPTION

"Initial version, published as RFC xxxx."
::= { mib-2 xx } -- xx to be assigned by IANA

--

-- Placeholder for notifications/traps.

--

docsIetfQosNotifications OBJECT IDENTIFIER ::= { docsIetfQosMIB 0 }

docsIetfQosMIBObjects OBJECT IDENTIFIER ::= { docsIetfQosMIB 1 }

-- Textual Conventions

DocsIetfQosRfMacIfDirection ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION "Indicates a direction on an RF MAC interface.

The value downstream(1) is from Cable Modem
Termination System to Cable Modem.

The value upstream(2) is from Cable Modem to
Cable Modem Termination System."

SYNTAX

INTEGER {

Expires August 2005

[Page 22]

```

        downstream(1),
        upstream(2)
    }

```

DocsIetfQosBitRate ::= TEXTUAL-CONVENTION

```

    DISPLAY-HINT    "d"
    STATUS          current
    DESCRIPTION     "The rate of traffic in unit of bits per second.
                    Used to specify traffic rate for QoS."
    SYNTAX          Unsigned32

```

DocsIetfQosSchedulingType ::= TEXTUAL-CONVENTION

```

    STATUS          current
    DESCRIPTION     "The scheduling service provided by a CMTS for an
                    upstream Service Flow. If the parameter is omitted
                    from an upstream QoS Parameter Set, this object
                    takes the value of bestEffort (2). This parameter
                    must be reported as undefined (1) for downstream
                    QoS Parameter Sets."
    SYNTAX          INTEGER {
                        undefined (1),
                        bestEffort (2),
                        nonRealTimePollingService(3),
                        realTimePollingService(4),
                        unsolicitedGrantServiceWithAD(5),
                        unsolicitedGrantService(6)
                    }

```

```

-----
--
-- Packet Classifier Table
--

```

docsIetfQosPktClassTable OBJECT-TYPE

```

    SYNTAX          SEQUENCE OF DocsIetfQosPktClassEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION     "This table describes the packet classification
                    configured on the CM or CMTS.
                    The model is that a packet either received
                    as input from an interface or transmitted
                    for output on an interface may be compared
                    against an ordered list of rules pertaining to
                    the packet contents. Each rule is a row of this
                    table. A matching rule provides a Service Flow
                    id to to which the packet is classified.
                    All rules need to match for a packet to match
                    a classifier.

```

The objects in this row correspond to a set of Classifier Encoding parameters in a DOCSIS MAC management message. The

docsIetfQosPktClassBitMap indicates which particular parameters were present in the classifier as signaled in the DOCSIS message. If the referenced parameter was not present in the signaled DOCSIS 1.1 and 2.0 Classifier, the corresponding object in this row reports a value as specified in the DESCRIPTION section.

```
 ::= { docsIetfQosMIBObjects 1 }
```

docsIetfQosPktClassEntry OBJECT-TYPE

SYNTAX DocSIetfQosPktClassEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION "An entry in this table provides a single packet classifier rule. The index ifIndex is an ifType of docsCableMacLayer(127)."

```
INDEX {
    ifIndex,
    docsIetfQosServiceFlowId,
    docsIetfQosPktClassId
}
```

```
 ::= { docsIetfQosPktClassTable 1 }
```

DocSIetfQosPktClassEntry ::= SEQUENCE {

docsIetfQosPktClassId	Unsigned32,
docsIetfQosPktClassDirection	DocSIetfQosRfMacIfDirection,
docsIetfQosPktClassPriority	Integer32,
docsIetfQosPktClassIpTosLow	OCTET STRING,
docsIetfQosPktClassIpTosHigh	OCTET STRING,
docsIetfQosPktClassIpTosMask	OCTET STRING,
docsIetfQosPktClassIpProtocol	Integer32,
docsIetfQosPktClassInetAddressType	InetAddressType,
docsIetfQosPktClassInetAddressSourceAddr	InetAddress,
docsIetfQosPktClassInetAddressSourceMask	InetAddress,
docsIetfQosPktClassInetAddressDestAddr	InetAddress,
docsIetfQosPktClassInetAddressDestMask	InetAddress,
docsIetfQosPktClassSourcePortStart	InetPortNumber,
docsIetfQosPktClassSourcePortEnd	InetPortNumber,
docsIetfQosPktClassDestPortStart	InetPortNumber,
docsIetfQosPktClassDestPortEnd	InetPortNumber,
docsIetfQosPktClassDestMacAddr	MacAddress,
docsIetfQosPktClassDestMacMask	MacAddress,
docsIetfQosPktClassSourceMacAddr	MacAddress,

docsIetfQosPktClassEnetProtocolType	INTEGER,
docsIetfQosPktClassEnetProtocol	Integer32,
docsIetfQosPktClassUserPriLow	Integer32,
docsIetfQosPktClassUserPriHigh	Integer32,

```

docsIetfQosPktClassVlanId      Integer32,
docsIetfQosPktClassStateActive TruthValue,
docsIetfQosPktClassPkts        Counter64,
docsIetfQosPktClassBitMap      BITS
}

```

```

docsIetfQosPktClassId          OBJECT-TYPE
    SYNTAX      Unsigned32 (1..65535)
    MAX-ACCESS   not-accessible
    STATUS      current
    DESCRIPTION  "Index assigned to packet classifier entry by
                  the CMTS which is unique per Service Flow."
    REFERENCE    "SP-RFiv2.0-I06-040804, Appendix C.2.1.3.2"
    ::= { docsIetfQosPktClassEntry 1 }

```

```

docsIetfQosPktClassDirection OBJECT-TYPE
    SYNTAX      DocsIetfQosRfMacIfDirection
    MAX-ACCESS   read-only
    STATUS      current
    DESCRIPTION  "Indicates the direction to which the classifier
                  is applied."
    ::= { docsIetfQosPktClassEntry 2 }

```

```

docsIetfQosPktClassPriority OBJECT-TYPE
    SYNTAX      Integer32 (0..255)
    MAX-ACCESS   read-only
    STATUS      current
    DESCRIPTION  "The value specifies the order of evaluation
                  of the classifiers.
                  The higher the value the higher the priority.
                  The value of 0 is used as default in
                  provisioned Service Flows Classifiers.
                  The default value of 64 is used for dynamic
                  Service Flow Classifiers.
                  If the referenced parameter is not present
                  in a classifier, this object reports the default
                  value as defined above."
    REFERENCE    "SP-RFiv2.0-I06-040804, Appendix C.2.1.3.5"
    ::= { docsIetfQosPktClassEntry 3 }

```

```

docsIetfQosPktClassIpTosLow OBJECT-TYPE
    SYNTAX      OCTET STRING (SIZE(1))
    MAX-ACCESS   read-only
    STATUS      current
    DESCRIPTION  "The low value of a range of TOS byte values.
                  If the referenced parameter is not present
                  in a classifier, this object reports the value

```

of 0.

The IP TOS octet as originally defined in [RFC 791](#) has been superseded by the 6 bit Differentiated

Services Field (DSField, [RFC 3260](#)) and the 2 bit Explicit Congestion Notification Field (ECN field, [RFC 3168](#)). This object is defined as a 8 bit octet as defined by the DOCSIS Specification for packet classification."

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.1.5.1](#)"
 ::= { docsIetfQosPktClassEntry 4 }

docsIetfQosPktClassIpTosHigh OBJECT-TYPE

SYNTAX OCTET STRING (SIZE(1))
MAX-ACCESS read-only
STATUS current
DESCRIPTION "The 8-bit high value of a range of TOS byte values.

If the referenced parameter is not present in a classifier, this object reports the value of 0.

The IP TOS octet as originally defined in [RFC 791](#) has been superseded by the 6 bit Differentiated Services Field (DSField, [RFC 3260](#)) and the 2 bit Explicit Congestion Notification Field (ECN field, [RFC 3168](#)). This object is defined as a 8 bit octet as defined by the DOCSIS Specification for packet classification."

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.1.5.1](#)"
 ::= { docsIetfQosPktClassEntry 5 }

docsIetfQosPktClassIpTosMask OBJECT-TYPE

SYNTAX OCTET STRING (SIZE(1))
MAX-ACCESS read-only
STATUS current
DESCRIPTION "The mask value is bitwise ANDed with TOS byte in an IP packet and this value is used check range checking of TosLow and TosHigh.

If the referenced parameter is not present in a classifier, this object reports the value of 0.

The IP TOS octet as originally defined in [RFC 791](#) has been superseded by the 6 bit Differentiated Services Field (DSField, [RFC 3260](#)) and the 2 bit Explicit Congestion Notification Field (ECN field, [RFC 3168](#)). This object is defined as a 8 bit octet as defined by the DOCSIS Specification

for packet classification."
REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.1.5.1](#)"
::= { docsIetfQosPktClassEntry 6 }

docsIetfQosPktClassIpProtocol OBJECT-TYPE

SYNTAX Integer32 (0..258)
MAX-ACCESS read-only
STATUS current
DESCRIPTION "This object indicates the value of the IP Protocol field required for IP packets to match this rule.

The value 256 matches traffic with any IP Protocol value. The value 257 by convention matches both TCP and UDP.

If the referenced parameter is not present in a classifier, this object reports the value of 258."
REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.1.5.2](#)"
::= { docsIetfQosPktClassEntry 7 }

docsIetfQosPktClassInetAddressType OBJECT-TYPE

SYNTAX InetAddressType
MAX-ACCESS read-only
STATUS current
DESCRIPTION "The type of the internet address for docsIetfQosPktClassInetSourceAddr, docsIetfQosPktClassInetSourceMask, docsIetfQosPktClassInetDestAddr, and docsIetfQosPktClassInetDestMask.

If the referenced parameter is not present in a classifier, this object reports the value of ipv4(1)."
REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.1.5.3](#)"
::= { docsIetfQosPktClassEntry 8 }

docsIetfQosPktClassInetSourceAddr OBJECT-TYPE

SYNTAX InetAddress
MAX-ACCESS read-only
STATUS current
DESCRIPTION "This object specifies the value of the IP Source Address required for packets to match this rule. An IP packet matches the rule when the packet ip source address bitwise ANDed with the docsIetfQosPktClassInetSourceMask value equals the docsIetfQosPktClassInetSourceAddr value.

The address type of this object is specified by docsIetfQosPktClassInetAddressType.

If the referenced parameter is not present
in a classifier, this object reports the value of
'00000000'H."

Expires August 2005

[Page 27]

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.1.5.3](#)"
 ::= { docsIetfQosPktClassEntry 9 }

docsIetfQosPktClassInetSourceMask OBJECT-TYPE

SYNTAX InetAddress
MAX-ACCESS read-only
STATUS current
DESCRIPTION "This object specifies which bits of a packet's
IP Source Address that are compared to match
this rule.
An IP packet matches the rule when the packet
source address bitwise ANDed with the
docsIetfQosPktClassInetSourceMask value equals the
docsIetfQosIpPktClassInetSourceAddr value.

The address type of this object is specified by
docsIetfQosPktClassInetAddressType.

If the referenced parameter is not present
in a classifier, this object reports the value of
'FFFFFFFF'H."

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.1.5.4](#)"
 ::= { docsIetfQosPktClassEntry 10 }

docsIetfQosPktClassInetDestAddr OBJECT-TYPE

SYNTAX InetAddress
MAX-ACCESS read-only
STATUS current
DESCRIPTION "This object specifies the value of the IP
Destination Address required for packets to match
this rule. An IP packet matches the rule when
the packet ip destination address
bitwise ANDed with the
docsIetfQosPktClassInetDestMask value
equals the docsIetfQosPktClassInetDestAddr value.

The address type of this object is specified by
docsIetfQosPktClassInetAddressType.

If the referenced parameter is not present
in a classifier, this object reports the value of
'00000000'H."

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.1.5.5](#)"
 ::= { docsIetfQosPktClassEntry 11 }

docsIetfQosPktClassInetDestMask OBJECT-TYPE

SYNTAX InetAddress
MAX-ACCESS read-only

STATUS	current
DESCRIPTION	"This object specifies which bits of a packet's IP Destination Address that are compared to

Expires August 2005

[Page 28]

match this rule.

An IP packet matches the rule when the packet destination address bitwise ANDed with the docsIetfQosPktClassInetDestMask value equals the docsIetfQosIpPktClassInetDestAddr value.

The address type of this object is specified by docsIetfQosPktClassInetAddressType.

If the referenced parameter is not present in a classifier, this object reports the value of 'FFFFFFFF'H."

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.1.5.6](#)"
 ::= { docsIetfQosPktClassEntry 12 }

docsIetfQosPktClassSourcePortStart OBJECT-TYPE

SYNTAX InetPortNumber
 MAX-ACCESS read-only
 STATUS current
 DESCRIPTION "This object specifies the low end inclusive range of TCP/UDP source port numbers to which a packet is compared. This object is irrelevant for non-TCP/UDP IP packets.

If the referenced parameter is not present in a classifier, this object reports the value of 0."

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.1.5.7](#)"
 ::= { docsIetfQosPktClassEntry 13 }

docsIetfQosPktClassSourcePortEnd OBJECT-TYPE

SYNTAX InetPortNumber
 MAX-ACCESS read-only
 STATUS current
 DESCRIPTION "This object specifies the high end inclusive range of TCP/UDP source port numbers to which a packet is compared. This object is irrelevant for non-TCP/UDP IP packets.

If the referenced parameter is not present in a classifier, this object reports the value of 65535."

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.1.5.8](#)"
 ::= { docsIetfQosPktClassEntry 14 }

docsIetfQosPktClassDestPortStart OBJECT-TYPE

SYNTAX InetPortNumber
 MAX-ACCESS read-only

STATUS	current
DESCRIPTION	"This object specifies the low end inclusive range of TCP/UDP destination port numbers to

Expires August 2005

[Page 29]

which a packet is compared.

If the referenced parameter is not present in a classifier, this object reports the value of 0."

REFERENCE "SP-RFIV2.0-I06-040804, [Appendix C.2.1.5.9](#)"
::= { docsIetfQosPktClassEntry 15 }

docsIetfQosPktClassDestPortEnd OBJECT-TYPE

SYNTAX InetPortNumber
MAX-ACCESS read-only
STATUS current
DESCRIPTION "This object specifies the high end inclusive range of TCP/UDP destination port numbers to which a packet is compared.

If the referenced parameter is not present in a classifier, this object reports the value of 65535."

REFERENCE "SP-RFIV2.0-I06-040804, [Appendix C.2.1.5.10](#)"
::= { docsIetfQosPktClassEntry 16 }

docsIetfQosPktClassDestMacAddr OBJECT-TYPE

SYNTAX MacAddress
MAX-ACCESS read-only
STATUS current
DESCRIPTION "An Ethernet packet matches an entry when its destination MAC address bitwise ANDed with docsIetfQosPktClassDestMacMask equals the value of docsIetfQosPktClassDestMacAddr.

If the referenced parameter is not present in a classifier, this object reports the value of '000000000000'H.
"

REFERENCE "SP-RFIV2.0-I06-040804, [Appendix C.2.1.6.1](#)"
::= { docsIetfQosPktClassEntry 17 }

docsIetfQosPktClassDestMacMask OBJECT-TYPE

SYNTAX MacAddress
MAX-ACCESS read-only
STATUS current
DESCRIPTION "An Ethernet packet matches an entry when its destination MAC address bitwise ANDed with docsIetfQosPktClassDestMacMask equals the value of docsIetfQosPktClassDestMacAddr.

If the referenced parameter is not present
in a classifier, this object reports the value of
'000000000000'H.

"

 REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.1.6.1](#)"

 ::= { docsIetfQosPktClassEntry 18 }

docsIetfQosPktClassSourceMacAddr OBJECT-TYPE

SYNTAX MacAddress

 MAX-ACCESS read-only

 STATUS current

 DESCRIPTION "An Ethernet packet matches this entry when its

 source MAC address equals the value of

 this object.

If the referenced parameter is not present

 in a classifier, this object reports the value of

 'FFFFFFFFFFFF'H.

"

 REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.1.6.2](#)"

 ::= { docsIetfQosPktClassEntry 19 }

docsIetfQosPktClassEnetProtocolType OBJECT-TYPE

SYNTAX INTEGER {

 none(0),

 ethertype(1),

 dsap(2),

 mac(3),

 all(4)

 }

 MAX-ACCESS read-only

 STATUS current

 DESCRIPTION "This object indicates the format of the layer 3

 protocol id in the Ethernet packet. A value of

 none(0) means that the rule does not use the

 layer 3 protocol type as a matching criteria.

A value of ethertype(1) means that the rule

 applies only to frames which contains an

 EtherType value. Ethertype values are contained

 in packets using the Dec-Intel-Xerox (DIX)

 encapsulation or the [RFC1042](#) Sub-Network Access

 Protocol (SNAP) encapsulation formats.

A value of dsap(2) means that the rule applies

 only to frames using the IEEE802.3

 encapsulation format with a Destination Service

 Access Point (DSAP) other

 than 0xAA (which is reserved for SNAP).

A value of mac(3) means that the rule applies only to MAC management messages for MAC management messages.

A value of all(4) means that the rule matches all Ethernet packets.

If the Ethernet frame contains an 802.1P/Q Tag header (i.e. EtherType 0x8100), this object applies to the embedded EtherType field within the 802.1P/Q header.

If the referenced parameter is not present in a classifier, this object reports the value of 0.

"

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.1.6.3](#)"
 ::= { docsIetfQosPktClassEntry 20 }

docsIetfQosPktClassEnetProtocol OBJECT-TYPE

SYNTAX Integer32 (0..65535)

MAX-ACCESS read-only

STATUS current

DESCRIPTION "If docsIetfQosEthPktClassProtocolType is none(0), this object is ignored when considering whether a packet matches the current rule.

If dosQosPktClassEnetProtocolType is ethertype(1), this object gives the 16-bit value of the EtherType that the packet must match in order to match the rule.

If docsIetfQosPktClassEnetProtocolType is dsap(2), the lower 8 bits of this object's value must match the DSAP byte of the packet in order to match the rule.

If docsIetfQosPktClassEnetProtocolType is mac(3), the lower 8 bits of this object value represent a lower bound (inclusive) of MAC management message type codes matched, and the upper 8 bits of this object value represent the upper bound (inclusive) of matched MAC message type codes. Certain message type codes are excluded from matching, as specified in the reference.

If the Ethernet frame contains an 802.1P/Q Tag header (i.e. EtherType 0x8100), this object applies to the embedded EtherType field within the 802.1P/Q header.

If the referenced parameter is not present in the

classifier, the value of this object is reported
as 0."

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.1.6.3](#)"

Expires August 2005

[Page 32]

```
::= { docsIetfQosPktClassEntry 21 }
```

docsIetfQosPktClassUserPriLow OBJECT-TYPE

SYNTAX Integer32 (0..7)

MAX-ACCESS read-only

STATUS current

DESCRIPTION "This object applies only to Ethernet frames using the 802.1P/Q tag header (indicated with EtherType 0x8100). Such frames include a 16-bit Tag that contains a 3 bit Priority field and a 12 bit VLAN number.

Tagged Ethernet packets must have a 3-bit Priority field within the range of docsIetfQosPktClassPriLow and docsIetfQosPktClassPriHigh in order to match this rule.

If the referenced parameter is not present in the classifier, the value of this object is reported as 0."

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.1.7.1](#)"

```
::= { docsIetfQosPktClassEntry 22 }
```

docsIetfQosPktClassUserPriHigh OBJECT-TYPE

SYNTAX Integer32 (0..7)

MAX-ACCESS read-only

STATUS current

DESCRIPTION "This object applies only to Ethernet frames using the 802.1P/Qtag header (indicated with EtherType 0x8100). Such frames include a 16-bit Tag that contains a 3 bit Priority field and a 12 bit VLAN number.

Tagged Ethernet packets must have a 3-bit Priority field within the range of docsIetfQosPktClassPriLow and docsIetfQosPktClassPriHigh in order to match this rule.

If the referenced parameter is not present in the classifier, the value of this object is reported as 7.

"

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.1.7.1](#)"

```
::= { docsIetfQosPktClassEntry 23 }
```

docsIetfQosPktClassVlanId OBJECT-TYPE

SYNTAX	Integer32 (0 1..4094)
MAX-ACCESS	read-only
STATUS	current

Expires August 2005

[Page 33]

DESCRIPTION "This object applies only to Ethernet frames using the 802.1P/Q tag header.

Tagged packets must have a VLAN Identifier that matches the value in order to match the rule.

If the referenced parameter is not present in the classifier, the value of this object is reported as 0.

"

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.1.7.2](#)"

::= { docsIetfQosPktClassEntry 24 }

docsIetfQosPktClassStateActive OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-only

STATUS current

DESCRIPTION "This object indicates whether or not the classifier is enabled to classify packets to a Service Flow.

If the referenced parameter is not present in the classifier, the value of this object is reported as true(1)."

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.1.3.6](#)"

::= { docsIetfQosPktClassEntry 25 }

docsIetfQosPktClassPkts OBJECT-TYPE

SYNTAX Counter64

MAX-ACCESS read-only

STATUS current

DESCRIPTION "This object counts the number of packets that have been classified using this entry. This includes all packets delivered to a Service Flow maximum rate policing function, whether or not that function drops the packets.

This counter's last discontinuity is the ifCounterDiscontinuityTime for same ifIndex that indexes this object."

::= { docsIetfQosPktClassEntry 26 }

docsIetfQosPktClassBitMap OBJECT-TYPE

SYNTAX BITS { -- Reference SP-RFiv2.0-I06-040804

rulePriority(0), -- [Appendix C.2.1.3.4](#)

activationState(1), -- [Appendix C.2.1.3.6](#)

ipTos(2), -- [Appendix C.2.1.5.1](#)

ipProtocol(3), -- [Appendix C.2.1.5.2](#)

ipSourceAddr(4),	-- Appendix C.2.1.5.3
ipSourceMask(5),	-- Appendix C.2.1.5.4
ipDestAddr(6),	-- Appendix C.2.1.5.5

```

        ipDestMask(7),      -- Appendix C.2.1.5.6
        sourcePortStart(8), -- Appendix C.2.1.5.7
        sourcePortEnd(9),   -- Appendix C.2.1.5.8
        destPortStart(10),  -- Appendix C.2.1.5.9
        destPortEnd(11),    -- Appendix C.2.1.5.10
        destMac(12),        -- Appendix C.2.1.6.1
        sourceMac(13),      -- Appendix C.2.1.6.2
        ethertype(14),      -- Appendix C.2.1.6.3
        userPri(15),        -- Appendix C.2.1.7.1
        vlanId(16),         -- Appendix C.2.1.7.2
    }
MAX-ACCESS      read-only
STATUS          current
DESCRIPTION     "This object indicates which parameter encodings
                were actually present in the DOCSIS packet
                classifier encoding signaled in the DOCSIS message
                that created or modified the classifier. Note that
                Dynamic Service Change messages have replace
                semantics, so that all non-default parameters must
                be present whether the classifier is being created
                or changed.

                A bit of this object is set to 1 if the parameter
                indicated by the comment was present in the
                classifier encoding, and 0 otherwise.

                Note that BITS are encoded most significant bit
                first, so that if e.g. bits 6 and 7 are set, this
                object is encoded as the octet string '030000'H."
 ::= { docsIetfQosPktClassEntry 27 }

--
-- QOS Parameter Set Table
--
docsIetfQosParamSetTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF DocsIetfQosParamSetEntry
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION  "This table describes the set of DOCSIS 1.1 and 2.0
                QOS parameters defined in a managed device.

                The ifIndex index specifies a DOCSIS MAC Domain.
                The docsIetfQosServiceFlowId index specifies a
                particular Service Flow.
                The docsIetfQosParamSetType index indicates whether
                the active, admitted, or provisioned QOS Parameter

```

Set is being described by the row.

Only the QoS Parameter Sets of DOCSIS 1.1 and 2.0
Service Flows are represented in this table.

DOCSIS 1.0 QoS service profiles are not represented in this table.

Each row corresponds to a DOCSIS QoS Parameter Set as signaled via DOCSIS MAC management messages. Each object in the row corresponds to one or part of one DOCSIS 1.1 Service Flow Encoding. The docsIetfQosParamSetBitMap object in the row indicates which particular parameters were signaled in the original registration or dynamic service request message that created the QoS Parameter Set.

In many cases, even if a QoS Parameter Set parameter was not signaled, the DOCSIS specification calls for a default value to be used. That default value is reported as the value of the corresponding object in this row.

Many objects are not applicable depending on the Service Flow direction or upstream scheduling type. The object value reported in this case is specified in the DESCRIPTION clause.

"

```
::= { docsIetfQosMIBObjects 2 }
```

docsIetfQosParamSetEntry OBJECT-TYPE

SYNTAX DocIetfQosParamSetEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"A unique set of QoS parameters."

INDEX {

ifIndex, docsIetfQosServiceFlowId, docsIetfQosParamSetType
}

```
::= { docsIetfQosParamSetTable 1 }
```

DocsIetfQosParamSetEntry ::= SEQUENCE {

docsIetfQosParamSetServiceClassName	SnmpAdminString,
docsIetfQosParamSetPriority	Integer32,
docsIetfQosParamSetMaxTrafficRate	DocsIetfQosBitRate,
docsIetfQosParamSetMaxTrafficBurst	Unsigned32,
docsIetfQosParamSetMinReservedRate	DocsIetfQosBitRate,
docsIetfQosParamSetMinReservedPkt	Integer32,
docsIetfQosParamSetActiveTimeout	Integer32,
docsIetfQosParamSetAdmittedTimeout	Integer32,
docsIetfQosParamSetMaxConcatBurst	Integer32,
docsIetfQosParamSetSchedulingType	DocsIetfQosSchedulingType,

docsIetfQosParamSetNomPollInterval	Unsigned32,
docsIetfQosParamSetTolPollJitter	Unsigned32,
docsIetfQosParamSetUnsolicitGrantSize	Integer32,
docsIetfQosParamSetNomGrantInterval	Unsigned32,

```

docsIetfQosParamSetTolGrantJitter      Unsigned32,
docsIetfQosParamSetGrantsPerInterval  Integer32,
docsIetfQosParamSetTosAndMask          OCTET STRING,
docsIetfQosParamSetTosOrMask           OCTET STRING,
docsIetfQosParamSetMaxLatency           Unsigned32,
docsIetfQosParamSetType                 INTEGER,
docsIetfQosParamSetRequestPolicyOct    OCTET STRING,
docsIetfQosParamSetBitMap               BITS
}

```

docsIetfQosParamSetServiceClassName OBJECT-TYPE

```

SYNTAX      SnmpAdminString
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION "Refers to the Service Class Name that the
            parameter set values were derived.

            If the referenced parameter is not present in the
            corresponding DOCSIS QOS Parameter Set, the default
            value of this object is a zero length string.
            "
REFERENCE   "SP-RFiv2.0-I06-040804, Appendix C.2.2.3.4"
 ::= { docsIetfQosParamSetEntry 1 }

```

docsIetfQosParamSetPriority OBJECT-TYPE

```

SYNTAX      Integer32 (0..7)
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION "The relative priority of a Service Flow.
            Higher numbers indicate higher priority.
            This priority should only be used to differentiate
            Service Flow with identical parameter sets.

            If the referenced parameter is not present in the
            corresponding DOCSIS QOS Parameter Set, the default
            value of this object is 0. If the parameter is
            not applicable, the reported value is 0.
            "
REFERENCE   "SP-RFiv2.0-I06-040804, Appendix C.2.2.5.1"
 ::= { docsIetfQosParamSetEntry 2 }

```

docsIetfQosParamSetMaxTrafficRate OBJECT-TYPE

```

SYNTAX      DocsIetfQosBitRate
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION "Maximum sustained traffic rate allowed for this
            Service Flow in bits/sec. Must count all MAC frame

```

data PDU from the bytes following the MAC header HCS to the end of the CRC. The number of bytes forwarded is limited during any time interval. The value 0 means no maximum traffic rate is

enforced. This object applies to both upstream and downstream Service Flows.

If the referenced parameter is not present in the corresponding DOCSIS QoS Parameter Set, the default value of this object is 0. If the parameter is not applicable, it is reported as 0.

"

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.2.5.2](#)"
 ::= { docsIetfQosParamSetEntry 3 }

docsIetfQosParamSetMaxTrafficBurst OBJECT-TYPE

SYNTAX Unsigned32

MAX-ACCESS read-only

STATUS current

DESCRIPTION "Specifies the token bucket size in bytes for this parameter set. The value is calculated from the byte following the MAC header HCS to the end of the CRC. This object is applied in conjunction with docsIetfQosParamSetMaxTrafficRate to calculate maximum sustained traffic rate.

If the referenced parameter is not present in the corresponding DOCSIS QoS Parameter Set, the default value of this object for scheduling types bestEffort (2), nonRealTimePollingService(3), and realTimePollingService(4) is 3044.

If this parameter is not applicable, it is reported as 0.

"

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.2.5.3](#)"
 ::= { docsIetfQosParamSetEntry 4 }

docsIetfQosParamSetMinReservedRate OBJECT-TYPE

SYNTAX DocsIetfQosBitRate

MAX-ACCESS read-only

STATUS current

DESCRIPTION "Specifies the guaranteed minimum rate in bits/sec for this parameter set. The value is calculated from the byte following the MAC header HCS to the end of the CRC. The default value of 0 has the meaning that no bandwidth is reserved.

If the referenced parameter is not present in the corresponding DOCSIS QoS Parameter Set, the default value of this object is 0. If the parameter

is not applicable, it is reported as 0.
"

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.2.5.4](#)"
::= { docsIetfQosParamSetEntry 5 }

docsIetfQosParamSetMinReservedPkt OBJECT-TYPE

SYNTAX Integer32 (0..65535)
MAX-ACCESS read-only
STATUS current
DESCRIPTION "Specifies an assumed minimum packet size in bytes for which the docsIetfQosParamSetMinReservedRate will be provided. The value is calculated from the byte following the MAC header HCS to the end of the CRC.

If the referenced parameter is omitted from a DOCSIS QOS parameter set, the default value is CMTS implementation dependent. In this case, the CMTS reports the default value it is using and the CM reports a value of 0. If the referenced parameter is not applicable to the direction or scheduling type of the Service Flow, both CMTS and CM report this object's value as 0."

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.2.5.5](#)"
 ::= { docsIetfQosParamSetEntry 6 }

docsIetfQosParamSetActiveTimeout OBJECT-TYPE

SYNTAX Integer32 (0..65535)
UNITS "seconds"
MAX-ACCESS read-only
STATUS current
DESCRIPTION "Specifies the maximum duration in seconds that resources remain unused on an active service flow before CMTS signals that both active and admitted parameters set are null.
The default value of 0 signifies an infinite amount of time.

If the referenced parameter is not present in the corresponding DOCSIS QOS Parameter Set, the default value of this object is 0."

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.2.5.6](#)"
 ::= { docsIetfQosParamSetEntry 7 }

docsIetfQosParamSetAdmittedTimeout OBJECT-TYPE

SYNTAX Integer32 (0..65535)
UNITS "seconds"
MAX-ACCESS read-only

STATUS	current
DESCRIPTION	"Specifies the maximum duration in seconds that resources remain in admitted state before resources must be released.

Expires August 2005

[Page 39]

The value of 0 signifies an infinite amount of time.

If the referenced parameter is not present in the corresponding DOCSIS QoS Parameter Set, the default value of this object is 200.

"

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.2.5.7](#)"

DEFVAL { 200 }

::= { docsIetfQosParamSetEntry 8 }

docsIetfQosParamSetMaxConcatBurst OBJECT-TYPE

SYNTAX Integer32 (0..65535)

MAX-ACCESS read-only

STATUS current

DESCRIPTION "Specifies the maximum concatenated burst in bytes which an upstream Service Flow is allowed. The value is calculated from the FC byte of the Concatenation MAC Header to the last CRC byte in of the last concatenated MAC frame, inclusive. The value of 0 specifies no maximum burst.

If the referenced parameter is not present in the corresponding DOCSIS QoS Parameter Set, the default value of this object for scheduling types bestEffort(2), nonRealTimePollingService(3), and realTimePollingService(4) is 1522. If the parameter is not applicable, this object's value is reported as 0.

"

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.2.6.1](#)"

::= { docsIetfQosParamSetEntry 9 }

docsIetfQosParamSetSchedulingType OBJECT-TYPE

SYNTAX DocsIetfQosSchedulingType

MAX-ACCESS read-only

STATUS current

DESCRIPTION "Specifies the upstream scheduling service used for upstream Service Flow.

If the referenced parameter is not present in the corresponding DOCSIS QoS Parameter Set of an upstream Service Flow, the default value of this object is bestEffort(2). For QoS parameter sets of downstream Service Flows, this object's value is reported as undefined(1).

"
REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.2.6.2](#)"
::= { docsIetfQosParamSetEntry 10 }

Expires August 2005

[Page 40]

docsIetfQosParamSetNomPollInterval OBJECT-TYPE

SYNTAX Unsigned32
 UNITS "microseconds"
 MAX-ACCESS read-only
 STATUS current
 DESCRIPTION "Specifies the nominal interval in microseconds
 between successive unicast request
 opportunities on an upstream Service Flow.

This object applies only to upstream Service Flows with DocsIetfQosSchedulingType of value nonRealTimePollingService(3), realTimePollingService(4), and unsolicitedGrantServiceWithAD(5). The parameter is mandatory for realTimePollingService(4). If the parameter is omitted with nonRealTimePollingService(3), the CMTS uses an implementation dependent value. If the parameter is omitted with unsolicitedGrantServiceWithAD(5), the CMTS uses as a default value the value of the Nominal Grant Interval parameter. In all cases, the CMTS reports the value it is using when the parameter is applicable. The CM reports the signaled parameter value if it was signaled, and 0 otherwise.

If the referenced parameter is not applicable to the direction or scheduling type of the corresponding DOCSIS QoS Parameter Set, both CMTS and CM report this object's value as 0.
 "

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.2.6.4](#)"
 ::= { docsIetfQosParamSetEntry 11 }

docsIetfQosParamSetTolPollJitter OBJECT-TYPE

SYNTAX Unsigned32
 UNITS "microseconds"
 MAX-ACCESS read-only
 STATUS current
 DESCRIPTION "Specifies the maximum amount of time in
 microseconds that the unicast request interval
 may be delayed from the nominal periodic
 schedule on an upstream Service Flow.

This parameter is applicable only to upstream Service Flows with a DocsIetfQosSchedulingType of realTimePollingService(4) or

unsolicitedGrantServiceWithAD(5).

If the referenced parameter is applicable but not present in the corresponding DOCSIS QoS Parameter

Expires August 2005

[Page 41]

Set, the CMTS uses an implementation dependent value and reports the value it is using. The CM reports a value of 0 in this case.

If the parameter is not applicable to the direction or upstream scheduling type of the Service Flow, both CMTS and CM report this object's value as 0.

"

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.2.6.5](#)"
 ::= { docsIetfQosParamSetEntry 12 }

docsIetfQosParamSetUnsolicitGrantSize OBJECT-TYPE

SYNTAX Integer32 (0..65535)

MAX-ACCESS read-only

STATUS current

DESCRIPTION "Specifies the unsolicited grant size in bytes. The grant size includes the entire MAC frame data PDU from the Frame Control byte to end of the MAC frame.

The referenced parameter is applicable only for upstream flows with a DocsIetfQosSchedulingType of unsolicitedGrantServiceWithAD(5) or unsolicitedGrantService(6), and is mandatory when applicable. Both CMTS and CM report the signaled value of the parameter in this case.

If the referenced parameter is not applicable to the direction or scheduling type of the corresponding DOCSIS QoS Parameter Set, both CMTS and CM report this object's value as 0.

"

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.2.6.6](#)"
 ::= { docsIetfQosParamSetEntry 13 }

docsIetfQosParamSetNomGrantInterval OBJECT-TYPE

SYNTAX Unsigned32

UNITS "microseconds"

MAX-ACCESS read-only

STATUS current

DESCRIPTION "Specifies the nominal interval in microseconds between successive data grant opportunities on an upstream Service Flow.

The referenced parameter is applicable only

for upstream flows with a DocsIetfQoS SchedulingType of unsolicitedGrantServiceWithAD(5) or unsolicitedGrantService(6), and is mandatory when applicable. Both CMTS and CM report the

signaled value of the parameter in this case.

If the referenced parameter is not applicable to the direction or scheduling type of the corresponding DOCSIS QoS Parameter Set, both CMTS and CM report this object's value as 0.

"

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.2.6.7](#)"
 ::= { docsIetfQosParamSetEntry 14 }

docsIetfQosParamSetTolGrantJitter OBJECT-TYPE

SYNTAX Unsigned32
 UNITS "microseconds"
 MAX-ACCESS read-only
 STATUS current
 DESCRIPTION "Specifies the maximum amount of time in microseconds that the transmission opportunities may be delayed from the nominal periodic schedule.

The referenced parameter is applicable only for upstream flows with a DocsIetfQosSchedulingType of unsolicitedGrantServiceWithAD(5) or unsolicitedGrantService(6), and is mandatory when applicable. Both CMTS and CM report the signaled value of the parameter in this case.

If the referenced parameter is not applicable to the direction or scheduling type of the corresponding DOCSIS QoS Parameter Set, both CMTS and CM report this object's value as 0.

"

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.2.6.8](#)"
 ::= { docsIetfQosParamSetEntry 15 }

docsIetfQosParamSetGrantsPerInterval OBJECT-TYPE

SYNTAX Integer32 (0..127)
 MAX-ACCESS read-only
 STATUS current
 DESCRIPTION "Specifies the number of data grants per Nominal Grant Interval (docsIetfQosParamSetNomGrantInterval).

The referenced parameter is applicable only for upstream flows with a DocsIetfQosSchedulingType of unsolicitedGrantServiceWithAD(5) or unsolicitedGrantService(6), and is mandatory when applicable. Both CMTS and CM report the

signaled value of the parameter in this case.

If the referenced parameter is not applicable to

Expires August 2005

[Page 43]

the direction or scheduling type of the corresponding DOCSIS QoS Parameter Set, both CMTS and CM report this object's value as 0.

"

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.2.6.9](#)"
 ::= { docsIetfQosParamSetEntry 16 }

docsIetfQosParamSetTosAndMask OBJECT-TYPE

SYNTAX OCTET STRING (SIZE(1))

MAX-ACCESS read-only

STATUS current

DESCRIPTION "Specifies the AND mask for IP TOS byte for overwriting IP packets TOS value. The IP packets TOS byte is bitwise ANDed with docsIetfQosParamSetTosAndMask and result is bitwise ORed with docsIetfQosParamSetTosORMask and result is written to IP packet TOS byte. A value of 'FF'H for docsIetfQosParamSetTosAndMask and a value of '00'H for docsIetfQosParamSetTosOrMask means that IP Packet TOS byte is not overwritten.

This combination is reported if the referenced parameter is not present in a QoS Parameter Set.

The IP TOS octet as originally defined in [RFC 791](#) has been superseded by the 6 bit Differentiated Services Field (DSField, [RFC 3260](#)) and the 2 bit Explicit Congestion Notification Field (ECN field, [RFC 3168](#)). Network operators SHOULD avoid specifying values of docsIetfQosParamSetTosAndMask and docsIetfQosParamSetTosORMask which would result in the modification of the ECN bits.

In particular, operators should not use values of docsIetfQosParamSetTosAndMask which have either of the least-significant two bits set to 0. Similarly, operators should not use values of docsIetfQosParamSetTosORMask which have either of the least-significant two bits set to 1.

Even though this object is only enforced by the Cable Modem Termination System (CMTS), Cable Modems MUST report the value as signaled in the referenced parameter."

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.2.6.10](#);

[RFC 3168](#), The Addition of Explicit Congestion
Notification (ECN) to IP;
[RFC 3260](#), New Terminology and Clarifications for
Diffserv."

Expires August 2005

[Page 44]

```
::= { docsIetfQosParamSetEntry 17 }
```

docsIetfQosParamSetTosOrMask OBJECT-TYPE

SYNTAX OCTET STRING (SIZE(1))

MAX-ACCESS read-only

STATUS current

DESCRIPTION "Specifies the OR mask for IP TOS byte.

See the description of docsIetfQosParamSetTosAndMask for further details.

The IP TOS octet as originally defined in [RFC 791](#) has been superseded by the 6 bit Differentiated Services Field (DSField, [RFC 3260](#)) and the 2 bit Explicit Congestion Notification Field (ECN field, [RFC 3168](#)). Network operators SHOULD avoid specifying values of docsIetfQosParamSetTosAndMask and docsIetfQosParamSetTosORMask which would result in the modification of the ECN bits."

REFERENCE "SP-RFIV2.0-I06-040804, [Appendix C.2.2.6.10](#); [RFC 3168](#), The Addition of Explicit Congestion Notification (ECN) to IP; [RFC 3260](#), New Terminology and Clarifications for Diffserv."

```
::= { docsIetfQosParamSetEntry 18 }
```

docsIetfQosParamSetMaxLatency OBJECT-TYPE

SYNTAX Unsigned32

UNITS "microseconds"

MAX-ACCESS read-only

STATUS current

DESCRIPTION "Specifies the maximum latency between the reception of a packet by the CMTS on its NSI and the forwarding of the packet to the RF interface. A value of 0 signifies no maximum latency enforced. This object only applies to downstream Service Flows.

If the referenced parameter is not present in the corresponding downstream DOCSIS QOS Parameter Set, the default value is 0. This parameter is not applicable to upstream DOCSIS QOS Parameter Sets, and its value is reported as 0 in this case."

REFERENCE "SP-RFIV2.0-I06-040804, [Appendix C.2.2.7.1](#)"

```
::= { docsIetfQosParamSetEntry 19 }
```

docsIetfQosParamSetType OBJECT-TYPE

SYNTAX

```
INTEGER {  
    active (1),  
    admitted (2),
```

Expires August 2005

[Page 45]

```

        provisioned (3)
    }
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION     "Defines the type of the QoS parameter set defined
                by this row. active(1) indicates the Active QoS
                parameter set, describing the service currently
                being provided by the DOCSIS MAC domain to the
                Service Flow. admitted(2) indicates the Admitted
                QoS Parameter Set, describing services reserved by
                the DOCSIS MAC domain for use by the service
                flow. provisioned (3) describes the QoS Parameter
                Set defined in the DOCSIS CM Configuration file for
                the Service Flow."
REFERENCE       "SP-RFiv2.0-I06-040804, 8.1.5"
 ::= { docsIetfQosParamSetEntry 20 }

```

docsIetfQosParamSetRequestPolicyOct OBJECT-TYPE

```

SYNTAX          OCTET STRING (SIZE(4))
                -- A 32-bit mask represented most significant byte
                -- first. The 32 bit integer represented in this
                -- manner equals the binary value of the referenced
                -- integer parameter of the DOCSIS RFI
                -- specification.
                -- The BITS syntax is not used in order to avoid
                -- the confusion caused by different bit numbering
                -- conventions.
MAX-ACCESS      read-only
STATUS          current
DESCRIPTION     "Specifies which transmit interval opportunities
                the CM omits for upstream transmission requests and
                packet transmissions. This object takes its
                default value for downstream Service Flows.

```

Unless otherwise indicated, a bit value of 1 means that a CM must **not** use that opportunity for upstream transmission.

Calling bit 0 the least significant bit of the least significant (4th) octet, and increasing bit number with significance, the bit definitions are as defined below:

```

broadcastReqOpp(0):
    all CMs broadcast request opportunities

```

```

priorityReqMulticastReq(1):

```

priority request multicast request
opportunities

reqDataForReq(2):

Expires August 2005

[Page 46]

request/data opportunities for requests

reqDataForData(3):
request/data opportunities for data

piggybackReqWithData(4):
piggyback requests with data

concatenateData(5):
concatenate data

fragmentData(6):
fragment data

suppresspayloadheaders(7):
suppress payload headers

dropPktsExceedUGSize(8):
A value of 1 mean that Service Flow must drop
packet that do not fit in the Unsolicited
Grant size

If the referenced parameter is not present in
a QoS Parameter Set, the value of this object is
reported as '00000000'H.
"

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.2.6.3](#)"
::= { docsIetfQosParamSetEntry 21 }

docsIetfQosParamSetBitMap OBJECT-TYPE

-- Each bit corresponds to a parameter
-- from SP-RFI-v1.1-I10-037030,
-- [Appendix C](#) in the indicated
-- section number.

SYNTAX BITS {
trafficPriority(0), -- C.2.2.5.1
maxTrafficRate(1), -- C.2.2.5.2
maxTrafficBurst(2), -- C.2.2.5.3
minReservedRate(3), -- C.2.2.5.4
minReservedPkt(4), -- C.2.2.5.5
activeTimeout(5), -- C.2.2.5.6
admittedTimeout(6), -- C.2.2.5.7
maxConcatBurst(7), -- C.2.2.6.1
schedulingType(8), -- C.2.2.6.2
requestPolicy(9), -- C.2.2.6.3
nomPollInterval(10), -- C.2.2.6.4
tolPollJitter(11), -- C.2.2.6.5
unsolicitGrantSize(12), -- C.2.2.6.6
nomGrantInterval(13), -- C.2.2.6.7

```
tolGrantJitter(14),      -- C.2.2.6.8
grantsPerInterval(15),   -- C.2.2.6.9
tosOverwrite(16),        -- C.2.2.6.10
```

```

        maxLatency(17)          -- C.2.2.7.1
    }
MAX-ACCESS      read-only
STATUS          current
DESCRIPTION     "This object indicates the set of QoS Parameter
                Set parameters actually signaled in the
                DOCSIS registration or dynamic service request
                message that created or modified the QoS Parameter
                Set. A bit is set to 1 when the parameter described
                by the indicated reference section is present
                in the original request.

                Note that when Service Class names are expanded,
                the registration or dynamic response message may
                contain parameters as expanded by the CMTS based
                on a stored service class. These expanded
                parameters are *not* indicated by a 1 bit in this
                object.

                Note that even though some QoS Parameter Set
                parameters may not be signaled in a message
                (so that the parameter's bit in this object is 0)
                the DOCSIS specification calls for default
                values to be used. These default values are
                reported as the corresponding object's value in
                the row.

                Note that BITS objects are encoded most
                significant bit first. For example, if bits
                1 and 16 are set, the value of this object
                is the octet string '400080'H.

                "
 ::= { docsIetfQosParamSetEntry 22 }

--
-- Service Flow Table
--
docsIetfQosServiceFlowTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF DocsIetfQosServiceFlowEntry
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION  "This table describes the set of DOCSIS-QoS
                Service Flows in a managed device. "
    ::= { docsIetfQosMIBObjects 3 }

docsIetfQosServiceFlowEntry OBJECT-TYPE

```

SYNTAX	DocsIetfQosServiceFlowEntry
MAX-ACCESS	not-accessible
STATUS	current
DESCRIPTION	"Describes a Service Flow.

Expires August 2005

[Page 48]

An entry in the table exists for each Service Flow ID. The ifIndex is an ifType of docsCableMacLayer(127)."

```
INDEX {
    ifIndex,
    docsIetfQosServiceFlowId
}
::= { docsIetfQosServiceFlowTable 1 }
```

```
DocsIetfQosServiceFlowEntry ::= SEQUENCE {
    docsIetfQosServiceFlowId      Unsigned32,
    docsIetfQosServiceFlowSID      Unsigned32,
    docsIetfQosServiceFlowDirection DocsIetfQosRfMacIfDirection,
    docsIetfQosServiceFlowPrimary  TruthValue
}
```

```
docsIetfQosServiceFlowId OBJECT-TYPE
    SYNTAX      Unsigned32 (1..4294967295)
    MAX-ACCESS   not-accessible
    STATUS      current
    DESCRIPTION  "An index assigned to a Service Flow by CMTS."
    REFERENCE    "SP-RFiv2.0-I06-040804, Appendix C.2.2.3.2"
    ::= { docsIetfQosServiceFlowEntry 1 }
```

```
docsIetfQosServiceFlowSID OBJECT-TYPE
    SYNTAX      Unsigned32 (0..16383)
    MAX-ACCESS   read-only
    STATUS      current
    DESCRIPTION  "Service Identifier (SID) assigned to an
    admitted or active Service Flow. This object
    reports a value of 0 if a Service Id is not
    associated with the Service Flow. Only active
    or admitted upstream Service Flows will have a
    Service Id (SID)."
    REFERENCE    "SP-RFiv2.0-I06-040804, Appendix C.2.2.3.3"
    ::= { docsIetfQosServiceFlowEntry 2 }
```

```
docsIetfQosServiceFlowDirection OBJECT-TYPE
    SYNTAX      DocsIetfQosRfMacIfDirection
    MAX-ACCESS   read-only
    STATUS      current
    DESCRIPTION  "The direction of the Service Flow."
    REFERENCE    "SP-RFiv2.0-I06-040804, Appendix C.2.1.1/2"
    ::= { docsIetfQosServiceFlowEntry 3 }
```

```
docsIetfQosServiceFlowPrimary OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS   read-only
```

STATUS	current
DESCRIPTION	"Object reflects whether Service Flow is the primary or a secondary Service Flow.

Expires August 2005

[Page 49]

A primary Service Flow is the default Service Flow for otherwise unclassified traffic and all MAC messages."

REFERENCE "SP-RFiv2.0-I06-040804, [Section 8.1](#) "

::= { docsIetfQosServiceFlowEntry 4 }

--

-- Service Flow Stats Table

--

docsIetfQosServiceFlowStatsTable OBJECT-TYPE

SYNTAX SEQUENCE OF DocsIetfQosServiceFlowStatsEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION "This table describes statistics associated with the Service Flows in a managed device. "

::= { docsIetfQosMIBObjects 4 }

docsIetfQosServiceFlowStatsEntry OBJECT-TYPE

SYNTAX DocsIetfQosServiceFlowStatsEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION "Describes a set of Service Flow statistics.
An entry in the table exists for each Service Flow ID. The ifIndex is an ifType of docsCableMaclayer(127)."

INDEX {
 ifIndex,
 docsIetfQosServiceFlowId
}

::= { docsIetfQosServiceFlowStatsTable 1 }

DocsIetfQosServiceFlowStatsEntry ::= SEQUENCE {

docsIetfQosServiceFlowPkts Counter64,

docsIetfQosServiceFlowOctets Counter64,

docsIetfQosServiceFlowTimeCreated TimeStamp,

docsIetfQosServiceFlowTimeActive Counter32,

docsIetfQosServiceFlowPHSUnknowns Counter32,

docsIetfQosServiceFlowPolicedDropPkts Counter32,

docsIetfQosServiceFlowPolicedDelayPkts Counter32

}

docsIetfQosServiceFlowPkts OBJECT-TYPE

SYNTAX Counter64

MAX-ACCESS read-only

STATUS current

DESCRIPTION "For outgoing Service Flows, this object counts the number of Packet Data PDUs forwarded to this

Service Flow. For CMTS incoming upstream service flows, this object counts the number of Packets Data PDUs actually received on the Service Flow identified by the SID for which the packet was

scheduled. CMs not classifying downstream packets may report this object's value as 0 for downstream Service Flows. This object does not count MAC-specific management messages.

Particularly for UGS flows, packets sent on the primary Service Flow in violation of the UGS grant size should be counted only by the instance of this object that is associated with the primary service flow.

Unclassified upstream user data packets (i.e. non MAC-management) forwarded to the primary upstream Service Flow should be counted by the instance of this object that is associated with the primary service flow.

This object does include packets counted by docsIetfQosServiceFlowPolicedDelayPkts, but does not include packets counted by docsIetfQosServiceFlowPolicedDropPkts and docsIetfQosServiceFlowPHSUnknowns.

This counter's last discontinuity is the ifCounterDiscontinuityTime for same ifIndex that indexes this object."

```
::= { docsIetfQosServiceFlowStatsEntry 1 }
```

docsIetfQosServiceFlowOctets OBJECT-TYPE

SYNTAX	Counter64
MAX-ACCESS	read-only
STATUS	current
DESCRIPTION	"The number of octets from the byte after the MAC header HCS to the end of the CRC for all packets counted in the docsIetfQosServiceFlowPkts object for this row. Note that this counts the octets after payload header suppression and before payload header expansion has been applied.

This counter's last discontinuity is the ifCounterDiscontinuityTime for same ifIndex that indexes this object."

```
::= { docsIetfQosServiceFlowStatsEntry 2 }
```

docsIetfQosServiceFlowTimeCreated OBJECT-TYPE

SYNTAX	TimeStamp
MAX-ACCESS	read-only
STATUS	current

DESCRIPTION "The value of sysUpTime when the service flow
 was created."
::= { docsIetfQosServiceFlowStatsEntry 3 }

Expires August 2005

[Page 51]

docsIetfQosServiceFlowTimeActive OBJECT-TYPE

SYNTAX Counter32
UNITS "seconds"
MAX-ACCESS read-only
STATUS current
DESCRIPTION "The number of seconds that the service flow
has been active.

This counter's last discontinuity is the
ifCounterDiscontinuityTime for same ifIndex that
indexes this object."
::= { docsIetfQosServiceFlowStatsEntry 4 }

docsIetfQosServiceFlowPHSUnknowns OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION "For CMTS incoming upstream service flows, this
object counts the number of packets received
with an unknown payload header suppression index.
The service flow is identified by the SID for which
the packet was scheduled.

On a CM, only this object's instance for the primary
downstream service flow count packets received with
an unknown payload header suppression index. All
other downstream service flows on CM report this
objects value as 0.

All outgoing service flows report this object's
value as 0.

This counter's last discontinuity is the
ifCounterDiscontinuityTime for same ifIndex that
indexes this object."
::= { docsIetfQosServiceFlowStatsEntry 5 }

docsIetfQosServiceFlowPolicedDropPkts OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION "For outgoing service flows, this object counts the
number of Packet Data PDUs classified to this
service flow dropped due to:
(1) implementation-dependent excessive delay
while enforcing the Maximum Sustained
Traffic Rate; or

- (2) UGS packets dropped due to exceeding the Unsolicited Grant Size with a Request/Transmission policy that requires such packets to be dropped.

Expires August 2005

[Page 52]

Classified packets dropped due to other reasons must be counted in ifOutDiscards for interface of this service flow. This object reports 0 for incoming service flows.

This counter's last discontinuity is the ifCounterDiscontinuityTime for same ifIndex that indexes this object."

```
::= { docsIetfQosServiceFlowStatsEntry 6 }
```

docsIetfQosServiceFlowPolicedDelayPkts OBJECT-TYPE

```
SYNTAX          Counter32
MAX-ACCESS      read-only
STATUS          current
DESCRIPTION     "This object counts only outgoing packets delayed in
order to maintain the Maximum Sustained Traffic
Rate. This object will always report a value of 0
for UGS flows because the Maximum Sustained Traffic
Rate does not apply. This object is 0 for incoming
service flows.
```

This counter's last discontinuity is the ifCounterDiscontinuityTime for same ifIndex that indexes this object."

```
::= { docsIetfQosServiceFlowStatsEntry 7 }
```

```
--
```

```
-- Upstream Service Flow Stats Table (CMTS ONLY)
```

```
--
```

docsIetfQosUpstreamStatsTable OBJECT-TYPE

```
SYNTAX          SEQUENCE OF DocsIetfQosUpstreamStatsEntry
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION     "This table describes statistics associated with
upstream service flows. All counted frames must
be received without an Frame Check Sequence (FCS)
error."
```

```
::= { docsIetfQosMIBObjects 5 }
```

docsIetfQosUpstreamStatsEntry OBJECT-TYPE

```
SYNTAX          DocsIetfQosUpstreamStatsEntry
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION     "Describes a set of upstream service flow
statistics. An entry in the table exists for each
upstream Service Flow in a managed device.
```

The ifIndex is an ifType of
docsCableMaclayer(127)."

INDEX {
 ifIndex,

Expires August 2005

[Page 53]

```

        docsIetfQoS SID
    }
    ::= { docsIetfQoSUpstreamStatsTable 1 }

```

```

DocsIetfQoSUpstreamStatsEntry ::= SEQUENCE {
    docsIetfQoS SID                               Unsigned32,
    docsIetfQoSUpstreamFragments                 Counter32,
    docsIetfQoSUpstreamFragDiscards              Counter32,
    docsIetfQoSUpstreamConcatBursts              Counter32
}

```

docsIetfQoS SID OBJECT-TYPE

```

SYNTAX          Unsigned32 (1..16383)
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION     "Identifies a service id for an admitted or active
                upstream service flow."
 ::= { docsIetfQoSUpstreamStatsEntry 1 }

```

docsIetfQoSUpstreamFragments OBJECT-TYPE

```

SYNTAX          Counter32
MAX-ACCESS      read-only
STATUS          current
DESCRIPTION     "The number of fragmentation headers received on an
                upstream service flow, regardless of whether
                the fragment was correctly reassembled into a
                valid packet.

                This counter's last discontinuity is the
                ifCounterDiscontinuityTime for same ifIndex that
                indexes this object."
 ::= { docsIetfQoSUpstreamStatsEntry 2 }

```

docsIetfQoSUpstreamFragDiscards OBJECT-TYPE

```

SYNTAX          Counter32
MAX-ACCESS      read-only
STATUS          current
DESCRIPTION     "The number of upstream fragments discarded and not
                assembled into a valid upstream packet.

                This counter's last discontinuity is the
                ifCounterDiscontinuityTime for same ifIndex that
                indexes this object."
 ::= { docsIetfQoSUpstreamStatsEntry 3 }

```

docsIetfQoSUpstreamConcatBursts OBJECT-TYPE

```

SYNTAX          Counter32
MAX-ACCESS      read-only

```

STATUS	current
DESCRIPTION	"The number of concatenation headers received on an upstream service flow.

Expires August 2005

[Page 54]

```

        This counter's last discontinuity is the
        ifCounterDiscontinuityTime for same ifIndex that
        indexes this object."
 ::= { docsIetfQosUpstreamStatsEntry 4 }

--
-- Dynamic Service Stats Table
--
docsIetfQosDynamicServiceStatsTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF DocsIetfQosDynamicServiceStatsEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION     "This table describes statistics associated with the
                    Dynamic Service Flows in a managed device. "
    ::= { docsIetfQosMIBObjects 6 }

docsIetfQosDynamicServiceStatsEntry OBJECT-TYPE
    SYNTAX          DocsIetfQosDynamicServiceStatsEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION     "Describes a set of dynamic service flow statistics.
                    Two entries exist for each DOCSIS mac layer
                    interface for the upstream and downstream
                    direction. On the CMTS, the downstream direction
                    row indicates messages transmitted or transactions
                    originated by the CMTS. The upstream direction row
                    indicates messages received or transaction
                    originated by the CM. On the CM, the downstream
                    direction row indicates messages received or
                    transactions originated by the CMTS. The upstream
                    direction row indicates messages transmitted by
                    the CM or transactions originated by the CM.
                    The ifIndex is an ifType of
                    docsCableMacLayer(127)."
```

INDEX {

```

        ifIndex,
        docsIetfQosIfDirection
    }
 ::= { docsIetfQosDynamicServiceStatsTable 1 }

DocsIetfQosDynamicServiceStatsEntry ::= SEQUENCE {
    docsIetfQosIfDirection          DocsIetfQosRfMacIfDirection,
    docsIetfQosDSAReqs              Counter32,
    docsIetfQosDSARsps              Counter32,
    docsIetfQosDSAAcks              Counter32,
```

docsIetfQosDSCReqs
docsIetfQosDSCRsps
docsIetfQosDSCAcks
docsIetfQosDSDReqs

Counter32,
Counter32,
Counter32,
Counter32,

Expires August 2005

[Page 55]

docsIetfQosDSDRsps	Counter32,
docsIetfQosDynamicAdds	Counter32,
docsIetfQosDynamicAddFails	Counter32,
docsIetfQosDynamicChanges	Counter32,
docsIetfQosDynamicChangeFails	Counter32,
docsIetfQosDynamicDeletes	Counter32,
docsIetfQosDynamicDeleteFails	Counter32,
docsIetfQosDCCReqs	Counter32,
docsIetfQosDCCRsps	Counter32,
docsIetfQosDCCAcks	Counter32,
docsIetfQosDCCs	Counter32,
docsIetfQosDCCFails	Counter32

}

docsIetfQosIfDirection OBJECT-TYPE

SYNTAX	DocsIetfQosRfMacIfDirection
MAX-ACCESS	not-accessible
STATUS	current
DESCRIPTION	"The direction of interface."

::= { docsIetfQosDynamicServiceStatsEntry 1 }

docsIetfQosDSAREqs OBJECT-TYPE

SYNTAX	Counter32
MAX-ACCESS	read-only
STATUS	current
DESCRIPTION	"The number of Dynamic Service Addition Requests, including retries."

This counter's last discontinuity is the ifCounterDiscontinuityTime for same ifIndex that indexes this object."

::= { docsIetfQosDynamicServiceStatsEntry 2 }

docsIetfQosDSARsps OBJECT-TYPE

SYNTAX	Counter32
MAX-ACCESS	read-only
STATUS	current
DESCRIPTION	"The number of Dynamic Service Addition Responses, including retries."

This counter's last discontinuity is the ifCounterDiscontinuityTime for same ifIndex that indexes this object."

::= { docsIetfQosDynamicServiceStatsEntry 3 }

docsIetfQosDSAACKs OBJECT-TYPE

SYNTAX	Counter32
--------	-----------

MAX-ACCESS	read-only
STATUS	current
DESCRIPTION	"The number of Dynamic Service Addition Acknowledgements, including retries.

Expires August 2005

[Page 56]

This counter's last discontinuity is the
ifCounterDiscontinuityTime for same ifIndex that
indexes this object."

::= { docsIetfQosDynamicServiceStatsEntry 4 }

docsIetfQosDSCReqs OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION "The number of Dynamic Service Change Requests,
including retries.

This counter's last discontinuity is the
ifCounterDiscontinuityTime for same ifIndex that
indexes this object."

::= { docsIetfQosDynamicServiceStatsEntry 5 }

docsIetfQosDSCRsps OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION "The number of Dynamic Service Change Responses,
including retries.

This counter's last discontinuity is the
ifCounterDiscontinuityTime for same ifIndex that
indexes this object."

::= { docsIetfQosDynamicServiceStatsEntry 6 }

docsIetfQosDSCAcks OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION "The number of Dynamic Service Change
Acknowledgements, including retries.

This counter's last discontinuity is the
ifCounterDiscontinuityTime for same ifIndex that
indexes this object."

::= { docsIetfQosDynamicServiceStatsEntry 7 }

docsIetfQosDSDReqs OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION "The number of Dynamic Service Delete Requests,
including retries.

This counter's last discontinuity is the
ifCounterDiscontinuityTime for same ifIndex that
indexes this object."

Expires August 2005

[Page 57]

```
::= { docsIetfQosDynamicServiceStatsEntry 8 }
```

```
docsIetfQosDSDRsps OBJECT-TYPE
```

```
    SYNTAX Counter32
```

```
    MAX-ACCESS read-only
```

```
    STATUS current
```

```
    DESCRIPTION "The number of Dynamic Service Delete Responses,  
including retries.
```

```
    This counter's last discontinuity is the  
    ifCounterDiscontinuityTime for same ifIndex that  
    indexes this object."
```

```
::= { docsIetfQosDynamicServiceStatsEntry 9 }
```

```
docsIetfQosDynamicAdds OBJECT-TYPE
```

```
    SYNTAX Counter32
```

```
    MAX-ACCESS read-only
```

```
    STATUS current
```

```
    DESCRIPTION "The number of successful Dynamic Service Addition  
transactions.
```

```
    This counter's last discontinuity is the  
    ifCounterDiscontinuityTime for same ifIndex that  
    indexes this object."
```

```
::= { docsIetfQosDynamicServiceStatsEntry 10 }
```

```
docsIetfQosDynamicAddFails OBJECT-TYPE
```

```
    SYNTAX Counter32
```

```
    MAX-ACCESS read-only
```

```
    STATUS current
```

```
    DESCRIPTION "The number of failed Dynamic Service Addition  
transactions.
```

```
    This counter's last discontinuity is the  
    ifCounterDiscontinuityTime for same ifIndex that  
    indexes this object."
```

```
::= { docsIetfQosDynamicServiceStatsEntry 11 }
```

```
docsIetfQosDynamicChanges OBJECT-TYPE
```

```
    SYNTAX Counter32
```

```
    MAX-ACCESS read-only
```

```
    STATUS current
```

```
    DESCRIPTION "The number of successful Dynamic Service Change  
transactions.
```

```
    This counter's last discontinuity is the  
    ifCounterDiscontinuityTime for same ifIndex that  
    indexes this object."
```

```
::= { docsIetfQosDynamicServiceStatsEntry 12 }
```

docsIetfQosDynamicChangeFails OBJECT-TYPE

Expires August 2005

[Page 58]

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION "The number of failed Dynamic Service Change transactions.

This counter's last discontinuity is the ifCounterDiscontinuityTime for same ifIndex that indexes this object."
 ::= { docsIetfQosDynamicServiceStatsEntry 13 }

docsIetfQosDynamicDeletes OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION "The number of successful Dynamic Service Delete transactions.

This counter's last discontinuity is the ifCounterDiscontinuityTime for same ifIndex that indexes this object."
 ::= { docsIetfQosDynamicServiceStatsEntry 14 }

docsIetfQosDynamicDeleteFails OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION "The number of failed Dynamic Service Delete transactions.

This counter's last discontinuity is the ifCounterDiscontinuityTime for same ifIndex that indexes this object."
 ::= { docsIetfQosDynamicServiceStatsEntry 15 }

docsIetfQosDCCReqs OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION "The number of Dynamic Channel Change Request messages traversing an interface. This count is nonzero only on downstream direction rows. This count should include number of retries.

This counter's last discontinuity is the ifCounterDiscontinuityTime for same ifIndex that indexes this object."

```
::= { docsIetfQosDynamicServiceStatsEntry 16 }
```

docsIetfQosDCCRsp OBJECT-TYPE

Expires August 2005

[Page 59]

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION "The number of Dynamic Channel Change Response messages traversing an interface. This count is nonzero only on upstream direction rows. This count should include number of retries.

This counter's last discontinuity is the ifCounterDiscontinuityTime for same ifIndex that indexes this object."

::= { docsIetfQosDynamicServiceStatsEntry 17 }

docsIetfQosDCCACKs OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION "The number of Dynamic Channel Change Acknowledgement messages traversing an interface. This count is nonzero only on downstream direction rows. This count should include number of retries.

This counter's last discontinuity is the ifCounterDiscontinuityTime for same ifIndex that indexes this object."

::= { docsIetfQosDynamicServiceStatsEntry 18 }

docsIetfQosDCCs OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION "The number of successful Dynamic Channel Change transactions. This count is nonzero only on downstream direction rows.

This counter's last discontinuity is the ifCounterDiscontinuityTime for same ifIndex that indexes this object."

::= { docsIetfQosDynamicServiceStatsEntry 19 }

docsIetfQosDCCFails OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION "The number of failed Dynamic Channel Change transactions. This count is nonzero only on downstream direction rows.

This counter's last discontinuity is the
ifCounterDiscontinuityTime for same ifIndex that
indexes this object."

Expires August 2005

[Page 60]

```
::= { docsIetfQosDynamicServiceStatsEntry 20 }
```

```
--
```

```
-- Service Flow Log Table (CMTS ONLY)
```

```
--
```

```
docsIetfQosServiceFlowLogTable OBJECT-TYPE
```

```
    SYNTAX          SEQUENCE OF DocsIetfQosServiceFlowLogEntry
```

```
    MAX-ACCESS      not-accessible
```

```
    STATUS          current
```

```
    DESCRIPTION     "This table contains a log of the disconnected  
                    Service Flows in a managed device."
```

```
    ::= { docsIetfQosMIBObjects 7 }
```

```
docsIetfQosServiceFlowLogEntry OBJECT-TYPE
```

```
    SYNTAX          DocsIetfQosServiceFlowLogEntry
```

```
    MAX-ACCESS      not-accessible
```

```
    STATUS          current
```

```
    DESCRIPTION     "The information regarding a single disconnected  
                    service flow."
```

```
    INDEX {  
        docsIetfQosServiceFlowLogIndex  
    }
```

```
    ::= { docsIetfQosServiceFlowLogTable 1 }
```

```
DocsIetfQosServiceFlowLogEntry ::= SEQUENCE {
```

```
    docsIetfQosServiceFlowLogIndex          Unsigned32,  
    docsIetfQosServiceFlowLogIfIndex        InterfaceIndex,  
    docsIetfQosServiceFlowLogSFID           Unsigned32,  
    docsIetfQosServiceFlowLogCmMac          MacAddress,  
    docsIetfQosServiceFlowLogPkts           Counter64,  
    docsIetfQosServiceFlowLogOctets         Counter64,  
    docsIetfQosServiceFlowLogTimeDeleted    TimeStamp,  
    docsIetfQosServiceFlowLogTimeCreated    TimeStamp,  
    docsIetfQosServiceFlowLogTimeActive     Counter32,  
    docsIetfQosServiceFlowLogDirection     DocsIetfQosRfMacIfDirection,  
    docsIetfQosServiceFlowLogPrimary        TruthValue,  
    docsIetfQosServiceFlowLogServiceClassName SnmpAdminString,  
    docsIetfQosServiceFlowLogPolicedDropPkts Counter32,  
    docsIetfQosServiceFlowLogPolicedDelayPkts Counter32,  
    docsIetfQosServiceFlowLogControl        INTEGER  
}
```

```
docsIetfQosServiceFlowLogIndex OBJECT-TYPE
```

```
    SYNTAX          Unsigned32 (1..4294967295)
```

```
    MAX-ACCESS      not-accessible
```

```
    STATUS          current
```

DESCRIPTION "Unique index for a logged service flow."
::= { docsIetfQosServiceFlowLogEntry 1 }

docsIetfQosServiceFlowLogIfIndex OBJECT-TYPE

Expires August 2005

[Page 61]

SYNTAX InterfaceIndex
MAX-ACCESS read-only
STATUS current
DESCRIPTION "The ifIndex of ifType docsCableMacLayer(127)
 on the CMTS where the service flow was present."
::= { docsIetfQosServiceFlowLogEntry 2 }

docsIetfQosServiceFlowLogSFID OBJECT-TYPE
SYNTAX Unsigned32 (1..4294967295)
MAX-ACCESS read-only
STATUS current
DESCRIPTION "The index assigned to the service flow by the CMTS."
::= { docsIetfQosServiceFlowLogEntry 3 }

docsIetfQosServiceFlowLogCmMac OBJECT-TYPE
SYNTAX MacAddress
MAX-ACCESS read-only
STATUS current
DESCRIPTION "The MAC address for the cable modem associated with
 the service flow."
::= { docsIetfQosServiceFlowLogEntry 4 }

docsIetfQosServiceFlowLogPkts OBJECT-TYPE
SYNTAX Counter64
MAX-ACCESS read-only
STATUS current
DESCRIPTION "The number of packets counted on this service flow
 after payload header suppression."
::= { docsIetfQosServiceFlowLogEntry 5 }

docsIetfQosServiceFlowLogOctets OBJECT-TYPE
SYNTAX Counter64
MAX-ACCESS read-only
STATUS current
DESCRIPTION "The number of octets counted on this service flow
 after payload header suppression."
::= { docsIetfQosServiceFlowLogEntry 6 }

docsIetfQosServiceFlowLogTimeDeleted OBJECT-TYPE
SYNTAX TimeStamp
MAX-ACCESS read-only
STATUS current
DESCRIPTION "The value of sysUpTime when the service flow
 was deleted."
::= { docsIetfQosServiceFlowLogEntry 7 }

docsIetfQosServiceFlowLogTimeCreated OBJECT-TYPE

SYNTAX	TimeStamp
MAX-ACCESS	read-only
STATUS	current
DESCRIPTION	"The value of sysUpTime when the service flow

Expires August 2005

[Page 62]

```
        was created."
 ::= { docsIetfQosServiceFlowLogEntry 8 }

docsIetfQosServiceFlowLogTimeActive OBJECT-TYPE
    SYNTAX      Counter32
    UNITS       "seconds"
    MAX-ACCESS   read-only
    STATUS      current
    DESCRIPTION  "The total time that service flow was active."
    ::= { docsIetfQosServiceFlowLogEntry 9 }

docsIetfQosServiceFlowLogDirection OBJECT-TYPE
    SYNTAX      DocsIetfQosRfMacIfDirection
    MAX-ACCESS   read-only
    STATUS      current
    DESCRIPTION  "The value of docsIetfQosServiceFlowDirection
                  for the service flow."
    ::= { docsIetfQosServiceFlowLogEntry 10 }

docsIetfQosServiceFlowLogPrimary OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS   read-only
    STATUS      current
    DESCRIPTION  "The value of docsIetfQosServiceFlowPrimary for the
                  service flow."
    ::= { docsIetfQosServiceFlowLogEntry 11 }

docsIetfQosServiceFlowLogServiceClassName OBJECT-TYPE
    SYNTAX      SnmpAdminString
    MAX-ACCESS   read-only
    STATUS      current
    DESCRIPTION  "The value of docsIetfQosParamSetServiceClassName for
                  the provisioned QOS Parameter Set of the
                  service flow."
    ::= { docsIetfQosServiceFlowLogEntry 12 }

docsIetfQosServiceFlowLogPolicedDropPkts OBJECT-TYPE
    SYNTAX      Counter32
    MAX-ACCESS   read-only
    STATUS      current
    DESCRIPTION  "The final value of
                  docsIetfQosServiceFlowPolicedDropPkts for the
                  service flow."
    ::= { docsIetfQosServiceFlowLogEntry 13 }

docsIetfQosServiceFlowLogPolicedDelayPkts OBJECT-TYPE
    SYNTAX      Counter32
```

MAX-ACCESS	read-only
STATUS	current
DESCRIPTION	"The final value of docsIetfQosServiceFlowPolicedDelayPkts for the

Expires August 2005

[Page 63]

```

        service flow."
 ::= { docsIetfQosServiceFlowLogEntry 14 }

docsIetfQosServiceFlowLogControl OBJECT-TYPE
    SYNTAX          INTEGER {
                        active(1),
                        destroy(6)
                    }

    MAX-ACCESS      read-write
    STATUS          current
    DESCRIPTION     "Setting this object to the value destroy(6) removes
                    this entry from the table.
                    Reading this object return the value active(1)."
```

```

 ::= { docsIetfQosServiceFlowLogEntry 15 }

--
-- Service Class Table (CMTS ONLY)
--
docsIetfQosServiceClassTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF DocsIetfQosServiceClassEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION     "This table describes the set of DOCSIS-QOS
                    Service Classes in a CMTS. "
```

```

 ::= { docsIetfQosMIBObjects 8 }

docsIetfQosServiceClassEntry OBJECT-TYPE
    SYNTAX          DocsIetfQosServiceClassEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION     "A provisioned service class on a CMTS.
                    Each entry defines a template for certain
                    DOCSIS QOS Parameter Set values. When a CM
                    creates or modifies an Admitted QOS Parameter Set for a
                    Service Flow, it may reference a Service Class
                    Name instead of providing explicit QOS Parameter
                    Set values. In this case, the CMTS populates
                    the QOS Parameter Set with the applicable
                    corresponding values from the named Service Class.
                    Subsequent changes to a Service Class row do *not*
                    affect the QOS Parameter Set values of any service flows
                    already admitted.

                    A service class template applies to only
                    a single direction, as indicated in the
                    docsIetfQosServiceClassDirection object.
```

```
INDEX {  
    docsIetfQosServiceClassName  
}
```

Expires August 2005

[Page 64]

```
::= { docsIetfQosServiceClassTable 1 }
```

```
DocsIetfQosServiceClassEntry ::= SEQUENCE {
    docsIetfQosServiceClassName          SnmpAdminString,
    docsIetfQosServiceClassStatus        RowStatus,
    docsIetfQosServiceClassPriority       Integer32,
    docsIetfQosServiceClassMaxTrafficRate DocsIetfQosBitRate,
    docsIetfQosServiceClassMaxTrafficBurst Unsigned32,
    docsIetfQosServiceClassMinReservedRate DocsIetfQosBitRate,
    docsIetfQosServiceClassMinReservedPkt Integer32,
    docsIetfQosServiceClassMaxConcatBurst Integer32,
    docsIetfQosServiceClassNomPollInterval Unsigned32,
    docsIetfQosServiceClassTolPollJitter Unsigned32,
    docsIetfQosServiceClassUnsolicitGrantSize Integer32,
    docsIetfQosServiceClassNomGrantInterval Unsigned32,
    docsIetfQosServiceClassTolGrantJitter Unsigned32,
    docsIetfQosServiceClassGrantsPerInterval Integer32,
    docsIetfQosServiceClassMaxLatency     Unsigned32,
    docsIetfQosServiceClassActiveTimeout Integer32,
    docsIetfQosServiceClassAdmittedTimeout Integer32,
    docsIetfQosServiceClassSchedulingType DocsIetfQosSchedulingType,
    docsIetfQosServiceClassRequestPolicy  OCTET STRING,
    docsIetfQosServiceClassTosAndMask     OCTET STRING,
    docsIetfQosServiceClassTosOrMask      OCTET STRING,
    docsIetfQosServiceClassDirection      DocsIetfQosRfMacIfDirection,
    docsIetfQosServiceClassStorageType    StorageType,
    docsIetfQosServiceClassDSCPOverwrite  DscpOrAny
}
```

docsIetfQosServiceClassName OBJECT-TYPE

```
SYNTAX          SnmpAdminString (SIZE (1..15))
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION     "Service Class Name. DOCSIS specifies that the
                maximum size is 16 ASCII characters including
                a terminating zero. The terminating zero is not
                represented in this SnmpAdminString syntax object.
                "
REFERENCE       "SP-RFiv2.0-I06-040804, Appendix C.2.2.3.4"
::= { docsIetfQosServiceClassEntry 1 }
```

docsIetfQosServiceClassStatus OBJECT-TYPE

```
SYNTAX          RowStatus
MAX-ACCESS      read-create
STATUS          current
DESCRIPTION     "Used to create or delete rows in this table.
                There is no restriction on the ability
```

```
        to change values in this row while the row is active.  
        Inactive rows need not be timed out."  
 ::= { docsIetfQosServiceClassEntry 2 }
```

docsIetfQosServiceClassPriority OBJECT-TYPE

SYNTAX Integer32 (0..7)
MAX-ACCESS read-create
STATUS current
DESCRIPTION "Template for docsIetfQosParamSetPriority."
DEFVAL { 0 }
::= { docsIetfQosServiceClassEntry 3 }

docsIetfQosServiceClassMaxTrafficRate OBJECT-TYPE

SYNTAX DocsIetfQosBitRate
MAX-ACCESS read-create
STATUS current
DESCRIPTION "Template for docsIetfQosParamSetMaxTrafficRate."
DEFVAL { 0 }
::= { docsIetfQosServiceClassEntry 4 }

docsIetfQosServiceClassMaxTrafficBurst OBJECT-TYPE

SYNTAX Unsigned32
MAX-ACCESS read-create
STATUS current
DESCRIPTION "Template for docsIetfQosParamSetMaxTrafficBurst."
DEFVAL { 3044 }
::= { docsIetfQosServiceClassEntry 5 }

docsIetfQosServiceClassMinReservedRate OBJECT-TYPE

SYNTAX DocsIetfQosBitRate
MAX-ACCESS read-create
STATUS current
DESCRIPTION "Template for docsIetfQosParamSetMinReservedRate."
DEFVAL { 0 }
::= { docsIetfQosServiceClassEntry 6 }

docsIetfQosServiceClassMinReservedPkt OBJECT-TYPE

SYNTAX Integer32 (0..65535)
MAX-ACCESS read-create
STATUS current
DESCRIPTION "Template for docsIetfQosParamSetMinReservedPkt."
::= { docsIetfQosServiceClassEntry 7 }

docsIetfQosServiceClassMaxConcatBurst OBJECT-TYPE

SYNTAX Integer32 (0..65535)
MAX-ACCESS read-create
STATUS current
DESCRIPTION "Template for docsIetfQosParamSetMaxConcatBurst."
DEFVAL { 1522 }
::= { docsIetfQosServiceClassEntry 8 }

docsIetfQosServiceClassNomPollInterval OBJECT-TYPE

SYNTAX	Unsigned32
UNITS	"microseconds"
MAX-ACCESS	read-create

Expires August 2005

[Page 66]

```
STATUS          current
DESCRIPTION     "Template for docsIetfQosParamSetNomPollInterval."
DEFVAL          { 0 }
::= { docsIetfQosServiceClassEntry 9 }
```

docsIetfQosServiceClassTolPollJitter OBJECT-TYPE

```
SYNTAX          Unsigned32
UNITS           "microseconds"
MAX-ACCESS      read-create
STATUS          current
DESCRIPTION     "Template for docsIetfQosParamSetTolPollJitter."
DEFVAL          { 0 }
::= { docsIetfQosServiceClassEntry 10 }
```

docsIetfQosServiceClassUnsolicitGrantSize OBJECT-TYPE

```
SYNTAX          Integer32 (0..65535)
MAX-ACCESS      read-create
STATUS          current
DESCRIPTION     "Template for docsIetfQosParamSetUnsolicitGrantSize."
DEFVAL          { 0 }
::= { docsIetfQosServiceClassEntry 11 }
```

docsIetfQosServiceClassNomGrantInterval OBJECT-TYPE

```
SYNTAX          Unsigned32
UNITS           "microseconds"
MAX-ACCESS      read-create
STATUS          current
DESCRIPTION     "Template for docsIetfQosParamSetNomGrantInterval."
DEFVAL          { 0 }
::= { docsIetfQosServiceClassEntry 12 }
```

docsIetfQosServiceClassTolGrantJitter OBJECT-TYPE

```
SYNTAX          Unsigned32
UNITS           "microseconds"
MAX-ACCESS      read-create
STATUS          current
DESCRIPTION     "Template for docsIetfQosParamSetTolGrantJitter."
DEFVAL          { 0 }
::= { docsIetfQosServiceClassEntry 13 }
```

docsIetfQosServiceClassGrantsPerInterval OBJECT-TYPE

```
SYNTAX          Integer32 (0..127)
MAX-ACCESS      read-create
STATUS          current
DESCRIPTION     "Template for docsIetfQosParamSetGrantsPerInterval."
DEFVAL          { 0 }
::= { docsIetfQosServiceClassEntry 14 }
```

docsIetfQosServiceClassMaxLatency OBJECT-TYPE
SYNTAX Unsigned32
UNITS "microseconds"

Expires August 2005

[Page 67]

MAX-ACCESS read-create
STATUS current
DESCRIPTION "Template for docsIetfQosParamSetClassMaxLatency."
REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.2.7.1](#)"
DEFVAL { 0 }
::= { docsIetfQosServiceClassEntry 15 }

docsIetfQosServiceClassActiveTimeout OBJECT-TYPE

SYNTAX Integer32 (0..65535)
UNITS "seconds"
MAX-ACCESS read-create
STATUS current
DESCRIPTION "Template for docsIetfQosParamSetActiveTimeout."
DEFVAL { 0 }
::= { docsIetfQosServiceClassEntry 16 }

docsIetfQosServiceClassAdmittedTimeout OBJECT-TYPE

SYNTAX Integer32 (0..65535)
UNITS "seconds"
MAX-ACCESS read-create
STATUS current
DESCRIPTION "Template for docsIetfQosParamSetAdmittedTimeout."
DEFVAL { 200 }
::= { docsIetfQosServiceClassEntry 17 }

docsIetfQosServiceClassSchedulingType OBJECT-TYPE

SYNTAX DocsIetfQosSchedulingType
MAX-ACCESS read-create
STATUS current
DESCRIPTION "Template for docsIetfQosParamSetSchedulingType."
DEFVAL { bestEffort }
::= { docsIetfQosServiceClassEntry 18 }

docsIetfQosServiceClassRequestPolicy OBJECT-TYPE

SYNTAX OCTET STRING (SIZE(4))
MAX-ACCESS read-create
STATUS current
DESCRIPTION "Template for docsIetfQosParamSetRequestPolicyOct."
DEFVAL { '00000000'H } -- no bits are set
::= { docsIetfQosServiceClassEntry 19 }

docsIetfQosServiceClassTosAndMask OBJECT-TYPE

SYNTAX OCTET STRING (SIZE(1))
MAX-ACCESS read-only
STATUS current
DESCRIPTION "Template for docsIetfQosParamSetTosAndMask.
The IP TOS octet as originally defined in [RFC 791](#)"

has been superseded by the 6 bit Differentiated Services Field (DSField, [RFC 3260](#)) and the 2 bit Explicit Congestion Notification Field (ECN field, [RFC 3168](#)). Network operators SHOULD avoid specifying

values of docsIetfQosServiceClassTosAndMask and docsIetfQosServiceClassTosOrMask which would result in the modification of the ECN bits.

In particular, operators should not use values of docsIetfQosServiceClassTosAndMask which have either of the least-significant two bits set to 0. Similarly, operators should not use values of docsIetfQosServiceClassTosOrMask which have either of the least-significant two bits set to 1."

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.2.6.10](#); [RFC 3168](#), The Addition of Explicit Congestion Notification (ECN) to IP; [RFC 3260](#), New Terminology and Clarifications for Diffserv."

::= { docsIetfQosServiceClassEntry 20 }

docsIetfQosServiceClassTosOrMask OBJECT-TYPE

SYNTAX OCTET STRING (SIZE(1))

MAX-ACCESS read-only

STATUS current

DESCRIPTION "Template for docsIetfQosParamSetTosOrMask. The IP TOS octet as originally defined in [RFC 791](#) has been superseded by the 6 bit Differentiated Services Field (DSField, [RFC 3260](#)) and the 2 bit Explicit Congestion Notification Field (ECN field, [RFC 3168](#)). Network operators SHOULD avoid specifying values of docsIetfQosServiceClassTosAndMask and docsIetfQosServiceClassTosOrMask which would result in the modification of the ECN bits.

In particular, operators should not use values of docsIetfQosServiceClassTosAndMask which have either of the least-significant two bits set to 0. Similarly, operators should not use values of docsIetfQosServiceClassTosOrMask which have either of the least-significant two bits set to 1."

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.2.6.10](#); [RFC 3168](#), The Addition of Explicit Congestion Notification (ECN) to IP; [RFC 3260](#), New Terminology and Clarifications for Diffserv."

::= { docsIetfQosServiceClassEntry 21 }

docsIetfQosServiceClassDirection OBJECT-TYPE

SYNTAX DocsIetfQosRfMacIfDirection

MAX-ACCESS read-create

STATUS	current
DESCRIPTION	"Specifies whether the service class template applies to upstream or downstream service flows."
DEFVAL	{ upstream }

Expires August 2005

[Page 69]

```
::= { docsIetfQosServiceClassEntry 22 }
```

```
docsIetfQosServiceClassStorageType OBJECT-TYPE
```

```
SYNTAX          StorageType
MAX-ACCESS      read-create
STATUS          current
DESCRIPTION     "This object defines whether this row is kept in
                 volatile storage and lost upon reboot or if this
                 row is backed up by non-volatile or permanent
                 storage. 'permanent' entries need not allow
                 writable access to any object."
DEFVAL { nonVolatile }
::= { docsIetfQosServiceClassEntry 23 }
```

```
docsIetfQosServiceClassDSCPOverwrite OBJECT-TYPE
```

```
SYNTAX          DscpOrAny
MAX-ACCESS      read-create
STATUS          current
DESCRIPTION     "This object allows the overwrite of the DSCP
                 field per RFC 3260.

                 If this object is -1 than the corresponding entry's
                 docsIetfQosServiceClassTosAndMask value MUST be
                 'FF'H and docsIetfQosServiceClassTosOrMask MUST be
                 '00'H. Otherwise, this object is in the range of
                 0..63 and the corresponding entry's
                 docsIetfQosServiceClassTosAndMask value MUST be
                 '03'H and the docsIetfQosServiceClassTosOrMask MUST
                 be this object's value shifted left by two bit
                 positions."
REFERENCE       "RFC 3168, The Addition of Explicit Congestion
                 Notification (ECN) to IP;
                 RFC 3260, New Terminology and Clarifications for
                 Diffserv."
DEFVAL          { -1 }
::= { docsIetfQosServiceClassEntry 24 }
```

```
--
```

```
-- Service Class PolicyTable
```

```
--
```

```
docsIetfQosServiceClassPolicyTable OBJECT-TYPE
```

```
SYNTAX          SEQUENCE OF DocsIetfQosServiceClassPolicyEntry
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION     "This table describes the set of DOCSIS-QoS
                 Service Class Policies."
```

This table is an adjunct to the docsDevFilterPolicy table. Entries in docsDevFilterPolicy table can point to specific rows in this table.

This table permits mapping a packet to a service class name of an active service flow so long as a classifier does not exist at a higher priority.

"

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix E.2.1](#)"

::= { docsIetfQosMIBObjects 9 }

docsIetfQosServiceClassPolicyEntry OBJECT-TYPE

SYNTAX DocsIetfQosServiceClassPolicyEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION "A service class name policy entry."

INDEX {
docsIetfQosServiceClassPolicyIndex
}

::= { docsIetfQosServiceClassPolicyTable 1 }

DocsIetfQosServiceClassPolicyEntry ::= SEQUENCE {

docsIetfQosServiceClassPolicyIndex Unsigned32,

docsIetfQosServiceClassPolicyName SnmpAdminString,

docsIetfQosServiceClassPolicyRulePriority Integer32,

docsIetfQosServiceClassPolicyStatus RowStatus,

docsIetfQosServiceClassPolicyStorageType StorageType

}

docsIetfQosServiceClassPolicyIndex OBJECT-TYPE

SYNTAX Unsigned32 (1..2147483647)

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION "Index value to uniquely identify an entry in this table."

::= { docsIetfQosServiceClassPolicyEntry 1 }

docsIetfQosServiceClassPolicyName OBJECT-TYPE

SYNTAX SnmpAdminString

MAX-ACCESS read-create

STATUS current

DESCRIPTION "Service Class Name to identify the name of the service class flow to which the packet should be directed."

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix E.2.1](#)"

::= { docsIetfQosServiceClassPolicyEntry 2 }

docsIetfQosServiceClassPolicyRulePriority OBJECT-TYPE

SYNTAX Integer32 (0..255)

MAX-ACCESS read-create

STATUS	current
DESCRIPTION	"Service Class Policy rule priority for the entry."
REFERENCE	"SP-RFiv2.0-I06-040804, Appendix C.2.1.3.5 "

Expires August 2005

[Page 71]

```
::= { docsIetfQosServiceClassPolicyEntry 3 }
```

```
docsIetfQosServiceClassPolicyStatus OBJECT-TYPE
```

```
SYNTAX          RowStatus
MAX-ACCESS      read-create
STATUS          current
DESCRIPTION     "Used to create or delete rows in this table.
                  This object should not be deleted if it is
                  referenced by an entry in docsDevFilterPolicy.
                  The reference should be deleted first.
                  There is no restriction on the ability
                  to change values in this row while the row is
                  active. Inactive rows need not be timed out."
```

```
::= { docsIetfQosServiceClassPolicyEntry 4 }
```

```
docsIetfQosServiceClassPolicyStorageType OBJECT-TYPE
```

```
SYNTAX          StorageType
MAX-ACCESS      read-create
STATUS          current
DESCRIPTION     "This object defines whether this row is kept in
                  volatile storage and lost upon reboot or if this
                  row is backed up by non-volatile or permanent
                  storage. 'permanent' entries need not allow
                  writable access to any object."
```

```
DEFVAL { nonVolatile }
```

```
::= { docsIetfQosServiceClassPolicyEntry 5 }
```

```
--
```

```
-- Payload Header Suppression(PHS) Table
```

```
--
```

```
docsIetfQosPHSTable OBJECT-TYPE
```

```
SYNTAX          SEQUENCE OF DocsIetfQosPHSEntry
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION     "This table describes the set of payload header
                  suppression entries."
```

```
::= { docsIetfQosMIBObjects 10 }
```

```
docsIetfQosPHSEntry OBJECT-TYPE
```

```
SYNTAX          DocsIetfQosPHSEntry
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION     "A payload header suppression entry.
                  The ifIndex is an ifType of docsCableMacLayer(127).
                  The index docsIetfQosServiceFlowId selects one
                  service flow from the cable MAC layer interface.
                  The docsIetfQosPktClassId index matches an
```

```
        index of the docsIetfQosPktClassTable.  
    "
```

```
INDEX {  
    ifIndex,
```

Expires August 2005

[Page 72]

```

        docsIetfQosServiceFlowId,
        docsIetfQosPktClassId
    }
    ::= { docsIetfQosPHSTable 1 }

```

```

DocsIetfQosPHSEntry ::= SEQUENCE {
    docsIetfQosPHSField      OCTET STRING,
    docsIetfQosPHSMask       OCTET STRING,
    docsIetfQosPHSSize       Integer32,
    docsIetfQosPHSVerify     TruthValue,
    docsIetfQosPHSIndex      Integer32
}

```

```

docsIetfQosPHSField      OBJECT-TYPE
    SYNTAX                 OCTET STRING (SIZE(0..255))
    MAX-ACCESS              read-only
    STATUS                  current
    DESCRIPTION             "Payload header suppression field defines the
                            bytes of the header which must be
                            suppressed/restored by the sending/receiving
                            device.

                            The number of octets in this object should be
                            the same as the value of docsIetfQosPHSSize."
    REFERENCE               "SP-RFiv2.0-I06-040804, Appendix C.2.2.10.1"
    ::= { docsIetfQosPHSEntry 1 }

```

```

docsIetfQosPHSMask       OBJECT-TYPE
    SYNTAX                 OCTET STRING(SIZE(0..32))
    MAX-ACCESS              read-only
    STATUS                  current
    DESCRIPTION             "Payload header suppression mask defines the
                            bit mask which is used in combination with the
                            docsIetfQosPHSField defines which bytes in header
                            must be suppressed/restored by the sending or
                            receiving device.

                            Each bit of this bit mask corresponds to a byte
                            in the docsIetfQosPHSField, with the least
                            significant bit corresponding to the first byte
                            of the docsIetfQosPHSField.

                            Each bit of the bit mask specifies whether or
                            not the corresponding byte should be suppressed
                            in the packet. A bit value of '1' indicates that
                            the byte should be suppressed by the sending
                            device and restored by the receiving device.

```

A bit value of '0' indicates that the byte should not be suppressed by the sending device or restored by the receiving device.

If the bit mask does not contain a bit for each byte in the docsIetfQosPHSField then the bit mask is extended with bit values of '1' to be the necessary length."

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.2.10.3](#)"

::= { docsIetfQosPHSEntry 2 }

docsIetfQosPHSSize OBJECT-TYPE

SYNTAX Integer32 (0..255)

MAX-ACCESS read-only

STATUS current

DESCRIPTION "Payload header suppression size specifies the number of bytes in the header to be suppressed and restored.

The value of this object must match the number of bytes in the docsIetfQosPHSField."

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.2.10.4](#)"

::= { docsIetfQosPHSEntry 3 }

docsIetfQosPHSVerify OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-only

STATUS current

DESCRIPTION "Payload header suppression verification value of 'true' the sender must verify docsIetfQosPHSField is the same as what is contained in the packet to be suppressed."

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.2.10.5](#)"

::= { docsIetfQosPHSEntry 4 }

docsIetfQosPHSIndex OBJECT-TYPE

SYNTAX Integer32 (1..255)

MAX-ACCESS read-only

STATUS current

DESCRIPTION "Payload header suppression index uniquely references the PHS rule for a given service flow."

REFERENCE "SP-RFiv2.0-I06-040804, [Appendix C.2.2.10.2](#)"

::= { docsIetfQosPHSEntry 5 }

--

-- docsIetfQosCmtsMacToSrvFlowTable (CMTS Only)

--

docsIetfQosCmtsMacToSrvFlowTable OBJECT-TYPE

SYNTAX SEQUENCE OF DocsIetfQosCmtsMacToSrvFlowEntry

MAX-ACCESS not-accessible

STATUS	current
DESCRIPTION	"This table provides for referencing the service flows associated with a particular cable modem. This allows for indexing into other docsIetfQos

Expires August 2005

[Page 74]

tables that are indexed by docsIetfQoSServiceFlowId
and ifIndex."

::= { docsIetfQoSMIObjects 11 }

docsIetfQoS CmtsMacToSrvFlowEntry OBJECT-TYPE

SYNTAX DocsIetfQoS CmtsMacToSrvFlowEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION "An entry is created by CMTS for each service flow
connected to this CMTS."

INDEX {
docsIetfQoS CmtsCmMac,
docsIetfQoS CmtsServiceFlowId
}

::= { docsIetfQoS CmtsMacToSrvFlowTable 1 }

DocsIetfQoS CmtsMacToSrvFlowEntry ::= SEQUENCE {

docsIetfQoS CmtsCmMac MacAddress,

docsIetfQoS CmtsServiceFlowId Unsigned32,

docsIetfQoS CmtsIfIndex InterfaceIndex

}

docsIetfQoS CmtsCmMac OBJECT-TYPE

SYNTAX MacAddress

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION "The MAC address for the referenced CM."

::= { docsIetfQoS CmtsMacToSrvFlowEntry 1 }

docsIetfQoS CmtsServiceFlowId OBJECT-TYPE

SYNTAX Unsigned32 (1..4294967295)

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION "An index assigned to a service flow by CMTS."

::= { docsIetfQoS CmtsMacToSrvFlowEntry 2 }

docsIetfQoS CmtsIfIndex OBJECT-TYPE

SYNTAX InterfaceIndex

MAX-ACCESS read-only

STATUS current

DESCRIPTION "The ifIndex of ifType docsCableMacLayer(127)
on the CMTS that is connected to the Cable Modem."

::= { docsIetfQoS CmtsMacToSrvFlowEntry 3 }

--

-- Conformance definitions

--

docsIetfQosConformance OBJECT IDENTIFIER
 ::= { docsIetfQosMIB 2 }

docsIetfQosGroups OBJECT IDENTIFIER

Expires August 2005

[Page 75]

```
::= { docsIetfQosConformance 1 }
```

```
docsIetfQosCompliances OBJECT IDENTIFIER  
    ::= { docsIetfQosConformance 2 }
```

```
docsIetfQosCompliance MODULE-COMPLIANCE
```

```
    STATUS current
```

```
    DESCRIPTION
```

```
        "The compliance statement for MCNS Cable Modems and  
        Cable Modem Termination Systems that implement DOCSIS  
        Service Flows."
```

```
MODULE -- docsIetfQosMIB
```

```
    MANDATORY-GROUPS { docsIetfQosBaseGroup }
```

```
    GROUP docsIetfQosCmtsGroup
```

```
    DESCRIPTION
```

```
        "This group is mandatory for Cable Modem Termination  
        Systems (CMTS) and not implemented for Cable Modems  
        (CM)."
```

```
    GROUP docsIetfQosParamSetGroup
```

```
    DESCRIPTION
```

```
        "This group is mandatory for Cable Modem Termination  
        Systems (CMTS) and Cable Modems. Cable modems only  
        implement objects in this group as read-only."
```

```
    GROUP docsIetfQoSrvClassPolicyGroup
```

```
    DESCRIPTION
```

```
        "This group is optional for Cable Modem Termination  
        Systems (CMTS) and Cable Modems. This group is relevant  
        if policy based service flow classification  
        is implemented. See docsDevPolicyTable in  
        DOCS-CABLE-DEVICE-MIB for more details. "
```

```
    GROUP docsIetfQosServiceClassGroup
```

```
    DESCRIPTION
```

```
        "The is group is mandatory for a Cable Modem Termination  
        System (CMTS) that implement expansion of Service Class  
        Names in a QOS Parameter Set. This group is  
        not implemented on the Cable Modems."
```

```
    OBJECT docsIetfQosPktClassPkts
```

```
    DESCRIPTION
```

```
        "This object only needs to be implemented in entries  
        that are classifying packets and not policing packets."
```

```
    OBJECT docsIetfQosPktClassInetAddressType
```

SYNTAX InetAddressType { ipv4(1) }

DESCRIPTION

"An implementation is only required to support IPv4

Expires August 2005

[Page 76]

address."

OBJECT docsIetfQosPktClassInetSourceAddr

SYNTAX InetAddress (SIZE(4))

DESCRIPTION

"An implementation is only required to support IPv4 address."

OBJECT docsIetfQosPktClassInetSourceMask

SYNTAX InetAddress (SIZE(4))

DESCRIPTION

"An implementation is only required to support IPv4 address."

OBJECT docsIetfQosPktClassInetDestAddr

SYNTAX InetAddress (SIZE(4))

DESCRIPTION

"An implementation is only required to support IPv4 address."

OBJECT docsIetfQosPktClassInetDestMask

SYNTAX InetAddress (SIZE(4))

DESCRIPTION

"An implementation is only required to support IPv4 address."

OBJECT docsIetfQosServiceClassStorageType

SYNTAX StorageType { nonVolatile(3) }

DESCRIPTION

"An implementation is only required to support nonvolatile storage."

OBJECT docsIetfQosServiceClassPolicyStorageType

SYNTAX StorageType { nonVolatile(3) }

DESCRIPTION

"An implementation is only required to support nonvolatile storage."

::= { docsIetfQosCompliances 1 }

docsIetfQosBaseGroup OBJECT-GROUP

OBJECTS {

docsIetfQosPktClassDirection,

docsIetfQosPktClassPriority,

docsIetfQosPktClassIpTosLow,

docsIetfQosPktClassIpTosHigh,

docsIetfQosPktClassIpTosMask,

docsIetfQosPktClassIpProtocol,

```
docsIetfQosPktClassSourcePortStart,  
docsIetfQosPktClassSourcePortEnd,  
docsIetfQosPktClassDestPortStart,
```

Expires August 2005

[Page 77]

docsIetfQosPktClassDestPortEnd,
docsIetfQosPktClassDestMacAddr,
docsIetfQosPktClassDestMacMask,
docsIetfQosPktClassSourceMacAddr,
docsIetfQosPktClassEnetProtocolType,
docsIetfQosPktClassEnetProtocol,
docsIetfQosPktClassUserPriLow,
docsIetfQosPktClassUserPriHigh,
docsIetfQosPktClassVlanId,
docsIetfQosPktClassStateActive,
docsIetfQosPktClassPkts,
docsIetfQosPktClassBitMap,
docsIetfQosPktClassInetAddressType,
docsIetfQosPktClassInetSourceAddr,
docsIetfQosPktClassInetSourceMask,
docsIetfQosPktClassInetDestAddr,
docsIetfQosPktClassInetDestMask,

docsIetfQosServiceFlowSID,
docsIetfQosServiceFlowDirection,
docsIetfQosServiceFlowPrimary,

docsIetfQosServiceFlowPkts,
docsIetfQosServiceFlowOctets,
docsIetfQosServiceFlowTimeCreated,
docsIetfQosServiceFlowTimeActive,
docsIetfQosServiceFlowPHSUnknowns,
docsIetfQosServiceFlowPolicedDropPkts,
docsIetfQosServiceFlowPolicedDelayPkts,

docsIetfQosDSAReqs,
docsIetfQosDSARsps,
docsIetfQosDSAAcks,
docsIetfQosDSCReq,
docsIetfQosDSCRsps,
docsIetfQosDSCAcks,
docsIetfQosDSDReq,
docsIetfQosDSDRsps,
docsIetfQosDynamicAdds,
docsIetfQosDynamicAddFails,
docsIetfQosDynamicChanges,
docsIetfQosDynamicChangeFails,
docsIetfQosDynamicDeletes,
docsIetfQosDynamicDeleteFails,
docsIetfQosDCCReq,
docsIetfQosDCCRsp,
docsIetfQosDCCAcks,

docsIetfQosDCCs,
docsIetfQosDCCFails,

docsIetfQosPHSField,

Expires August 2005

[Page 78]

```
docsIetfQosPHSMask,
docsIetfQosPHSSize,
docsIetfQosPHSVerify,
docsIetfQosPHSIndex
}
STATUS current
DESCRIPTION
    "Group of objects implemented in both Cable Modems and
    Cable Modem Termination Systems."
 ::= { docsIetfQosGroups 1 }
```

```
docsIetfQosParamSetGroup OBJECT-GROUP
    OBJECTS {
        docsIetfQosParamSetServiceClassName,
        docsIetfQosParamSetPriority,
        docsIetfQosParamSetMaxTrafficRate,
        docsIetfQosParamSetMaxTrafficBurst,
        docsIetfQosParamSetMinReservedRate,
        docsIetfQosParamSetMinReservedPkt,
        docsIetfQosParamSetActiveTimeout,
        docsIetfQosParamSetAdmittedTimeout,
        docsIetfQosParamSetMaxConcatBurst,
        docsIetfQosParamSetSchedulingType,
        docsIetfQosParamSetNomPollInterval,
        docsIetfQosParamSetTolPollJitter,
        docsIetfQosParamSetUnsolicitGrantSize,
        docsIetfQosParamSetNomGrantInterval,
        docsIetfQosParamSetTolGrantJitter,
        docsIetfQosParamSetGrantsPerInterval,
        docsIetfQosParamSetTosAndMask,
        docsIetfQosParamSetTosOrMask,
        docsIetfQosParamSetMaxLatency,
        docsIetfQosParamSetRequestPolicyOct,
        docsIetfQosParamSetBitMap
    }
    STATUS current
    DESCRIPTION
        "Group of objects implemented in both Cable Modems and
        Cable Modem Termination Systems for QoS parameter sets."
 ::= { docsIetfQosGroups 2 }
```

```
docsIetfQosCmtsGroup OBJECT-GROUP
    OBJECTS {

        docsIetfQosUpstreamFragments,
        docsIetfQosUpstreamFragDiscards,
```

docsIetfQosUpstreamConcatBursts,

docsIetfQosServiceFlowLogIfIndex,
docsIetfQosServiceFlowLogSFID,

Expires August 2005

[Page 79]

```
docsIetfQosServiceFlowLogCmMac,  
docsIetfQosServiceFlowLogPkts,  
docsIetfQosServiceFlowLogOctets,  
docsIetfQosServiceFlowLogTimeDeleted,  
docsIetfQosServiceFlowLogTimeCreated,  
docsIetfQosServiceFlowLogTimeActive,  
docsIetfQosServiceFlowLogDirection,  
docsIetfQosServiceFlowLogPrimary,  
docsIetfQosServiceFlowLogServiceClassName,  
docsIetfQosServiceFlowLogPolicedDropPkts,  
docsIetfQosServiceFlowLogPolicedDelayPkts,  
docsIetfQosServiceFlowLogControl,
```

```
docsIetfQosCmtsIfIndex -- docsIetfQosCmtsMacToSrvFlowTable required
```

```
}  
STATUS current  
DESCRIPTION  
    "Group of objects implemented only in the CMTS."  
 ::= { docsIetfQosGroups 3 }
```

```
docsIetfQoSrvClassPolicyGroup OBJECT-GROUP  
    OBJECTS {  
        docsIetfQosServiceClassPolicyName,  
        docsIetfQosServiceClassPolicyRulePriority,  
        docsIetfQosServiceClassPolicyStatus,  
        docsIetfQosServiceClassPolicyStorageType  
    }  
    STATUS current  
    DESCRIPTION  
        "Group of objects implemented in both Cable Modems and  
        Cable Modem Termination Systems when supporting policy based  
        service flows."  
 ::= { docsIetfQosGroups 4 }
```

```
docsIetfQosServiceClassGroup OBJECT-GROUP  
    OBJECTS {  
        docsIetfQosServiceClassStatus,  
        docsIetfQosServiceClassPriority,  
        docsIetfQosServiceClassMaxTrafficRate,  
        docsIetfQosServiceClassMaxTrafficBurst,  
        docsIetfQosServiceClassMinReservedRate,  
        docsIetfQosServiceClassMinReservedPkt,  
        docsIetfQosServiceClassMaxConcatBurst,  
        docsIetfQosServiceClassNomPollInterval,  
        docsIetfQosServiceClassTolPollJitter,  
        docsIetfQosServiceClassUnsolicitGrantSize,
```

docsIetfQosServiceClassNomGrantInterval,
docsIetfQosServiceClassTolGrantJitter,
docsIetfQosServiceClassGrantsPerInterval,
docsIetfQosServiceClassMaxLatency,

```
docsIetfQosServiceClassActiveTimeout,
docsIetfQosServiceClassAdmittedTimeout,
docsIetfQosServiceClassSchedulingType,
docsIetfQosServiceClassRequestPolicy,
docsIetfQosServiceClassTosAndMask,
docsIetfQosServiceClassTosOrMask,
docsIetfQosServiceClassDirection,
docsIetfQosServiceClassStorageType,
docsIetfQosServiceClassDSCPOverwrite
}
STATUS current
DESCRIPTION
    "Group of object implemented only in Cable Modem
    Termination Systems when supporting expansion of Service
    Class Names in a QoS Parameter Set"
::= { docsIetfQosGroups 5 }
```

END

Expires August 2005

[Page 81]

6. Security Considerations

This MIB module relates to an agent which will provide metropolitan public internet access. As such, improper manipulation of the objects represented by this MIB module may result in denial of service to a large number of end-users [6]. Manipulation of the docsIetfQosServiceClassTable and docsIetfQosServiceClassPolicyTable may allow an end-user to increase their service levels, or affect other end-users in either a positive or negative manner. In addition, manipulation of docsIetfQosServiceFlowLogControl could allow an attacker to remove logs of packet and byte counts forwarded on a Service Flow. If such logs were used for billing, the attacker would obtain free service.

There are a number of management objects defined in this MIB module with a MAX-ACCESS clause of read-write and/or read-create. Such objects may be considered sensitive or vulnerable in some network environments. The support for SET operations in a non-secure environment without proper protection can have a negative effect on network operations. These are the tables and objects and their sensitivity/vulnerability:

- o The docsIetfQosServiceClassTable provides a template of QoS parameters such as maximum rate limits for a named service class. Changing these parameters would allow an attacker to obtain unauthorized class of service.
- o The docsIetfQosServiceClassPolicyTable applies CMTS vendor proprietary policies for packet forwarding, including dropping, scheduling, notification, or other policies. Changing this table could allow an attacker to deny service to all subscribers of the CMTS or grant the attacker unauthorized forwarding policies.
- o The docsIetfQosServiceFlowLogControl object controls the deletion of entries in the docsIetfQosServiceFlowLogTable, which acts as a historical "detail record" of DOCSIS Service Flow packets and bytes transmitted. Such records may be used for billing purposes, so the unauthorized deletion of the records can result in free service.

Some of the readable objects in this MIB module (i.e., objects with a MAX-ACCESS other than not-accessible) may be considered sensitive or vulnerable in some network environments. It is thus important to control even GET access to these objects and possibly to even encrypt the values of these objects when sending them over the network via SNMP. These are the tables and objects and their

sensitivity/vulnerability:

- o Unauthorized SNMP GET access of the docsIetfQosPktClassTable

Expires August 2005

[Page 82]

or docsIetfQosPHSTable can allow an attacker to learn IP addresses permitted to have enhanced quality of service, for possible spoofing. This table typically contains the IP addresses involved in voice-over-IP sessions, for example.

- o Unauthorized SNMP GET access of the docsIetfQosParamSetTable allows an attacker to learn the names of Service Classes which are permitted to have enhanced QoS service, and the values of that enhanced service. That name can be referenced in an unauthorized DOCSIS cable modem configuration file to obtain enhanced service.
- o Unauthorized SNMP GET access of the docsIetfQosServiceFlowTable can tell an attacker when Service Flows are active, e.g. when a voice-over-IP call is in progress.

Unauthorized SNMP GET access of the docsIetfQosServiceFlowLogTable can expose private information about network usage.

- o Unauthorized SNMP GET access of the docsIetfQosServiceFlowStatsTable, docsIetfQosUpstreamStatsTable, docsIetfQosDynamicServiceStatsTable, docsIetfQosServiceFlowLogTable, and docsIetfQosCmtsMacToSrvFlowTable can tell an attacker the volume of traffic to and from any Service Flow in the system, resulting in loss of privacy of the amount and direction of data transfer.

SNMP versions prior to SNMPv3 did not include adequate security. Even if the network itself is secure (for example by using IPSec), even then, there is no control as to who on the secure network is allowed to access and GET/SET (read/change/create/delete) the objects in this MIB module. It is RECOMMENDED that implementers consider the security features as provided by the SNMPv3 framework (see [15], section 8), including full support for the SNMPv3 cryptographic mechanisms (for authentication and privacy). Further, deployment of SNMP versions prior to SNMPv3 is NOT RECOMMENDED. Instead, it is RECOMMENDED to deploy SNMPv3 and to enable cryptographic security. It is then a customer/operator responsibility to ensure that the SNMP entity giving access to an instance of this MIB module, is properly configured to give access to the objects only to those principals (users) that have legitimate rights to indeed GET or SET (change/create/delete) them.

Expires August 2005

[Page 83]

7. IANA Considerations

The MIB module in this document uses the following IANA-assigned OBJECT IDENTIFIER values recorded in the SMI Numbers registry:

Descriptor	OBJECT IDENTIFIER Value
-----	-----
docsIetfQosMIB	{ mib-2 xx }

Editor's Note (to be removed prior to publication): the IANA is requested to assign a value for xx under the mib-2 subtree and to record the assignment in the SMI Numbers registry. When the assignment has been made, the RFC Editor is asked to replace xx (here and in the MIB module) with the assigned value and to remove this note.

8. Acknowledgement

Funding for the RFC Editor function is currently provided by the Internet Society.

The authors gratefully acknowledge the comments and suggestions of the IP over Cable Data Network (IPCDN) Working Group (especially the co-chairs Richard Woundy & Jean-Francois Mule) as well as the contributions of the Operation and Management Area Director, Bert Wijnen.

9. Normative References

- [1] McCloghrie, K., Perkins, D. and J. Schoenwaelder, "Structure of Management Information for Version 2 (SMIv2)", STD 58, [RFC 2578](#), April 1999.
- [2] McCloghrie, K., Perkins, D. and J. Schoenwaelder, "Textual Conventions for SMIv2", STD 58, [RFC 2579](#), April 1999.
- [3] McCloghrie, K., Perkins, D. and J. Schoenwaelder, "Conformance Statements for SMIv2", STD 58, [RFC 2580](#), April 1999.
- [4] "Data-Over-Cable Service Interface Specifications: Radio Frequency Interface Specification SP-RFIV2.0-I06-040804", DOCSIS, August 2004, <http://www.cablelabs.com/specifications/archives/>.

- [5] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [RFC2119](#), March 1997.

- [6] St. Johns, M., "Cable Device Management Information Base for DOCSIS compliant Cable Modems and Cable Modem Termination Systems", [RFC 2669](#), August 1999.

```
*****
* NOTES TO RFC Editor (to be removed prior to publication) *
*
*   The I-D <draft-ietf-ipcdn-device-mibv2-06.txt> (or a
* successor) is expected to eventually replace RFC 2669.
* If that draft (or a successor) is published as an RFC
* prior to or concurrently with this document, then the
* normative reference [6] should be updated to
* point to the replacement RFC.
*****
```

- [7] St. Johns, M., "Radio Frequency (RF) Interface Management Information Base for MCNS/DOCSIS compliant RF interfaces", [RFC 2670](#), August 1999.

```
*****
* NOTES TO RFC Editor (to be removed prior to publication) *
*
*   The I-D <draft-ietf-ipcdn-docs-rfmibv2-12.txt> (or a
* successor) is expected to eventually replace RFC 2670.
* If that draft (or a successor) is published as an RFC
* prior to or concurrently with this document, then the
* normative reference [7] should be updated to
* point to the replacement RFC.
*****
```

- [8] Daniele, M. et. al., "Textual Conventions for Internet Network Addresses", [RFC 3291](#), May 2002.

```
*****
* NOTES TO RFC Editor (to be removed prior to publication) *
*
*   The I-D <draft-ietf-ops-rfc3291bis-01.txt> (or a
* successor) is expected to eventually replace RFC 3291.
* If that draft (or a successor) is published as an RFC
* prior to or concurrently with this document, then the
* normative reference [8] should be updated to
* point to the replacement RFC.
*****
```

- [9] D. Grossman, "New Terminology and Clarifications for Diffserv", [RFC 3260](#), April 2002.

- [10] Ramakrishnan, K., Floyd, S. and D. Black, "The Addition of

Explicit Congestion Notification (ECN) to IP", [RFC 3168](#),
September 2001.

Expires August 2005

[Page 85]

- [11] McCloghrie, K., and F. Kastenholz, "The Interfaces Group MIB", [RFC 2863](#), June 2000.
- [12] Harrington, D., Presuhn, R., and B. Wijnen, "An Architecture for Describing Simple Network Management Protocol (SNMP) Management Frameworks", STD 62, [RFC 3411](#), December 2002.
- [13] Baker, F., Chan, K., and A. Smith, "Management Information Base for the Differentiated Services Architecture", [RFC 3289](#), May 2002.
- [14] Postel, J., "Internet Protocol", [RFC 791](#), DARPA, September 1981.

10. Informative References

- [15] Case, J., Mundy, R., Partain, D. and B. Stewart, "Introduction and Applicability Statements for Internet-Standard Management Framework", [RFC 3410](#), December 2002.

Expires August 2005

[Page 86]

11. Author's Address

Michael Patrick
Motorola Broadband Communications Sector
111 Locke Drive
Marlborough, MA 01752
Phone: (508) 786-7563
Email: michael.patrick@motorola.com

William Murwin
Motorola Broadband Communications Sector
111 Locke Drive
Marlborough, MA 01752
Phone: (508) 786-7594
Email: w.murwin@motorola.com

Expires August 2005

[Page 87]

12. Disclaimer of Validity

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

13. Intellectual Property

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at ietf-ipr@ietf.org.

14. Copyright Statement

Copyright (C) The Internet Society (2005). This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

Expires August 2005

[Page 88]