

IP Version 6 Addressing Architecture

<[draft-ietf-ipngwg-addr-arch-v2-05.txt](#)>

Status of this Memo

This document is an Internet-Draft. Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet- Drafts as reference material or to cite them other than as ``work in progress.''

To learn the current status of any Internet-Draft, please check the ``1id-abstracts.txt' listing contained in the Internet- Drafts Shadow Directories on ds.internic.net (US East Coast), nic.nordu.net (Europe), ftp.isi.edu (US West Coast), or munnari.oz.au (Pacific Rim).

This Internet Draft expires May 10, 1998.

Abstract

This specification defines the addressing architecture of the IP Version 6 protocol [[IPv6](#)]. The document includes the IPv6 addressing model, text representations of IPv6 addresses, definition of IPv6 unicast addresses, anycast addresses, and multicast addresses, and an IPv6 node's required addresses.

Table of Contents

1. Introduction.....	3
2. IPv6 Addressing.....	3
2.1 Addressing Model.....	4
2.2 Text Representation of Addresses.....	4
2.3 Text Representation of Address Prefixes.....	5
2.4 Address Type Representation.....	6
2.5 Unicast Addresses.....	8
2.5.1 Interface Identifiers.....	9
2.5.2 The Unspecified Address.....	10
2.5.3 The Loopback Address.....	10
2.5.4 IPv6 Addresses with Embedded IPv4 Addresses.....	10
2.5.5 NSAP Addresses.....	11
2.5.6 IPX Addresses.....	11
2.5.7 Aggregatable Global Unicast Addresses.....	12
2.5.8 Local-use IPv6 Unicast Addresses.....	12
2.6 Anycast Addresses.....	13
2.6.1 Required Anycast Address.....	14
2.7 Multicast Addresses.....	15
2.7.1 Pre-Defined Multicast Addresses.....	16
2.7.2 Assignment of New IPv6 Multicast Addresses.....	18
2.8 A Node's Required Addresses.....	18
3. Security Considerations.....	19
APPENDIX A: Creating EUI-64 based Interface Identifiers.....	20
APPENDIX B: ABNF Description of Text Representations.....	22
APPENDIX C: CHANGES FROM RFC-1884	23
REFERENCES.....	24
AUTHOR'S ADDRESSES.....	25

1.0 INTRODUCTION

This specification defines the addressing architecture of the IP Version 6 protocol. It includes a detailed description of the currently defined address formats for IPv6 [[IPV6](#)].

The authors would like to acknowledge the contributions of Paul Francis, Scott Bradner, Jim Bound, Brian Carpenter, Matt Crawford, Deborah Estrin, Roger Fajman, Bob Fink, Peter Ford, Bob Gilligan, Dmitry Haskin, Tom Harsch, Christian Huitema, Tony Li, Greg Minshall, Thomas Narten, Erik Nordmark, Yakov Rekhter, Bill Simpson, and Sue Thomson.

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC 2119](#)].

2.0 IPv6 ADDRESSING

IPv6 addresses are 128-bit identifiers for interfaces and sets of interfaces. There are three types of addresses:

Unicast: An identifier for a single interface. A packet sent to a unicast address is delivered to the interface identified by that address.

Anycast: An identifier for a set of interfaces (typically belonging to different nodes). A packet sent to an anycast address is delivered to one of the interfaces identified by that address (the "nearest" one, according to the routing protocols' measure of distance).

Multicast: An identifier for a set of interfaces (typically belonging to different nodes). A packet sent to a multicast address is delivered to all interfaces identified by that address.

There are no broadcast addresses in IPv6, their function being superseded by multicast addresses.

In this document, fields in addresses are given a specific name, for example "subscriber". When this name is used with the term "ID" for identifier after the name (e.g., "subscriber ID"), it refers to the contents of the named field. When it is used with the term "prefix" (e.g. "subscriber prefix") it refers to all of the address up to and including this field.

In IPv6, all zeros and all ones are legal values for any field, unless specifically excluded. Specifically, prefixes may contain zero-valued fields or end in zeros.

2.1 Addressing Model

IPv6 addresses of all types are assigned to interfaces, not nodes. An IPv6 unicast address refers to a single interface. Since each interface belongs to a single node, any of that node's interfaces' unicast addresses may be used as an identifier for the node.

All interfaces are required to have at least one link-local unicast address (see [section 2.8](#) for additional required addresses). A single interface may also be assigned multiple IPv6 addresses of any type (unicast, anycast, and multicast) or scope. Unicast addresses with scope greater than link-scope are not needed for interfaces that are not used as the origin or destination of any IPv6 packets to or from non-neighbors. This is sometimes convenient for point-to-point interfaces. There is one exception to this addressing model:

An unicast address or a set of unicast addresses may be assigned to multiple physical interfaces if the implementation treats the multiple physical interfaces as one interface when presenting it to the internet layer. This is useful for load-sharing over multiple physical interfaces.

Currently IPv6 continues the IPv4 model that a subnet prefix is associated with one link. Multiple subnet prefixes may be assigned to the same link.

2.2 Text Representation of Addresses

There are three conventional forms for representing IPv6 addresses as text strings:

1. The preferred form is x:x:x:x:x:x:x:x, where the 'x's are the hexadecimal values of the eight 16-bit pieces of the address. Examples:

FEDC:BA98:7654:3210:FEDC:BA98:7654:3210

1080:0:0:0:8:800:200C:417A

Note that it is not necessary to write the leading zeros in an individual field, but there must be at least one numeral in every

field (except for the case described in 2.).

2. Due to some methods of allocating certain styles of IPv6 addresses, it will be common for addresses to contain long strings of zero bits. In order to make writing addresses containing zero bits easier a special syntax is available to compress the zeros. The use of "::" indicates multiple groups of 16-bits of zeros. The "::" can only appear once in an address. The "::" can also be used to compress the leading and/or trailing zeros in an address.

For example the following addresses:

1080:0:0:0:8:800:200C:417A	a unicast address
FF01:0:0:0:0:0:0:101	a multicast address
0:0:0:0:0:0:0:1	the loopback address
0:0:0:0:0:0:0:0	the unspecified addresses

may be represented as:

1080::8:800:200C:417A	a unicast address
FF01::101	a multicast address
::1	the loopback address
::	the unspecified addresses

3. An alternative form that is sometimes more convenient when dealing with a mixed environment of IPv4 and IPv6 nodes is x:x:x:x:x:x:d.d.d.d, where the 'x's are the hexadecimal values of the six high-order 16-bit pieces of the address, and the 'd's are the decimal values of the four low-order 8-bit pieces of the address (standard IPv4 representation). Examples:

0:0:0:0:0:0:13.1.68.3

0:0:0:0:0:FFFF:129.144.52.38

or in compressed form:

::13.1.68.3

::FFFF:129.144.52.38

2.3 Text Representation of Address Prefixes

The text representation of IPv6 address prefixes is similar to the way IPv4 addresses prefixes are written in CIDR notation. An IPv6 address prefix is represented by the notation:

ipv6-address/prefix-length

where

ipv6-address is an IPv6 address in any of the notations listed in [section 2.2](#).

prefix-length is a decimal value specifying how many of the leftmost contiguous bits of the address comprise the prefix.

For example, the following are legal representations of the 60-bit prefix 12AB00000000CD3 (hexadecimal):

```
12AB:0000:0000:CD30:0000:0000:0000:0000/60
12AB::CD30:0:0:0:0/60
12AB:0:0:CD30::/60
```

The following are NOT legal representations of the above prefix:

12AB:0:0:CD3/60 may drop leading zeros, but not trailing zeros, within any 16-bit chunk of the address

12AB::CD30/60 address to left of "/" expands to
12AB:0000:0000:0000:0000:000:0000:CD30

12AB::CD3/60 address to left of "/" expands to
12AB:0000:0000:0000:0000:000:0000:0CD3

When writing both a node address and a prefix of that node address (e.g., the node's subnet prefix), the two can be combined as follows:

the node address 12AB:0:0:CD30:123:4567:89AB:CDEF
and its subnet number 12AB:0:0:CD30::/60

can be abbreviated as 12AB:0:0:CD30:123:4567:89AB:CDEF/60

[2.4](#) Address Type Representation


The specific type of an IPv6 address is indicated by the leading bits in the address. The variable-length field comprising these leading bits is called the Format Prefix (FP). The initial allocation of these prefixes is as follows:

Allocation	Prefix (binary)	Fraction of Address Space
-----	-----	-----
Reserved	0000 0000	1/256
Unassigned	0000 0001	1/256
Reserved for NSAP Allocation	0000 001	1/128
Reserved for IPX Allocation	0000 010	1/128
Unassigned	0000 011	1/128
Unassigned	0000 1	1/32
Unassigned	0001	1/16
Aggregatable Global Unicast Addresses	001	1/8
Unassigned	010	1/8
Unassigned	011	1/8
Unassigned	100	1/8
Unassigned	101	1/8
Unassigned	110	1/8
Unassigned	1110	1/16
Unassigned	1111 0	1/32
Unassigned	1111 10	1/64
Unassigned	1111 110	1/128
Unassigned	1111 1110 0	1/512
Link-Local Unicast Addresses	1111 1110 10	1/1024
Site-Local Unicast Addresses	1111 1110 11	1/1024
Multicast Addresses	1111 1111	1/256

Notes:

- (1) The "unspecified address" (see [section 2.5.2](#)), the loopback address (see [section 2.5.3](#)), and the IPv6 Addresses with Embedded IPv4 Addresses (see [section 2.5.4](#)), are assigned out of the 0000 0000 format prefix space.
- (2) The format prefixes 001 through 111, except for Multicast Addresses (1111 1111), are all required to have to have 64-bit interface identifiers in EUI-64 format. See [section 2.5.1](#) for definitions.

This allocation supports the direct allocation of aggregation addresses, local use addresses, and multicast addresses. Space is reserved for NSAP addresses and IPX addresses. The remainder of the address space is unassigned for future use. This can be used for

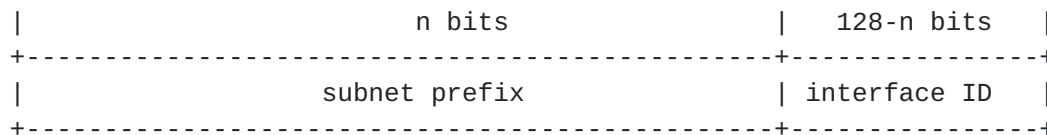

Still more sophisticated hosts may be aware of other hierarchical boundaries in the unicast address. Though a very simple router may have no knowledge of the internal structure of IPv6 unicast addresses, routers will more generally have knowledge of one or more of the hierarchical boundaries for the operation of routing protocols. The known boundaries will differ from router to router, depending on what positions the router holds in the routing hierarchy.

2.5.1 Interface Identifiers

Interface identifiers in IPv6 unicast addresses are used to identify interfaces on a link. They are required to be unique on that link. They may also be unique over a broader scope. In many cases an interface's identifier will be the same as that interface's link-layer address. The same interface identifier may be used on multiple interfaces on a single node.

Note that the use of the same interface identifier on multiple interfaces of a single node does not affect the interface identifier's global uniqueness or each IPv6 addresses global uniqueness created using that interface identifier.

In a number of the format prefixes (see [section 2.4](#)) Interface IDs are required to be 64 bits long and to be constructed in IEEE EUI-64 format [[EUI64](#)]. EUI-64 based Interface identifiers may have global scope when a global token is available (e.g., IEEE 48bit MAC) or may have local scope where a global token is not available (e.g., serial links, tunnel end-points, etc.). It is required that the "u" bit (universal/local bit in IEEE EUI-64 terminology) be inverted when forming the interface identifier from the EUI-64. The "u" bit is set to one (1) to indicate global scope, and it is set to zero (0) to indicate local scope. The first three octets in binary of an EUI-64 identifier are as follows:

```

      0      0 0      1 1      2
|0      7 8      5 6      3|
+----+----+----+----+----+----+
|cccc|ccug|cccc|cccc|cccc|cccc|
+----+----+----+----+----+----+
```

written in Internet standard bit-order , where "u" is the universal/local bit, "g" is the individual/group bit, and "c" are the bits of the company_id. [Appendix A](#): "Creating EUI-64 based Interface Identifiers" provides examples on the creation of different EUI-64

based interface identifiers.

This use of the universal/local bit in the IEEE EUI-64 identifier is to allow development of future technology that can take advantage of interface identifiers with global scope.

The details of forming interface identifiers are defined in the appropriate "IPv6 over <link>" specification such as "IPv6 over Ethernet" [[ETHER](#)], "IPv6 over FDDI" [[FDDI](#)], etc.

2.5.2 The Unspecified Address

The address 0:0:0:0:0:0:0:0 is called the unspecified address. It must never be assigned to any node. It indicates the absence of an address. One example of its use is in the Source Address field of any IPv6 packets sent by an initializing host before it has learned its own address.

The unspecified address must not be used as the destination address of IPv6 packets or in IPv6 Routing Headers.

2.5.3 The Loopback Address

The unicast address 0:0:0:0:0:0:0:1 is called the loopback address. It may be used by a node to send an IPv6 packet to itself. It may never be assigned to any physical interface. It may be thought of as being associated with a virtual interface (e.g., the loopback interface).

The loopback address must not be used as the source address in IPv6 packets that are sent outside of a single node. An IPv6 packet with a destination address of loopback must never be sent outside of a single node and must never be forwarded by an IPv6 router.

2.5.4 IPv6 Addresses with Embedded IPv4 Addresses

The IPv6 transition mechanisms [[TRAN](#)] include a technique for hosts and routers to dynamically tunnel IPv6 packets over IPv4 routing infrastructure. IPv6 nodes that utilize this technique are assigned special IPv6 unicast addresses that carry an IPv4 address in the low-order 32-bits. This type of address is termed an "IPv4-compatible IPv6 address" and has the format:

80 bits	16		32 bits	
+-----+-----+-----+-----+				
0000.....0000	0000		IPv4 address	
+-----+-----+-----+-----+				

A second type of IPv6 address which holds an embedded IPv4 address is also defined. This address is used to represent the addresses of IPv4-only nodes (those that *do not* support IPv6) as IPv6 addresses. This type of address is termed an "IPv4-mapped IPv6 address" and has the format:

80 bits	16		32 bits	
+-----+-----+-----+-----+				
0000.....0000	FFFF		IPv4 address	
+-----+-----+-----+-----+				

[2.5.5 NSAP Addresses](#)

This mapping of NSAP address into IPv6 addresses is defined in [\[NSAP\]](#). This document recommends that network implementors who have planned or deployed an OSI NSAP addressing plan, and who wish to deploy or transition to IPv6, should redesign a native IPv6 addressing plan to meet their needs. However, it also defines a set of mechanisms for the support of OSI NSAP addressing in an IPv6 network. These mechanisms are the ones that must be used if such support is required. This document also defines a mapping of IPv6 addresses within the OSI address format, should this be required.

[2.5.6 IPX Addresses](#)

This mapping of IPX address into IPv6 addresses is as follows:

7		121 bits	
+-----+-----+-----+-----+			
0000010		to be defined	
+-----+-----+-----+-----+			

The draft definition, motivation, and usage are under study.

2.5.7 Aggregatable Global Unicast Addresses

The global aggregatable global unicast address is defined in [AGGR]. This address format is designed to support both the current provider based aggregation and a new type of aggregation called exchanges. The combination will allow efficient routing aggregation for both sites which connect directly to providers and who connect to exchanges. Sites will have the choice to connect to either type of aggregation point.

The IPv6 aggregatable global unicast address format is as follows:

3	13	32	16	64 bits
+---+	+-----+	+-----+	+-----+	+-----+
FP	TLA	NLA ID	SLA ID	Interface ID
ID				
+---+	+-----+	+-----+	+-----+	+-----+

Where

001	Format Prefix (3 bit) for Aggregatable Global Unicast Addresses
TLA ID	Top-Level Aggregation Identifier
NLA ID	Next-Level Aggregation Identifier
SLA ID	Site-Level Aggregation Identifier
INTERFACE ID	Interface Identifier

The contents, field sizes, and assignment rules are defined in [AGGR].

2.5.8 Local-Use IPv6 Unicast Addresses

There are two types of local-use unicast addresses defined. These are Link-Local and Site-Local. The Link-Local is for use on a single link and the Site-Local is for use in a single site. Link-Local addresses have the following format:

10	
bits	54 bits 64 bits
+-----+	+-----+
1111111010	0 interface ID
+-----+	+-----+

Link-Local addresses are designed to be used for addressing on a single link for purposes such as auto-address configuration, neighbor discovery, or when no routers are present.

Note that in, the worst case, the prefix P of an anycast set may be the null prefix, i.e., the members of the set may have no topological locality. In that case, the anycast address must be advertised as a separate routing entry throughout the entire internet, which presents

a severe scaling limit on how many such "global" anycast sets may be supported. Therefore, it is expected that support for global anycast sets may be unavailable or very restricted.

One expected use of anycast addresses is to identify the set of routers belonging to an organization providing internet service. Such addresses could be used as intermediate addresses in an IPv6 Routing header, to cause a packet to be delivered via a particular aggregation or sequence of aggregations. Some other possible uses are to identify the set of routers attached to a particular subnet, or the set of routers providing entry into a particular routing domain.

There is little experience with widespread, arbitrary use of internet anycast addresses, and some known complications and hazards when using them in their full generality [[ANYCST](#)]. Until more experience has been gained and solutions agreed upon for those problems, the following restrictions are imposed on IPv6 anycast addresses:

- o An anycast address must not be used as the source address of an IPv6 packet.
- o An anycast address must not be assigned to an IPv6 host, that is, it may be assigned to an IPv6 router only.

2.6.1 Required Anycast Address

The Subnet-Router anycast address is predefined. Its format is as follows:

n bits	128-n bits
subnet prefix	0000000000000000

The "subnet prefix" in an anycast address is the prefix which identifies a specific link. This anycast address is syntactically the same as a unicast address for an interface on the link with the interface identifier set to zero.

Packets sent to the Subnet-Router anycast address will be delivered to one router on the subnet. All routers are required to support the Subnet-Router anycast addresses for the subnets which they have interfaces.

The subnet-router anycast address is intended to be used for applications where a node needs to communicate with one of a set of routers on a remote subnet. For example when a mobile host needs to communicate with one of the mobile agents on its "home" subnet.

2.7 Multicast Addresses

An IPv6 multicast address is an identifier for a group of nodes. A node may belong to any number of multicast groups. Multicast addresses have the following format:

8	4	4	112 bits

11111111	flgs	scop	group ID

11111111 at the start of the address identifies the address as being a multicast address.

flgs is a set of 4 flags:

0	0	0	T
---	---	---	---

The high-order 3 flags are reserved, and must be initialized to 0.

T = 0 indicates a permanently-assigned ("well-known") multicast address, assigned by the global internet numbering authority.

T = 1 indicates a non-permanently-assigned ("transient") multicast address.

scop is a 4-bit multicast scope value used to limit the scope of the multicast group. The values are:

- 0 reserved
- 1 node-local scope
- 2 link-local scope
- 3 (unassigned)
- 4 (unassigned)
- 5 site-local scope
- 6 (unassigned)
- 7 (unassigned)
- 8 organization-local scope
- 9 (unassigned)
- A (unassigned)

B (unassigned)
C (unassigned)
D (unassigned)
E global scope
F reserved

group ID identifies the multicast group, either permanent or transient, within the given scope.

The "meaning" of a permanently-assigned multicast address is independent of the scope value. For example, if the "NTP servers group" is assigned a permanent multicast address with a group ID of 101 (hex), then:

FF01:0:0:0:0:0:0:101 means all NTP servers on the same node as the sender.

FF02:0:0:0:0:0:0:101 means all NTP servers on the same link as the sender.

FF05:0:0:0:0:0:0:101 means all NTP servers at the same site as the sender.

FF0E:0:0:0:0:0:0:101 means all NTP servers in the internet.

Non-permanently-assigned multicast addresses are meaningful only within a given scope. For example, a group identified by the non-permanent, site-local multicast address FF15:0:0:0:0:0:0:101 at one site bears no relationship to a group using the same address at a different site, nor to a non-permanent group using the same group ID with different scope, nor to a permanent group with the same group ID.

Multicast addresses must not be used as source addresses in IPv6 packets or appear in any routing header.

2.7.1 Pre-Defined Multicast Addresses

The following well-known multicast addresses are pre-defined:

Reserved Multicast Addresses: FF00:0:0:0:0:0:0:0
 FF01:0:0:0:0:0:0:0
 FF02:0:0:0:0:0:0:0
 FF03:0:0:0:0:0:0:0
 FF04:0:0:0:0:0:0:0


```
FF05:0:0:0:0:0:0:0
FF06:0:0:0:0:0:0:0
FF07:0:0:0:0:0:0:0
FF08:0:0:0:0:0:0:0
FF09:0:0:0:0:0:0:0
FF0A:0:0:0:0:0:0:0
FF0B:0:0:0:0:0:0:0
FF0C:0:0:0:0:0:0:0
FF0D:0:0:0:0:0:0:0
FF0E:0:0:0:0:0:0:0
FF0F:0:0:0:0:0:0:0
```

The above multicast addresses are reserved and shall never be assigned to any multicast group.

All Nodes Addresses: FF01:0:0:0:0:0:0:1
 FF02:0:0:0:0:0:0:1

The above multicast addresses identify the group of all IPv6 nodes, within scope 1 (node-local) or 2 (link-local).

All Routers Addresses: FF01:0:0:0:0:0:0:2
 FF02:0:0:0:0:0:0:2
 FF05:0:0:0:0:0:0:2

The above multicast addresses identify the group of all IPv6 routers, within scope 1 (node-local), 2 (link-local), or 5 (site-local).

Solicited-Node Address: FF02:0:0:0:0:1:FFXX:XXXX

The above multicast address is computed as a function of a node's unicast and anycast addresses. The solicited-node multicast address is formed by taking the low-order 24 bits of the address (unicast or anycast) and appending those bits to the prefix FF02:0:0:0:0:1:FF00::/104 resulting in a multicast address in the range

```
FF02:0:0:0:0:1:FF00:0000
```

to

```
FF02:0:0:0:0:1:FFFF:FFFF
```

For example, the solicited node multicast address corresponding to the IPv6 address 4037::01:800:200E:8C6C is FF02::1:FF0E:8C6C. IPv6 addresses that differ only in the high-order bits, e.g. due to multiple high-order prefixes associated with different aggregations, will map to the same solicited-node address thereby reducing the

- o Its Link-Local Address for each interface
- o Assigned Unicast Addresses
- o Loopback Address
- o All-Nodes Multicast Addresses
- o Solicited-Node Multicast Address for each of its assigned unicast and anycast addresses
- o Multicast Addresses of all other groups to which the host belongs.

A router is required to recognize all addresses that a host is required to recognize, plus the following addresses as identifying itself:

- o The Subnet-Router anycast addresses for the interfaces it is configured to act as a router on.
- o All other Anycast addresses with which the router has been configured.
- o All-Routers Multicast Addresses
- o Multicast Addresses of all other groups to which the router belongs.

The only address prefixes which should be predefined in an implementation are the:

- o Unspecified Address
- o Loopback Address
- o Multicast Prefix (FF)
- o Local-Use Prefixes (Link-Local and Site-Local)
- o Pre-Defined Multicast Addresses
- o IPv4-Compatible Prefixes

Implementations should assume all other addresses are unicast unless specifically configured (e.g., anycast addresses).

3. Security Considerations

IPv6 addressing documents do not have any direct impact on Internet infrastructure security. Authentication of IPv6 packets is defined in [[AUTH](#)].

APPENDIX A : Creating EUI-64 based Interface Identifiers

Depending on the characteristics of a specific link or node there are a number of approaches for creating EUI-64 based interface identifiers. This appendix describes some of these approaches.

Links or Nodes with EUI-64 Identifiers

The only change needed to transform an EUI-64 identifier to an interface identifier is to invert the "u" (universal/local) bit. For example, a globally unique EUI-64 identifier of the form:

0	1 1	3 3	4 4	6
0	5 6	1 2	7 8	3
+-----+-----+-----+-----+-----+				
cccccc0gcccccccc	ccccccccmmmmmmmmmm	mmmmmmmmmmmmmmmmmm	mmmmmmmmmmmmmmmmmm	mmmmmmmmmmmmmmmmmm
+-----+-----+-----+-----+-----+				

where "c" are the bits of the assigned company_id, "0" is the value of the universal/local bit to indicate global scope, "g" is individual/group bit, and "m" are the bits of the manufacturer-selected extension identifier. The IPv6 interface identifier would be of the form:

0	1 1	3 3	4 4	6
0	5 6	1 2	7 8	3
+-----+-----+-----+-----+-----+				
cccccc1gcccccccc	ccccccccmmmmmmmmmm	mmmmmmmmmmmmmmmmmm	mmmmmmmmmmmmmmmmmm	mmmmmmmmmmmmmmmmmm
+-----+-----+-----+-----+-----+				

The only change is inverting the value of the universal/local bit.

Links or Nodes with IEEE 802 48 bit MAC's

[EUI64] defines a method to create a EUI-64 identifier from an IEEE 48bit MAC identifier. This is to insert two octets, with hexadecimal values of 0xFF and 0xFE, in the middle of the 48 bit MAC (between the company_id and vendor supplied id). For example the 48 bit MAC with global scope:


```

|0           1|1           3|3           4|
|0           5|6           1|2           7|
+-----+-----+-----+
|cccccc0gcccccccc|ccccccmmmmmmmm|mmmmmmmmmmmmmmmm|
+-----+-----+-----+

```

where "c" are the bits of the assigned company_id, "0" is the value of the universal/local bit to indicate global scope, "g" is individual/group bit, and "m" are the bits of the manufacturer-selected extension identifier. The interface identifier would be of the form:

```

|0           1|1           3|3           4|4           6|
|0           5|6           1|2           7|8           3|
+-----+-----+-----+-----+
|cccccc1gcccccccc|cccccccc11111111|11111110mmmmmmmm|mmmmmmmmmmmmmmmm|
+-----+-----+-----+-----+

```

When IEEE 802 48bit MAC addresses are available (on an interface or a node), an implementation should use them to create interface identifiers due to their availability and uniqueness properties.

Links with Non-Global Identifiers

There are a number of types of links that, while multi-access, do not have globally unique link identifiers. Examples include LocalTalk and Arcnet. The method to create an EUI-64 formatted identifier is to take the link identifier (e.g., the LocalTalk 8 bit node identifier) and zero fill it to the left. For example a LocalTalk 8 bit node identifier of hexadecimal value 0x4F results in the following interface identifier:

```

|0           1|1           3|3           4|4           6|
|0           5|6           1|2           7|8           3|
+-----+-----+-----+-----+
|0000000000000000|0000000000000000|0000000000000000|0000000001001111|
+-----+-----+-----+-----+

```

Note that this results in the universal/local bit set to "0" to indicate local scope.

Links without Identifiers

There are a number of links that do not have any type of built-in identifier. The most common of these are serial links and configured tunnels. Interface identifiers must be chosen that are unique for

the link.

When no built-in identifier is available on a link the preferred approach is to use a global interface identifier from another interface or one which is assigned to the node itself. To use this approach no other interface connecting the same node to the same link may use the same identifier.

If there is no global interface identifier available for use on the link the implementation needs to create a local scope interface identifier. The only requirement is that it be unique on the link. There are many possible approaches to select a link-unique interface identifier. They include:

- Manual Configuration
- Generated Random Number
- Node Serial Number (or other node-specific token)

The link-unique interface identifier should be generated in a manner that it does not change after a reboot of a node or if interfaces are added or deleted from the node.

The selection of the appropriate algorithm is link and implementation dependent. The details on forming interface identifiers are defined in the appropriate "IPv6 over <link>" specification. It is strongly recommended that a collision detection algorithm be implemented as part of any automatic algorithm.

APPENDIX B: ABNF Description of Text Representations

This appendix defines the text representation of IPv6 addresses and prefixes in Augmented BNF [[ABNF](#)] for reference purposes.

```
IPv6address = hexpart [ ":" IPv4address ]
IPv4address = 1*3DIGIT "." 1*3DIGIT "." 1*3DIGIT "." 1*3DIGIT

IPv6prefix  = hexpart "/" 1*2DIGIT

hexpart = hexseq | hexseq ":" [ hexseq ] | "::" [ hexseq ]
hexseq  = hex4 *( ":" hex4 )
hex4    = 1*4HEXDIG
```


APPENDIX C: CHANGES FROM [RFC-1884](#)

The following changes were made from [RFC-1884](#) "IP Version 6 Addressing Architecture":

- Added an appendix providing a ABNF description of text representations.
- Clarification that link unique identifiers not change after reboot or other interface reconfigurations.
- Clarification of Address Model based on comments.
- Changed aggregation format terminology to be consistent with aggregation draft.
- Added text to allow interface identifier to be used on more than one interface on same node.
- Added rules for defining new multicast addresses.
- Added appendix describing procedures for creating EUI-64 based interface ID's.
- Added notation for defining IPv6 prefixes.
- Changed solicited node multicast definition to use a longer prefix.
- Added site scope all routers multicast address.
- Defined Aggregatable Global Unicast Addresses to use "001" Format Prefix.
- Changed "010" (Provider-Based Unicast) and "100" (Reserved for Geographic) Format Prefixes to Unassigned.
- Added section on Interface ID definition for unicast addresses. Requires use of EUI-64 in range of format prefixes and rules for setting global/local scope bit in EUI-64.
- Updated NSAP text to reflect working in [RFC1888](#).
- Removed protocol specific IPv6 multicast addresses (e.g., DHCP) and referenced the IANA definitions.
- Removed section "Unicast Address Example". Had become OBE.
- Added new and updated references.
- Minor text clarifications and improvements.

REFERENCES

- [ABNF] Crocker, D., P. Overell, "Augmented BNF for Syntax Specifications: ABNF", Internet Draft, <[draft-ietf-drums-abnf-05.txt](#)>, October 1997.
- [AGGR] Hinden, R., S. Deering, M. O'Dell, "An Aggregatable Global Unicast Address Format", internet draft, <[draft-ietf-ipngwg-unicast-aggr-00.txt](#)>, May 1997.
- [AUTH] Atkinson, R., "IP Authentication Header", [RFC1826](#), August 1995.
- [ANYCST] Partridge, C., T. Mendez, and W. Milliken, "Host Anycasting Service", [RFC1546](#), November 1993.
- [CIDR] Fuller, V., Li, T., Yu, J., Varadhan, K., "Classless Inter-Domain Routing (CIDR): An Address Assignment and Aggregation Strategy", [RFC1519](#), September 1993.
- [ETHER] Crawford, M., "Transmission of IPv6 Packets over Ethernet Networks", Internet Draft, <[draft-ietf-ipngwg-trans-ethernet-00.txt](#)>, March 1997.
- [EUI64] IEEE, "Guidelines for 64-bit Global Identifier (EUI-64) Registration Authority", <http://standards.ieee.org/db/oui/tutorials/EUI64.html>, March 1997.
- [FDDI] Crawford, M., "Transmission of IPv6 Packets over FDDI Networks", Internet Draft, <[draft-ietf-ipngwg-trans-fddi-net-00.txt](#)>, March 1997.
- [IPv6] Deering, S., R. Hinden, Editors, "Internet Protocol, Version 6 (IPv6) Specification", [RFC1883](#), December 1995.
- [MASGN] Hinden, R., "IPv6 Multicast Address Assignments", Internet Draft, <[draft-ietf-ipngwg-multicast-assgn-02.txt](#)>, May 1997.
- [NSAP] Bound, J., B. Carpenter, D. Harrington, J. Houldsworth, A. Lloyd, "OSI NSAPs and IPv6", [RFC1888](#), August 1996.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [RFC2119](#), [BCP14](#), March 1997.
- [TOKEN] Thomas, S., "Transmission of IPv6 Packets over Token Ring Networks", Internet Draft, June 1997.

[TRAN] Gilligan, R., E. Nordmark, "Transition Mechanisms for IPv6 Hosts and Routers", [RFC1993](#), April 1996.

AUTHOR'S ADDRESSES

Robert M. Hinden
Ipsilon Networks, Inc.
232 Java Drive
Sunnyvale, CA 94089
USA

phone: +1 408 990-2004
fax: +1 408 743-5677
email: hinden@ipsilon.com

Stephen E. Deering
Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA

phone: +1 408 527-8213
fax: +1 408 527-8254
email: deering@cisco.com

