

ippm
Internet-Draft
Intended status: Standards Track
Expires: March 14, 2020

F. Brockners
S. Bhandari
C. Pignataro
Cisco
H. Gredler
RtBrick Inc.
J. Leddy

S. Youell
JPMC
T. Mizrahi
Huawei Network.IO Innovation Lab
D. Mozes

P. Lapukhov
Facebook
R. Chang
Barefoot Networks
D. Bernier
Bell Canada
J. Lemon
Broadcom
September 11, 2019

Data Fields for In-situ OAM
draft-ietf-ippm-ioam-data-07

Abstract

In-situ Operations, Administration, and Maintenance (IOAM) records operational and telemetry information in the packet while the packet traverses a path between two points in the network. This document discusses the data fields and associated data types for in-situ OAM. In-situ OAM data fields can be embedded into a variety of transports such as NSH, Segment Routing, Geneve, native IPv6 (via extension header), or IPv4. In-situ OAM can be used to complement OAM mechanisms based on e.g. ICMP or other types of probe packets.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Draft

In-situ OAM Data Fields

September 2019

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on March 14, 2020.

Copyright Notice

Copyright (c) 2019 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](https://trustee.ietf.org/bcp78) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	3
2.	Conventions	3
3.	Scope, Applicability, and Assumptions	4
4.	IOAM Data-Fields, Types, Nodes	5
4.1.	IOAM Data-Fields and Option-Types	5
4.2.	IOAM-Domains and types of IOAM Nodes	6
4.3.	IOAM-Namespaces	7
4.4.	IOAM Trace Option-Types	9
4.4.1.	Pre-allocated and Incremental Trace Option-Types	11
4.4.2.	IOAM node data fields and associated formats	15
4.4.3.	Examples of IOAM node data	21
4.5.	IOAM Proof of Transit Option-Type	23
4.5.1.	IOAM Proof of Transit Type 0	25
4.6.	IOAM Edge-to-Edge Option-Type	26
5.	Timestamp Formats	28
5.1.	PTP Truncated Timestamp Format	28
5.2.	NTP 64-bit Timestamp Format	29
5.3.	POSIX-based Timestamp Format	30
6.	IOAM Data Export	32

7.	IANA Considerations	32
7.1.	Creation of a new In-Situ OAM Protocol Parameters Registry (IOAM) Protocol Parameters IANA registry	32
7.2.	IOAM Option-Type Registry	33
7.3.	IOAM Trace-Type Registry	33

7.4.	IOAM Trace-Flags Registry	34
7.5.	IOAM POT-Type Registry	34
7.6.	IOAM POT-Flags Registry	34
7.7.	IOAM E2E-Type Registry	35
7.8.	IOAM Namespace-ID Registry	35
8.	Security Considerations	35
9.	Acknowledgements	36
10.	References	37
10.1.	Normative References	37
10.2.	Informative References	37
	Authors' Addresses	39

[1.](#) Introduction

This document defines data fields for "in-situ" Operations, Administration, and Maintenance (IOAM). In-situ OAM records OAM information within the packet while the packet traverses a particular network domain. The term "in-situ" refers to the fact that the OAM data is added to the data packets rather than is being sent within packets specifically dedicated to OAM. IOAM is to complement mechanisms such as Ping or Traceroute, or more recent active probing mechanisms as described in [[I-D.lapukhov-dataplane-probe](#)]. In terms of "active" or "passive" OAM, "in-situ" OAM can be considered a hybrid OAM type. "In-situ" mechanisms do not require extra packets to be sent. IOAM adds information to the already available data packets and therefore cannot be considered passive. In terms of the classification given in [[RFC7799](#)] IOAM could be portrayed as Hybrid Type 1. IOAM mechanisms can be leveraged where mechanisms using e.g. ICMP do not apply or do not offer the desired results, such as proving that a certain traffic flow takes a pre-defined path, SLA verification for the live data traffic, detailed statistics on traffic distribution paths in networks that distribute traffic across multiple paths, or scenarios in which probe traffic is potentially handled differently from regular data traffic by the network devices.

[2.](#) Conventions

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

Abbreviations used in this document:

E2E Edge to Edge

Geneve: Generic Network Virtualization Encapsulation
 [[I-D.ietf-nvo3-geneve](#)]

Brockners, et al.

Expires March 14, 2020

[Page 3]

Internet-Draft

In-situ OAM Data Fields

September 2019

IOAM: In-situ Operations, Administration, and Maintenance

MTU: Maximum Transmit Unit

NSH: Network Service Header [[RFC8300](#)]

OAM: Operations, Administration, and Maintenance

POT: Proof of Transit

SFC: Service Function Chain

SID: Segment Identifier

SR: Segment Routing

VXLAN-GPE: Virtual eXtensible Local Area Network, Generic Protocol
 Extension [[I-D.ietf-nvo3-vxlan-gpe](#)]

[3.](#) Scope, Applicability, and Assumptions

IOAM deployment assumes a set of constraints, requirements, and guiding principles which are described in this section.

Scope: This document defines the data fields and associated data types for in-situ OAM. The in-situ OAM data field can be transported by a variety of transport protocols, including NSH, Segment Routing, Geneve, IPv6, or IPv4. Specification details for these different transport protocols are outside the scope of this document.

Deployment domain (or scope) of in-situ OAM deployment: IOAM is a network domain focused feature, with "network domain" being a set of network devices or entities within a single administration. For example, a network domain can include an enterprise campus using physical connections between devices or an overlay network using virtual connections / tunnels for connectivity between said devices. A network domain is defined by its perimeter or edge. Designers of protocol encapsulations for IOAM must specify mechanisms to ensure that IOAM data stays within an IOAM domain. In addition, the operator of such a domain is expected to put provisions in place to ensure that IOAM data does not leak beyond the edge of an IOAM domain, e.g. using for example packet filtering methods. The operator should consider the potential operational impact of IOAM to mechanisms such as ECMP processing (e.g. load-balancing schemes based on packet length could be impacted by the increased packet size due to IOAM), path MTU (i.e. ensure that the MTU of all links within a domain is sufficiently large to support the increased packet size due to IOAM) and ICMP message handling (i.e. in case of a native IPv6

transport, IOAM support for ICMPv6 Echo Request/Reply could be desired which would translate into ICMPv6 extensions to enable IOAM-Data-Fields to be copied from an Echo Request message to an Echo Reply message).

IOAM control points: IOAM-Data-Fields are added to or removed from the live user traffic by the devices which form the edge of a domain. Devices which form an IOAM-Domain can add, update or remove IOAM-Data-Fields. Edge devices of an IOAM-Domain can be hosts or network devices.

Traffic-sets that IOAM is applied to: IOAM can be deployed on all or only on subsets of the live user traffic. It SHOULD be possible to enable IOAM on a selected set of traffic (e.g., per interface, based on an access control list or flow specification defining a specific set of traffic, etc.) The selected set of traffic can also be all traffic.

Encapsulation independence: Data formats for IOAM SHOULD be defined in a transport-independent manner. IOAM applies to a variety of encapsulating protocols. A definition of how IOAM-Data-Fields are encapsulated into "parent" protocols, like NSH or IPv6 is outside the

scope of this document.

Layering: If several encapsulation protocols (e.g., in case of tunneling) are stacked on top of each other, IOAM-Data-Fields could be present at multiple layers. The behavior follows the ships-in-the-night model, i.e. IOAM-Data-Fields in one layer are independent from IOAM-Data-Fields in another layer. Layering allows operators to instrument the protocol layer they want to measure. The different layers could, but do not have to share the same IOAM encapsulation mechanisms.

IOAM implementation: The definition of the IOAM-Data-Fields take the specifics of devices with hardware data-plane and software data-plane into account.

[4.](#) IOAM Data-Fields, Types, Nodes

This section details IOAM-related nomenclature and describes data types such as IOAM-Data-Fields, IOAM-Types, IOAM-Namespaces as well as the different types of IOAM nodes.

[4.1.](#) IOAM Data-Fields and Option-Types

An IOAM-Data-Field is a set of bits with a defined format and meaning, which can be stored at a certain place in a packet for the purpose of IOAM.

To accommodate the different uses of IOAM, IOAM-Data-Fields fall into different categories. In IOAM these categories are referred to as IOAM-Option-Types. A common registry is maintained for IOAM-Option-Types, see [Section 7.2](#) for details. Corresponding to these IOAM-Option-Types, different IOAM-Data-Fields are defined. IOAM-Data-Fields can be encapsulated into a variety of protocols, such as NSH, Geneve, IPv6, etc. The definition of how IOAM-Data-Fields are encapsulated into other protocols is outside the scope of this document.

This document defines four IOAM-Option-Types:

- o Pre-allocated Trace Option-Type
- o Incremental Trace Option-Type

- o Proof of Transit (POT) Option-Type
- o Edge-to-Edge (E2E) Option-Type

4.2. IOAM-Domains and types of IOAM Nodes

IOAM is expected to be deployed in a specific domain. The part of the network which employs IOAM is referred to as the "IOAM-Domain". One or more IOAM-Option-Types are added to a packet upon entering the IOAM-Domain and are removed from the packet when exiting the domain. Within the IOAM-Domain, the IOAM-Data-Fields MAY be updated by network nodes that the packet traverses. An IOAM-Domain consists of "IOAM encapsulating nodes", "IOAM decapsulating nodes" and "IOAM transit nodes". The role of a node (i.e. encapsulating, transit, decapsulating) is defined within an IOAM-Namespace (see below). A node can have different roles in different IOAM-Namespace.

A device which adds at least one IOAM-Option-Type to the packet is called the "IOAM encapsulating node", whereas a device which removes an IOAM-Option-Type is referred to as the "IOAM decapsulating node". Nodes within the domain which are aware of IOAM data and read and/or write or process the IOAM data are called "IOAM transit nodes". IOAM nodes which add or remove the IOAM-Data-Fields can also update the IOAM-Data-Fields at the same time. Or in other words, IOAM encapsulating or decapsulating nodes can also serve as IOAM transit nodes at the same time. Note that not every node in an IOAM domain needs to be an IOAM transit node. For example, a deployment might require that packets traverse a set of firewalls which support IOAM. In that case, only the set of firewall nodes would be IOAM transit nodes rather than all nodes.

An "IOAM encapsulating node" incorporates one or more IOAM-Option-Types (from the list of IOAM-Types, see [Section 7.2](#)) into packets that IOAM is enabled for. If IOAM is enabled for a selected subset of the traffic, the IOAM encapsulating node is responsible for applying the IOAM functionality to the selected subset.

An "IOAM transit node" updates one or more of the IOAM-Data-Fields. If both the Pre-allocated and the Incremental Trace Option-Types are

present in the packet, each IOAM transit node will update at most one of these Option-Types. A transit node MUST NOT add new IOAM-Option-Types to a packet, and MUST NOT change the IOAM-Data-Fields of an IOAM Edge-to-Edge Option-Type.

An "IOAM decapsulating node" removes IOAM-Option-Type(s) from packets.

[4.3.](#) IOAM-Namespaces

A subset or all of the IOAM-Option-Types and their corresponding IOAM-Data-Fields can be associated to an IOAM-Namespace. IOAM-Namespaces add further context to IOAM-Option-Types and associated IOAM-Data-Fields. Any IOAM-Namespace MUST interpret the IOAM-Option-Types and associated IOAM-Data-Fields per the definition in this document. IOAM-Namespaces group nodes to support different deployment approaches of IOAM (see a few example use-cases below) as well as resolve issues which can occur due to IOAM-Data-Fields not being globally unique (e.g. IOAM node identifiers do not have to be globally unique). IOAM-Data-Fields significance is always within a particular IOAM-Namespace.

An IOAM-Namespace is identified by a 16-bit namespace identifier (Namespace-ID). IOAM-Namespace identifiers MUST be present and populated in all IOAM-Option-Types. The Namespace-ID value is divided into two sub-ranges:

- o An operator-assigned range from 0x0001 to 0x7FFF
- o An IANA-assigned range from 0x8000 to 0xFFFF

The IANA-assigned range is intended to allow future extensions to have new and interoperable IOAM functionality, while the operator-assigned range is intended to be domain specific, and managed by the network operator. The Namespace-ID value of 0x0000 is default and known to all the nodes implementing IOAM.

Namespace identifiers allow devices which are IOAM capable to determine:

- o whether IOAM-Option-Type(s) need to be processed by a device: If

the Namespace-ID contained in a packet does not match any Namespace-ID the node is configured to operate on, then the node MUST NOT change the contents of the IOAM-Data-Fields.

- o which IOAM-Option-Type needs to be processed/updated in case there are multiple IOAM-Option-Types present in the packet. Multiple IOAM-Option-Types can be present in a packet in case of overlapping IOAM-Domains or in case of a layered IOAM deployment.
- o whether IOAM-Option-Type(s) should be removed from the packet, e.g. at a domain edge or domain boundary.

IOAM-Namespaces support several different uses:

- o IOAM-Namespaces can be used by an operator to distinguish different operational domains. Devices at domain edges can filter on Namespace-IDs to provide for proper IOAM-Domain isolation.
- o IOAM-Namespaces provide additional context for IOAM-Data-Fields and thus ensure that IOAM-Data-Fields are unique and can be interpreted properly by management stations or network controllers. While, for example, the node identifier field (node_id, see below) does not need to be unique in a deployment (e.g. an operator may wish to use different node identifiers for different IOAM layers, even within the same device; or node identifiers might not be unique for other organizational reasons, such as after a merger of two formerly separated organizations), the combination of node_id and Namespace-ID will always be unique. Similarly, IOAM-Namespaces can be used to define how certain IOAM-Data-Fields are interpreted: IOAM offers three different timestamp format options. The Namespace-ID can be used to determine the timestamp format. IOAM-Data-Fields (e.g. buffer occupancy) which do not have a unit associated are to be interpreted within the context of a IOAM-Namespace.
- o IOAM-Namespaces can be used to identify different sets of devices (e.g., different types of devices) in a deployment: If an operator desires to insert different IOAM-Data-Fields based on the device, the devices could be grouped into multiple IOAM-Namespaces. This could be due to the fact that the IOAM feature set differs between different sets of devices, or it could be for reasons of optimized space usage in the packet header. It could also stem from hardware or operational limitations on the size of the trace data that can be added and processed, preventing collection of a full trace for a flow.

- * Assigning different IOAM Namespace-IDs to different sets of nodes or network partitions and using the Namespace-ID as a selector at the IOAM encapsulating node, a full trace for a flow could be collected and constructed via partial traces in different packets of the same flow. Example: An operator could choose to group the devices of a domain into two IOAM-Namespaces, in a way that at average, only every second hop would be recorded by any device. To retrieve a full view of the deployment, the captured IOAM-Data-Fields of the two IOAM-Namespaces need to be correlated.
- * Assigning different IOAM Namespace-IDs to different sets of nodes or network partitions and using a separate instance of an IOAM-Option-Type for each Namespace-ID, a full trace for a flow could be collected and constructed via partial traces from each IOAM-Option-Type in each of the packets in the flow. Example: An operator could choose to group the devices of a domain into two IOAM-Namespaces, in a way that each IOAM-Namespace is represented by one of two IOAM-Option-Types in the packet. Each node would record data only for the IOAM-Namespace that it belongs to, ignoring the other IOAM-Option-Type with a IOAM-Namespace to which it doesn't belong. To retrieve a full view of the deployment, the captured IOAM-Data-Fields of the two IOAM-Namespaces need to be correlated.

4.4. IOAM Trace Option-Types

"IOAM tracing data" is expected to be collected at every IOAM transit node that a packet traverses to ensure visibility into the entire path a packet takes within an IOAM-Domain. I.e., in a typical deployment all nodes in an IOAM-Domain would participate in IOAM and thus be IOAM transit nodes, IOAM encapsulating or IOAM decapsulating nodes. If not all nodes within a domain are IOAM capable, IOAM tracing information (i.e., node data, see below) will only be collected on those nodes which are IOAM capable. Nodes which are not IOAM capable will forward the packet without any changes to the IOAM-Data-Fields. The maximum number of hops and the minimum path MTU of the IOAM domain is assumed to be known.

To optimize hardware and software implementations IOAM tracing is defined as two separate options. Any deployment MAY choose to configure and support one or both of the following options.

Pre-allocated Trace-Option: This trace option is defined as a container of node data fields (see below) with pre-allocated space for each node to populate its information. This option is useful

for implementations where it is efficient to allocate the space once and index into the array to populate the data during transit

(e.g., software forwarders often fall into this class). The IOAM encapsulating node allocates space for Pre-allocated Trace Option-Type in the packet and sets corresponding fields in this IOAM-Option-Type. The IOAM encapsulating node allocates an array which is used to store operational data retrieved from every node while the packet traverses the domain. IOAM transit nodes update the content of the array, and possibly update the checksums of outer headers. A pointer which is part of the IOAM trace data, points to the next empty slot in the array. An IOAM transit node that updates the content of the pre-allocated option also updates the value of the pointer, which specifies where the next IOAM transit node fills in its data. The "node data list" array (see below) in the packet is populated iteratively as the packet traverses the network, starting with the last entry of the array, i.e., "node data list [n]" is the first entry to be populated, "node data list [n-1]" is the second one, etc.

Incremental Trace-Option: This trace option is defined as a container of node data fields where each node allocates and pushes its node data immediately following the option header. This type of trace recording is useful for some of the hardware implementations as it eliminates the need for the transit network elements to read the full array in the option and allows for arbitrarily long packets as the MTU allows. The IOAM encapsulating node allocates space for the Incremental Trace Option-Type. Based on operational state and configuration, the IOAM encapsulating node sets the fields in the Option-Type that control what IOAM-Data-Fields should be collected and how large the node data list can grow. IOAM transit nodes push their node data to the node data list, decrease the remaining length available to subsequent nodes and adjust the lengths and possibly checksums in outer headers.

A particular implementation of IOAM MAY choose to support only one of the two trace option types. In the event that both options are utilized at the same time, the Incremental Trace-Option MUST be placed before the Pre-allocated Trace-Option. Deployments which mix devices which either the Incremental Trace-Option or the Pre-allocated Trace-Option could result in both Option-Types being

present in a packet. Given that the operator knows which equipment is deployed in a particular IOAM, the operator will decide by means of configuration which type(s) of trace options will be used for a particular domain.

Every node data entry holds information for a particular IOAM transit node that is traversed by a packet. The IOAM decapsulating node removes the IOAM-Option-Type(s) and processes and/or exports the associated data. IOAM-Data-Fields are defined in the context of an

IOAM-Namespace. This allows for a namespace-specific definition and interpretation. For example: In one case an interface-id could point to a physical interface (e.g., to understand which physical interface of an aggregated link is used when receiving or transmitting a packet) whereas in another case it could refer to a logical interface (e.g., in case of tunnels).

IOAM tracing can collect the following types of information:


- o Identification of the IOAM node. An IOAM node identifier can match to a device identifier or a particular control point or subsystem within a device.
- o Identification of the interface that a packet was received on, i.e. ingress interface.
- o Identification of the interface that a packet was sent out on, i.e. egress interface.
- o Time of day when the packet was processed by the node as well as the transit delay. Different definitions of processing time are feasible and expected, though it is important that all devices of an in-situ OAM domain follow the same definition.
- o Generic data: Format-free information where syntax and semantic of the information is defined by the operator in a specific deployment. For a specific IOAM-Namespace, all IOAM nodes should interpret the generic data the same way. Examples for generic IOAM data include geo-location information (location of the node at the time the packet was processed), buffer queue fill level or cache fill level at the time the packet was processed, or even a battery charge level.

- o Information to detect whether IOAM trace data was added at every hop or whether certain hops in the domain weren't IOAM transit nodes.


4.4.1. Pre-allocated and Incremental Trace Option-Types


The IOAM Pre-allocated Trace-Option and the IOAM Incremental Trace-Option have similar formats. Except where noted below, the internal formats and fields of the two trace options are identical. Both Trace-Options consist of a fixed size "trace option header" and a variable data space to store gathered data, the "node data list":

Pre-allocated and incremental trace option headers:

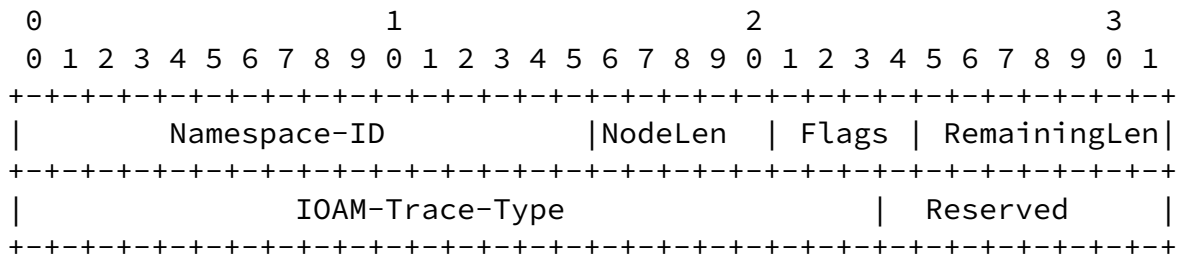

The trace option data MUST be 4-octet aligned:

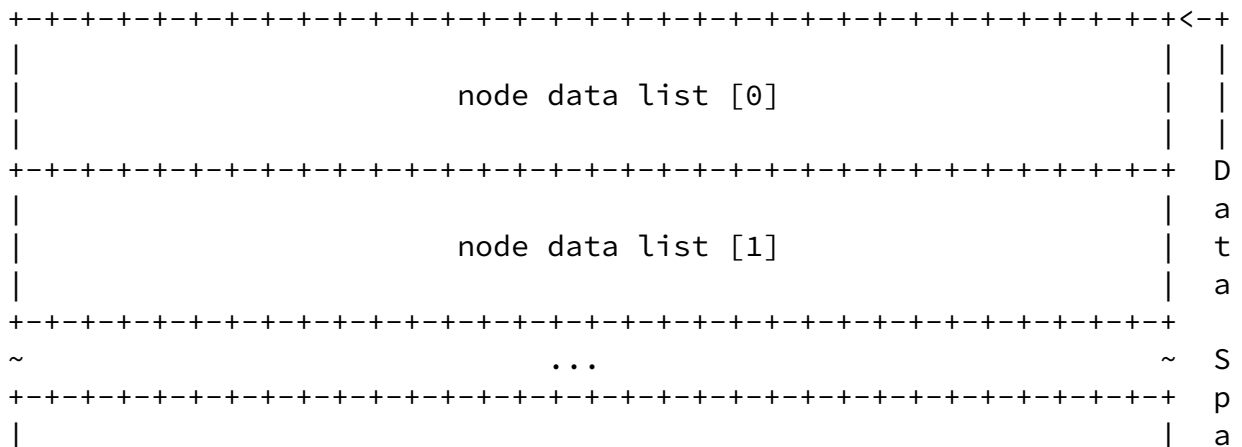

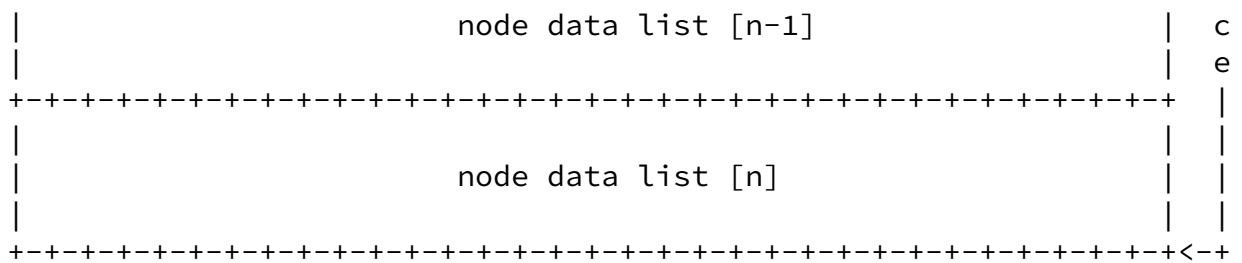

Namespace-ID: 16-bit identifier of an IOAM-Namespace. The Namespace-ID value of 0x0000 is defined as the default value and MUST be known to all the nodes implementing IOAM. For any other Namespace-ID value that does not match any Namespace-ID the node is configured to operate on, the node MUST NOT change the contents of the IOAM-Data-Fields.

NodeLen: 5-bit unsigned integer. This field specifies the length of data added by each node in multiples of 4-octets, excluding the length of the "Opaque State Snapshot" field.

If IOAM-Trace-Type bit 22 is not set, then NodeLen specifies the actual length added by each node. If IOAM-Trace-Type bit 22 is

set, then the actual length added by a node would be (NodeLen + Opaque Data Length).

For example, if 3 IOAM-Trace-Type bits are set and none of them are wide, then NodeLen would be 3. If 3 IOAM-Trace-Type bits are set and 2 of them are wide, then NodeLen would be 5.

An IOAM encapsulating node must set NodeLen.

A node receiving an IOAM Pre-allocated or Incremental Trace-Option may rely on the NodeLen value, or it may ignore the NodeLen value and calculate the node length from the IOAM-Trace-Type bits (see below).

Flags 4-bit field. Flags are allocated by IANA, as specified in [Section 7.4](#). This document allocates a single flag as follows:

Bit 0 "Overflow" (0-bit) (most significant bit). This bit is set

by the network element if there are not enough octets left to record node data, no field is added and the overflow "O-bit" must be set to "1" in the IOAM-Trace-Option header. This is useful for transit nodes to ignore further processing of the option.

RemainingLen: 7-bit unsigned integer. This field specifies the data space in multiples of 4-octets remaining for recording the node data, before the node data list is considered to have overflowed. When RemainingLen reaches 0, nodes are no longer allowed to add node data. Given that the sender knows the minimum path MTU, the sender MAY set the initial value of RemainingLen according to the number of node data bytes allowed before exceeding the MTU. Subsequent nodes can carry out a simple comparison between RemainingLen and NodeLen, along with the length of the "Opaque State Snapshot" if applicable, to determine whether or not data can be added by this node. When node data is added, the node MUST decrease RemainingLen by the amount of data added. In the pre-allocated trace option, RemainingLength is used to derive the offset in data space to record the node data element. Specifically, the recording of the node data element would start from RemainingLen - NodeLen - sizeof(opaque snapshot) in 4 octet units.

IOAM-Trace-Type: A 24-bit identifier which specifies which data types are used in this node data list.

The IOAM-Trace-Type value is a bit field. The following bits are defined in this document, with details on each bit described in the [Section 4.4.2](#). The order of packing the data fields in each

node data element follows the bit order of the IOAM-Trace-Type field, as follows:

- Bit 0 (Most significant bit) When set indicates presence of Hop_Lim and node_id in the node data.
- Bit 1 When set indicates presence of ingress_if_id and egress_if_id (short format) in the node data.
- Bit 2 When set indicates presence of timestamp seconds in the node data.

- Bit 3 When set indicates presence of timestamp subseconds in the node data.
- Bit 4 When set indicates presence of transit delay in the node data.
- Bit 5 When set indicates presence of IOAM-Namespace specific data (short format) in the node data.
- Bit 6 When set indicates presence of queue depth in the node data.
- Bit 7 When set indicates presence of the Checksum Complement node data.
- Bit 8 When set indicates presence of Hop_Lim and node_id in wide format in the node data.
- Bit 9 When set indicates presence of ingress_if_id and egress_if_id in wide format in the node data.
- Bit 10 When set indicates presence of IOAM-Namespace specific data in wide format in the node data.
- Bit 11 When set indicates presence of buffer occupancy in the node data.
- Bit 12-21 Undefined. An IOAM encapsulating node MUST set the value of each of these bits to 0. If an IOAM transit node receives a packet with one or more of these bits set to 1, it must either:
1. Add corresponding node data filled with the reserved value 0xFFFFFFFF, after the node data fields for the IOAM-Trace-Type bits defined above, such that the

total node data added by this node in units of 4-octets is equal to NodeLen, or

2. Not add any node data fields to the packet, even for

the IOAM-Trace-Type bits defined above.

- Bit 22 When set indicates presence of variable length Opaque State Snapshot field.
- Bit 23 Reserved: Must be set to zero upon transmission and ignored upon receipt.

[Section 4.4.2](#) describes the IOAM-Data-Types and their formats. Within an IOAM-Domain possible combinations of these bits making the IOAM-Trace-Type can be restricted by configuration knobs.

Reserved: 8-bits. Must be zero.

Node data List [n]: Variable-length field. The type of which is determined by the IOAM-Trace-Type bit representing the n-th node data in the node data list. The node data list is encoded starting from the last node data of the path. The first element of the node data list (node data list [0]) contains the last node of the path while the last node data of the node data list (node data list[n]) contains the first node data of the path traced. Populating the node data list in this way ensures that the order of node data list is the same for incremental and pre-allocated trace options. In the pre-allocated trace option, the index contained in RemainingLen identifies the offset for current active node data to be populated.


[4.4.2.](#) IOAM node data fields and associated formats

All the IOAM-Data-Fields MUST be 4-octet aligned. If a node which is supposed to update an IOAM-Data-Field is not capable of populating the value of a field set in the IOAM-Trace-Type, the field value MUST be set to 0xFFFFFFFF for 4-octet fields or 0xFFFFFFFFFFFFFFFF for 8-octet fields, indicating that the value is not populated, except when explicitly specified in the field description below.

Some IOAM-Data-Fields defined below, such as interface identifiers or IOAM-Namespace specific data, are defined in both "short format" as well as "wide format". Their use is not exclusive. A deployment could choose to leverage both. For example, ingress_if_id_(short format) could be an identifier for the physical interface, whereas ingress_if_id_(wide format) could be an identifier for a logical sub-interface of that physical interface.

Data field and associated data type for each of the IOAM-Data-Fields is shown below:


Hop_Lim and node_id: 4-octet field defined as follows:

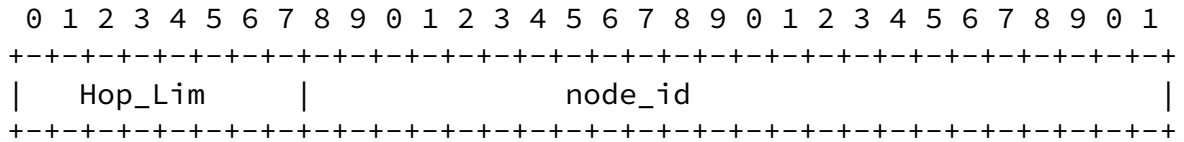

Hop_Lim: 1-octet unsigned integer. It is set to the Hop Limit value in the packet at the node that records this data. Hop Limit information is used to identify the location of the node in the communication path. This is copied from the lower layer, e.g., TTL value in IPv4 header or hop limit field from IPv6 header of the packet when the packet is ready for transmission. The semantics of the Hop_Lim field depend on the lower layer protocol that IOAM is encapsulated over, and therefore its specific semantics are outside the scope of this memo.

node_id: 3-octet unsigned integer. Node identifier field to uniquely identify a node within the IOAM-Namespace and associated IOAM-Domain. The procedure to allocate, manage and map the node_ids is beyond the scope of this document.

ingress_if_id and egress_if_id: 4-octet field defined as follows:

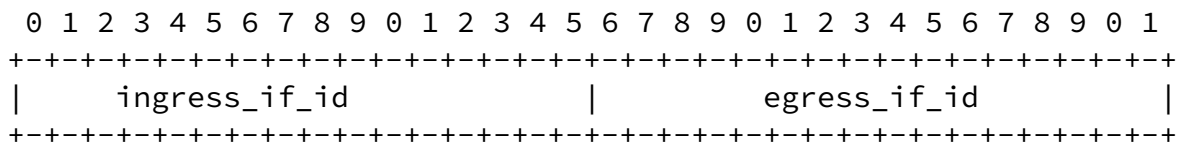

ingress_if_id: 2-octet unsigned integer. Interface identifier to record the ingress interface the packet was received on.

egress_if_id: 2-octet unsigned integer. Interface identifier to record the egress interface the packet is forwarded out of.

Note that due to the fact that IOAM uses its own IOAM-Namespace for IOAM-Data-Fields, data fields like interface identifiers can be used in a flexible way to represent system resources that are associated with ingressing or egressing packets, i.e. ingress_if_id could represent a physical interface, a virtual or logical interface, or even a queue.


timestamp seconds: 4-octet unsigned integer. Absolute timestamp in

seconds that specifies the time at which the packet was received

by the node. This field has three possible formats; based on either PTP [[IEEE1588v2](#)], NTP [[RFC5905](#)], or POSIX [[POSIX](#)]. The three timestamp formats are specified in [Section 5](#). In all three cases, the Timestamp Seconds field contains the 32 most significant bits of the timestamp format that is specified in [Section 5](#). If a node is not capable of populating this field, it assigns the value 0xFFFFFFFF. Note that this is a legitimate value that is valid for 1 second in approximately 136 years; the analyzer should correlate several packets or compare the timestamp value to its own time-of-day in order to detect the error indication.

timestamp subseconds: 4-octet unsigned integer. Absolute timestamp in subseconds that specifies the time at which the packet was received by the node. This field has three possible formats; based on either PTP [[IEEE1588v2](#)], NTP [[RFC5905](#)], or POSIX [[POSIX](#)]. The three timestamp formats are specified in [Section 5](#). In all three cases, the Timestamp Subseconds field contains the 32 least significant bits of the timestamp format that is specified in [Section 5](#). If a node is not capable of populating this field, it assigns the value 0xFFFFFFFF. Note that this is a legitimate value in the NTP format, valid for approximately 233 picoseconds in every second. If the NTP format is used the analyzer should correlate several packets in order to detect the error indication.

transit delay: 4-octet unsigned integer in the range 0 to $2^{31}-1$. It is the time in nanoseconds the packet spent in the transit node. This can serve as an indication of the queuing delay at the node. If the transit delay exceeds $2^{31}-1$ nanoseconds then the top bit '0' is set to indicate overflow and value set to 0x80000000. When this field is part of the data field but a node populating the field is not able to fill it, the field position in the field must be filled with value 0xFFFFFFFF to mean not populated.

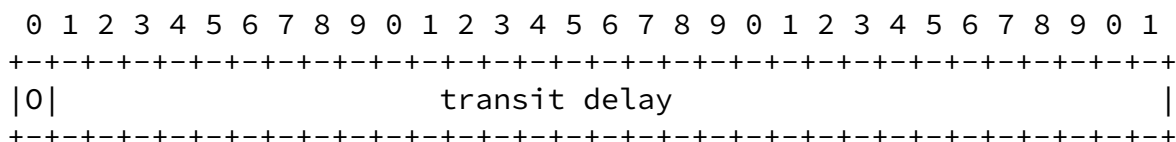

namespace specific data: 4-octet field which can be used by the node to add IOAM-Namespace specific data. This represents a "free-format" 4-octet bit field with its semantics defined in the context of a specific IOAM-Namespace.

```

 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-----+-----+-----+-----+-----+-----+-----+-----+
|                               namespace specific data                               |
+-----+-----+-----+-----+-----+-----+-----+-----+

```

queue depth: 4-octet unsigned integer field. This field indicates the current length of the egress interface queue of the interface from where the packet is forwarded out. The queue depth is expressed as the current number of memory buffers used by the queue (a packet may consume one or more memory buffers, depending on its size).

```

 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-----+-----+-----+-----+-----+-----+-----+-----+
|                               queue depth                               |
+-----+-----+-----+-----+-----+-----+-----+-----+

```

Hop_Lim and node_id wide: 8-octet field defined as follows:

```

 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-----+-----+-----+-----+-----+-----+-----+-----+
| Hop_Lim |                               node_id                               ~
+-----+-----+-----+-----+-----+-----+-----+-----+
~                               node_id (contd)                               |
+-----+-----+-----+-----+-----+-----+-----+-----+


```

Hop_Lim: 1-octet unsigned integer. It is set to the Hop Limit value in the packet at the node that records this data. Hop Limit information is used to identify the location of the node in the communication path. This is copied from the lower layer for e.g. TTL value in IPv4 header or hop limit field from IPv6 header of the packet. The semantics of the Hop_Lim field depend on the lower layer protocol that IOAM is encapsulated

over, and therefore its specific semantics are outside the scope of this memo.

node_id: 7-octet unsigned integer. Node identifier field to uniquely identify a node within the IOAM-Namespace and associated IOAM-Domain. The procedure to allocate, manage and map the node_ids is beyond the scope of this document.


ingress_if_id and egress_if_id wide: 8-octet field defined as follows:

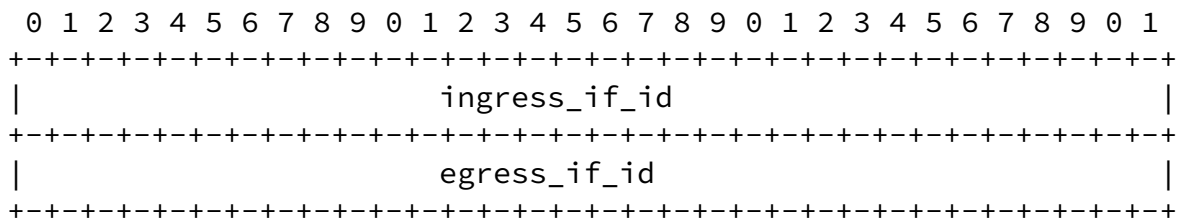

ingress_if_id: 4-octet unsigned integer. Interface identifier to record the ingress interface the packet was received on.


egress_if_id: 4-octet unsigned integer. Interface identifier to record the egress interface the packet is forwarded out of.

namespace specific data wide: 8-octet field which can be used by the node to add IOAM-Namespace specific data. This represents a "free-format" 8-octet bit field with its semantics defined in the context of a specific IOAM-Namespace.

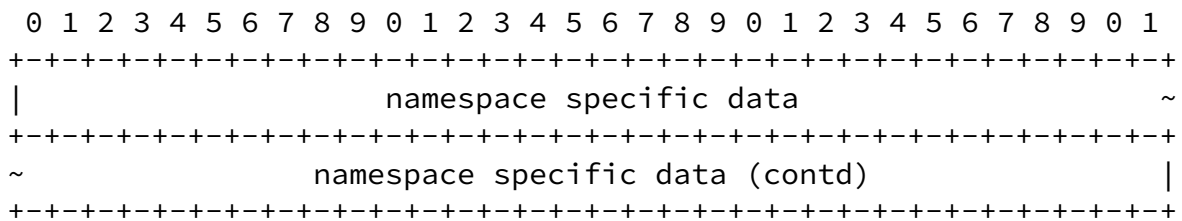

buffer occupancy: 4-octet unsigned integer field. This field

indicates the current status of the occupancy of the common buffer pool used by a set of queues. The units of this field depend on the equipment type and deployment and has to be interpreted within the context of an IOAM-Namespace and/or node-id if used.

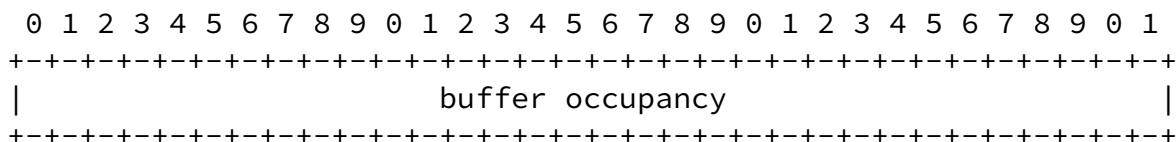


Checksum Complement: 4-octet node data which contains a 4-octet Checksum Complement field. The Checksum Complement is useful when IOAM is transported over encapsulations that make use of a UDP transport, such as VXLAN-GPE or Geneve. Without the Checksum Complement, nodes adding IOAM node data must update the UDP Checksum field. When the Checksum Complement is present, an IOAM encapsulating node or IOAM transit node adding node data MUST carry out one of the following two alternatives in order to maintain the correctness of the UDP Checksum value:

1. Recompute the UDP Checksum field.

2. Use the Checksum Complement to make a checksum-neutral update in the UDP payload; the Checksum Complement is assigned a value that complements the rest of the node data fields that were added by the current node, causing the existing UDP Checksum field to remain correct.


IOAM decapsulating nodes MUST recompute the UDP Checksum field, since they do not know whether previous hops modified the UDP Checksum field or the Checksum Complement field.

Checksum Complement fields are used in a similar manner in [\[RFC7820\]](#) and [\[RFC7821\]](#).

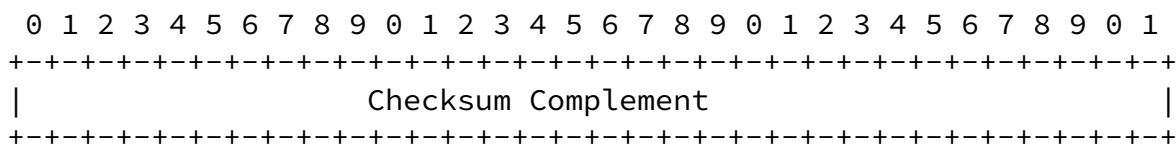

Opaque State Snapshot: Opaque State Snapshot is a variable length

field and immediately follows the fixed length IOAM-Data-Fields defined above. It allows the network element to store an arbitrary state in the node data field, without a pre-defined schema. The schema is to be defined within the context of an IOAM-Namespace. The schema needs to be made known to the analyzer by some out-of-band mechanism. The specification of this mechanism is beyond the scope of this document. A 24-bit "Schema Id" field, interpreted within the context of an IOAM-Namespace, indicates which particular schema is used, and should be configured on the network element by the operator.

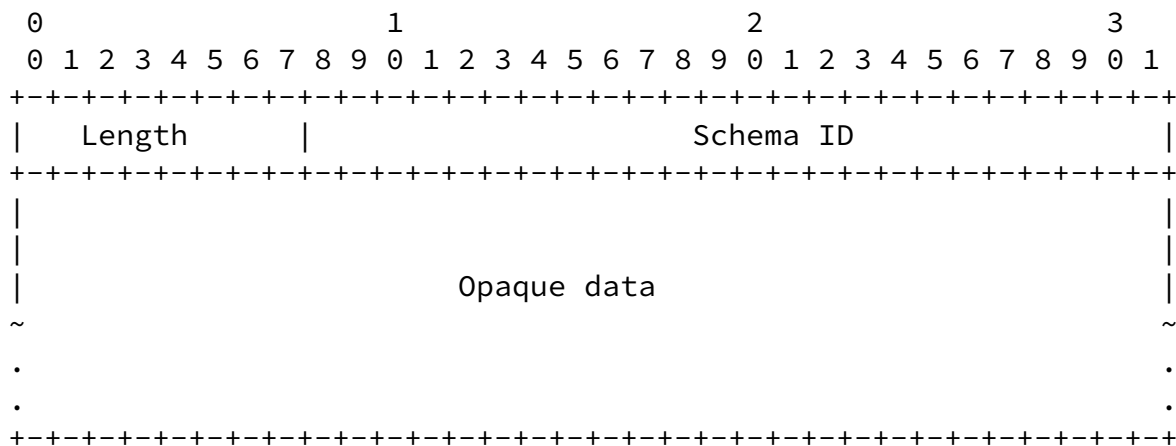

Length: 1-octet unsigned integer. It is the length in multiples of 4-octets of the Opaque data field that follows Schema Id.

Schema ID: 3-octet unsigned integer identifying the schema of Opaque data.

Opaque data: Variable length field. This field is interpreted as specified by the schema identified by the Schema ID.

When this field is part of the data field but a node populating the field has no opaque state data to report, the Length must be set to 0 and the Schema ID must be set to 0xFFFFFFFF to mean no schema.

4.4.3. Examples of IOAM node data

An entry in the "node data list" array can have different formats, following the needs of the deployment. Some deployments might only

be interested in recording the node identifiers, whereas others might be interested in recording node identifier and timestamp. The section provides example entries of the "node data list".

0xD40000: IOAM-Trace-Type is 0xD40000 (0b110101000000000000000000) then the format of node data is:

```
 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
| Hop_Lim      |                      node_id                          |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
| ingress_if_id          | egress_if_id          |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|                      timestamp subseconds                          |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|                      namespace specific data                        |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
```

0xC00000: IOAM-Trace-Type is 0xC00000 (0b110000000000000000000000) then the format is:


```
 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
| Hop_Lim      |                      node_id                          |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
| ingress_if_id          | egress_if_id          |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
```

0x900000: IOAM-Trace-Type is 0x900000 (0b100100000000000000000000) then the format is:


```
 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
| Hop_Lim      |                      node_id                          |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|                      timestamp subseconds                          |
```


+-----+


0x840000: IOAM-Trace-Type is 0x840000 (0b100001000000000000000000)
then the format is:

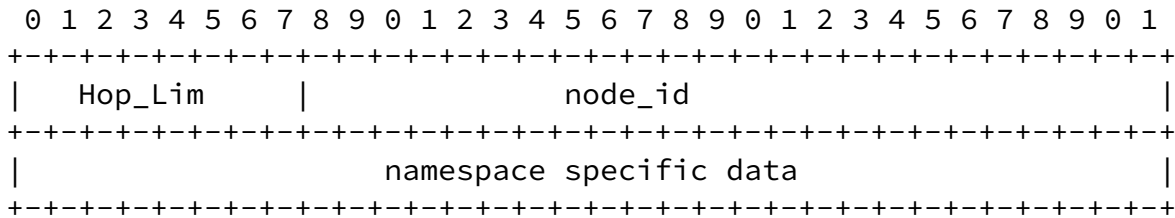

0x940000: IOAM-Trace-Type is 0x940000 (0b100101000000000000000000)
then the format is:

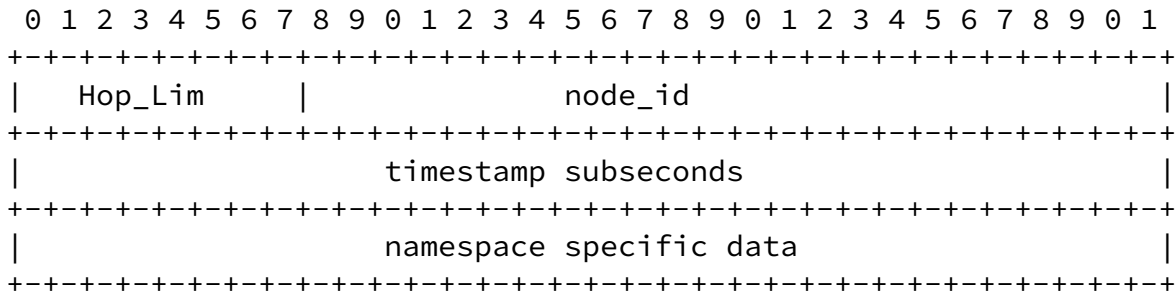

0x308002: IOAM-Trace-Type is 0x308002 (0b001100001000000000000010)
then the format is:

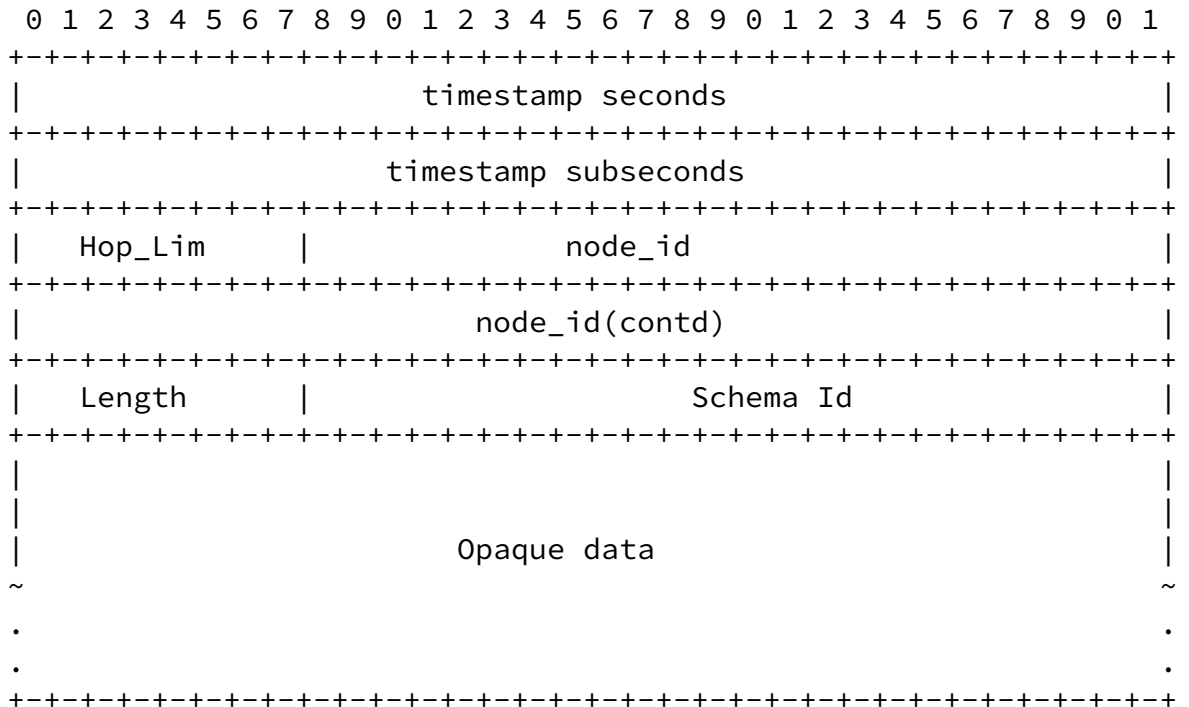

4.5. IOAM Proof of Transit Option-Type

IOAM Proof of Transit Option-Type is to support path or service function chain [[RFC7665](#)] verification use cases. Proof-of-transit uses methods like nested hashing or nested encryption of the IOAM data or mechanisms such as Shamir's Secret Sharing Schema (SSSS). While details on how the IOAM data for the proof of transit option is processed at IOAM encapsulating, decapsulating and transit nodes are outside the scope of the document, all of these approaches share the need to uniquely identify a packet as well as iteratively operate on a set of information that is handed from node to node. Correspondingly, two pieces of information are added as IOAM-Data-Fields to the packet:

- o Random: Unique identifier for the packet (e.g., 64-bits allow for the unique identification of 2^{64} packets).
- o Cumulative: Information which is handed from node to node and updated by every node according to a verification algorithm.

The IOAM Proof of Transit Option-Type consist of a fixed size "IOAM proof of transit option header" and "IOAM proof of transit option data fields":

Internet-Draft

In-situ OAM Data Fields

September 2019

IOAM proof of transit option header:

```

0             1             2             3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-----+-----+-----+-----+-----+-----+-----+-----+
|           Namespace-ID           | IOAM POT Type | IOAM POT flags |
+-----+-----+-----+-----+-----+-----+-----+-----+

```

IOAM proof of transit Option-Type IOAM-Data-Fields MUST be 4-octet aligned:

```

0             1             2             3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-----+-----+-----+-----+-----+-----+-----+-----+
|           POT Option data field determined by IOAM-POT-Type           |
+-----+-----+-----+-----+-----+-----+-----+-----+

```

Namespace-ID: 16-bit identifier of an IOAM-Namespace. The Namespace-ID value of 0x0000 is defined as the default value and MUST be known to all the nodes implementing IOAM. For any other Namespace-ID value that does not match any Namespace-ID the node is configured to operate on, the node MUST NOT change the contents of the IOAM-Data-Fields.

IOAM POT Type: 8-bit identifier of a particular POT variant that specifies the POT data that is included. This document defines POT Type 0:

0: POT data is a 16 Octet field as described below.

IOAM POT flags: 8-bit. Following flags are defined:


Bit 0 "Profile-to-use" (P-bit) (most significant bit). For IOAM POT types that use a maximum of two profiles to drive computation, indicates which POT-profile is used. The two profiles are numbered 0, 1.

Bit 1-7 Reserved: Must be set to zero upon transmission and ignored upon receipt.

POT Option data: Variable-length field. The type of which is determined by the IOAM-POT-Type.

[4.5.1.](#) IOAM Proof of Transit Type 0

IOAM proof of transit option of IOAM POT Type 0:

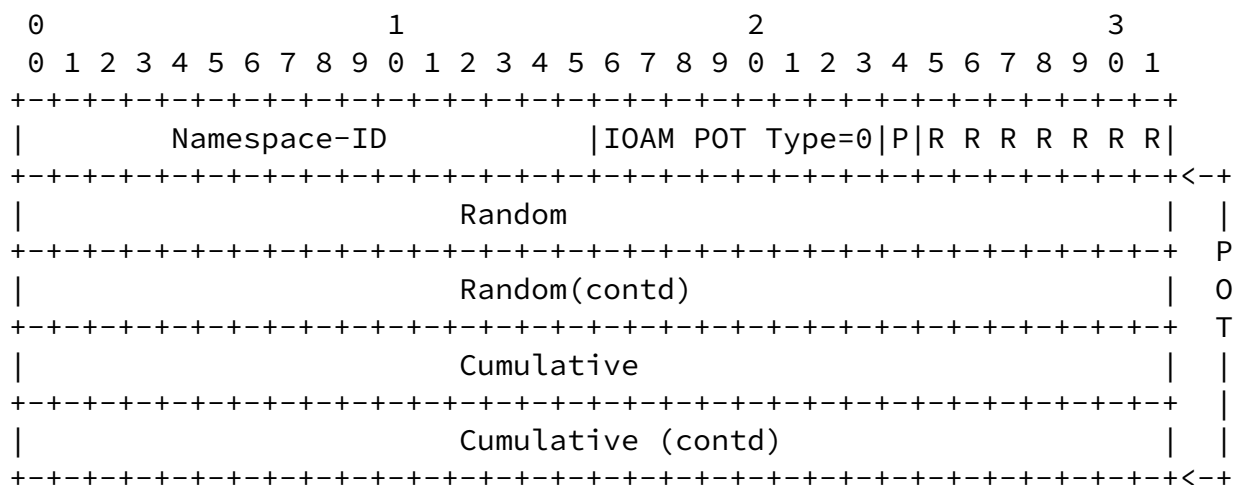

Namespace-ID: 16-bit identifier of an IOAM-Namespace. The Namespace-ID value of 0x0000 is defined as the default value and MUST be known to all the nodes implementing IOAM. For any other Namespace-ID value that does not match any Namespace-ID the node is configured to operate on, the node MUST NOT change the contents of the IOAM-Data-Fields.

IOAM POT Type: 8-bit identifier of a particular POT variant that specifies the POT data that is included. This section defines the POT data when the IOAM POT Type is set to the value 0.

P bit: 1-bit. "Profile-to-use" (P-bit) (most significant bit). Indicates which POT-profile is used to generate the Cumulative. Any node participating in POT will have a maximum of 2 profiles configured that drive the computation of cumulative. The two

profiles are numbered 0, 1. This bit conveys whether profile 0 or profile 1 is used to compute the Cumulative.

R (7 bits): 7-bit IOAM POT flags for future use. MUST be set to zero upon transmission and ignored upon receipt.

Random: 64-bit Per packet Random number.

Cumulative: 64-bit Cumulative that is updated at specific nodes by processing per packet Random number field and configured parameters.


Note: Larger or smaller sizes of "Random" and "Cumulative" data are feasible and could be required for certain deployments (e.g. in case of space constraints in the transport protocol used). Future versions of this document will address different sizes of data for "proof of transit".

[4.6.](#) IOAM Edge-to-Edge Option-Type


The IOAM Edge-to-Edge Option-Type is to carry data that is added by the IOAM encapsulating node and interpreted by IOAM decapsulating node. The IOAM transit nodes MAY process the data but MUST NOT modify it.

The IOAM Edge-to-Edge Option-Type consist of a fixed size "IOAM Edge-to-Edge Option-Type header" and "IOAM Edge-to-Edge Option-Type data fields":

IOAM Edge-to-Edge Option-Type header:

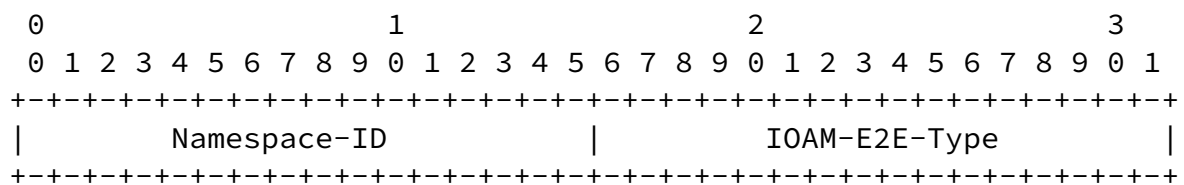

IOAM Edge-to-Edge Option-Type IOAM-Data-Fields MUST be 4-octet aligned:

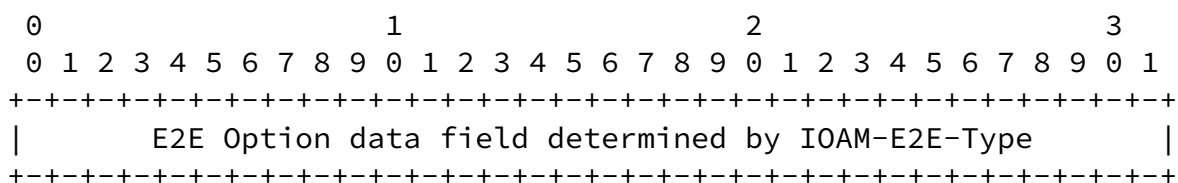

Namespace-ID: 16-bit identifier of an IOAM-Namespace. The Namespace-ID value of 0x0000 is defined as the default value and MUST be known to all the nodes implementing IOAM. For any other Namespace-ID value that does not match any Namespace-ID the node is configured to operate on, then the node MUST NOT change the contents of the IOAM-Data-Fields.

IOAM-E2E-Type: A 16-bit identifier which specifies which data types are used in the E2E option data. The IOAM-E2E-Type value is a bit field. The order of packing the E2E option data field elements follows the bit order of the IOAM-E2E-Type field, as follows:

- Bit 0 (Most significant bit) When set indicates presence of a 64-bit sequence number added to a specific "packet group" which is used to detect packet loss, packet reordering, or packet duplication within the group. The "packet group" is deployment dependent and defined at the IOAM encapsulating node e.g. by n-tuple based classification of packets.
- Bit 1 When set indicates presence of a 32-bit sequence number added to a specific "packet group" which is used to detect packet loss, packet reordering, or packet duplication within that group. The "packet group" is deployment dependent and defined at the IOAM encapsulating node e.g. by n-tuple based classification of packets.
- Bit 2 When set indicates presence of timestamp seconds for the transmission of the frame. This 4-octet field has three possible formats; based on either PTP [[IEEE1588v2](#)], NTP [[RFC5905](#)], or POSIX [[POSIX](#)]. The three timestamp formats are specified in [Section 5](#). In all three cases, the

Timestamp Seconds field contains the 32 most significant bits of the timestamp format that is specified in [Section 5](#). If a node is not capable of populating this field, it assigns the value 0xFFFFFFFF. Note that this is a legitimate value that is valid for 1 second in approximately 136 years; the analyzer should correlate several packets or compare the timestamp value to its own time-of-day in order to detect the error indication.

Bit 3 When set indicates presence of timestamp subseconds for the transmission of the frame. This 4-octet field has three possible formats; based on either PTP [[IEEE1588v2](#)], NTP [[RFC5905](#)], or POSIX [[POSIX](#)]. The three timestamp formats are specified in [Section 5](#). In all three cases, the Timestamp Subseconds field contains the 32 least significant bits of the timestamp format that is specified in [Section 5](#). If a node is not capable of populating this field, it assigns the value 0xFFFFFFFF. Note that this is a legitimate value in the NTP format, valid for approximately 233 picoseconds in every second. If the NTP format is used the analyzer should correlate several packets in order to detect the error indication.

Bit 4-15 Undefined. An IOAM encapsulating node Must set the value of these bits to zero upon transmission and ignore upon receipt.

E2E Option data: Variable-length field. The type of which is determined by the IOAM-E2E-Type.

[5](#). Timestamp Formats

The IOAM-Data-Fields include a timestamp field which is represented in one of three possible timestamp formats. It is assumed that the management plane is responsible for determining which timestamp format is used.

[5.1](#). PTP Truncated Timestamp Format

The Precision Time Protocol (PTP) [[IEEE1588v2](#)] uses an 80-bit timestamp format. The truncated timestamp format is a 64-bit field,

which is the 64 least significant bits of the 80-bit PTP timestamp. The PTP truncated format is specified in Section 4.3 of [\[I-D.ietf-ntp-packet-timestamps\]](#), and the details are presented below for the sake of completeness.

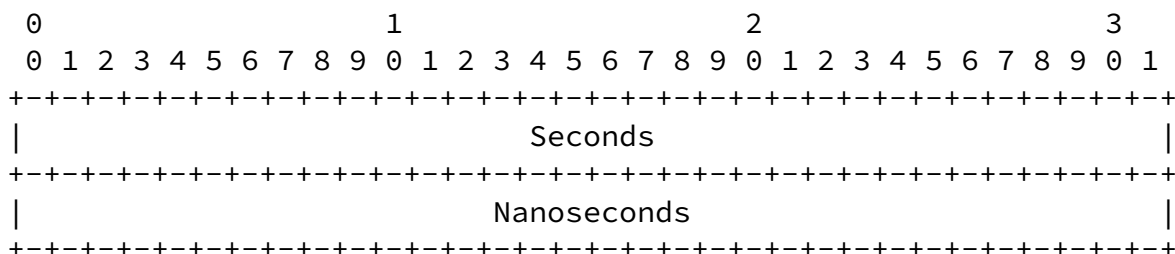


Figure 1: PTP [\[IEEE1588v2\]](#) Truncated Timestamp Format

Timestamp field format:

Seconds: specifies the integer portion of the number of seconds since the epoch.

+ Size: 32 bits.

+ Units: seconds.

Nanoseconds: specifies the fractional portion of the number of seconds since the epoch.

+ Size: 32 bits.

+ Units: nanoseconds. The value of this field is in the range 0 to $(10^9)-1$.

Epoch:

The PTP [\[IEEE1588v2\]](#) epoch is 1 January 1970 00:00:00 TAI, which is 31 December 1969 23:59:51.999918 UTC.

Resolution:

The resolution is 1 nanosecond.

Wraparound:

This time format wraps around every 2^{32} seconds, which is roughly 136 years. The next wraparound will occur in the year 2106.

Synchronization Aspects:

It is assumed that nodes that run this protocol are synchronized among themselves. Nodes may be synchronized to a global reference time. Note that if PTP [[IEEE1588v2](#)] is used for synchronization, the timestamp may be derived from the PTP-synchronized clock, allowing the timestamp to be measured with respect to the clock of an PTP Grandmaster clock.

The PTP truncated timestamp format is not affected by leap seconds.

5.2. NTP 64-bit Timestamp Format

The Network Time Protocol (NTP) [[RFC5905](#)] timestamp format is 64 bits long. This format is specified in Section 4.2.1 of [[I-D.ietf-ntp-packet-timestamps](#)], and the details are presented below for the sake of completeness.

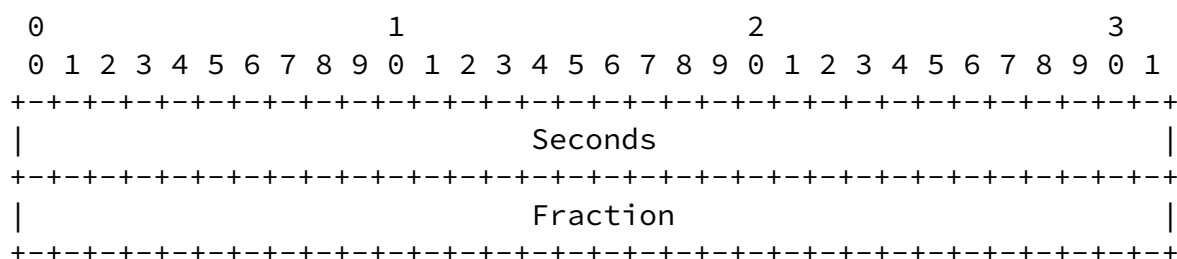


Figure 2: NTP [[RFC5905](#)] 64-bit Timestamp Format

Timestamp field format:

Seconds: specifies the integer portion of the number of seconds since the epoch.

+ Size: 32 bits.

+ Units: seconds.

Fraction: specifies the fractional portion of the number of seconds since the epoch.

+ Size: 32 bits.

+ Units: the unit is 2^{-32} seconds, which is roughly equal to 233 picoseconds.

Epoch:

The epoch is 1 January 1900 at 00:00 UTC.

Resolution:

The resolution is 2^{-32} seconds.

Wraparound:

This time format wraps around every 2^{32} seconds, which is roughly 136 years. The next wraparound will occur in the year 2036.

Synchronization Aspects:

Nodes that use this timestamp format will typically be synchronized to UTC using NTP [[RFC5905](#)]. Thus, the timestamp may be derived from the NTP-synchronized clock, allowing the timestamp to be measured with respect to the clock of an NTP server.

The NTP timestamp format is affected by leap seconds; it represents the number of seconds since the epoch minus the number of leap seconds that have occurred since the epoch. The value of a timestamp during or slightly after a leap second may be temporarily inaccurate.

[5.3.](#) POSIX-based Timestamp Format

This timestamp format is based on the POSIX time format [[POSIX](#)]. The detailed specification of the timestamp format used in this document is presented below.

Internet-Draft

In-situ OAM Data Fields

September 2019

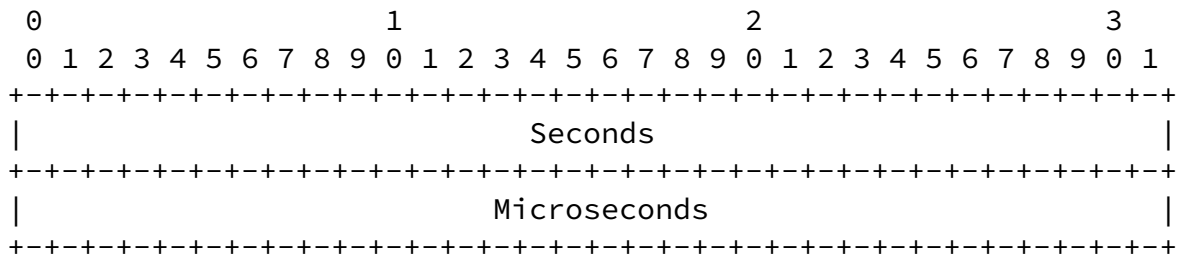


Figure 3: POSIX-based Timestamp Format

Timestamp field format:

Seconds: specifies the integer portion of the number of seconds since the epoch.

+ Size: 32 bits.

+ Units: seconds.

Microseconds: specifies the fractional portion of the number of seconds since the epoch.

+ Size: 32 bits.

+ Units: the unit is microseconds. The value of this field is in the range 0 to $(10^6)-1$.

Epoch:

The epoch is 1 January 1970 00:00:00 TAI, which is 31 December 1969 23:59:51.999918 UTC.

Resolution:

The resolution is 1 microsecond.

Wraparound:

This time format wraps around every 2^{32} seconds, which is roughly 136 years. The next wraparound will occur in the year 2106.

Synchronization Aspects:

It is assumed that nodes that use this timestamp format run Linux operating system, and hence use the POSIX time. In some cases nodes may be synchronized to UTC using a synchronization mechanism that is outside the scope of this document, such as NTP [[RFC5905](#)]. Thus, the timestamp may be derived from the NTP-synchronized

clock, allowing the timestamp to be measured with respect to the clock of an NTP server.

The POSIX-based timestamp format is affected by leap seconds; it represents the number of seconds since the epoch minus the number of leap seconds that have occurred since the epoch. The value of a timestamp during or slightly after a leap second may be temporarily inaccurate.

[6.](#) IOAM Data Export

IOAM nodes collect information for packets traversing a domain that supports IOAM. IOAM decapsulating nodes as well as IOAM transit nodes can choose to retrieve IOAM information from the packet, process the information further and export the information using e.g., IPFIX. The mechanisms and associated data formats for exporting IOAM data is outside the scope of this document.

Raw data export of IOAM data using IPFIX is discussed in [[I-D.spiegel-ippm-ioam-rawexport](#)].

[7.](#) IANA Considerations

This document requests the following IANA Actions.

[7.1.](#) Creation of a new In-Situ OAM Protocol Parameters Registry (IOAM) Protocol Parameters IANA registry

IANA is requested to create a new protocol registry for "In-Situ OAM (IOAM) Protocol Parameters". This is the common registry that will include registrations for all IOAM-Namespaces. Each Registry, whose names are listed below:

IOAM Option-Type

IOAM Trace-Type

IOAM Trace-Flags

IOAM POT-Type

IOAM POT-Flags

IOAM E2E-Type

IOAM Namespace-ID

will contain the current set of possibilities defined in this document. New registries in this name space are created via RFC Required process as per [[RFC8126](#)].

The subsequent sub-sections detail the registries herein contained.

[7.2.](#) IOAM Option-Type Registry

This registry defines 128 code points for the IOAM Option-Type field for identifying IOAM Option-Types as explained in [Section 4](#). The following code points are defined in this draft:

0 IOAM Pre-allocated Trace Option-Type

1 IOAM Incremental Trace Option-Type

2 IOAM POT Option-Type

3 IOAM E2E Option-Type

4 - 127 are available for assignment via RFC Required process as per [[RFC8126](#)].

[7.3.](#) IOAM Trace-Type Registry

This registry defines code point for each bit in the 24-bit IOAM-Trace-Type field for Pre-allocated trace option and Incremental trace option defined in [Section 4.4](#). The meaning of Bits 0 - 11 for trace type are defined in this document in Paragraph 5 of [Section 4.4.1](#):

Bit 0 hop_Lim and node_id in short format
Bit 1 ingress_if_id and egress_if_id in short format
Bit 2 timestamp seconds
Bit 3 timestamp subseconds
Bit 4 transit delay
Bit 5 namespace specific data in short format
Bit 6 queue depth
Bit 7 checksum complement
Bit 8 hop_Lim and node_id in wide format

Bit 9 ingress_if_id and egress_if_id in wide format
Bit 10 namespace specific data in wide format
Bit 11 buffer occupancy
Bit 22 variable length Opaque State Snapshot
Bit 23 reserved

The meaning for Bits 12 - 21 are available for assignment via RFC Required process as per [[RFC8126](#)].

[7.4.](#) IOAM Trace-Flags Registry

This registry defines code points for each bit in the 4 bit flags for the Pre-allocated trace option and for the Incremental trace option defined in [Section 4.4](#). The meaning of Bit 0 (the most significant bit) for trace flags is defined in this document in Paragraph 3 of [Section 4.4.1](#):

Bit 0 "Overflow" (0-bit)

[7.5.](#) IOAM POT-Type Registry

This registry defines 256 code points to define IOAM POT Type for IOAM proof of transit option [Section 4.5](#). The code point value 0 is defined in this document:

0: 16 Octet POT data

1 - 255 are available for assignment via RFC Required process as per [\[RFC8126\]](#).

[7.6.](#) IOAM POT-Flags Registry

This registry defines code points for each bit in the 8 bit flags for IOAM POT option defined in [Section 4.5](#). The meaning of Bit 0 for IOAM POT flags is defined in this document in [Section 4.5](#):

Bit 0 "Profile-to-use" (P-bit)

The meaning for Bits 1 - 7 are available for assignment via RFC Required process as per [\[RFC8126\]](#).

[7.7.](#) IOAM E2E-Type Registry

This registry defines code points for each bit in the 16 bit IOAM-E2E-Type field for IOAM E2E option [Section 4.6](#). The meaning of Bit 0 - 3 are defined in this document:

Bit 0 64-bit sequence number

Bit 1 32-bit sequence number

Bit 2 timestamp seconds

Bit 3 timestamp subseconds

The meaning of Bits 4 - 15 are available for assignment via RFC

Required process as per [[RFC8126](#)].

7.8. IOAM Namespace-ID Registry

IANA is requested to set up an "IOAM Namespace-ID Registry", containing 16-bit values. The meaning of Bit 0 is defined in this document. IANA is requested to reserve the values 0x0001 to 0x7FFF for private use (managed by operators), as specified in [Section 4.3](#) of the current document. Registry entries for the values 0x8000 to 0xFFFF are to be assigned via the "Expert Review" policy defined in [[RFC8126](#)].

0: default namespace (known to all IOAM nodes)

0x0001 - 0x7FFF: reserved for private use

0x8000 - 0xFFFF: unassigned

8. Security Considerations

As discussed in [[RFC7276](#)], a successful attack on an OAM protocol in general, and specifically on IOAM, can prevent the detection of failures or anomalies, or create a false illusion of nonexistent ones.

The Proof of Transit Option-Type (Section [Section 4.5](#)) is used for verifying the path of data packets. The security considerations of POT are further discussed in [[I-D.ietf-sfc-proof-of-transit](#)].

The data elements of IOAM can be used for network reconnaissance, allowing attackers to collect information about network paths, performance, queue states, buffer occupancy and other information. Note that in case IOAM is used in "immediate export" mode (reference

to be added in a future revision), the IOAM related trace information would not be available in the customer data packets, but would trigger export of packet related IOAM information at every node. IOAM data export and securing IOAM data export is outside the scope of this document.

IOAM can be used as a means for implementing Denial of Service (DoS) attacks, or for amplifying them. For example, a malicious attacker

can add an IOAM header to packets in order to consume the resources of network devices that take part in IOAM or collectors that analyze the IOAM data. Another example is a packet length attack, in which an attacker pushes headers associated with IOAM Option-Types into data packets, causing these packets to be increased beyond the MTU size, resulting in fragmentation or in packet drops.

Since IOAM options may include timestamps, if network devices use synchronization protocols then any attack on the time protocol [[RFC7384](#)] can compromise the integrity of the timestamp-related data fields.

At the management plane, attacks may be implemented by misconfiguring or by maliciously configuring IOAM-enabled nodes in a way that enables other attacks. Thus, IOAM configuration should be secured in a way that authenticates authorized users and verifies the integrity of configuration procedures.

Notably, IOAM is expected to be deployed in specific network domains, thus confining the potential attack vectors to within the network domain. Indeed, in order to limit the scope of threats to within the current network domain the network operator is expected to enforce policies that prevent IOAM traffic from leaking outside of the IOAM domain, and prevent IOAM data from outside the domain to be processed and used within the domain. Note that the Immediate Export mode (reference to be added in a future revision) can mitigate the potential threat of IOAM data leaking through data packets.

[9.](#) Acknowledgements

The authors would like to thank Eric Vyncke, Nalini Elkins, Srihari Raghavan, Ranganathan T S, Karthik Babu Harichandra Babu, Akshaya Nadahalli, LJ Wobker, Erik Nordmark, Vengada Prasad Govindan, Andrew Yourtchenko, Aviv Kfir, Tianran Zhou and Zhenbin (Robin) for the comments and advice.

This document leverages and builds on top of several concepts described in [[I-D.kitamura-ipv6-record-route](#)]. The authors would like to acknowledge the work done by the author Hiroshi Kitamura and people involved in writing it.

insightful comments received from Joe Clarke, Al Morton, Tom Herbet, Haoyu song, and Mickey Spiegel.

The authors would like to acknowledge the contribution of "Immediate export" of IOAM trace by Barak Gafni.

10. References

10.1. Normative References

[IEEE1588v2]

Institute of Electrical and Electronics Engineers, "IEEE Std 1588-2008 - IEEE Standard for a Precision Clock Synchronization Protocol for Networked Measurement and Control Systems", IEEE Std 1588-2008, 2008, <<http://standards.ieee.org/findstds/standard/1588-2008.html>>.

[POSIX]

Institute of Electrical and Electronics Engineers, "IEEE Std 1003.1-2008 (Revision of IEEE Std 1003.1-2004) - IEEE Standard for Information Technology - Portable Operating System Interface (POSIX(R))", IEEE Std 1003.1-2008, 2008, <<https://standards.ieee.org/findstds/standard/1003.1-2008.html>>.

[RFC2119]

Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.

[RFC5905]

Mills, D., Martin, J., Ed., Burbank, J., and W. Kasch, "Network Time Protocol Version 4: Protocol and Algorithms Specification", [RFC 5905](#), DOI 10.17487/RFC5905, June 2010, <<https://www.rfc-editor.org/info/rfc5905>>.

[RFC8126]

Cotton, M., Leiba, B., and T. Narten, "Guidelines for Writing an IANA Considerations Section in RFCs", [BCP 26](#), [RFC 8126](#), DOI 10.17487/RFC8126, June 2017, <<https://www.rfc-editor.org/info/rfc8126>>.

10.2. Informative References

[I-D.ietf-ntp-packet-timestamps]

Mizrahi, T., Fabini, J., and A. Morton, "Guidelines for Defining Packet Timestamps", [draft-ietf-ntp-packet-timestamps-07](#) (work in progress), August 2019.

[I-D.ietf-nvo3-geneve]

Gross, J., Ganga, I., and T. Sridhar, "Geneve: Generic Network Virtualization Encapsulation", [draft-ietf-nvo3-geneve-13](#) (work in progress), March 2019.

[I-D.ietf-nvo3-vxlan-gpe]

Maino, F., Kreeger, L., and U. Elzur, "Generic Protocol Extension for VXLAN", [draft-ietf-nvo3-vxlan-gpe-07](#) (work in progress), April 2019.

[I-D.ietf-sfc-proof-of-transit]

Brockners, F., Bhandari, S., Dara, S., Pignataro, C., Leddy, J., Youell, S., Mozes, D., Mizrahi, T., Aguado, A., and D. Lopez, "Proof of Transit", [draft-ietf-sfc-proof-of-transit-02](#) (work in progress), March 2019.

[I-D.kitamura-ipv6-record-route]

Kitamura, H., "Record Route for IPv6 (PR6) Hop-by-Hop Option Extension", [draft-kitamura-ipv6-record-route-00](#) (work in progress), November 2000.

[I-D.lapukhov-dataplane-probe]

Lapukhov, P. and r. remy@barefootnetworks.com, "Data-plane probe for in-band telemetry collection", [draft-lapukhov-dataplane-probe-01](#) (work in progress), June 2016.

[I-D.spiegel-ippm-ioam-rawexport]

Spiegel, M., Brockners, F., Bhandari, S., and R. Sivakolundu, "In-situ OAM raw data export with IPFIX", [draft-spiegel-ippm-ioam-rawexport-02](#) (work in progress), July 2019.

[RFC7276] Mizrahi, T., Sprecher, N., Bellagamba, E., and Y. Weingarten, "An Overview of Operations, Administration, and Maintenance (OAM) Tools", [RFC 7276](#), DOI 10.17487/RFC7276, June 2014, <<https://www.rfc-editor.org/info/rfc7276>>.

[RFC7384] Mizrahi, T., "Security Requirements of Time Protocols in Packet Switched Networks", [RFC 7384](#), DOI 10.17487/RFC7384, October 2014, <<https://www.rfc-editor.org/info/rfc7384>>.

[RFC7665] Halpern, J., Ed. and C. Pignataro, Ed., "Service Function Chaining (SFC) Architecture", [RFC 7665](#), DOI 10.17487/RFC7665, October 2015, <<https://www.rfc-editor.org/info/rfc7665>>.

Internet-Draft

In-situ OAM Data Fields

September 2019

- [RFC7799] Morton, A., "Active and Passive Metrics and Methods (with Hybrid Types In-Between)", [RFC 7799](#), DOI 10.17487/RFC7799, May 2016, <<https://www.rfc-editor.org/info/rfc7799>>.
- [RFC7820] Mizrahi, T., "UDP Checksum Complement in the One-Way Active Measurement Protocol (OWAMP) and Two-Way Active Measurement Protocol (TWAMP)", [RFC 7820](#), DOI 10.17487/RFC7820, March 2016, <<https://www.rfc-editor.org/info/rfc7820>>.
- [RFC7821] Mizrahi, T., "UDP Checksum Complement in the Network Time Protocol (NTP)", [RFC 7821](#), DOI 10.17487/RFC7821, March 2016, <<https://www.rfc-editor.org/info/rfc7821>>.
- [RFC8300] Quinn, P., Ed., Elzur, U., Ed., and C. Pignataro, Ed., "Network Service Header (NSH)", [RFC 8300](#), DOI 10.17487/RFC8300, January 2018, <<https://www.rfc-editor.org/info/rfc8300>>.

Authors' Addresses

Frank Brockners
Cisco Systems, Inc.
Hansaallee 249, 3rd Floor
DUESSELDORF, NORDRHEIN-WESTFALEN 40549
Germany

Email: fbrockne@cisco.com

Shwetha Bhandari
Cisco Systems, Inc.
Cessna Business Park, Sarjapura Marathalli Outer Ring Road
Bangalore, KARNATAKA 560 087
India

Email: shwethab@cisco.com

Carlos Pignataro
Cisco Systems, Inc.
7200-11 Kit Creek Road
Research Triangle Park, NC 27709
United States

Email: cpignata@cisco.com

Brockners, et al.

Expires March 14, 2020

[Page 39]

Internet-Draft

In-situ OAM Data Fields

September 2019

Hannes Gredler
RtBrick Inc.

Email: hannes@rtbrick.com

John Leddy
United States

Email: john@leddy.net

Stephen Youell
JP Morgan Chase
25 Bank Street
London E14 5JP
United Kingdom

Email: stephen.youell@jpmorgan.com

Tal Mizrahi
Huawei Network.IO Innovation Lab
Israel

Email: tal.mizrahi.phd@gmail.com

David Mozes

Email: mosesster@gmail.com

Petr Lapukhov
Facebook
1 Hacker Way
Menlo Park, CA 94025
US

Email: petr@fb.com

Remy Chang
Barefoot Networks
4750 Patrick Henry Drive
Santa Clara, CA 95054
US

Brockners, et al.

Expires March 14, 2020

[Page 40]

Internet-Draft

In-situ OAM Data Fields

September 2019

Daniel Bernier
Bell Canada
Canada

Email: daniel.bernier@bell.ca

John Lemon
Broadcom
270 Innovation Drive
San Jose, CA 95134
US

Email: john.lemon@broadcom.com

