

Workgroup: ippm  
Internet-Draft:  
draft-ietf-ippm-ioam-ipv6-options-07  
Published: 6 February 2022  
Intended Status: Standards Track  
Expires: 10 August 2022  
Authors: S. Bhandari, Ed.    F. Brockners, Ed.  
         Thoughtspot           Cisco  
**In-situ OAM IPv6 Options**

## Abstract

In-situ Operations, Administration, and Maintenance (IOAM) records operational and telemetry information in the packet while the packet traverses a path between two points in the network. This document outlines how IOAM data fields are encapsulated in IPv6.

## Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 10 August 2022.

## Copyright Notice

Copyright (c) 2022 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

## Table of Contents

- [1. Introduction](#)
- [2. Contributors](#)
- [3. Conventions](#)
  - [3.1. Requirements Language](#)
  - [3.2. Abbreviations](#)
- [4. In-situ OAM Metadata Transport in IPv6](#)
- [5. IOAM Deployment In IPv6 Networks](#)
  - [5.1. Considerations for IOAM deployment in IPv6 networks](#)
  - [5.2. IOAM domains bounded by hosts](#)
  - [5.3. IOAM domains bounded by network devices](#)
  - [5.4. Deployment options](#)
    - [5.4.1. IP-in-IPv6 encapsulation with ULA](#)
    - [5.4.2. x-in-IPv6 Encapsulation that is used Independently](#)
- [6. Security Considerations](#)
- [7. IANA Considerations](#)
- [8. Acknowledgements](#)
- [9. References](#)
  - [9.1. Normative References](#)
  - [9.2. Informative References](#)
- [Contributors' Addresses](#)
- [Authors' Addresses](#)

## 1. Introduction

In-situ Operations, Administration, and Maintenance (IOAM) records operational and telemetry information in the packet while the packet traverses a path between two points in the network. This document outlines how IOAM data fields are encapsulated in the IPv6 [[RFC8200](#)] and discusses deployment options for networks that use IPv6-encapsulated IOAM data fields. These options have distinct deployment considerations; for example, the IOAM domain can either be between hosts, or be between IOAM encapsulating and decapsulating network nodes that forward traffic, such as routers.

## 2. Contributors

This document was the collective effort of several authors. The text and content were contributed by the editors and the co-authors listed below. The contact information of the co-authors appears at the end of this document.

\*Carlos Pignataro

\*Hannes Gredler

\*John Leddy

\*Stephen Youell

\*Tal Mizrahi

\*Aviv Kfir

\*Barak Gafni

\*Petr Lapukhov

\*Mickey Spiegel

\*Suresh Krishnan

\*Rajiv Asati

\*Mark Smith

### **3. Conventions**

#### **3.1. Requirements Language**

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in BCP 14 [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

#### **3.2. Abbreviations**

Abbreviations used in this document:

**E2E:** Edge-to-Edge

**IOAM:** In-situ Operations, Administration, and Maintenance

**ION:** IOAM Overlay Network

**OAM:** Operations, Administration, and Maintenance

**POT:** Proof of Transit

### **4. In-situ OAM Metadata Transport in IPv6**

In-situ OAM in IPv6 is used to enhance diagnostics of IPv6 networks. It complements other mechanisms designed to enhance diagnostics of IPv6 networks, such as the IPv6 Performance and Diagnostic Metrics Destination Option described in [[RFC8250](#)].


IOAM data fields can be encapsulated in "option data" fields using two types of extension headers in IPv6 packets - either Hop-by-Hop Options header or Destination options header. Deployments select one of these extension header types depending on how IOAM is used, as

described in section 4 of [[I-D.ietf-ippm-ioam-data](#)]. Multiple options with the same Option Type MAY appear in the same Hop-by-Hop Options or Destination Options header, with distinct content.

In order for IOAM to work in IPv6 networks, IOAM MUST be explicitly enabled per interface on every node within the IOAM domain. Unless a particular interface is explicitly enabled (i.e., explicitly configured) for IOAM, a router MUST ignore IOAM Options. As additional security, IOAM domains SHOULD provide a mechanism to prevent injections at ingress or leaks at egress.

An IPv6 packet carrying IOAM data in an Extension header can have other extension headers, compliant with [[RFC8200](#)].

IPv6 Hop-by-Hop and Destination Option format for carrying in-situ OAM data fields:

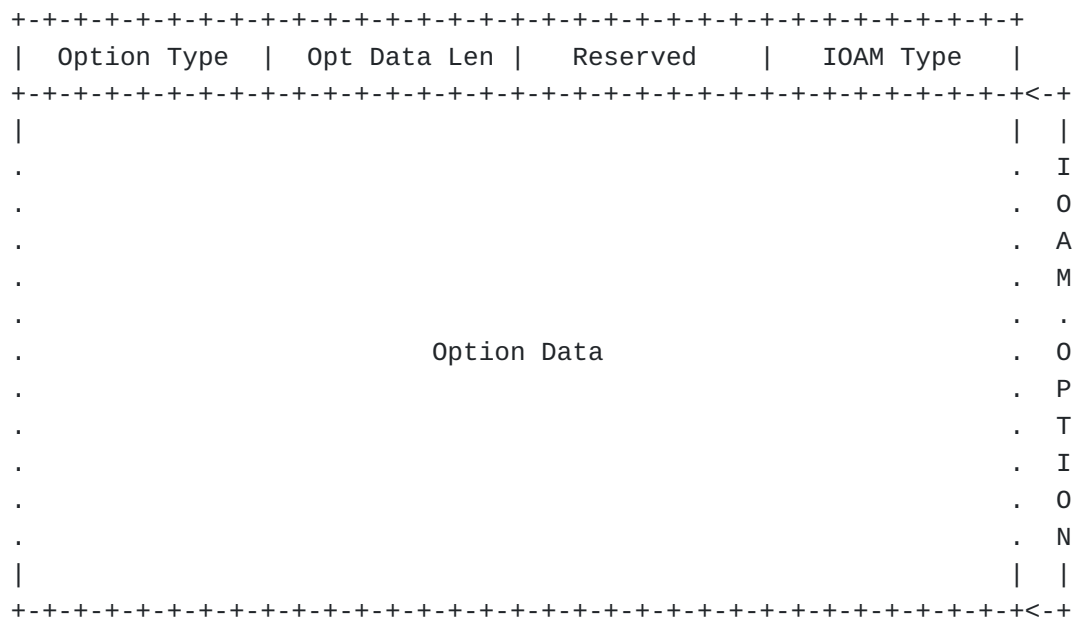

**Option Type:** 8-bit option type identifier as defined in [Section 7](#).

**Opt Data Len:** 8-bit unsigned integer. Length of this option, in octets, not including the first 2 octets.

**Reserved:** 8-bit field MUST be set to zero upon transmission and ignored upon reception.

**IOAM Type:** 8-bit field as defined in section 7.2 in [[I-D.ietf-ippm-ioam-data](#)].

**Option Data:** Variable-length field. Option-Type-specific data.

In-situ OAM Option-Types are inserted as Option data as follows:

1. Pre-allocated Trace Option: The in-situ OAM Preallocated Trace Option-Type defined in [[I-D.ietf-ippm-ioam-data](#)] is represented as an IPv6 option in the Hop-by-Hop extension header:

**Option Type:** 001xxxxx 8-bit identifier of the IOAM type of option. xxxxx=TBD.

**IOAM Option-Type:** IOAM Pre-allocated Trace Option-Type.

2. Incremental Trace Option: The in-situ OAM Incremental Trace Option-Type defined in [[I-D.ietf-ippm-ioam-data](#)] is represented as an IPv6 option in the Hop-by-Hop extension header:

**Option Type:** 001xxxxx 8-bit identifier of the IOAM type of option. xxxxx=TBD.

**IOAM Option-Type:** IOAM Incremental Trace Option-Type.

3. Proof of Transit Option: The in-situ OAM POT Option-Type defined in [[I-D.ietf-ippm-ioam-data](#)] is represented as an IPv6 option in the Hop-by-Hop extension header:

**Option Type:** 001xxxxx 8-bit identifier of the IOAM type of option. xxxxx=TBD.

**IOAM Option-Type:** IOAM POT Option-Type.

4. Edge to Edge Option: The in-situ OAM E2E option defined in [[I-D.ietf-ippm-ioam-data](#)] is represented as an IPv6 option in Destination extension header:

**Option Type:** 000xxxxx 8-bit identifier of the IOAM type of option. xxxxx=TBD.

**IOAM Option-Type:** IOAM E2E Option-Type.

5. Direct Export (DEX) Option: The in-situ OAM Direct Export Option-Type defined in [[I-D.ietf-ippm-ioam-direct-export](#)] is represented as an IPv6 option in the Hop-by-Hop extension header:

**Option Type:** 000xxxxx 8-bit identifier of the IOAM type of option. xxxxx=TBD.

**IOAM Option-Type:** IOAM Direct Export (DEX) Option-Type.

All the in-situ OAM IPv6 options defined here have alignment requirements. Specifically, they all require 4n alignment. This

ensures that fields specified in [[I-D.ietf-ippm-ioam-data](#)] are aligned at a multiple-of-4 offset from the start of the Hop-by-Hop and Destination Options header. In addition, to maintain IPv6 extension header 8-octet alignment and avoid the need to add or remove padding at every hop, the Trace-Type for Incremental Trace Option in IPv6 MUST be selected such that the IOAM node data length is a multiple of 8-octets.

IPv6 options can have a maximum length of 255 octets. Consequently, the total length of IOAM Option-Types including all data fields is also limited to 255 octets when encapsulated into IPv6.

## **5. IOAM Deployment In IPv6 Networks**

### **5.1. Considerations for IOAM deployment in IPv6 networks**

IOAM deployments in IPv6 networks should take the following considerations and requirements into account:

- C1** It is desirable that the addition of IOAM data fields neither changes the way routers forward packets nor the forwarding decisions the routers take. Packets with added OAM information should follow the same path within the domain that an identical packet without OAM information would follow, even in the presence of ECMP. Such behavior is particularly important for deployments where IOAM data fields are only added "on-demand", e.g., to provide further insights in case of undesired network behavior for certain flows. Implementations of IOAM SHOULD ensure that ECMP behavior for packets with and without IOAM data fields is the same.
- C2** Given that IOAM data fields increase the total size of a packet, the size of a packet including the IOAM data could exceed the PMTU. In particular, the incremental trace IOAM Hop-by-Hop (HbH) Option, which is intended to support hardware implementations of IOAM, changes Option Data Length en-route. Operators of an IOAM domain SHOULD ensure that the addition of OAM information does not lead to fragmentation of the packet, e.g., by configuring the MTU of transit routers and switches to a sufficiently high value. Careful control of the MTU in a network is one of the reasons why IOAM is considered a domain-specific feature (see also [[I-D.ietf-ippm-ioam-data](#)]). In addition, the PMTU tolerance range in the IOAM domain should be identified (e.g., through configuration) and IOAM encapsulation operations and/or IOAM data field insertion (in case of incremental tracing) should not be performed if it exceeds the packet size beyond PMTU.
- C3** Packets with IOAM data or associated ICMP errors, should not arrive at destinations that have no knowledge of IOAM. For

example, if IOAM is used in in transit devices, misleading ICMP errors due to addition and/or presence of OAM data in a packet could confuse the host that sent the packet if it did not insert the OAM information.

- C4** OAM data leaks can affect the forwarding behavior and state of network elements outside an IOAM domain. IOAM domains SHOULD provide a mechanism to prevent data leaks or be able to ensure that if a leak occurs, network elements outside the domain are not affected (i.e., they continue to process other valid packets).
- C5** The source that inserts and leaks the IOAM data needs to be easy to identify for the purpose of troubleshooting, due to the high complexity of troubleshooting a source that inserted the IOAM data and did not remove it when the packet traversed across an Autonomous System (AS). Such a troubleshooting process might require coordination between multiple operators, complex configuration verification, packet capture analysis, etc.
- C6** Compliance with [\[RFC8200\]](#) requires OAM data to be encapsulated instead of header/option insertion directly into in-flight packets using the original IPv6 header.

## **5.2. IOAM domains bounded by hosts**

For deployments where the IOAM domain is bounded by hosts, hosts will perform the operation of IOAM data field encapsulation and decapsulation. IOAM data is carried in IPv6 packets as Hop-by-Hop or Destination options as specified in this document.

## **5.3. IOAM domains bounded by network devices**

For deployments where the IOAM domain is bounded by network devices, network devices such as routers form the edge of an IOAM domain. Network devices will perform the operation of IOAM data field encapsulation and decapsulation.

## **5.4. Deployment options**

This section lists out possible deployment options that can be employed to meet the requirements listed in [Section 5.1](#).

### **5.4.1. IP-in-IPv6 encapsulation with ULA**

The "IP-in-IPv6 encapsulation with ULA" [\[RFC4193\]](#) approach can be used to apply IOAM to either an IPv6 or an IPv4 network. In addition, it fulfills requirement C4 (avoid leaks) by using ULA for the ION. Similar to the IPv6-in-IPv6 encapsulation approach above, the original IP packet is preserved. An IPv6 header including IOAM

data fields in an extension header is added in front of it, to forward traffic within and across the IOAM domain. IPv6 addresses for the ION, i.e. the outer IPv6 addresses are assigned from the ULA space. Addressing and routing in the ION are to be configured so that the IP-in-IPv6 encapsulated packets follow the same path as the original, non-encapsulated packet would have taken. This would create an internal IPv6 forwarding topology using the IOAM domain's interior ULA address space which is parallel with the forwarding topology that exists with the non-IOAM address space (the topology and address space that would be followed by packets that do not have supplemental IOAM information). Establishment and maintenance of the parallel IOAM ULA forwarding topology could be automated, e.g., similar to how LDP [[RFC5036](#)] is used in MPLS to establish and maintain an LSP forwarding topology that is parallel to the network's IGP forwarding topology.

Transit across the ION could leverage the transit approach for traffic between BGP border routers, as described in [[RFC1772](#)], "A. 2.3 Encapsulation". Assuming that the operational guidelines specified in Section 4 of [[RFC4193](#)] are properly followed, the probability of leaks in this approach will be almost close to zero. If the packets do leak through IOAM egress device misconfiguration or partial IOAM egress device failure, the packets' ULA destination address is invalid outside of the IOAM domain. There is no exterior destination to be reached, and the packets will be dropped when they encounter either a router external to the IOAM domain that has a packet filter that drops packets with ULA destinations, or a router that does not have a default route.

#### **5.4.2. x-in-IPv6 Encapsulation that is used Independently**

In some cases it is desirable to monitor a domain that uses an overlay network that is deployed independently of the need for IOAM, e.g., an overlay network that runs Geneve-in-IPv6, or VXLAN-in-IPv6. In this case IOAM can be encapsulated in as an extension header in the tunnel (outer) IPv6 header. Thus, the tunnel encapsulating node is also the IOAM encapsulating node, and the tunnel end point is also the IOAM decapsulating node.

## **6. Security Considerations**

This document describes the encapsulation of IOAM data fields in IPv6. Security considerations of the specific IOAM data fields for each case (i.e., Trace, Proof of Transit, and E2E) are described and defined in [[I-D.ietf-ippm-ioam-data](#)].

As this document describes new options for IPv6, these are similar to the security considerations of [[RFC8200](#)] and the weakness documented in [[RFC8250](#)].



## 7. IANA Considerations

This draft requests the following IPv6 Option Type assignments from the Destination Options and Hop-by-Hop Options sub-registry of Internet Protocol Version 6 (IPv6) Parameters.

<http://www.iana.org/assignments/ipv6-parameters/ipv6-parameters.xhtml#ipv6-parameters-2>

Hex Value	Binary Value			Description	Reference
	act	chg	rest		
-----					
TBD_1_0	00	0	TBD_1	IOAM	[This draft]
TBD_1_1	00	1	TBD_1	IOAM	[This draft]

## 8. Acknowledgements

The authors would like to thank Tom Herbert, Eric Vyncke, Nalini Elkins, Srihari Raghavan, Ranganathan T S, Karthik Babu Harichandra Babu, Akshaya Nadahalli, Stefano Previdi, Hemant Singh, Erik Nordmark, LJ Wobker, Mark Smith, Andrew Yourtchenko and Justin Iurman for the comments and advice. For the IPv6 encapsulation, this document leverages concepts described in [[I-D.kitamura-ipv6-record-route](#)]. The authors would like to acknowledge the work done by the author Hiroshi Kitamura and people involved in writing it.

## 9. References

### 9.1. Normative References

[I-D.ietf-ippm-ioam-data] Brockners, F., Bhandari, S., and T. Mizrahi, "Data Fields for In-situ OAM", Work in Progress, Internet-Draft, draft-ietf-ippm-ioam-data-17, 13 December 2021, <<https://www.ietf.org/archive/id/draft-ietf-ippm-ioam-data-17.txt>>.

[I-D.ietf-ippm-ioam-direct-export] Song, H., Gafni, B., Zhou, T., Li, Z., Brockners, F., Bhandari, S., Sivakolundu, R., and T. Mizrahi, "In-situ OAM Direct Exporting", Work in Progress, Internet-Draft, draft-ietf-ippm-ioam-direct-export-07, 13 October 2021, <<https://www.ietf.org/archive/id/draft-ietf-ippm-ioam-direct-export-07.txt>>.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/

RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.

- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", BCP 14, RFC 8174, DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.

## 9.2. Informative References

### [I-D.kitamura-ipv6-record-route]

Kitamura, H., "Record Route for IPv6 (PR6) Hop-by-Hop Option Extension", Work in Progress, Internet-Draft, draft-kitamura-ipv6-record-route-00, November 2000, <<https://tools.ietf.org/id/draft-kitamura-ipv6-record-route-00.txt>>.

- [RFC1772] Rekhter, Y. and P. Gross, "Application of the Border Gateway Protocol in the Internet", RFC 1772, DOI 10.17487/RFC1772, March 1995, <<https://www.rfc-editor.org/info/rfc1772>>.

- [RFC4193] Hinden, R. and B. Haberman, "Unique Local IPv6 Unicast Addresses", RFC 4193, DOI 10.17487/RFC4193, October 2005, <<https://www.rfc-editor.org/info/rfc4193>>.

- [RFC5036] Andersson, L., Ed., Minei, I., Ed., and B. Thomas, Ed., "LDP Specification", RFC 5036, DOI 10.17487/RFC5036, October 2007, <<https://www.rfc-editor.org/info/rfc5036>>.

- [RFC8200] Deering, S. and R. Hinden, "Internet Protocol, Version 6 (IPv6) Specification", STD 86, RFC 8200, DOI 10.17487/RFC8200, July 2017, <<https://www.rfc-editor.org/info/rfc8200>>.

- [RFC8250] Elkins, N., Hamilton, R., and M. Ackermann, "IPv6 Performance and Diagnostic Metrics (PDM) Destination Option", RFC 8250, DOI 10.17487/RFC8250, September 2017, <<https://www.rfc-editor.org/info/rfc8250>>.

## Contributors' Addresses

Carlos Pignataro  
Cisco Systems, Inc.  
7200-11 Kit Creek Road  
Research Triangle Park, NC 27709  
United States  
Email: cpignata@cisco.com

Hannes Gredler  
RtBrick Inc.  
Email: hannes@rtbrick.com

John Leddy  
Email: john@leddy.net

Stephen Youell  
JP Morgan Chase  
25 Bank Street  
London E14 5JP  
United Kingdom  
Email: stephen.youell@jpmorgan.com

Tal Mizrahi  
Huawei Network.IO Innovation Lab  
Israel  
Email: tal.mizrahi.phd@gmail.com

Aviv Kfir  
Mellanox Technologies, Inc.  
350 Oakmead Parkway, Suite 100  
Sunnyvale, CA 94085  
U.S.A.  
Email: avivk@mellanox.com

Barak Gafni  
Mellanox Technologies, Inc.  
350 Oakmead Parkway, Suite 100  
Sunnyvale, CA 94085  
U.S.A.  
Email: gbarak@mellanox.com

Petr Lapukhov  
Facebook

1 Hacker Way  
Menlo Park, CA 94025  
US  
Email: petr@fb.com

Mickey Spiegel  
Barefoot Networks, an Intel company  
4750 Patrick Henry Drive  
Santa Clara, CA 95054  
US  
Email: mickey.spiegel@intel.com

Suresh Krishnan  
Kaloom  
Email: suresh@kaloom.com

Rajiv Asati  
Cisco Systems, Inc.  
7200 Kit Creek Road  
Research Triangle Park, NC 27709  
US  
Email: rajiva@cisco.com

Mark Smith  
PO BOX 521  
HEIDELBERG, VIC 3084  
AU  
Email: markzzzsmith+id@gmail.com

## Authors' Addresses

Shwetha Bhandari (editor)  
Thoughtspot  
3rd Floor, Indiqube Orion, 24th Main Rd, Garden Layout, HSR Layout  
Bangalore, KARNATAKA 560 102  
India

Email: [shwetha.bhandari@thoughtspot.com](mailto:shwetha.bhandari@thoughtspot.com)

Frank Brockners (editor)  
Cisco Systems, Inc.  
Hansaallee 249, 3rd Floor  
40549 DUESSELDORF  
Germany

Email: [fbrockne@cisco.com](mailto:fbrockne@cisco.com)