

Network Working Group  
Internet-Draft  
Intended status: Standards Track  
Expires: September 2, 2018

G. Mirsky  
ZTE Corp.  
G. Jun  
ZTE Corporation  
H. Nydell  
Accedian Networks  
R. Foote  
Nokia  
March 1, 2018

Simple Two-way Active Measurement Protocol  
draft-ietf-ippm-stamp-01

## Abstract

This document describes a Simple Two-way Active Measurement Protocol which enables measurement of both one-way and round-trip performance metrics like delay, delay variation and packet loss.

## Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on September 2, 2018.

## Copyright Notice

Copyright (c) 2018 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must

Internet-Draft

STAMP

March 2018

include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	Introduction . . . . .	<a href="#">2</a>
<a href="#">2.</a>	Conventions used in this document . . . . .	<a href="#">3</a>
<a href="#">2.1.</a>	Terminology . . . . .	<a href="#">3</a>
<a href="#">2.2.</a>	Requirements Language . . . . .	<a href="#">3</a>
<a href="#">3.</a>	Softwarization of Performance Measurement . . . . .	<a href="#">3</a>
<a href="#">4.</a>	Theory of Operation . . . . .	<a href="#">4</a>
<a href="#">4.1.</a>	Session-Sender Behavior and Packet Format . . . . .	<a href="#">4</a>
4.1.1.	Session-Sender Packet Format in Unauthenticated Mode	4
4.1.2.	Session-Sender Packet Format in Authenticated and Encrypted Modes . . . . .	<a href="#">7</a>
<a href="#">4.2.</a>	Session-Reflector Behavior and Packet Format . . . . .	<a href="#">8</a>
4.2.1.	Session-Reflector Packet Format in Unauthenticated Mode . . . . .	<a href="#">9</a>
4.2.2.	Session-Reflector Packet Format in Authenticated and Encrypted Modes . . . . .	<a href="#">10</a>
<a href="#">4.3.</a>	Interoperability with TWAMP Light . . . . .	<a href="#">12</a>
<a href="#">5.</a>	IANA Considerations . . . . .	<a href="#">12</a>
<a href="#">6.</a>	Security Considerations . . . . .	<a href="#">12</a>
<a href="#">7.</a>	Acknowledgments . . . . .	<a href="#">12</a>
<a href="#">8.</a>	References . . . . .	<a href="#">13</a>
<a href="#">8.1.</a>	Normative References . . . . .	<a href="#">13</a>
<a href="#">8.2.</a>	Informative References . . . . .	<a href="#">14</a>
	Authors' Addresses . . . . .	<a href="#">14</a>

## [1.](#) Introduction

Development and deployment of Two-Way Active Measurement Protocol (TWAMP) [[RFC5357](#)] and its extensions, e.g. [[RFC6038](#)] that defined features such as Reflect Octets and Symmetrical Size for TWAMP, provided invaluable experience. Several independent implementations exist, have been deployed and provide important operational performance measurements. At the same time there has been noticeable interest in using a simpler mechanism for active performance monitoring that can provide deterministic behaviour and inherit separation of control (vendor-specific configuration or orchestration) and test functions. One of such is Performance Measurement from IP Edge to Customer Equipment using TWAMP Light from

Broadband Forum ([[BBF.TR-390](#)]). This document defines active performance measurement test protocol, Simple Two-way Active Measurement Protocol (STAMP), that enables measurement of both one-way and round-trip performance metrics like delay, delay variation and packet loss.

## [2.](#) Conventions used in this document

### [2.1.](#) Terminology

STAMP - Simple Two-way Active Measurement Protocol

NTP - Network Time Protocol

PTP - Precision Time Protocol

HMAC Hashed Message Authentication Code

OWAMP One-Way Active Measurement Protocol

TWAMP Two-Way Active Measurement Protocol

### [2.2.](#) Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#) [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

## [3.](#) Softwarization of Performance Measurement

Figure 1 presents Simple Two-way Active Measurement Protocol (STAMP) Session-Sender and Session-Reflector with a measurement session. The configuration and management of the STAMP Session-Sender, Session-Reflector and management of the STAMP sessions can be achieved through various means. Command Line Interface, OSS/BSS using SNMP or SDN using Netconf/YANG are but a few examples.

o-----o  
| Configuration and |

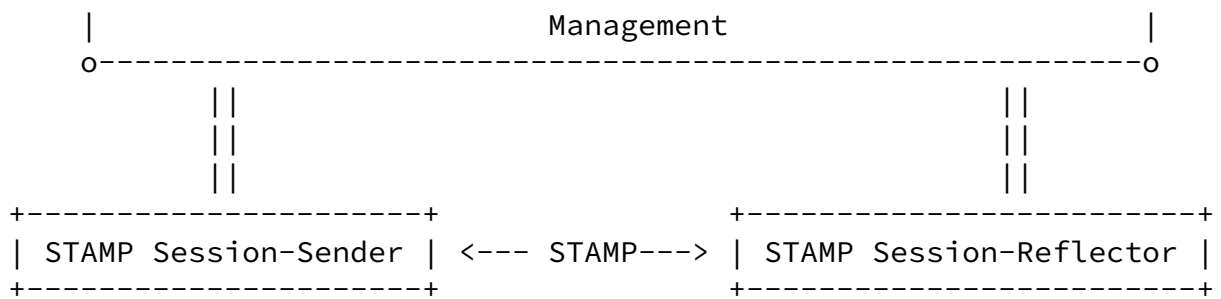


Figure 1: STAMP Reference Model

#### [4.](#) Theory of Operation

STAMP Session-Sender transmits test packets toward STAMP Session-Reflector. STAMP Session-Reflector receives Session-Sender's packet and acts according to the configuration and optional control information communicated in the Session-Sender's test packet. STAMP defines two different test packet formats, one for packets transmitted by the STAMP-Session-Sender and one for packets transmitted by the STAMP-Session-Reflector. STAMP supports three modes: unauthenticated, authenticated, and encrypted. Unauthenticated STAMP test packets are compatible on the wire with unauthenticated TWAMP-Test [\[RFC5357\]](#) packet formats.

By default STAMP uses symmetrical packets, i.e. size of the packet transmitted by Session-Reflector equals to the size of the packet received by the Session-Reflector.

##### [4.1.](#) Session-Sender Behavior and Packet Format

###### [4.1.1.](#) Session-Sender Packet Format in Unauthenticated Mode


Because STAMP supports symmetrical test packets, STAMP Session-Sender packet has minimum size of 44 octets in unauthenticated mode, see Figure 2, and 48 octets in authenticated or encrypted modes , see Figure 4.

For unauthenticated mode:

Internet-Draft

STAMP

March 2018

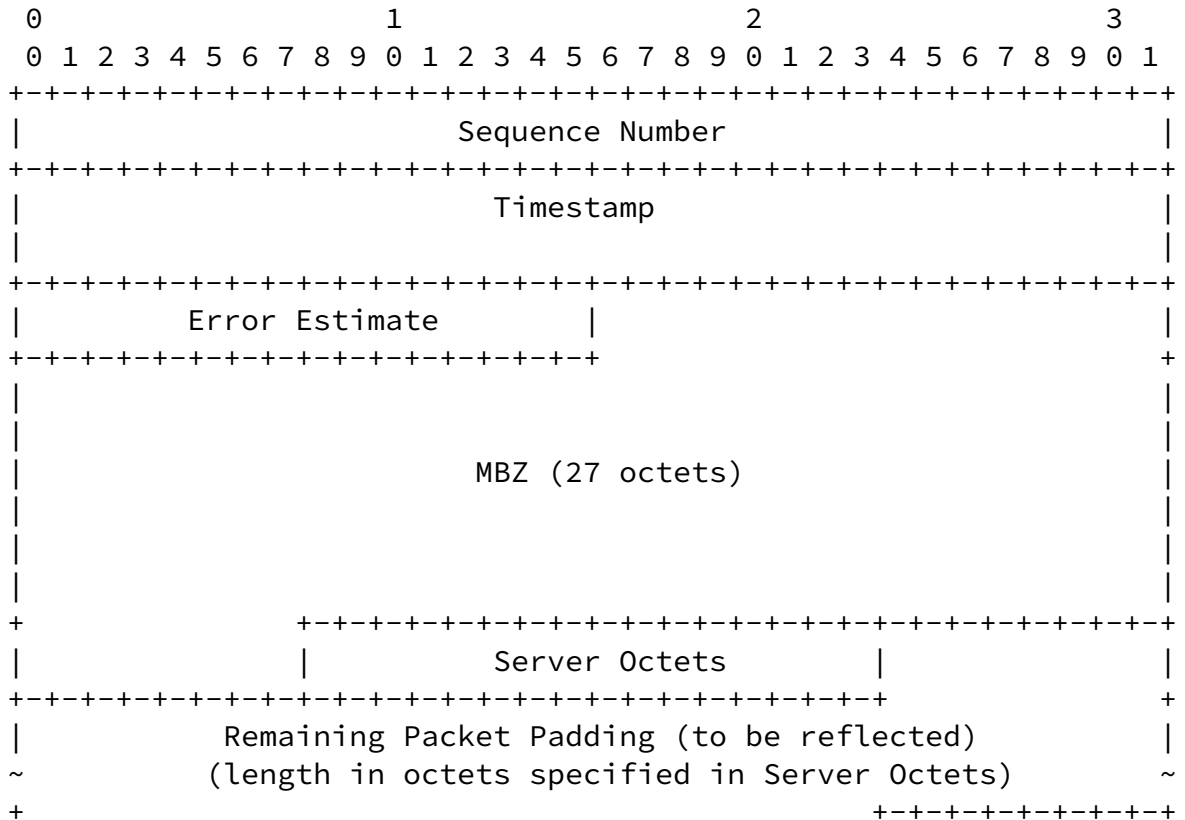



The STAMP Session-Sender and Session-Reflector MAY use, not use, or set value of the Z field in accordance with the timestamp format in use. This optional field is to enhance operations but local configuration or defaults could be used in its place.

- o Must-be-Zero (MBZ) field in the session-sender unauthenticated packet is 27 octets long. It MUST be all zeroed on transmission and ignored on receipt.
- o Server Octets field is two octets long field. It MUST follow the 27 octets long MBZ field. The Reflect Octets capability defined in [[RFC6038](#)]. The value in the Server Octets field equals to the number of octets the Session-Reflector is expected to copy back to the Session-Sender starting with the Server Octets field. Thus the minimal non-zero value for the Server Octets field is two and value of one is invalid. If none of Payload to be copied the value of the Server Octets field MUST be set to zero on transmit.
- o Remaining Packet Padding is optional field of variable length. The number of octets in the Remaining Packet Padding field is the value of the Server Octets field less the length of the Server Octets field.
- o Comp.MBZ is variable length field used to achieve alignment on word boundary. Thus the length of Comp.MBZ field may be only 0, 1, 2 or 3 octets. The value of the field MUST be zeroed on transmission and ignored on receipt.

The unauthenticated STAMP Session-Sender packet MAY include Type-Length-Value encodings that immediately follow the Comp. MBZ field.

- o Type field is two octets long. The value of the Type field is the codepoint allocated by IANA [Section 5](#) that identifies data in the Value field.
- o Length is two octets long field and its value is the length of the Value field in octets.
- o Value field contains the application specific information. The





listed in [Section 4.1.1](#). In addition, Commp.MBZ field is variable length field to align the packet on 16 octets boundary. Also, the packet includes a key-hashed message authentication code (HMAC) ([\[RFC2104\]](#)) hash at the end of the PDU.

The STAMP Session-Sender-packet format (Figure 4) is the same in authenticated and encrypted modes. The encryption and authentication operations are, however, different and protect the data as following:

in authenticated mode the Sequence Number is protected while the Timestamp and the Error Estimate are sent in clear text;

in encrypted mode all fields, including the timestamp and Error Estimate, are protected to provide maximum data confidentiality and integrity protection.

Sending the Timestamp in clear text in authenticated mode allows more consistent reading of time by a Session-Sender on the transmission of the test packet. Reading of the time in encrypted mode must be followed by its encryption which introduces variable delay thus affecting calculated timing metrics.

#### [4.2](#). Session-Reflector Behavior and Packet Format



The Session-Reflector receives the STAMP test packet, verifies it, prepares and transmits the reflected test packet.

Two modes of STAMP Session-Reflector characterize expected behavior and, consequently, performance metrics that can be measured:

- o Stateless - STAMP Session-Reflector does not maintain test state and will reflect back the received sequence number without modification. As a result, only round-trip packet loss can be calculated while the reflector is operating in stateless mode.
- o Stateful - STAMP Session-Reflector maintains test state determining forward loss, gaps recognized in the received sequence number. This means both near-end (forward) and far-end (backward) packet loss can be computed. This implies that the STAMP Session-Reflector MUST keep a state for each accepted STAMP-test session, uniquely identifying STAMP-test packets to one such session instance, and enabling adding a sequence number in the test reply that is individually incremented on a per-session basis.





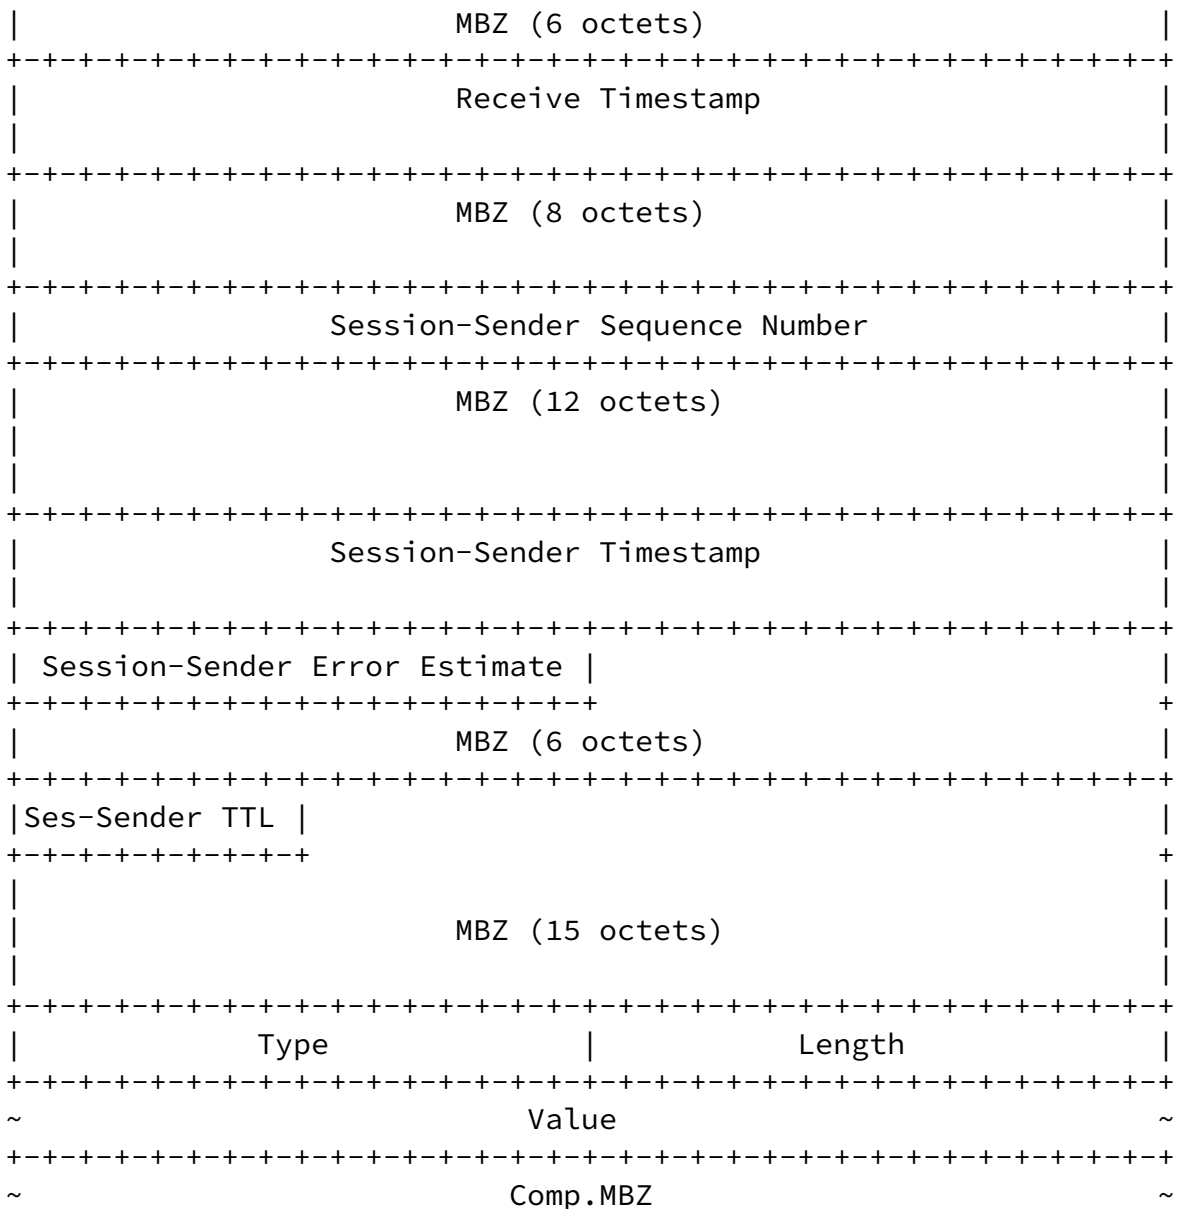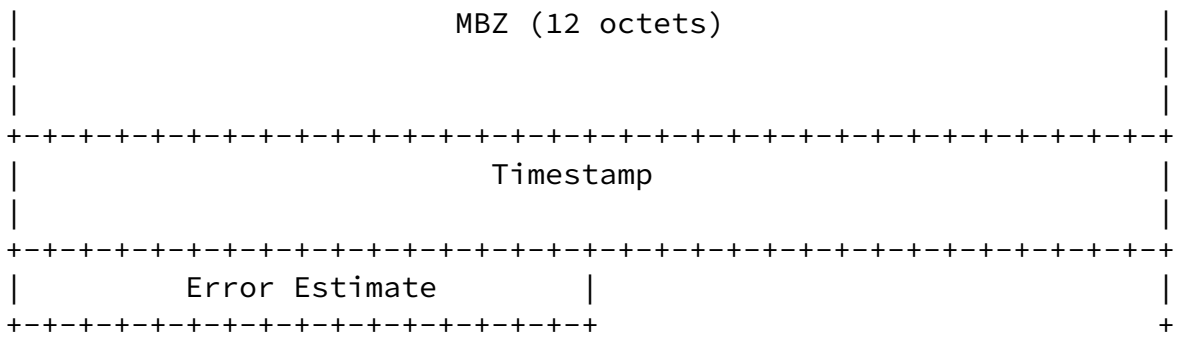



Light Session-Sender includes in its transmitted packet, the STAMP Session-Reflector will process it according to [[RFC6038](#)] and return reflected packet of the symmetrical size. The Session-Reflector MUST use the default format for its timestamps - NTP.

## [5.](#) IANA Considerations

This document doesn't have any IANA action. This section may be removed before the publication.

## [6.](#) Security Considerations

Use of HMAC in authenticated and encrypted modes may be used to simultaneously verify both the data integrity and the authentication of the STAMP test packets.

## [7.](#) Acknowledgments

TBD

## [8.](#) References

### [8.1.](#) Normative References

[BBF.TR-390]

"Performance Measurement from IP Edge to Customer Equipment using TWAMP Light", BBF TR-390, May 2017.

[I-D.ietf-ippm-port-twamp-test]

Morton, A. and G. Mirsky, "OWAMP and TWAMP Well-Known Port Assignments", [draft-ietf-ippm-port-twamp-test-00](#) (work in progress), January 2018.

[IEEE.1588.2008]

"Standard for a Precision Clock Synchronization Protocol for Networked Measurement and Control Systems", IEEE Standard 1588, March 2008.

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC4656] Shalunov, S., Teitelbaum, B., Karp, A., Boote, J., and M. Zekauskas, "A One-way Active Measurement Protocol (OWAMP)", [RFC 4656](#), DOI 10.17487/RFC4656, September 2006, <<https://www.rfc-editor.org/info/rfc4656>>.
- [RFC5357] Hedayat, K., Krzanowski, R., Morton, A., Yum, K., and J. Babiarez, "A Two-Way Active Measurement Protocol (TWAMP)", [RFC 5357](#), DOI 10.17487/RFC5357, October 2008, <<https://www.rfc-editor.org/info/rfc5357>>.
- [RFC5905] Mills, D., Martin, J., Ed., Burbank, J., and W. Kasch, "Network Time Protocol Version 4: Protocol and Algorithms Specification", [RFC 5905](#), DOI 10.17487/RFC5905, June 2010, <<https://www.rfc-editor.org/info/rfc5905>>.
- [RFC6038] Morton, A. and L. Ciavattone, "Two-Way Active Measurement Protocol (TWAMP) Reflect Octets and Symmetrical Size Features", [RFC 6038](#), DOI 10.17487/RFC6038, October 2010, <<https://www.rfc-editor.org/info/rfc6038>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.

Mirsky, et al.

Expires September 2, 2018

[Page 13]

---

Internet-Draft

STAMP

March 2018

- [RFC8186] Mirsky, G. and I. Meilik, "Support of the IEEE 1588 Timestamp Format in a Two-Way Active Measurement Protocol (TWAMP)", [RFC 8186](#), DOI 10.17487/RFC8186, June 2017, <<https://www.rfc-editor.org/info/rfc8186>>.

## 8.2. Informative References

- [RFC2104] Krawczyk, H., Bellare, M., and R. Canetti, "HMAC: Keyed-Hashing for Message Authentication", [RFC 2104](#), DOI 10.17487/RFC2104, February 1997, <<https://www.rfc-editor.org/info/rfc2104>>.

## Authors' Addresses

Greg Mirsky  
ZTE Corp.

Email: [gregimirsky@gmail.com](mailto:gregimirsky@gmail.com)

Guo Jun  
ZTE Corporation  
68# Zijinghua Road  
Nanjing, Jiangsu 210012  
P.R.China

Phone: +86 18105183663  
Email: [guo.jun2@zte.com.cn](mailto:guo.jun2@zte.com.cn)

Henrik Nydell  
Accedian Networks

Email: [hnydell@accedian.com](mailto:hnydell@accedian.com)

Richard Foote  
Nokia

Email: [footer.foote@nokia.com](mailto:footer.foote@nokia.com)