

Internet Key Exchange (IKEv2) Protocol
<[draft-ietf-ipsec-ikev2-06.txt](#)>

Status of this Memo

This document is a submission by the IPSEC Working Group of the Internet Engineering Task Force (IETF). Comments should be submitted to the ipsec@lists.tislabs.com mailing list.

Distribution of this memo is unlimited.

This document is an Internet Draft and is in full conformance with all provisions of [Section 10 of RFC2026](#) [[Bra96](#)]. Internet Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and working groups. Note that other groups may also distribute working documents as Internet Drafts.

Internet Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet Drafts as reference material or to cite them other than as "work in progress."

To learn the current status of any Internet Draft, please check the "lid-abstracts.txt" listing contained in the Internet Drafts Shadow Directories on [ftp.is.co.za](ftp://ftp.is.co.za) (Africa), [nic.nordu.net](ftp://nic.nordu.net) (Europe), [munniari.oz.au](ftp://munniari.oz.au) (Australia), [ds.internic.net](ftp://ds.internic.net) (US East Coast), or [ftp.isi.edu](ftp://ftp.isi.edu) (US West Coast).

Abstract

This document describes version 2 of the IKE (Internet Key Exchange) protocol. IKE is a component of IPsec used for performing mutual authentication and establishing and maintaining security associations.

This version of IKE simplifies the design by removing options that were rarely used and simplifying the encoding. This version of the IKE specification combines the contents of what were previously separate documents, including ISAKMP ([RFC 2408](#)), IKE ([RFC 2409](#)), the Internet DOI ([RFC 2407](#)), NAT Traversal, Legacy authentication, and remote address acquisition.

Version 2 of IKE does not interoperate with version 1, but it has enough of the header format in common that both versions can unambiguously run over the same UDP port.

Table of Contents

Abstract.....	1
Requirements Terminology.....	3
<u>1</u> IKE Protocol Overview.....	<u>3</u>
<u>1.1</u> Usage Scenarios.....	<u>5</u>
<u>1.1.1</u> Gateway to Gateway Tunnel.....	<u>5</u>
<u>1.1.2</u> Endpoint to Endpoint Transport.....	<u>5</u>
<u>1.1.3</u> Endpoint to Gateway Transport.....	<u>6</u>
<u>1.1.4</u> Other Scenarios.....	<u>7</u>
<u>1.2</u> The Initial Exchange.....	<u>7</u>
<u>1.3</u> The CREATE_CHILD_SA Exchange.....	<u>9</u>
<u>1.4</u> The INFORMATIONAL Exchange.....	<u>10</u>
<u>1.5</u> Informational Messages outside of an IKE_SA.....	<u>11</u>
<u>2</u> IKE Protocol Details and Variations.....	<u>12</u>
<u>2.1</u> Use of Retransmission Timers.....	<u>12</u>
<u>2.2</u> Use of Sequence Numbers for Message ID.....	<u>13</u>
<u>2.3</u> Window Size for overlapping requests.....	<u>13</u>
<u>2.4</u> State Synchronization and Connection Timeouts.....	<u>14</u>
<u>2.5</u> Version Numbers and Forward Compatibility.....	<u>15</u>
<u>2.6</u> Cookies.....	<u>17</u>
<u>2.7</u> Cryptographic Algorithm Negotiation.....	<u>19</u>
<u>2.8</u> Rekeying.....	<u>20</u>
<u>2.9</u> Traffic Selector Negotiation.....	<u>21</u>
<u>2.10</u> Nonces.....	<u>23</u>
<u>2.11</u> Address and Port Agility.....	<u>23</u>
<u>2.12</u> Reuse of Diffie-Hellman Exponentials.....	<u>24</u>
<u>2.13</u> Generating Keying Material.....	<u>24</u>
<u>2.14</u> Generating Keying Material for the IKE_SA.....	<u>25</u>
<u>2.15</u> Authentication of the IKE_SA.....	<u>26</u>
<u>2.16</u> Extended Authentication Protocol Methods.....	<u>27</u>
<u>2.17</u> Generating Keying Material for CHILD_SAs.....	<u>29</u>
<u>2.18</u> Rekeying IKE_SAs using a CREATE_CHILD_SA exchange.....	<u>29</u>
<u>2.19</u> Requesting an internal address on a remote network.....	<u>30</u>
<u>2.20</u> Requesting a Peer's Version.....	<u>31</u>
<u>2.21</u> Error Handling.....	<u>32</u>
<u>2.22</u> IPcomp.....	<u>33</u>
<u>2.23</u> NAT Traversal.....	<u>33</u>
<u>2.24</u> ECN Notification.....	<u>34</u>
<u>3</u> Header and Payload Formats.....	<u>36</u>
<u>3.1</u> The IKE Header.....	<u>36</u>
<u>3.2</u> Generic Payload Header.....	<u>39</u>
<u>3.3</u> Security Association Payload.....	<u>40</u>

3.3.1	Proposal Substructure.....	42
3.3.2	Transform Substructure.....	44
3.3.3	Mandatory Transform Types.....	46
3.3.4	Mandatory Transform IDs.....	47
3.3.5	Transform Attributes.....	48
3.3.6	Attribute Negotiation.....	50
3.4	Key Exchange Payload.....	51
3.5	Identification Payload.....	52
3.6	Certificate Payload.....	53
3.7	Certificate Request Payload.....	55
3.8	Authentication Payload.....	57
3.9	Nonce Payload.....	58
3.10	Notify Payload.....	58
3.10.1	Notify Message Types.....	59
3.11	Delete Payload.....	64
3.12	Vendor ID Payload.....	66
3.13	Traffic Selector Payload.....	67
3.13.1	Traffic Selector.....	68
3.14	Encrypted Payload.....	69
3.15	Configuration Payload.....	71
3.15.1	Configuration Attributes.....	74
3.16	Extended Authentication Protocol (EAP) Payload.....	76
3.17	Other Payload types.....	78
4	Conformance Requirements.....	78
5	Security Considerations.....	80
6	IANA Considerations.....	81
7	Acknowledgements.....	81
8	References.....	82
8.1	Normative References.....	82
8.2	Non-normative References.....	82
Appendix A:	Summary of Changes from IKEv1.....	85
Appendix B:	Diffie-Hellman Groups.....	87
	Change History.....	90
	Editor's Address.....	93
	Full Copyright Statement.....	93

Requirements Terminology

Keywords "MUST", "MUST NOT", "REQUIRED", "SHOULD", "SHOULD NOT" and "MAY" that appear in this document are to be interpreted as described in [[Bra97](#)].

[1](#) IKE Protocol Overview

IP Security (IPsec) provides confidentiality, data integrity, access control, and data source authentication to IP datagrams. These services are provided by maintaining shared state between the source and the sink of an IP datagram. This state defines, among other

things, the specific services provided to the datagram, which cryptographic algorithms will be used to provide the services, and the keys used as input to the cryptographic algorithms.

Establishing this shared state in a manual fashion does not scale well. Therefore a protocol to establish this state dynamically is needed. This memo describes such a protocol-- the Internet Key Exchange (IKE). This is version 2 of IKE. Version 1 of IKE was defined in RFCs 2407, 2408, and 2409. This single document is intended to replace all three of those RFCs.

IKE performs mutual authentication between two parties and establishes an IKE security association that includes shared secret information that can be used to efficiently establish SAs for ESP ([RFC 2406](#)) and/or AH ([RFC 2402](#)). It also negotiates use of IPcomp ([RFC 2393](#)) in connection with an ESP and/or AH SA. We call the IKE SA an "IKE_SA". The SAs for ESP and/or AH that get set up through that IKE_SA we call "CHILD_SA"s.

All IKE communications consist of pairs of messages: a request and a response. The pair is called an "exchange". We call the first messages establishing an IKE_SA IKE_SA_INIT and IKE_AUTH exchanges and subsequent IKE exchanges CREATE_CHILD_SA or INFORMATIONAL exchanges. In the common case, there is a single IKE_SA_INIT exchange and a single IKE_AUTH exchange (a total of four messages) to establish the IKE_SA and the first CHILD_SA. In exceptional cases, there may be more than one of each of these exchanges. In all cases, all IKE_SA_INIT exchanges MUST complete before any other exchange type, then all IKE_AUTH exchanges MUST complete, and following that any number of CREATE_CHILD_SA and INFORMATIONAL exchanges may occur in any order. In some scenarios, only a single CHILD_SA is needed between the IPsec endpoints and therefore there would be no additional exchanges. Subsequent exchanges MAY be used to establish additional CHILD_SAs between the same authenticated pair of endpoints and to perform housekeeping functions.

IKE message flow always consists of a request followed by a response. It is the responsibility of the requester to ensure reliability. If the response is not received within a timeout interval, the requester MUST retransmit the request (or abandon the connection).

The first request/response of an IKE session negotiates security parameters for the IKE_SA, sends nonces, and sends Diffie-Hellman values. We call the initial exchange IKE_SA_INIT (request and response).

The second request/response, which we'll call IKE_AUTH transmits identities, proves knowledge of the secrets corresponding to the two

identities, and sets up an SA for the first (and often only) AH and/or ESP CHILD_SA.

The types of subsequent exchanges are CREATE_CHILD_SA (which creates a CHILD_SA), or and INFORMATIONAL (which deletes an SA, reports error conditions, or does other housekeeping). Every request requires a response. An INFORMATIONAL request with no payloads is commonly used as a check for liveness. These subsequent exchanges cannot be used until the initial exchanges have completed.

In the description that follows, we assume that no errors occur. Modifications to the flow should errors occur are described in [section 2.21](#).

[1.1](#) Usage Scenarios

IKE is expected to be used to negotiate ESP and/or AH SAs in a number of different scenarios, each with its own special requirements.

[1.1.1](#) Gateway to Gateway Tunnel

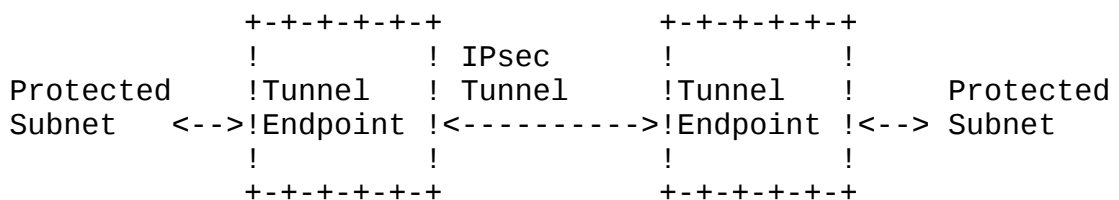


Figure 1: Firewall to Firewall Tunnel

In this scenario, neither endpoint of the IP connection implements IPsec, but network nodes between them protect traffic for part of the way. Protection is transparent to the endpoints, and depends on ordinary routing sending packets through the tunnel endpoints for processing. Each endpoint would announce the set of addresses "behind" it, and packets would be sent in Tunnel Mode where the inner IP header would contain the IP addresses of the actual endpoints.

[1.1.2](#) Endpoint to Endpoint Transport

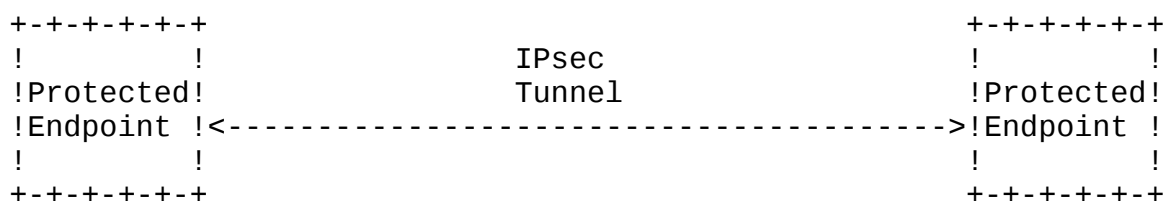


Figure 2: Endpoint to Endpoint

In this scenario, both endpoints of the IP connection implement IPsec. These endpoints may implement application layer access controls based on the authenticated identities of the participants. Transport mode will commonly be used with no inner IP header. If there is an inner IP header, the inner addresses will be the same as the outer addresses. A single pair of addresses will be negotiated for packets to be sent over this SA.

It is possible in this scenario that one or both of the protected endpoints will be behind a network address translation (NAT) node, in which case the tunnelled packets will have to be UDP encapsulated so that port numbers in the UDP headers can be used to identify individual endpoints "behind" the NAT.

1.1.3 Endpoint to Gateway Transport

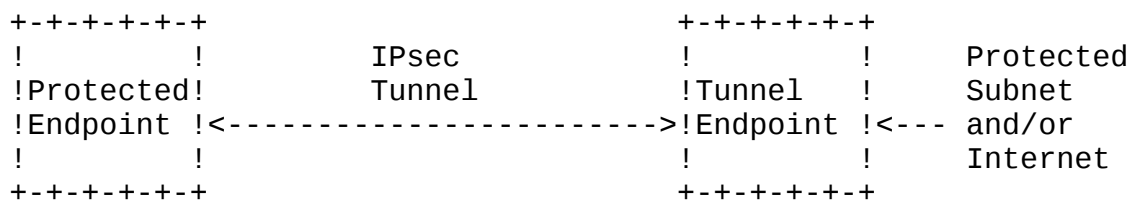


Figure 3: Endpoint to Gateway

In this scenario, a protected endpoint (typically a portable roaming computer) connects back to its corporate network through an IPsec protected tunnel. It might use this tunnel only to access information on the corporate network or it might tunnel all of its traffic back through the corporate network in order to take advantage of protection provided by a corporate firewall against Internet based attacks. In either case, the protected endpoint will want an IP address associated with the gateway so that packets returned to it will go to the gateway and be tunnelled back. This IP address may be static or may be dynamically allocated by the gateway. In support of the latter case, IKEv2 includes a mechanism for the initiator to request an IP address owned by the gateway for use for the duration of its SA.

In this scenario, packets will use tunnel mode. On each packet from the protected endpoint, the outer IP header will contain the source IP address associated with its current location (i.e. the address that will get traffic routed to the endpoint directly) while the inner IP header will contain the source IP address assigned by the gateway (i.e. the address that will get traffic routed to the gateway for forwarding to the endpoint). The outer destination address will always be that of the gateway, while the inner destination address will be the ultimate destination for the packet.

In this scenario, it is possible that the protected endpoint will be behind a NAT. In that case, the IP address as seen by the gateway will not be the same as the IP address sent by the protected endpoint, and packets will have to be UDP encapsulated in order to be routed properly.

1.1.4 Other Scenarios

Other scenarios are possible, as are nested combinations of the above. One notable example combines aspects of 1.1.1 and 1.1.3. A subnet may make all external accesses through a remote gateway using an IPsec tunnel, where the addresses on the subnet are routed to the gateway by the rest of the Internet. An example would be someones home network being virtually on the Internet with static IP addresses even though connectivity is provided by an ISP that assigns a single dynamically assigned IP address (where the static IP addresses and an IPsec relay is provided by a third party located elsewhere).

1.2 The Initial Exchanges

Communication using IKE always begins with IKE_SA_INIT and IKE_AUTH exchanges (known in IKEv1 as Phase 1). These initial exchanges normally consist of four messages, though in some scenarios that number can grow. All communications using IKE consist of request/response pairs. We'll describe the base exchange first, followed by variations. The first pair of messages (IKE_SA_INIT) negotiate cryptographic algorithms, exchange nonces, and do a Diffie-Hellman exchange.

The second pair of messages (IKE_AUTH) authenticate the previous messages, exchange identities and certificates, and establish the first CHILD_SA. Parts of these messages are encrypted and integrity protected with keys established through the IKE_SA_INIT exchange, so the identities are hidden from eavesdroppers and all fields in all the messages are authenticated.

In the following description, the payloads contained in the message are indicated by names such as SA. The details of the contents of each payload are described later. Payloads which may optionally appear will be shown in brackets, such as [CERTREQ], would indicate that optionally a certificate request payload can be included.

The initial exchanges are as follows:

Initiator		Responder
-----		-----
HDR, SAI1, KEi, Ni	-->	

HDR contains the SPIs, version numbers, and flags of various sorts. The SAI1 payload states the cryptographic algorithms the Initiator supports for the IKE_SA. The KE payload sends the Initiator's Diffie-Hellman value. Ni is the Initiator's nonce.

```
<--      HDR, SAR1, KEr, Nr, [CERTREQ]
```

The Responder chooses a cryptographic suite from the Initiator's offered choices and expresses that choice in the SAR1 payload, completes the Diffie-Hellman exchange with the KEr payload, and sends its nonce in the Nr payload.

At this point in the negotiation each party can generate SKEYSEED, from which all keys are derived for that IKE_SA. All but the headers of all the messages that follow are encrypted and integrity protected. The keys used for the encryption and integrity protection are derived from SKEYSEED and are known as SK_e (encryption) and SK_a (authentication, a.k.a. integrity protection). A separate SK_e and SK_a is computed for each direction. In addition to the keys SK_e and SK_a derived from the DH value for protection of the IKE_SA, another quantity SK_d is derived and used for derivation of further keying material for CHILD_SAs. The notation SK { ... } indicates that these payloads are encrypted and integrity protected using that direction's SK_e and SK_a.

```
HDR, SK {IDi, [CERT,] [CERTREQ,] [IDr,]
      AUTH, SAI2, TSi, TSr}      -->
```

The Initiator asserts her identity with the IDi payload, proves knowledge of the secret corresponding to IDi and integrity protects the contents of the first two messages using the AUTH payload (see [section 2.15](#)). She might also send her certificate(s) in CERT payload(s) and a list of her trust anchors in CERTREQ payload(s). If any CERT payloads are included, the first certificate provided must contain the public key used to verify the AUTH field. The optional payload IDr enables Alice to specify which of Bob's identities she wants to talk to. This is useful when Bob is hosting multiple identities at the same IP address. She begins negotiation of a CHILD_SA using the SAI2 payload. The final fields (starting with SAI2) are described in the description of the CREATE_CHILD_SA exchange.

```
<--      HDR, SK {IDr, [CERT,] AUTH,
      SAR2, TSi, TSr}
```

The Responder asserts his identity with the IDr payload, optionally sends one or more certificates (again with the certificate containing the public key used to verify AUTH listed first), authenticates his

identity with the AUTH payload, and completes negotiation of a CHILD_SA with the additional fields described below in the CREATE_CHILD_SA exchange.

The recipients of messages 3 and 4 MUST verify that all signatures and MACs are computed correctly and that the names in the ID payloads correspond to the keys used to generate the AUTH payload.

1.3 The CREATE_CHILD_SA Exchange

This exchange consists of a single request/response pair, and was referred to as a phase 2 exchange in IKEv1. It MAY be initiated by either end of the IKE_SA after the initial exchanges are completed.

All messages following the initial exchange are cryptographically protected using the cryptographic algorithms and keys negotiated in the first two messages of the IKE exchange using a syntax described in [section 3.14](#).

Either endpoint may initiate a CREATE_CHILD_SA exchange, so in this section the term Initiator refers to the endpoint initiating this exchange.

A CHILD_SA is created by sending a CREATE_CHILD_SA request. The CREATE_CHILD_SA request MAY optionally contain a KE payload for an additional Diffie-Hellman exchange to enable stronger guarantees of forward secrecy for the CHILD_SA. The keying material for the CHILD_SA is a function of SK_d established during the establishment of the IKE_SA, the nonces exchanged during the CREATE_CHILD_SA exchange, and the Diffie-Hellman value (if KE payloads are included in the CREATE_CHILD_SA exchange).

In the CHILD_SA created as part of the initial exchange, a second KE payload and nonce MUST NOT be sent. The nonces from the initial exchange are used in computing the keys for the CHILD_SA.

The CREATE_CHILD_SA request contains:

Initiator	Responder
-----	-----
HDR, SK {SA, Ni, [KEi], [TSi, TSr]}	-->

The Initiator sends SA offer(s) in the SA payload, a nonce in the Ni payload, optionally a Diffie-Hellman value in the KEi payload, and the proposed traffic selectors in the TSi and TSr payloads. If the SA offers include different Diffie-Hellman groups, KEi must be an element of the group the Initiator expects the responder to accept.

If she guesses wrong, the CREATE_CHILD_SA exchange will fail and she will have to retry with a different KEi.

The message following the header is encrypted and the message including the header is integrity protected using the cryptographic algorithms negotiated for the IKE_SA.

The CREATE_CHILD_SA response contains:

```
<--      HDR, SK {SA, Nr, [KEr],  
                [TSi, TSr]}
```

The Responder replies (using the same Message ID to respond) with the accepted offer in an SA payload, and a Diffie-Hellman value in the KEr payload if KEi was included in the request and the selected cryptographic suite includes that group. If the responder chooses a cryptographic suite with a different group, it MUST reject the request and have the initiator make another one.

The traffic selectors for traffic to be sent on that SA are specified in the TS payloads, which may be a subset of what the Initiator of the CHILD_SA proposed. Traffic selectors are omitted if this CREATE_CHILD_SA request is being used to change the key of the IKE_SA.

1.4 The INFORMATIONAL Exchange

At various points during the operation of an IKE_SA, peers may desire to convey control messages to each other regarding errors or notifications of certain events. To accomplish this IKE defines an INFORMATIONAL exchange. INFORMATIONAL exchanges MAY ONLY occur after the initial exchanges and are cryptographically protected with the negotiated keys.

Control messages that pertain to an IKE_SA MUST be sent under that IKE_SA. Control messages that pertain to CHILD_SAs MUST be sent under the protection of the IKE_SA which generated them (or its successor if the IKE_SA was replaced for the purpose of rekeying).

Messages in an INFORMATIONAL Exchange contain zero or more Notification, Delete, and Configuration payloads. The Recipient of an INFORMATIONAL Exchange request MUST send some response (else the Sender will assume the message was lost in the network and will retransmit it). That response MAY be a message with no payloads. The request message in an INFORMATIONAL Exchange MAY also contain no payloads. This is the expected way an endpoint can ask the other endpoint to verify that it is alive.

ESP and AH SAs always exist in pairs, with one SA in each direction. When an SA is closed, both members of the pair **MUST** be closed. When SAs are nested, as when data (and IP headers if in tunnel mode) are encapsulated first with IPcomp, then with ESP, and finally with AH between the same pair of endpoints, all of the SAs **MUST** be deleted together. Each endpoint **MUST** close the SAs it receives on and allow the other endpoint to close the other SA in each pair. To delete an SA, an INFORMATIONAL Exchange with one or more delete payloads is sent listing the SPIs (as they would be expected in the headers of inbound packets) of the SAs to be deleted. The recipient **MUST** close the designated SAs. Normally, the reply in the INFORMATIONAL Exchange will contain delete payloads for the paired SAs going in the other direction. There is one exception. If by chance both ends of a set of SAs independently decide to close them, each may send a delete payload and the two requests may cross in the network. If a node receives a delete request for SAs for which it has already issued a delete request, it **MUST** delete the outgoing SAs while processing the request and the incoming SAs while processing the response. In that case, the responses **MUST NOT** include delete payloads for the deleted SAs, since that would result in duplicate deletion and could in theory delete the wrong SA.

A node **SHOULD** regard half closed connections as anomalous and audit their existence should they persist. Note that this specification nowhere specifies time periods, so it is up to individual endpoints to decide how long to wait. A node **MAY** refuse to accept incoming data on half closed connections but **MUST NOT** unilaterally close them and reuse the SPIs. If connection state becomes sufficiently messed up, a node **MAY** close the IKE_SA which will implicitly close all SAs negotiated under it. It can then rebuild the SAs it needs on a clean base under a new IKE_SA.

The INFORMATIONAL Exchange is defined as:

Initiator	Responder
-----	-----
HDR, SK {[N,] [D,] [CP,] ...} -->	<-- HDR, SK {[N,] [D,] [CP], ...}

The processing of an INFORMATIONAL Exchange is determined by its component payloads.

[1.5](#) Informational Messages outside of an IKE_SA

If a packet arrives with an unrecognised SPI, it could be because the receiving node has recently crashed and lost state or because of some other system malfunction or attack. If the receiving node has an active IKE_SA to the IP address from whence the packet came, it **MAY**

send a notification of the wayward packet over that IKE_SA. If it does not, it MAY send an Informational message without cryptographic protection to the source IP address and port to alert it to a possible problem.

2 IKE Protocol Details and Variations

IKE normally listens and sends on UDP port 500, though IKE messages may also be received on UDP port 4500 with a slightly different format (see [section 2.23](#)). Since UDP is a datagram (unreliable) protocol, IKE includes in its definition recovery from transmission errors, including packet loss, packet replay, and packet forgery. IKE is designed to function so long as (1) at least one of a series of retransmitted packets reaches its destination before timing out; and (2) the channel is not so full of forged and replayed packets so as to exhaust the network or CPU capacities of either endpoint. Even in the absence of those minimum performance requirements, IKE is designed to fail cleanly (as though the network were broken).

2.1 Use of Retransmission Timers

All messages in IKE exist in pairs: a request and a response. The setup of an IKE_SA normally consists of two request/response pairs. Once the IKE_SA is set up, either end of the security association may initiate requests at any time, and there can be many requests and responses "in flight" at any given moment. But each message is labelled as either a request or a response and for each request/response pair one end of the security association is the Initiator and the other is the Responder.

For every pair of messages, the Initiator is responsible for retransmission in the event of a timeout. The Responder MUST never retransmit a response unless it receives a retransmission of the request. In that event, the Responder MUST ignore the retransmitted request except insofar as it triggers a retransmission of the response. The Initiator MUST remember each request until it receives the corresponding response. The Responder MUST remember each response until it receives a request whose sequence number is larger than the sequence number in the response plus his window size (see [section 2.3](#)).

IKE is a reliable protocol, in the sense that the Initiator MUST retransmit a request until either it receives a corresponding reply OR it deems the IKE security association to have failed and it discards all state associated with the IKE_SA and any CHILD_SAs negotiated using that IKE_SA.

2.2 Use of Sequence Numbers for Message ID

Every IKE message contains a Message ID as part of its fixed header. This Message ID is used to match up requests and responses, and to identify retransmissions of messages.

The Message ID is a 32 bit quantity, which is zero for the first IKE request in each direction. The IKE_SA initial setup messages will always be numbered 0 and 1. Each endpoint in the IKE Security Association maintains two "current" Message IDs: the next one to be used for a request it initiates and the next one it expects to see in a request from the other end. These counters increment as requests are generated and received. Responses always contain the same message ID as the corresponding request. That means that after the initial exchange, each integer n may appear as the message ID in four distinct messages: The nth request from the original IKE Initiator, the corresponding response, the nth request from the original IKE Responder, and the corresponding response. If the two ends make very different numbers of requests, the Message IDs in the two directions can be very different. There is no ambiguity in the messages, however, because each the (I)nitiator and (R)esponse bits in the message header specify which of the four messages a particular one is.

Note that Message IDs are cryptographically protected and provide protection against message replays. In the unlikely event that Message IDs grow too large to fit in 32 bits, the IKE SA MUST be closed. Rekeying an IKE SA resets the sequence numbers.

2.3 Window Size for overlapping requests

In order to maximize IKE throughput, an IKE endpoint MAY issue multiple requests before getting a response to any of them. For simplicity, an IKE implementation MAY choose to process requests strictly in order and/or wait for a response to one request before issuing another. Certain rules must be followed to assure interoperability between implementations using different strategies.

After an IKE_SA is set up, either end can initiate one or more requests. These requests may pass one another over the network. An IKE endpoint MUST be prepared to accept and process a request while it has a request outstanding in order to avoid a deadlock in this situation. An IKE endpoint SHOULD be prepared to accept and process multiple requests while it has a request outstanding.

An IKE endpoint MUST wait for a response to each of its messages before sending a subsequent message unless it has received a Notify message from its peer informing it that the peer is prepared to

maintain state for multiple outstanding messages in order to allow greater throughput.

An IKE endpoint MUST NOT exceed the peer's stated window size for transmitted IKE requests. In other words, if Bob stated his window size is N, then when Alice needs to make a request X, she MUST wait until she has received responses to all requests up through request X-N. An IKE endpoint MUST keep a copy of (or be able to regenerate exactly) each request it has sent until it receives the corresponding response. An IKE endpoint MUST keep a copy of (or be able to regenerate exactly) the number of previous responses equal to its declared window size in case its response was lost and the Initiator requests its retransmission by retransmitting the request.

An IKE endpoint supporting a window size greater than one SHOULD be capable of processing incoming requests out of order to maximize performance in the event of network failures or packet reordering.

2.4 State Synchronization and Connection Timeouts

An IKE endpoint is allowed to forget all of its state associated with an IKE_SA and the collection of corresponding CHILD_SAs at any time. This is the anticipated behavior in the event of an endpoint crash and restart. It is important when an endpoint either fails or reinitializes its state that the other endpoint detect those conditions and not continue to waste network bandwidth by sending packets over discarded SAs and having them fall into a black hole.

Since IKE is designed to operate in spite of Denial of Service (DoS) attacks from the network, an endpoint MUST NOT conclude that the other endpoint has failed based on any routing information (e.g. ICMP messages) or IKE messages that arrive without cryptographic protection (e.g., notify messages complaining about unknown SPIs). An endpoint MUST conclude that the other endpoint has failed only when repeated attempts to contact it have gone unanswered for a timeout period or when a cryptographically protected INITIAL_CONTACT notification is received on a different IKE_SA to the same authenticated identity. An endpoint SHOULD suspect that the other endpoint has failed based on routing information and initiate a request to see whether the other endpoint is alive. To check whether the other side is alive, IKE specifies an empty INFORMATIONAL message that (like all IKE requests) requires an acknowledgment. If a cryptographically protected message has been received from the other side recently, unprotected notifications MAY be ignored. Implementations MUST limit the rate at which they take actions based on unprotected messages.

Numbers of retries and lengths of timeouts are not covered in this

specification because they do not affect interoperability. It is suggested that messages be retransmitted at least a dozen times over a period of at least several minutes before giving up on an SA, but different environments may require different rules. If there has only been outgoing traffic on all of the SAs associated with an IKE_SA, it is essential to confirm liveness of the other endpoint to avoid black holes. If no cryptographically protected messages have been received on an IKE_SA or any of its CHILD_SAs recently, a liveness check MUST be performed. Receipt of a fresh cryptographically protected message on an IKE_SA or any of its CHILD_SAs assures liveness of the IKE_SA and all of its CHILD_SAs. Note that this places requirements on the failure modes of an IKE endpoint. An implementation MUST NOT continue sending on any SA if some failure prevents it from receiving on all of the associated SAs. If CHILD_SAs can fail independently from one another without the associated IKE_SA being able to send a delete message, then they MUST be negotiated by separate IKE_SAs.

There is a Denial of Service attack on the Initiator of an IKE_SA that can be avoided if the Initiator takes the proper care. Since the first two messages of an SA setup are not cryptographically protected, an attacker could respond to the Initiator's message before the genuine Responder and poison the connection setup attempt. To prevent this, the Initiator MAY be willing to accept multiple responses to its first message, treat each as potentially legitimate, respond to it, and then discard all the invalid half open connections when she receives a valid cryptographically protected response to any one of her requests. Once a cryptographically valid response is received, all subsequent responses should be ignored whether or not they are cryptographically valid.

Note that with these rules, there is no reason to negotiate and agree upon an SA lifetime. If IKE presumes the partner is dead, based on repeated lack of acknowledgment to an IKE message, then the IKE SA and all CHILD_SAs set up through that IKE_SA are deleted.

An IKE endpoint may at any time delete inactive CHILD_SAs to recover resources used to hold their state. If an IKE endpoint chooses to do so, it MUST send Delete payloads to the other end notifying it of the deletion. It MAY similarly time out the IKE_SA. Closing the IKE_SA implicitly closes all associated CHILD_SAs. In this case, an IKE endpoint SHOULD send a Delete payload indicating that it has closed the IKE_SA.

[2.5](#) Version Numbers and Forward Compatibility

This document describes version 2.0 of IKE, meaning the major version number is 2 and the minor version number is zero. It is likely that some implementations will want to support both version 1.0 and

version 2.0, and in the future, other versions.

The major version number should only be incremented if the packet formats or required actions have changed so dramatically that an older version node would not be able to interoperate with a newer version node if it simply ignored the fields it did not understand and took the actions specified in the older specification. The minor version number indicates new capabilities, and MUST be ignored by a node with a smaller minor version number, but used for informational purposes by the node with the larger minor version number. For example, it might indicate the ability to process a newly defined notification message. The node with the larger minor version number would simply note that its correspondent would not be able to understand that message and therefore would not send it.

If an endpoint receives a message with a higher major version number, it MUST drop the message and SHOULD send an unauthenticated notification message containing the highest version number it supports. If an endpoint supports major version *n*, and major version *m*, it MUST support all versions between *n* and *m*. If it receives a message with a major version that it supports, it MUST respond with that version number. In order to prevent two nodes from being tricked into corresponding with a lower major version number than the maximum that they both support, IKE has a flag that indicates that the node is capable of speaking a higher major version number.

Thus the major version number in the IKE header indicates the version number of the message, not the highest version number that the transmitter supports. If A is capable of speaking versions *n*, *n*+1, and *n*+2, and B is capable of speaking versions *n* and *n*+1, then they will negotiate speaking *n*+1, where A will set the flag indicating ability to speak a higher version. If they mistakenly (perhaps through an active attacker sending error messages) negotiate to version *n*, then both will notice that the other side can support a higher version number, and they MUST break the connection and reconnect using version *n*+1.

Note that IKEv1 does not follow these rules, because there is no way in v1 of noting that you are capable of speaking a higher version number. So an active attacker can trick two v2-capable nodes into speaking v1. When a v2-capable node negotiates down to v1, it SHOULD note that fact in its logs.

Also for forward compatibility, all fields marked RESERVED MUST be set to zero by a version 2.0 implementation and their content MUST be ignored by a version 2.0 implementation ("Be conservative in what you send and liberal in what you receive"). In this way, future versions of the protocol can use those fields in a way that is guaranteed to

be ignored by implementations that do not understand them. Similarly, payload types that are not defined are reserved for future use and implementations of version 2.0 MUST skip over those payloads and ignore their contents.

IKEv2 adds a "critical" flag to each payload header for further flexibility for forward compatibility. If the critical flag is set and the payload type is unrecognised, the message MUST be rejected and the response to the IKE request containing that payload MUST include a notify payload UNSUPPORTED_CRITICAL_PAYLOAD, indicating an unsupported critical payload was included. If the critical flag is not set and the payload type is unsupported, that payload MUST be ignored.

While new payload types may be added in the future and may appear interleaved with the fields defined in this specification, implementations MUST send the payloads defined in this specification in the order shown in [section 3](#) and implementations SHOULD reject as invalid a message with payloads in any other order.

[2.6](#) Cookies

The term "cookies" originates with Karn and Simpson [[RFC 2522](#)] in Photuris, an early proposal for key management with IPsec. It has persisted because the IETF has never rejected a proposal involving cookies. The ISAKMP fixed message header includes two eight octet fields titled "cookies", and that syntax is used by both IKEv1 and IKEv2 though in IKEv2 they are referred to as the IKE SPI and there is a new separate field in a NOTIFY payload holding the cookie. The initial two eight octet fields in the header are used as a connection identifier at the beginning of IKE packets. Each endpoint chooses one of the two SPIs and SHOULD choose them so as to be unique identifiers of an IKE_SA. An SPI value of zero is special and indicates that the remote SPI value is not yet known by the sender.

Unlike ESP and AH where only the recipient's SPI appears in the header of a message, in IKE the sender's SPI is also sent in every message. Since the SPI chosen by the original initiator of the IKE_SA is always sent first, an endpoint with multiple IKE_SAs open that wants to find the appropriate IKE_SA using the SPI it assigned must look at the I(nitiator) Flag bit in the header to determine whether it assigned the first or the second eight octets.

In the first message of an initial IKE exchange, the initiator will not know the responder's SPI value and will therefore set that field to zero.

An expected attack against IKE is state and CPU exhaustion, where the

target is flooded with session initiation requests from forged IP addresses. This attack can be made less effective if an implementation of a responder uses minimal CPU and commits no state to an SA until it knows the initiator can receive packets at the address from which he claims to be sending them. To accomplish this, a responder SHOULD - when it detects a large number of half-open IKE_SAs - reject initial IKE messages unless they contain a notify payload of type "cookie". It SHOULD instead send an unprotected IKE message as a response and include its cookie in a notify payload. Initiators who receive such responses MUST retry the IKE_SA_INIT with the responder supplied cookie as the first payload. The initial exchange will then be as follows:

Initiator -----	Responder -----
HDR(A,0), SAI1, KEi, Ni -->	
	<-- HDR(A,0), N(COOKIE_REQUIRED), N(COOKIE)
HDR(A,0), N(COOKIE), SAI1, KEi, Ni -->	
	<-- HDR(A,B), SAR1, KEr, Nr, [CERTREQ]
HDR(A,B), SK {IDi, [CERT,] [CERTREQ,] [IDr,] AUTH, SAI2, TSi, TSr} -->	
	<-- HDR(A,B), SK {IDr, [CERT,] AUTH, SAR2, TSi, TSr}

The first two messages do not affect any initiator or responder state except for communicating the cookie. In particular, the message sequence numbers in the first four messages will all be zero and the message sequence numbers in the last two messages will be one.

An IKE implementation SHOULD implement its responder cookie generation in such a way as to not require any saved state to recognise its valid cookie when the second IKE_SA_INIT message arrives. The exact algorithms and syntax they use to generate cookies does not affect interoperability and hence is not specified here. The following is an example of how an endpoint could use cookies to implement limited DOS protection.

A good way to do this is to set the responder cookie to be:

Cookie = <SecretVersionNumber> | Hash(Ni | IPi | SPIi | <secret>)

where <secret> is a randomly generated secret known only to the responder and periodically changed. <SecretVersionNumber> should be changed whenever <secret> is regenerated. The cookie can be recomputed when the IKE_SA_INIT arrives the second time and compared to the cookie in the received message. If it matches, the responder knows that SPI_r was generated since the last change to <secret> and that IPI must be the same as the source address it saw the first time. Incorporating SPI_i into the calculation assures that if multiple IKE_SAs are being set up in parallel they will all get different cookies (assuming the initiator chooses unique SPI_i's). Incorporating N_i into the hash assures that an attacker who sees only message 2 can't successfully forge a message 3.

If a new value for <secret> is chosen while there are connections in the process of being initialized, an IKE_SA_INIT might be returned with other than the current <SecretVersionNumber>. The responder in that case MAY reject the message by sending another response with a new cookie or it MAY keep the old value of <secret> around for a short time and accept cookies computed from either one. The responder SHOULD NOT accept cookies indefinitely after <secret> is changed, since that would defeat part of the denial of service protection. The responder SHOULD change the value of <secret> frequently, especially if under attack.

[2.7](#) Cryptographic Algorithm Negotiation

The payload type known as "SA" indicates a proposal for a set of choices of protocols (IKE, ESP, and/or AH) for the SA as well as cryptographic algorithms associated with each protocol.

An SA consists of one or more proposals. Each proposal includes one or more protocols (usually one). Each protocol contains one or more transforms - each specifying a cryptographic algorithm. Each transform contains zero or more attributes (attributes are only needed if the transform identifier does not completely specify the cryptographic algorithm).

This hierarchical structure was designed to be able to efficiently encode proposals for cryptographic suites when the number of supported suites is large because multiple values are acceptable for multiple transforms. The responder MUST choose a single suite, which MAY be any subset of the SA proposal following the rules below:

Each proposal contains one or more protocols. If a proposal is accepted, the SA response must contain the same protocols in the same order as the proposal. At most one proposal MAY be accepted. (Example: if a single proposal contains ESP and AH and that

proposal is accepted, both ESP and AH MUST be accepted. If ESP and AH are included in separate proposals, only one of them MAY be accepted).

Each protocol contains one or more transforms. Each transform contains a transform type. The accepted cryptographic suite MUST contain exactly one transform of each type included in the proposal. (Example: if an ESP proposal includes transforms ENCR_3DES, ENCR_AES128, AUTH_HMAC_MD5, and AUTH_HMAC_SHA, the accepted suite MUST contain one of the ENCR_ transforms and one of the AUTH_ transforms. Thus four combinations are acceptable).

Since Alice sends her Diffie-Hellman value in the IKE_SA_INIT, she must guess at the Diffie-Hellman group that Bob will select from her list of supported groups. If she guesses wrong, Bob will respond with a NOTIFY payload of type INVALID_KEY_PAYLOAD indicating the selected group. In this case, Alice MUST retry the IKE_SA_INIT with the corrected Diffie-Hellman group. Alice MUST again propose her full set of acceptable cryptographic suites because the rejection message was unauthenticated and otherwise an active attacker could trick Alice and Bob into negotiating a weaker suite than a stronger one that they both prefer.

[2.8](#) Rekeying

IKE, ESP, and AH security associations use secret keys which SHOULD only be used for a limited amount of time and to protect a limited amount of data. This limits the lifetime of the entire security association. When the lifetime of a security association expires the security association MUST NOT be used. If there is demand, new security associations MAY be established. Reestablishment of security associations to take the place of ones which expire is referred to as "rekeying".

To rekey a CHILD_SA, create a new, equivalent SA (see [section 2.17](#) below), and when the new one is established, delete the old one. To rekey an IKE_SA, establish a new equivalent IKE_SA (see [section 2.18](#) below) with the peer to whom the old IKE_SA is shared using a CREATE_CHILD_SA within the existing IKE_SA. An IKE_SA so created inherits all of the original IKE_SA's CHILD_SAs. Use the new IKE_SA for all control messages needed to maintain the CHILD_SAs created by the old IKE_SA, and delete the old IKE_SA. The Delete payload to delete itself MUST be the last request sent over an IKE_SA.

SAs SHOULD be rekeyed proactively, i.e., the new SA should be established before the old one expires and becomes unusable. Enough time should elapse between the time the new SA is established and the old one becomes unusable so that traffic can be switched over to the

new SA.

A difference between IKEv1 and IKEv2 is that in IKEv1 SA lifetimes were negotiated. In IKEv2, each end of the SA is responsible for enforcing its own lifetime policy on the SA and rekeying the SA when necessary. If the two ends have different lifetime policies, the end with the shorter lifetime will end up always being the one to request the rekeying. If an SA bundle has been inactive for a long time and if an endpoint would not initiate the SA in the absence of traffic, the endpoint MAY choose to close the SA instead of rekeying it when its lifetime expires. It SHOULD do so if there has been no traffic since the last time the SA was rekeyed.

If the two ends have the same lifetime policies, it is possible that both will initiate a rekeying at the same time (which will result in redundant SAs). To reduce the probability of this happening, the timing of rekeying requests SHOULD be jittered (delayed by a random amount of time after the need for rekeying is noticed).

This form of rekeying may temporarily result in multiple similar SAs between the same pairs of nodes. When there are two SAs eligible to receive packets, a node MUST accept incoming packets through either SA. If redundant SAs are created through such a collision, the SA created with the lowest of the four nonces used in the two exchanges SHOULD be closed by the endpoint that created it.

The node that initiated the surviving rekeyed SA SHOULD delete the replaced SA after the new one is established.

2.9 Traffic Selector Negotiation

When an IP packet is received by an [RFC2401](#) compliant IPsec subsystem and matches a "protect" selector in its SPD, the subsystem MUST protect that packet with IPsec. When no SA exists yet it is the task of IKE to create it. Maintenance of a system's SPD is outside the scope of IKE (see [\[PFKEY\]](#) for an example protocol), though some implementations might update their SPD in connection with the running of IKE (for an example scenario, see [section 1.1.3](#)).

Traffic Selector (TS) payloads allow endpoints to communicate some of the information from their SPD to their peers. TS payloads specify the selection criteria for packets that will be forwarded over the newly set up SA. This can serve as a consistency check in some scenarios to assure that the SPDs are consistent. In others, it guides the dynamic update of the SPD.

Two TS payloads appear in each of the messages in the exchange that creates a CHILD_SA pair. Each TS payload contains one or more Traffic

Selectors. Each Traffic Selector consists of an address range (IPv4 or IPv6), a port range, and a protocol ID. In support of the scenario described in [section 1.1.3](#), an initiator may request that the responder assign an IP address and tell the initiator what it is.

IKEv2 allows the responder to choose a subset of the traffic proposed by the initiator. This could happen when the configuration of the two endpoints are being updated but only one end has received the new information. Since the two endpoints may be configured by different people, the incompatibility may persist for an extended period even in the absence of errors. It also allows for intentionally different configurations, as when one end is configured to tunnel all addresses and depends on the other end to have the up to date list.

The first of the two TS payloads is known as TS_i (Traffic Selector-initiator). The second is known as TS_r (Traffic Selector-responder). TS_i specifies the source address of traffic forwarded from (or the destination address of traffic forwarded to) the initiator of the CHILD_SA pair. TS_r specifies the destination address of the traffic forwarded from (or the source address of the traffic forwarded to) the responder of the CHILD_SA pair. For example, if Alice initiates the creation of the CHILD_SA pair from Alice to Bob, and wishes to tunnel all traffic from subnet 10.2.16.* on Alice's side to subnet 18.16.*.* on Bob's side, Alice would include a single traffic selector in each TS payload. TS_i would specify the address range (10.2.16.0 - 10.2.16.255) and TS_r would specify the address range (18.16.0.0 - 18.16.255.255). Assuming that proposal was acceptable to Bob, he would send identical TS payloads back.

The Responder is allowed to narrow the choices by selecting a subset of the traffic, for instance by eliminating or narrowing the range of one or more members of the set of traffic selectors, provided the set does not become the NULL set.

It is possible for the Responder's policy to contain multiple smaller ranges, all encompassed by the Initiator's traffic selector, and with the Responder's policy being that each of those ranges should be sent over a different SA. Continuing the example above, Bob might have a policy of being willing to tunnel those addresses to and from Alice, but might require that each address pair be on a separately negotiated CHILD_SA. If Alice generated her request in response to an incoming packet from 10.2.16.43 to 18.16.2.123, there would be no way for Bob to determine which pair of addresses should be included in this tunnel, and he would have to make his best guess or reject the request with a status of SINGLE_PAIR_REQUIRED.

To enable Bob to choose the appropriate range in this case, if Alice has initiated the SA due to a data packet, Alice MAY include as the

first traffic selector in each of TS_i and TS_r a very specific traffic selector including the addresses in the packet triggering the request. In the example, Alice would include in TS_i two traffic selectors: the first containing the address range (10.2.16.43 - 10.2.16.43) and the source port and protocol from the packet and the second containing (10.2.16.0 - 10.2.16.255) with all ports and protocols. She would similarly include two traffic selectors in TS_r.

If Bob's policy does not allow him to accept the entire set of traffic selectors in Alice's request, but does allow him to accept the first selector of TS_i and TS_r, then Bob **MUST** narrow the traffic selectors to a subset that includes Alice's first choices. In this example, Bob might respond with TS_i being (10.2.16.43 - 10.2.16.43) with all ports and protocols.

If Alice creates the CHILD_SA pair not in response to an arriving packet, but rather - say - upon startup, then there may be no specific addresses Alice prefers for the initial tunnel over any other. In that case, the first values in TS_i and TS_r **MAY** be ranges rather than specific values, and Bob chooses a subset of Alice's TS_i and TS_r that are acceptable to him. If more than one subset is acceptable but their union is not, Bob **MUST** accept some subset and **MAY** include a NOTIFY payload of type ADDITIONAL_TS_POSSIBLE to indicate that Alice might want to try again. This case will only occur when Alice and Bob are configured differently from one another. If Alice and Bob agree on the granularity of tunnels, she will never request a tunnel wider than Bob will accept.

2.10 Nonces

The IKE_SA_INIT messages each contain a nonce. These nonces are used as inputs to cryptographic functions. The CREATE_CHILD_SA request and the CREATE_CHILD_SA response also contain nonces. These nonces are used to add freshness to the key derivation technique used to obtain keys for CHILD_SAs. Nonces used in IKEv2 **MUST** therefore be randomly chosen and be at least 128 bits in size.

2.11 Address and Port Agility

IKE runs over UDP ports 500 and 4500, and implicitly sets up ESP and AH associations for the same IP addresses it runs over. The IP addresses and ports in the outer header are, however, not themselves cryptographically protected, and IKE is designed to work even through Network Address Translation (NAT) boxes. An implementation **MUST** accept incoming connection requests even if not received from UDP port 500 or 4500, and **MUST** respond to the address and port from which the request was received. IKE functions identically over IPv4 or IPv6.

2.12 Reuse of Diffie-Hellman Exponentials

IKE generates keying material using an ephemeral Diffie-Hellman exchange in order to gain the property of "perfect forward secrecy". This means that once a connection is closed and its corresponding keys are forgotten, even someone who has recorded all of the data from the connection and gets access to all of the long term keys of the two endpoints cannot reconstruct the keys used to protect the conversation.

Achieving perfect forward secrecy requires that when a connection is closed, each endpoint must forget not only the keys used by the connection but any information that could be used to recompute those keys. In particular, it must forget the secrets used in the Diffie-Hellman calculation and any state that may persist in the state of a pseudo-random number generator that could be used to recompute the Diffie-Hellman secrets.

Since the computing of Diffie-Hellman exponentials is computationally expensive, an endpoint may find it advantageous to reuse those exponentials for multiple connection setups. There are several reasonable strategies for doing this. An endpoint could choose a new exponential only periodically though this could result in less-than-perfect forward secrecy if some connection lasts for less than the lifetime of the exponential. Or it could keep track of which exponential was used for each connection and delete the information associated with the exponential only when some corresponding connection was closed. This would allow the exponential to be reused without losing perfect forward secrecy at the cost of maintaining more state.

Decisions as to whether and when to reuse Diffie-Hellman exponentials is a private decision in the sense that it will not affect interoperability. An implementation that reuses exponentials MAY choose to remember the exponential used by the other endpoint on past exchanges and if one is reused to avoid the second half of the calculation.

2.13 Generating Keying Material

In the context of the IKE_SA, four cryptographic algorithms are negotiated: an encryption algorithm, an integrity protection algorithm, a Diffie-Hellman group, and a pseudo-random function (prf). The pseudo-random function is used for the construction of keying material for all of the cryptographic algorithms used in both the IKE_SA and the CHILD_SAs.

We assume that each encryption algorithm and integrity protection

algorithm uses a fixed size key, and that any randomly chosen value of that fixed size can serve as an appropriate key. For algorithms that accept a variable length key, a fixed key size MUST be specified as part of the cryptographic transform negotiated. For integrity protection functions based on HMAC, the fixed key size is the size of the output of the underlying hash function. We assume that the prf function takes a variable length key and produces a fixed length output. When the key for the prf function has fixed length, its specification for use in IKEv2 must include a procedure for deriving its required fixed length key from a variable length key.

Keying material will always be derived as the output of the negotiated prf algorithm. Since the amount of keying material needed may be greater than the size of the output of the prf algorithm, we will use the prf iteratively. We will use the terminology prf+ to describe the function that outputs a pseudo-random stream based on the inputs to a prf as follows: (where | indicates concatenation)

$$\text{prf+}(K, S) = T1 \mid T2 \mid T3 \mid T4 \mid \dots$$

where:

T1 = prf (K, S | 0x01)
T2 = prf (K, T1 | S | 0x02)
T3 = prf (K, T2 | S | 0x03)
T4 = prf (K, T3 | S | 0x04)

continuing as needed to compute all required keys. The keys are taken from the output string without regard to boundaries (e.g. if the required keys are a 256 bit AES key and a 160 bit HMAC key, and the prf function generates 160 bits, the AES key will come from T1 and the beginning of T2, while the HMAC key will come from the rest of T2 and the beginning of T3).

The constant concatenated to the end of each string feeding the prf is a single octet. prf+ in this document is not defined beyond 255 times the size of the prf output.

[2.14](#) Generating Keying Material for the IKE_SA

The shared keys are computed as follows. A quantity called SKEYSEED is calculated from the nonces exchanged during the IKE_SA_INIT exchange and the Diffie-Hellman shared secret established during that exchange. SKEYSEED is used to calculate five other secrets: SK_d used for deriving new keys for the CHILD_SAs established with this IKE_SA; SK_ai and SK_ar used as a key to the integrity protection algorithm for authenticating the component messages of subsequent exchanges; and SK_ei and SK_er used for encrypting (and of course decrypting) all subsequent exchanges. SKEYSEED and its derivatives

are computed as follows:

```

SKEYSEED = prf(Ni | Nr, g^ir)

{SK_d, SK_ai, SK_ar, SK_ei, SK_er}
    = prf+ (SKEYSEED, g^ir | Ni | Nr | SPIi | SPIr )

```

(indicating that the quantities SK_d, SK_ai, SK_ar, SK_ei, and SK_er are taken in order from the generated bits of the prf+). g^ir is the shared secret from the ephemeral Diffie-Hellman exchange. g^ir is represented as a string of octets in big endian order padded with zeros if necessary to make it the length of the modulus. Ni and Nr are the nonces, stripped of any headers.

The two directions of flow use different keys. The keys used to protect messages from the original initiator are SK_ai and SK_ei. The keys used to protect messages in the other direction are SK_ar and SK_er. Each algorithm takes a fixed number of bits of keying material, which is specified as part of the algorithm. For integrity algorithms based on HMAC, the key size is always equal to the length of the output of the underlying hash function.

[2.15](#) Authentication of the IKE_SA

When not using extended authentication (see [section 2.16](#)), the peers are authenticated by having each sign (or MAC using a shared secret as the key) a block of data. For the responder, the octets to be signed start with the first octet of the first SPI in the header of the second message and end with the last octet of the last payload in the second message. Appended to this (for purposes of computing the signature) are the initiator's nonce Ni (just the value, not the payload containing it), and the value prf(SK_ar, IDr') where IDr' is the responder's ID payload excluding the fixed header. Note that neither the nonce Ni nor the value prf(SK_ar, IDr') are transmitted. Similarly, the initiator signs the first message, starting with the first octet of the first SPI in the header and ending with the last octet of the last payload. Appended to this (for purposes of computing the signature) are the responder's nonce Nr, and the value prf(SK_ai, IDi'). In the above calculation, IDi' and IDr' are the entire ID payloads excluding the fixed header. It is critical to the security of the exchange that each side sign the other side's nonce (see [\[SIGMA\]](#)).

Note that all of the payloads are included under the signature, including any payload types not defined in this document. If the first message of the exchange is sent twice (the second time with a responder cookie and/or a different Diffie-Hellman group), it is the second version of the message that is signed.

Optionally, messages 3 and 4 MAY include a certificate, or certificate chain providing evidence that the key used to compute a digital signature belongs to the name in the ID payload. The signature or MAC will be computed using algorithms dictated by the type of key used by the signer, an RSA-signed PKCS1-padded-hash for an RSA digital signature, a DSS-signed SHA1-hash for a DSA digital signature, or the negotiated prf function for a pre-shared key. There is no requirement that the Initiator and Responder sign with the same cryptographic algorithms. The choice of cryptographic algorithms depends on the type of key each has. This type is either indicated in the certificate supplied or, if the keys were exchanged out of band, the key types must have been similarly learned. In particular, the initiator may be using a shared key while the responder may have a public signature key and certificate. It will commonly be the case (but it is not required) that if a shared secret is used for authentication that the same key is used in both directions. Note that it is a common but insecure practice to have a shared key derived from a user chosen password. This is insecure because user chosen passwords are unlikely to have sufficient randomness to resist dictionary attacks. The pre-shared key SHOULD contain as much randomness as the strongest key being negotiated. In the case of a pre-shared key, the AUTH value is computed as:

$$\text{AUTH} = \text{prf}(\text{Shared Secret} \parallel \text{"Key Pad for IKEv2"}, <\text{message octets}>)$$

where the string "Key Pad for IKEv2" is ASCII encoded and not null terminated. The shared secret can be variable length. The pad string is added so that if the shared secret is derived from a password, the IKE implementation need not store the password in cleartext, but rather can store a one way transformation of it that could not be used as a password equivalent for protocols other than IKEv2. As noted above, deriving the shared secret from a password is not secure. This construction is used because it is anticipated that people will do it anyway.

2.16 Extended Authentication Protocol Methods

In addition to authentication using public key signatures and shared secrets, IKE supports authentication using methods defined in [RFC 2284](#) [EAP]. Typically, these methods are asymmetric (designed for a user authenticating to a server), and they may not be mutual. For this reason, these protocols are typically used to authenticate the initiator to the responder and are used in addition to a public key signature based authentication of the responder to the initiator. These methods are also referred to as "Legacy Authentication" mechanisms.

While this memo references [EAP] with the intent that new methods can

be added in the future without updating this specification, the protocols expected to be used most commonly are fully documented here and in [section 3.16](#). [EAP] defines an authentication protocol requiring a variable number of messages. Extended Authentication is implemented in IKE as additional IKE_AUTH exchanges that MUST be completed in order to initialize the IKE_SA.

An initiator indicates a desire to use extended authentication by leaving out the AUTH payload from message 3. By including an IDi payload but not an AUTH payload, the initiator has declared an identity but has not proven it. If the responder is willing to use an extended authentication method, it will place an EAP payload in message 4 and defer sending SAR2, TSi, and TSr until initiator authentication is complete in a subsequent IKE_AUTH exchange. In the case of a minimal extended authentication, the initial SA establishment will appear as follows:

Initiator -----		Responder -----
HDR, SAi1, KEi, Ni	-->	
	<--	HDR, SAR1, KEr, Nr, [CERTREQ]
HDR, SK {IDi, [CERTREQ,] [IDr,] SAi2, TSi, TSr}	-->	
	<--	HDR, SK {IDr, [CERT,] AUTH, EAP }
HDR, SK {EAP, [AUTH] }	-->	
	<--	HDR, SK {EAP, [AUTH], SAR2, TSi, TSr }

For EAP methods that create a shared key as a side effect of authentication, that shared key MUST be used by both the Initiator and Responder to generate an AUTH payload using the syntax for shared secrets specified in [section 2.15](#). This shared key MUST NOT be used for any other purpose.

The Initiator of an IKE_SA using EAP SHOULD be capable of extending the initial protocol exchange to at least ten IKE_AUTH exchanges in the event the Responder sends notification messages and/or retries the authentication prompt. The protocol terminates when the Responder sends the Initiator and EAP payload containing either a success or failure type.

[2.17](#) Generating Keying Material for CHILD_SAs

CHILD_SAs are created either by being piggybacked on the IKE_AUTH exchange, or in a CREATE_CHILD_SA exchange. Keying material for them is generated as follows:

$$\text{KEYMAT} = \text{prf}+(\text{SK}_d, \text{Ni} \mid \text{Nr})$$

Where Ni and Nr are the Nonces from the IKE_SA_INIT exchange if this request is the first CHILD_SA created or the fresh Ni and Nr from the CREATE_CHILD_SA exchange if this is a subsequent creation.

For CREATE_CHILD_SA exchanges with PFS the keying material is defined as:

$$\text{KEYMAT} = \text{prf}+(\text{SK}_d, g^{\text{air}}(\text{ph2}) \mid \text{Ni} \mid \text{Nr})$$

where $g^{\text{air}}(\text{ph2})$ is the shared secret from the ephemeral Diffie-Hellman exchange of this CREATE_CHILD_SA exchange (represented as an octet string in big endian order padded with zeros if necessary to make it the length of the modulus),

A single CHILD_SA negotiation may result in multiple security associations. ESP and AH SAs exist in pairs (one in each direction), and four SAs could be created in a single CHILD_SA negotiation if a combination of ESP and AH is being negotiated.

Keying material is taken from the expanded KEYMAT in the following order:

All keys for SAs carrying data from the initiator to the responder are taken before SAs going in the reverse direction.

If multiple protocols are negotiated, keying material is taken in the order in which the protocol headers will appear in the encapsulated packet.

If a single protocol has both encryption and authentication keys, the encryption key is taken from the first octets of KEYMAT and the authentication key is taken from the next octets.

Each cryptographic algorithm takes a fixed number of bits of keying material specified as part of the algorithm.

[2.18](#) Rekeying IKE_SAs using a CREATE_CHILD_SA exchange

The CREATE_CHILD_SA exchange can be used to re-key an existing IKE_SA (see [section 2.8](#)). New Initiator and Responder SPIs are supplied in

the SPI fields. The TS payloads are omitted when rekeying an IKE_SA. SKEYSEED for the new IKE_SA is computed using SK_d from the existing IKE_SA as follows:

$$\text{SKEYSEED} = \text{prf}(\text{SK_d (old)}, [\text{g}^{\text{air}} (\text{new})] \parallel \text{Ni} \parallel \text{Nr})$$

where $\text{g}^{\text{air}} (\text{new})$ is the shared secret from the ephemeral Diffie-Hellman exchange of this CREATE_CHILD_SA exchange (represented as an octet string in big endian order padded with zeros if necessary to make it the length of the modulus) and Ni and Nr are the two nonces stripped of any headers.

The new IKE_SA MUST reset its message counters to 0.

SK_d, SK_ai, SK_ar, and SK_ei, and SK_er are computed from SKEYSEED as specified in [section 2.14](#).

[2.19](#) Requesting an internal address on a remote network

Most commonly in the endpoint to gateway scenario, an endpoint may need an IP address on the gateway's internal network, and may need to have that address dynamically assigned. A request for such a temporary address can be included in any request to create a CHILD_SA (including the implicit request in message 3) by including a CP payload.

This function provides address allocation to an IRAC trying to tunnel into a network protected by an IRAS. Since the IKE_AUTH exchange creates an IKE_SA and a CHILD_SA the IRAC MUST request the internal address, and optionally other information concerning the internal network, in the IKE_AUTH exchange. The may IRAS procure an internal address for the IRAC from any number of sources such as a DHCP/BOOTP server or its own address pool.

Initiator	Responder
-----	-----
HDR, SK {IDi, [CERT,] [CERTREQ,] [IDr,] AUTH, CP(CFG_REQUEST), SAi2, TSi, TSr}	-->
	<-- HDR, SK {IDr, [CERT,] AUTH, CP(CFG_REPLY), SAr2, TSi, TSr}

In all cases, the CP payload MUST be inserted immediately before the SA payload. In variations of the protocol where there are multiple IKE_AUTH exchanges, the CP payloads MUST be inserted in the messages containing the SA payloads.

CP(CFG_REQUEST) MUST contain at least an INTERNAL_ADDRESS attribute (either IPv4 or IPv6) but MAY contain any number of additional attributes the initiator wants returned in the response.

For example, message from Initiator to Responder:

```
CP(CFG_REQUEST)=
  INTERNAL_ADDRESS(0.0.0.0)
  INTERNAL_NETMASK(0.0.0.0)
  INTERNAL_DNS(0.0.0.0)
  TSi = (0, 0-65536,0.0.0.0-255.255.255.255)
  TSr = (0, 0-65536,0.0.0.0-255.255.255.255)
```

NOTE: Traffic Selectors are a (protocol, port range, address range)

Message from Responder to Initiator:

```
CP(CFG_REPLY)=
  INTERNAL_ADDRESS(192.168.219.202)
  INTERNAL_NETMASK(255.255.255.0)
  INTERNAL_SUBNET(192.168.219.0/255.255.255.0)
  TSi = (0, 0-65536,192.168.219.202-192.168.219.202)
  TSr = (0, 0-65536,192.168.219.0-192.168.219.255)
```

All returned values will be implementation dependent. As can be seen in the above example, the IRAS MAY also send other attributes that were not included in CP(CFG_REQUEST) and MAY ignore the non-mandatory attributes that it does not support.

The responder MUST not send a CFG_REPLY without having first received a CP(CFG_REQUEST) from the initiator, because we do not want the IRAS to perform an unnecessary configuration lookup if the IRAC cannot process the REPLY. In the case where the IRAS's configuration requires that CP be used for a given identity IDi, but IRAC has failed to send a CP(CFG_REQUEST), IRAS MUST fail the request, and terminate the IKE exchange with a FAILED_CP_REQUIRED error.

[2.20](#) Requesting the Peer's Version

An IKE peer wishing to inquire about the other peer's version information MUST use the method below. This is an example of a configuration request within an INFORMATIONAL Exchange, after the IKE_SA and first CHILD_SA have been created.

An IKE implementation MAY decline to give out version information prior to authentication or even after authentication to prevent trolling in case some implementation is known to have some security weakness. In that case, it MUST either return an empty string or no CP payload if CP is not supported.

Initiator		Responder
-----		-----
HDR, SK{CP(CFG_REQUEST)}	-->	
	<--	HDR, SK{CP(CFG_REPLY)}
CP(CFG_REQUEST)=		
APPLICATION_VERSION("")		
CP(CFG_REPLY)		
APPLICATION_VERSION("foobar v1.3beta, (c) Foo Bar Inc.")		

2.21 Error Handling

There are many kinds of errors that can occur during IKE processing. If a request is received that is badly formatted or unacceptable for reasons of policy (e.g. no matching cryptographic algorithms), the response **MUST** contain a Notify payload indicating the error. If an error occurs outside the context of an IKE request (e.g. the node is getting ESP messages on a non-existent SPI), the node **SHOULD** initiate an INFORMATIONAL Exchange with a Notify payload describing the problem.

Errors that occur before a cryptographically protected IKE_SA is established must be handled very carefully. There is a trade-off between wanting to be helpful in diagnosing a problem and responding to it and wanting to avoid being a dupe in a denial of service attack based on forged messages.

If a node receives a message on UDP port 500 outside the context of an IKE_SA known to it (and not a request to start one), it may be the result of a recent crash of the node. If the message is marked as a response, the node **MAY** audit the suspicious event but **MUST NOT** respond. If the message is marked as a request, the node **MAY** audit the suspicious event and **MAY** send a response. If a response is sent, the response **MUST** be sent to the IP address and port from whence it came with the same IKE SPIs and the Message ID copied. The response **MUST NOT** be cryptographically protected and **MUST** contain a notify payload indicating INVALID_IKE_SPI.

A node receiving such an unprotected NOTIFY payload **MUST NOT** respond and **MUST NOT** change the state of any existing SAs. The message might be a forgery or might be a response the genuine correspondent was tricked into sending. A node **SHOULD** treat such a message (and also a network message like ICMP destination unreachable) as a hint that there might be problems with SAs to that IP address and **SHOULD** initiate a liveness test for any such IKE_SA. An implementation **SHOULD** limit the frequency of such tests to avoid being tricked into participating in a denial of service attack.

A node receiving a suspicious message from an IP address with which it has an IKE_SA MAY send an IKE notify payload in an IKE INFORMATIONAL exchange over that SA. The recipient MUST NOT change the state of any SA's as a result but SHOULD audit the event to aid in diagnosing malfunctions. A node MUST limit the rate at which it will send messages in response to unprotected messages.

[2.22](#) IPcomp

Use of IP compression [IPCOMP] can be negotiated as part of the setup of a CHILD_SA. While IP compression involves an extra header in each packet and a CPI (compression parameter index), the virtual "compression association" has no life outside the ESP or AH SA that contains it. Compression associations disappear when the corresponding ESP or AH SA goes away, and is not explicitly mentioned in any DELETE payload.

Negotiation of IP compression is separate from the negotiation of cryptographic parameters associated with a CHILD_SA. A node requesting a CHILD_SA MAY advertise its support for one or more compression algorithms though one or more NOTIFY payloads of type IPCOMP_SUPPORTED. The response MAY indicate acceptance of a single compression algorithm with a NOTIFY payload of type IPCOMP_SUPPORTED. These payloads MAY ONLY occur in the same messages that contain SA payloads.

While there has been discussion of allowing multiple compression algorithms to be accepted and to have different compression algorithms available for the two directions of a CHILD_SA, implementations of this specification MUST NOT accept an IPcomp algorithm that was not proposed, MUST NOT accept more than one, and MUST NOT compress using an algorithm other than one proposed and accepted in the setup of the CHILD_SA.

A side effect of separating the negotiation of IPcomp from cryptographic parameters is that it is not possible to propose multiple cryptographic suites and propose IP compression with some of them but not others.

[2.23](#) NAT Traversal

NAT (Network Address Translation) gateways are a controversial subject. This section briefly describes what they are and how they are likely to act on IKE traffic. Many people believe that NATs are evil and that we should not design our protocols so as to make them work better. IKEv2 does specify some unintuitive processing rules in order that NATs are more likely to work.

NATs exist primarily because of the shortage of IPv4 addresses, though there are other rationales. IP nodes that are "behind" a NAT have IP addresses that are not globally unique, but rather are assigned from some space that is unique within the network behind the NAT but which are likely to be reused by nodes behind other NATs. Generally, nodes behind NATs can communicate with other nodes behind the same NAT and with nodes with globally unique addresses, but not with nodes behind other NATs. There are exceptions to that rule. When those nodes make connections to nodes on the real Internet, the NAT gateway "translates" the IP source address to an address that will be routed back to the gateway. Messages to the gateway from the Internet have their destination addresses "translated" to the internal address that will route the packet to the correct endnode.

NATs are designed to be "transparent" to endnodes. Neither software on the node behind the NAT nor the node on the Internet require modification to communicate through the NAT. Achieving this transparency is more difficult with some protocols than with others. Protocols that include IP addresses of the endpoints within the payloads of the packet will fail unless the NAT gateway understands the protocol and modifies the internal references as well as those in the headers. Such knowledge is inherently unreliable, is a network layer violation, and often results in subtle problems.

Opening an IPsec connection through a NAT introduces special problems. If the connection runs in transport mode, changing the IP addresses on packets will cause the checksums to fail and the NAT cannot correct the checksums because they are cryptographically protected. Even in tunnel mode, there are routing problems because transparently translating the addresses of AH and ESP packets requires special logic in the NAT and that logic is heuristic and unreliable in nature. For that reason, IKEv2 can negotiate UDP encapsulation of IKE, ESP, and AH packets. This encoding is slightly less efficient but is easier for NATs to process. In addition, firewalls may be configured to pass IPsec traffic over UDP but not ESP/AH or vice versa.

It is a common practice of NATs to translate TCP and UDP port numbers as well as addresses and use the port numbers of inbound packets to decide which internal node should get a given packet. For this reason, even though IKE packets MUST be sent from and to UDP port 500, they SHOULD be accepted coming from any port and responses SHOULD be sent to the port from whence they came. This is because the ports may be modified as the packets pass through NATs. Similarly, IP addresses of the IKE endpoints are generally not included in the IKE payloads because the payloads are cryptographically protected and could not be transparently modified by NATs.

Port 4500 is reserved for UDP encapsulated ESP, AH, and IKE. When working through a NAT, it is generally better to pass IKE packets over port 4500 because some older NATs modify IKE traffic on port 500 in an attempt to transparently establish IPsec connections. Such NATs may interfere with the straightforward NAT traversal envisioned by this document, so an IPsec endpoint that discovers a NAT between it and its correspondent SHOULD send all subsequent traffic to and from port 4500, which all NATs should know run the NAT-friendly protocol.

The specific requirements for supporting NAT traversal are listed below. Support for NAT traversal is optional. In this section only, requirements listed as MUST only apply to implementations supporting NAT.

IKE MUST listen on port 4500 as well as port 500. IKE MUST respond to the IP address and port from which packets arrived.

The IKE responder MUST include in its IKE_SA_INIT response Notify payloads of type NAT_DETECTION_SOURCE_IP and NAT_DETECTION_DESTINATION_IP. The IKE initiator MUST check these payloads if present and if they do not match the addresses in the outer packet MUST tunnel all future IKE, ESP, and AH packets associated with this IKE_SA over UDP port 4500.

2.24 ECN Notification

Sections [5.1.2.1](#) and [5.1.2.2](#) of [\[RFC 2401\]](#) specify that the IPv4 TOS octet and IPv6 traffic class octet are to be copied from the inner header to the outer header by the encapsulator and that the outer header is to be discarded (no change to inner header) by the decapsulator. If ECN is in use, ECT codepoints will be copied to the outer header, but if a router within the tunnel changes an ECT codepoint to a CE codepoint to indicate congestion, that indication will be discarded by the decapsulator. This behavior is highly undesirable, and [Section 9.2 of \[RFC 3168\]](#) specifies changes to IPsec to avoid it. These changes include two ECN operating modes and negotiation support to detect and cope with IPsec decapsulators that discard ECN congestion indications; use of ECN in the outer IP header of IPsec tunnels is not permitted when such discarding is a possibility.

In order to avoid multiple ECN operating modes and negotiation, tunnel decapsulators for tunnel-mode Security Associations (SAs) created by IKEv2 MUST implement the following modifications to prevent discarding of ECN congestion indications. IKEv2 tunnel-mode SA negotiation is handled by the USE_TRANSPORT_MODE notify message type (see [Section 5.10.1](#) of [\[IKEv2\]](#)). The following modifications *replace* [Section 9.2 of RFC 3168](#) and *update* Sections [5.1.2.1](#) and

5.1.2.2 of [RFC 2401](#).

Encapsulation and Decapsulation of packets for a tunnel-mode SA created by IKEv2 MUST NOT follow the modifications specified by [Section 9.2 of RFC 3168](#) and its subsections. Instead, the following modifications to encapsulation and decapsulation in Sections [5.1.2.1](#) and 5.1.2.2 of [RFC 2401](#) MUST be performed:

	Outer Hdr at Encapsulator	Inner Hdr at Decapsulator
IPv4		
Header fields:	-----	-----
DS Field	copied from inner hdr (5)	no change
ECN Field	copied from inner hdr	constructed (7)
IPv6		
Header fields:		
DS Field	copied from inner hdr (6)	no change
ECN Field	copied from inner hdr	constructed (7)

(5)(6) If the packet will immediately enter a domain for which the DSCP value in the outer header is not appropriate, that value MUST be mapped to an appropriate value for the domain [[RFC 2474](#)]. Also see [[RFC 2475](#)] for further information.

(7) If the ECN field in the inner header is set to ECT(0) or ECT(1) and the ECN field in the outer header is set to CE, then set the ECN field in the inner header to CE, otherwise make no change to the ECN field in the inner header.

(5) and (6) are identical to match usage in [[RFC2401](#)], although they are different in [[RFC2401](#)]. These actions are not related to ECN, but are required for Differentiated Services support. They are carried over to this document from [RFC 3168](#) so that all of [RFC 3168](#)'s changes to IPsec can be made non-applicable to SAs created by IKEv2.

[3](#) Header and Payload Formats

[3.1](#) The IKE Header

IKE messages use UDP ports 500 and/or 4500, with one IKE message per UDP datagram. Information from the UDP header is largely ignored except that the IP addresses and UDP ports from the headers are reversed and used for return packets. When sent on UDP port 500, IKE messages begin immediately following the UDP header. When sent on UDP port 4500, IKE messages have prepended four octets of zero. These four octets of zero are not part of the IKE message and are not included in any of the length fields or checksums defined by IKE.

Each IKE message begins with the IKE header, denoted HDR in this memo. Following the header are one or more IKE payloads each identified by a "Next Payload" field in the preceding payload. Payloads are processed in the order in which they appear in an IKE message by invoking the appropriate processing routine according to the "Next Payload" field in the IKE header and subsequently according to the "Next Payload" field in the IKE payload itself until a "Next Payload" field of zero indicates that no payloads follow. If a payload of type "Encrypted" is found, that payload is decrypted and its contents parsed as additional payloads. An Encrypted payload MUST be the last payload in a packet and an encrypted payload MUST NOT contain another encrypted payload.

The Recipient SPI in the header identifies an instance of an IKE security association. It is therefore possible for a single instance of IKE to multiplex distinct sessions with multiple peers.

All multi-octet fields representing integers are laid out in big endian order (aka most significant byte first, or network byte order).

The format of the IKE header is shown in Figure 4.

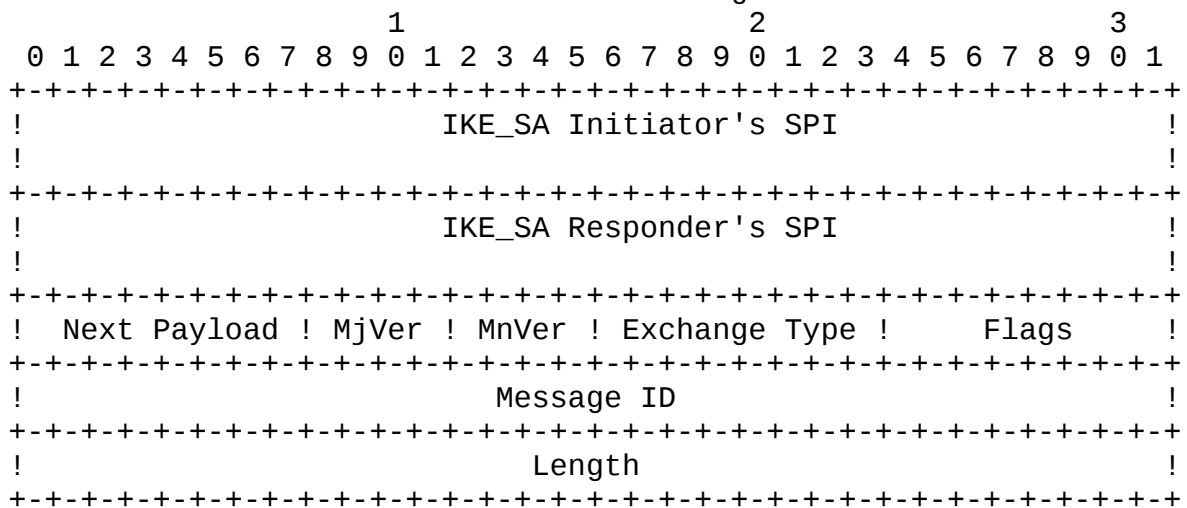


Figure 4: IKE Header Format

- o Initiator's SPI (8 octets) - A value chosen by the initiator to identify a unique IKE security association. This value MUST NOT be zero.
- o Responder's SPI (8 octets) - A value chosen by the responder to identify a unique IKE security association. This value MUST be zero in the first message of an IKE Initial Exchange and MUST NOT be zero in any other message other

than a cookie request (see [section 2.6](#)).

- o Next Payload (1 octet) - Indicates the type of payload that immediately follows the header. The format and value of each payload is defined below.
- o Major Version (4 bits) - indicates the major version of the IKE protocol in use. Implementations based on this version of IKE MUST set the Major Version to 2. Implementations based on previous versions of IKE and ISAKMP MUST set the Major Version to 1. Implementations based on this version of IKE MUST reject (or ignore) messages containing a version number greater than 2.
- o Minor Version (4 bits) - indicates the minor version of the IKE protocol in use. Implementations based on this version of IKE MUST set the Minor Version to 0. They MUST ignore the minor version number of received messages.
- o Exchange Type (1 octet) - indicates the type of exchange being used. This dictates the payloads sent in each message and message orderings in the exchanges.

Exchange Type	Value
RESERVED	0
Reserved for ISAKMP	1-31
Reserved for IKEv1	32-33
IKE_SA_INIT	34
IKE_AUTH	35
CREATE_CHILD_SA	36
INFORMATIONAL	37
Reserved for IKEv2+	38-239
Reserved for private use	240-255

- o Flags (1 octet) - indicates specific options that are set for the message. Presence of options are indicated by the appropriate bit in the flags field being set. The bits are defined LSB first, so bit 0 would be the least significant bit of the Flags octet. In the description below, a bit being 'set' means its value is '1', while 'cleared' means its value is '0'.
 - X(reserved) (bits 0-2) - These bits MUST be cleared when sending and MUST be ignored on receipt.
 - I(nitiator) (bit 3 of Flags) - This bit MUST be set in messages sent by the original Initiator of the IKE_SA

and MUST be cleared in messages sent by the original Responder. It is used by the recipient to determine which eight octets of the SPI was generated by the recipient.

- V(ersion) (bit 4 of Flags) - This bit indicates that the transmitter is capable of speaking a higher major version number of the protocol than the one indicated in the major version number field. Implementations of IKEv2 must clear this bit when sending and MUST ignore it in incoming messages.
- R(esponse) (bit 5 of Flags) - This bit indicates that this message is a response to a message containing the same message ID. This bit MUST be cleared in all request messages and MUST be set in all responses. An IKE endpoint MUST NOT generate a response to a message that is marked as being a response.
- X(reserved) (bits 6-7 of Flags) - These bits MUST be cleared when sending and MUST be ignored on receipt.
- o Message ID (4 octets) - Message identifier used to control retransmission of lost packets and matching of requests and responses. It is essential to the security of the protocol because it is used to prevent message replay attacks. See [section 2.2](#).
- o Length (4 octets) - Length of total message (header + payloads) in octets.

[3.2](#) Generic Payload Header

Each IKE payload defined in sections [3.3](#) through [3.16](#) begins with a generic header, shown in Figure 5. Figures for each payload below will include the generic payload header but for brevity the description of each field will be omitted.

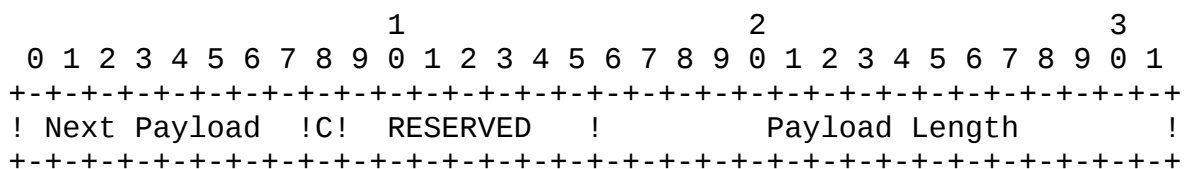


Figure 5: Generic Payload Header

The Generic Payload Header fields are defined as follows:

- o Next Payload (1 octet) - Identifier for the payload type of the next payload in the message. If the current payload is the last in the message, then this field will be 0. This field provides a "chaining" capability whereby additional payloads can be added to a message by appending it to the end of the message and setting the "Next Payload" field of the preceding payload to indicate the new payload's type. For an Encrypted payload, which must always be the last payload of a message, the Next Payload field is set to the payload type of the first contained payload.
- o Critical (1 bit) - MUST be set to zero if the sender wants the recipient to skip this payload if he does not understand the payload type code in the Next Payload field of the previous payload. MUST be set to one if the sender wants the recipient to reject this entire message if he does not understand the payload type. MUST be ignored by the recipient if the recipient understands the payload type code. MUST be set to zero for payload types defined in this document. Note that the critical bit applies to the current payload rather than the "next" payload whose type code appears in the first octet. The reasoning behind not setting the critical bit for payloads defined in this document is that all implementations MUST understand all payload types defined in this document and therefore must ignore the Critical bit's value. Skipped payloads are expected to have valid Next Payload and Payload Length fields.
- o RESERVED (7 bits) - MUST be sent as zero; MUST be ignored.
- o Payload Length (2 octets) - Length in octets of the current payload, including the generic payload header.

3.3 Security Association Payload

The Security Association Payload, denoted SA in this memo, is used to negotiate attributes of a security association. Assembly of Security Association Payloads requires great peace of mind. An SA may contain multiple proposals. Each proposal may contain multiple protocols (where a protocol is IKE, ESP, or AH), each protocol may contain multiple transforms, and each transform may contain multiple attributes. When parsing an SA, an implementation MUST check that the total Payload Length is consistent with the payload's internal lengths and counts. Proposals, Transforms, and Attributes each have their own variable length encodings. They are nested such that the Payload Length of an SA includes the combined contents of the SA, Proposal, Transform, and Attribute information. The length of a Proposal includes the lengths of all Transforms and Attributes it

contains. The length of a Transform includes the lengths of all Attributes it contains.

The syntax of Security Associations, Proposals, Transforms, and Attributes is based on ISAKMP, however the semantics are somewhat different. The reason for the complexity and the hierarchy is to allow for multiple possible combinations of algorithms to be encoded in a single SA. Sometimes there is a choice of multiple algorithms, while other times there is a combination of algorithms. For example, an Initiator might want to propose using (AH w/MD5 and ESP w/3DES) OR (ESP w/MD5 and 3DES).

One of the reasons the semantics of the SA payload has changed from ISAKMP and IKEv1 is to make the encodings more compact in common cases.

The Proposal structure contains within it a Proposal # and a Protocol_id. Each structure MUST have the same Proposal # as the previous one or one greater. The first Proposal MUST have a Proposal # of one. If two successive structures have the same Proposal number, it means that the proposal consists of the first structure AND the second. So a proposal of AH AND ESP would have two proposal structures, one for AH and one for ESP and both would have Proposal #1. A proposal of AH OR ESP would have two proposal structures, one for AH with proposal #1 and one for ESP with proposal #2.

Each Proposal/Protocol structure is followed by one or more transform structures. The number of different transforms is generally determined by the Protocol. AH generally has a single transform: an integrity check algorithm. ESP generally has two: an encryption algorithm AND an integrity check algorithm. IKE generally has four transforms: a Diffie-Hellman group, an integrity check algorithm, a PRF algorithm, and an encryption algorithm. For each Protocol, the set of permissible transforms are assigned transform ID numbers, which appear in the header of each transform.

If there are multiple transforms with the same Transform Type, the proposal is an OR of those transforms. If there are multiple Transforms with different Transform Types, the proposal is an AND of the different groups. For example, to propose ESP with (3DES or IDEA) and (HMAC_MD5 or HMAC_SHA), the ESP proposal would contain two Transform Type 1 candidates (one for 3DES and one for IDEA) and two Transform Type 2 candidates (one for HMAC_MD5 and one for HMAC_SHA). This effectively proposes four combinations of algorithms. If the Initiator wanted to propose only a subset of those - say (3DES and HMAC_MD5) or (IDEA and HMAC_SHA), there is no way to encode that as multiple transforms within a single Proposal. Instead, the Initiator would have to construct two different Proposals, each with two

transforms.

A given transform MAY have one or more Attributes. Attributes are necessary when the transform can be used in more than one way, as when an encryption algorithm has a variable key size. The transform would specify the algorithm and the attribute would specify the key size. Most transforms do not have attributes.

Note that the semantics of Transforms and Attributes are quite different than in IKEv1. In IKEv1, a single Transform carried multiple algorithms for a protocol with one carried in the Transform and the others carried in the Attributes.

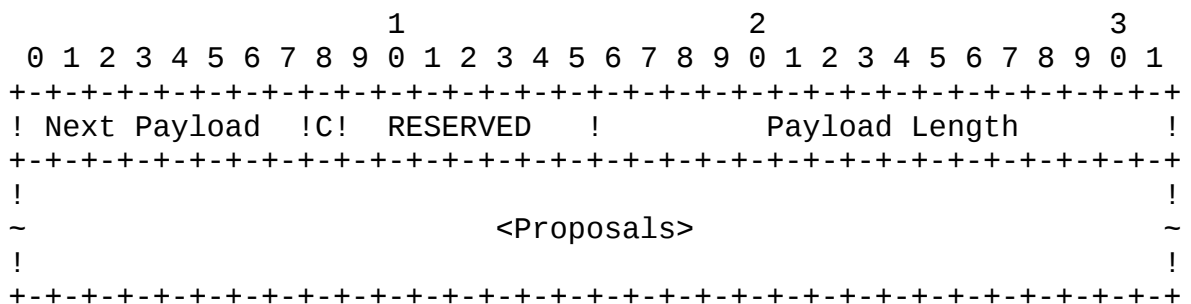


Figure 6: Security Association Payload

o Proposals (variable) - one or more proposal substructures.

The payload type for the Security Association Payload is one (1).

[3.3.1](#) Proposal Substructure

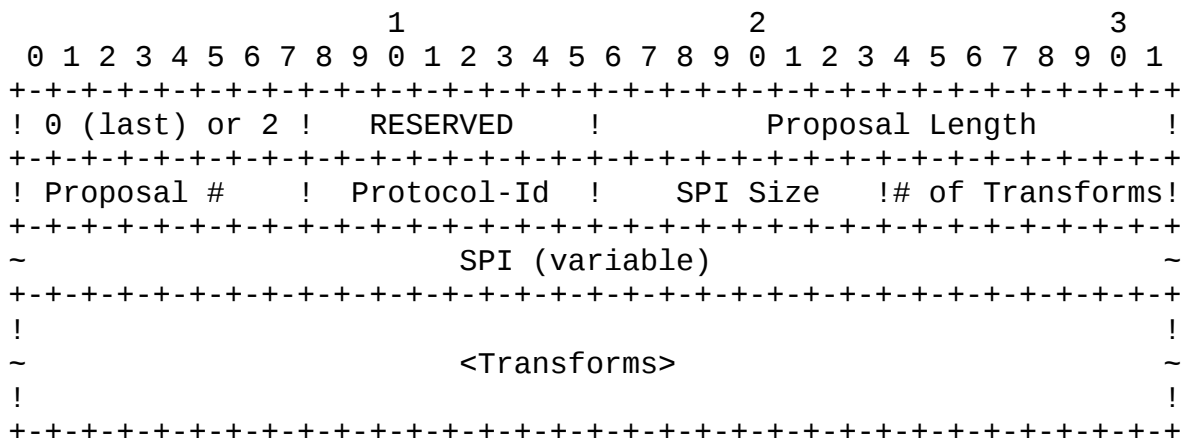


Figure 7: Proposal Substructure

o 0 (last) or 2 (more) (1 octet) - Specifies whether this is the

last Proposal Substructure in the SA. This syntax is inherited from ISAKMP, but is unnecessary because the last Proposal could be identified from the length of the SA. The value (2) corresponds to a Payload Type of Proposal, and the first four octets of the Proposal structure are designed to look somewhat like the header of a Payload.

- o RESERVED (1 octet) - MUST be sent as zero; MUST be ignored.
- o Proposal Length (2 octets) - Length of this proposal, including all transforms and attributes that follow.
- o Proposal # (1 octet) - When a proposal is made, the first proposal in an SA MUST be #1, and subsequent proposals MUST either be the same as the previous proposal (indicating an AND of the two proposals) or one more than the previous proposal (indicating an OR of the two proposals). When a proposal is accepted, all of the proposal numbers in the SA must be the same and must match the number on the proposal sent that was accepted.
- o Protocol-Id (1 octet) - Specifies the protocol identifier for the current negotiation. Zero (0) indicates IKE, one (1) indicates ESP, and two (2) indicates AH.
- o SPI Size (1 octet) - For an initial IKE_SA negotiation, this field MUST be zero; the SPI is obtained from the cookie field of the outer header. During subsequent negotiations, it is equal to the size, in octets, of the SPI of the corresponding protocol (8 for IKE, 4 for ESP and AH).
- o # of Transforms (1 octet) - Specifies the number of transforms in this proposal.
- o SPI (variable) - The sending entity's SPI. Even if the SPI Size is not a multiple of 4 octets, there is no padding applied to the payload. When the SPI Size field is zero, this field is not present in the Security Association payload.
- o Transforms (variable) - one or more transform substructures.

3.3.2 Transform Substructure

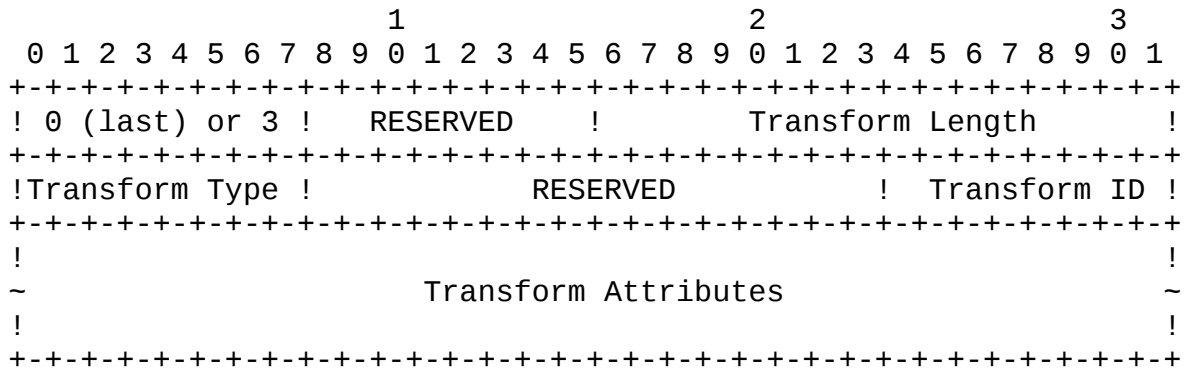


Figure 8: Transform Substructure

- o 0 (last) or 3 (more) (1 octet) - Specifies whether this is the last Transform Substructure in the Proposal. This syntax is inherited from ISAKMP, but is unnecessary because the last Proposal could be identified from the length of the SA. The value (3) corresponds to a Payload Type of Transform, and the first four octets of the Transform structure are designed to look somewhat like the header of a Payload.
- o RESERVED - MUST be sent as zero; MUST be ignored.
- o Transform Length - The length (in octets) of the Transform Substructure including Header and Attributes.
- o Transform Type (1 octet) - The type of transform being specified in this transform. Different protocols support different transform types. For some protocols, some of the transforms may be optional. If a transform is optional and the initiator wishes to propose that the transform be omitted, no transform of the given type is included in the proposal. If the initiator wishes to make use of the transform optional to the responder, she includes a transform substructure with transform ID = 0 as one of the options.
- o Transform ID (1 octet) - The specific instance of the transform type being proposed.

Transform Type Values

	Transform Type	Used In
Encryption Algorithm	1	(IKE and ESP)
Pseudo-random Function	2	(IKE)

Integrity Algorithm	3	(IKE, AH, and optional in ESP)
Diffie-Hellman Group	4	(IKE and optional in AH and ESP)
Extended Sequence Numbers	5	(Optional in AH and ESP)

values 8-240 are reserved to IANA. Values 241-255 are for private use among mutually consenting parties.

For Transform Type 1 (Encryption Algorithm), defined Transform IDs are:

Name	Number	Defined In
RESERVED	0	
ENCR_DES_IV64	1	(RFC1827)
ENCR_DES	2	(RFC2405)
ENCR_3DES	3	(RFC2451)
ENCR_RC5	4	(RFC2451)
ENCR_IDEA	5	(RFC2451)
ENCR_CAST	6	(RFC2451)
ENCR_BLOWFISH	7	(RFC2451)
ENCR_3IDEA	8	(RFC2451)
ENCR_DES_IV32	9	
ENCR_RC4	10	
ENCR_NULL	11	(RFC2410)
ENCR_AES_128_CBC	12	
ENCR_AES_128_CTR	13	

values 13-240 are reserved to IANA. Values 241-255 are for private use among mutually consenting parties.

For Transform Type 2 (Pseudo-random Function), defined Transform IDs are:

Name	Number	Defined In
RESERVED	0	
PRF_HMAC_MD5	1	(RFC2104)
PRF_HMAC_SHA1	2	(RFC2104)
PRF_HMAC_TIGER	3	(RFC2104)
PRF_AES128_CBC	4	

values 4-240 are reserved to IANA. Values 241-255 are for private use among mutually consenting parties.

For Transform Type 3 (Integrity Algorithm), defined Transform IDs are:

Name	Number	Defined In
NONE	0	

AUTH_HMAC_MD5_96	1	(RFC2403)
AUTH_HMAC_SHA1_96	2	(RFC2404)
AUTH_DES_MAC	3	
AUTH_KPDK_MD5	4	(RFC1826)
AUTH_AES_XCBC_96	5	

For Transform Type 4 (Diffie-Hellman Group), defined Transform IDs are:

Name	Number
NONE	0
Pre-defined (see Appendix B)	1 - 5
RESERVED	6 - 200
MODP (exponentiation)	201 (w/attributes)
ECP (elliptic curve over GF[P])	202 (w/attributes)
EC2N (elliptic curve over GF[2 ^N])	203 (w/attributes)

values 6-200 are reserved to IANA for new MODP, ECP or EC2N groups. Values 204-255 are for private use among mutually consenting parties. Specification of values 201, 202 or 203 allow peers to define a new Diffie-Hellman group in-line as part of the exchange. Private use of values 204-255 may entail complete definition of a group or may require attributes to accompany them.

For Transform Type 5 (Extended Sequence Numbers), defined Transform IDs are:

Name	Number
No Extended Sequence Numbers	0
Extended Sequence Numbers	1
RESERVED	2 - 255

If Transform Type 5 is not included in a proposal, use of Extended Sequence Numbers is assumed.

[3.3.3](#) Mandatory Transform Types

The number and type of transforms that accompany an SA payload are dependent on the protocol in the SA itself. An SA payload proposing the establishment of an SA has the following mandatory and optional transform types. A compliant implementation **MUST** support all mandatory and optional types for each protocol it supports. Whether the optional types are present in a particular proposal depends solely on the discretion of the sender.

Protocol	Mandatory Types	Optional Types
----------	-----------------	----------------

IKE	1, 2, 3, 4	
ESP	1	3, 4, 5
AH	3	4, 5

3.3.4 Mandatory Transform IDs

The specification of suites that MUST and SHOULD be supported for interoperability has been removed from this document because they are likely to change more rapidly than this document evolves.

The previously-MUST ciphersuites (3DES/HMAC_SHA1/DH Group 2) are based on currently-deployed hardware that meets the security requirements of the vast majority of current IPsec users, and should be useful for at least a decade according to cryptographic estimates from NIST for business user scenarios. The previously-SHOULD ciphersuites (AES/HMAC_SHA1/DH Group 5) are based on expectations of where the security industry is moving (namely, to the AES encryption suite) and where more security-conscious users are moving as current key lengths become more attackable due to the steady lowering of cost to mount brute-force attacks.

An important lesson learned from IKEv1 is that no system should only implement the mandatory algorithms and expect them to be the best choice for all customers. For example, at the time that this document was being written, many IKEv1 implementers are starting to migrate to AES in CBC mode for VPN applications. Many IPsec systems based on IKEv2 will implement AES, longer Diffie-Hellman keys, and additional hash algorithms, and some IPsec customers already require these algorithms in addition to the ones listed above.

It is likely that IANA will add additional transforms in the future, and some users may want to use private suites, especially for IKE where implementations should be capable of supporting different parameters, up to certain size limits. In support of this goal, all implementations of IKEv2 SHOULD include a management facility that allows specification (by a user or system administrator) of Diffie-Hellman parameters (the generator, modulus, and exponent lengths and values) for new DH groups. Implementations SHOULD provide a management interface via which these parameters and the associated transform IDs may be entered (by a user or system administrator), to enable negotiating such groups.

All implementations of IKEv2 MUST include a management facility that enables a user or system administrator to specify the suites that are acceptable for use with IKE. Upon receipt of a payload with a set of transform IDs, the implementation MUST compare the transmitted transform IDs against those locally configured via the management controls, to verify that the proposed suite is acceptable based on

local policy. The implementation MUST reject key exchange payloads that are not authorized by these IKE suite controls.

3.3.5 Transform Attributes

Each transform in a Security Association payload may include attributes that modify or complete the specification of the transform. These attributes are type/value pairs and are defined below. For example, if an encryption algorithm has a variable length key, the key length to be used may be specified as an attribute. Attributes can have a value with a fixed two octet length or a variable length value. For the latter the attribute is the form of type/length/value.

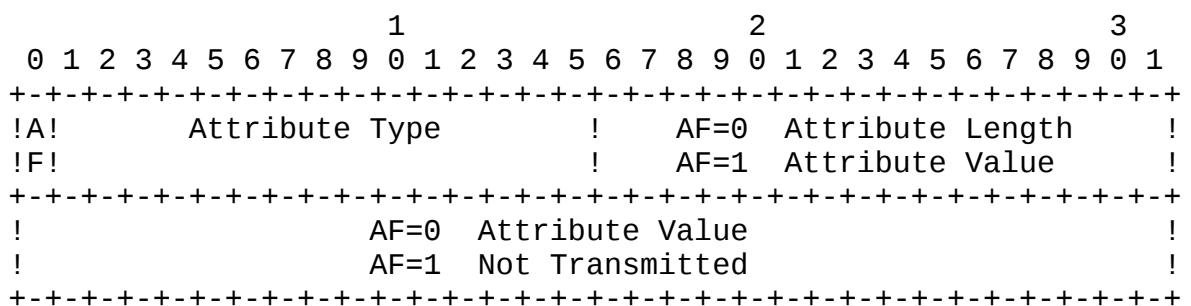


Figure 9: Data Attributes

- o Attribute Type (2 octets) - Unique identifier for each type of attribute (see below).

The most significant bit of this field is the Attribute Format bit (AF). It indicates whether the data attributes follow the Type/Length/Value (TLV) format or a shortened Type/Value (TV) format. If the AF bit is zero (0), then the Data Attributes are of the Type/Length/Value (TLV) form. If the AF bit is a one (1), then the Data Attributes are of the Type/Value form.

- o Attribute Length (2 octets) - Length in octets of the Attribute Value. When the AF bit is a one (1), the Attribute Value is only 2 octets and the Attribute Length field is not present.
- o Attribute Value (variable length) - Value of the Attribute associated with the Attribute Type. If the AF bit is a zero (0), this field has a variable length defined by the Attribute Length field. If the AF bit is a one (1), the Attribute Value has a length of 2 octets.

Note that while quite a few attribute types are defined, the only algorithms defined in this document that accept attributes are the defined on the fly Diffie-Hellman groups, whose use is optional and

likely unusual. An IKEv2 implementation MAY ignore attributes if it does not support any algorithms that use them.

Attributes described as basic MUST NOT be encoded as variable. Variable length attributes MUST NOT be encoded as basic even if their value can fit into two octets. NOTE: This is a change from IKEv1, where increased flexibility may have simplified the composer of messages but certainly complicated the parser.

Attribute Type	value	Attribute Format
-----	-----	-----
RESERVED	0-5	
Group Prime/Irreducible Polynomial	6	TLV
Group Generator One	7	TLV
Group Generator Two	8	TLV
Group Curve A	9	TLV
Group Curve B	10	TLV
RESERVED	11-13	
Key Length	14	TV
Field Size	15	TV
Group Order	16	TLV
Block Size	17	TV

values 0-5, 11-13, and 18-16383 are reserved to IANA. Values 16384-32767 are for private use among mutually consenting parties.

- Group Prime/Irreducible Polynomial

The prime number of a MODP Diffie-Hellman group or the irreducible polynomial of an elliptic curve when specifying a private Diffie-Hellman group.

- Generator One, Generator Two

The X- and Y-coordinate of a point on an elliptic curve. When the Y-coordinate (generator two) is not given it can be computed with the X-coordinate and the definition of the curve.

- Curve A, Curve B

Coefficients from the definition of an elliptic curve:

$$y^2 + xy = x^3 + (\text{curve A})x^2 + (\text{curve B})$$

- Key Length

When using an Encryption Algorithm that has a variable length key, this attribute specifies the key length in bits. (MUST use network

byte order). This attribute MUST NOT be used when the specified Encryption Algorithm uses a fixed length key.

- Field Size

The field size, in bits, of a Diffie-Hellman group.

- Group Order

The group order of an elliptic curve group. Note the length of this attribute depends on the field size.

- Block Size

The number of bits per block of a cipher with a variable block length.

3.3.6 Attribute Negotiation

During security association negotiation Initiators present offers to Responders. Responders MUST select a single complete set of parameters from the offers (or reject all offers if none are acceptable). If there are multiple proposals, the Responder MUST choose a single proposal number and return all of the Proposal substructures with that Proposal number. If there are multiple Transforms with the same type the Responder MUST choose a single one. Any attributes of a selected transform MUST be returned unmodified. The Initiator of an exchange MUST check that the accepted offer is consistent with one of its proposals, and if not that response MUST be rejected.

Negotiating Diffie-Hellman groups presents some special challenges. Diffie-Hellman groups are specified either using a defined group description (see [Appendix B](#)) or by defining all attributes of a group in an IKE policy offer. Group attributes, such as group type or prime number MUST NOT be offered in conjunction with a previously defined group. SA offers include proposed attributes and a Diffie-Hellman public number (KE) in the same message. If the Initiator offers to use one of several Diffie-Hellman groups, it SHOULD pick the one the Responder is most likely to accept and include a KE corresponding to that group. If the guess turns out to be wrong, the Responder will indicate the correct group in the response and the Initiator SHOULD pick an element of that group for its KE value in the third message. If the Initiator guesses wrong in a CREATE_CHILD_SA negotiation, no SA is created and the Initiator SHOULD retry with the correct group.

Implementation Note:

Certain negotiable attributes can have ranges or could have multiple acceptable values. These are the Diffie-Hellman group and the key length of a variable key length symmetric cipher. To further interoperability and to support upgrading endpoints independently, implementers of this protocol SHOULD accept values which they deem to supply greater security. For instance if a peer is configured to accept a variable lengthed cipher with a key length of X bits and is offered that cipher with a larger key length an implementation SHOULD accept the offer.

Support of this capability allows an implementation to express a concept of "at least" a certain level of security-- "a key length of _at least_ X bits for cipher foo".

3.4 Key Exchange Payload

The Key Exchange Payload, denoted KE in this memo, is used to exchange Diffie-Hellman public numbers as part of a Diffie-Hellman key exchange. The Key Exchange Payload consists of the IKE generic header followed by the Diffie-Hellman public value itself.

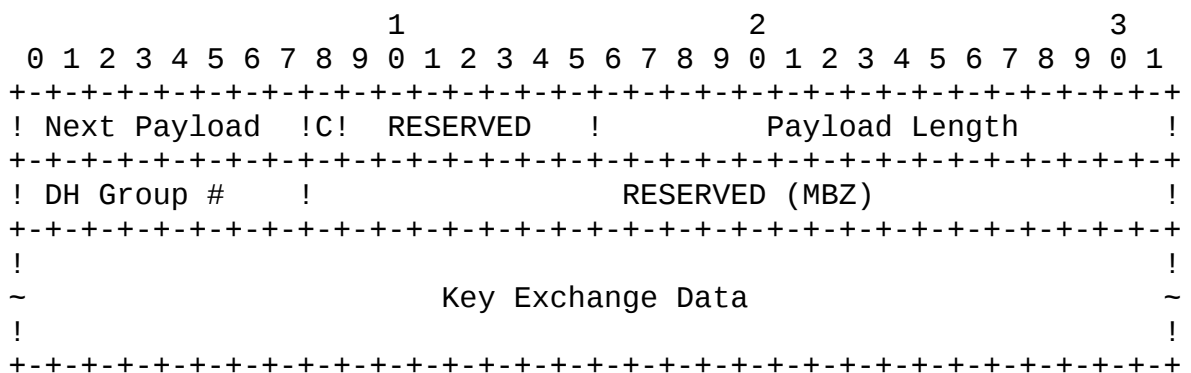


Figure 10: Key Exchange Payload Format

A key exchange payload is constructed by copying ones Diffie-Hellman public value into the "Key Exchange Data" portion of the payload. The length of the Diffie-Hellman public value MUST be equal to the length of the prime modulus over which the exponentiation was performed, prepending zero bits to the value if necessary.

The DH Group # identifies the Diffie-Hellman group in which the Key Exchange Data was computed. If the selected proposal uses a different Diffie-Hellman group, the message MUST be rejected with a Notify payload of type INVALID_KEY_PAYLOAD.

The payload type for the Key Exchange payload is four (4).

3.5 Identification Payload

The Identification Payload, denoted ID in this memo, allows peers to assert an identify to one another. The ID Payload names the identity to be authenticated with the AUTH payload.

NOTE: In IKEv1, two ID payloads were used in each direction to hold Traffic Selector information for data passing over the SA. In IKEv2, this information is carried in Traffic Selector (TS) payloads (see [section 3.13](#)).

The Identification Payload consists of the IKE generic header followed by identification fields as follows:

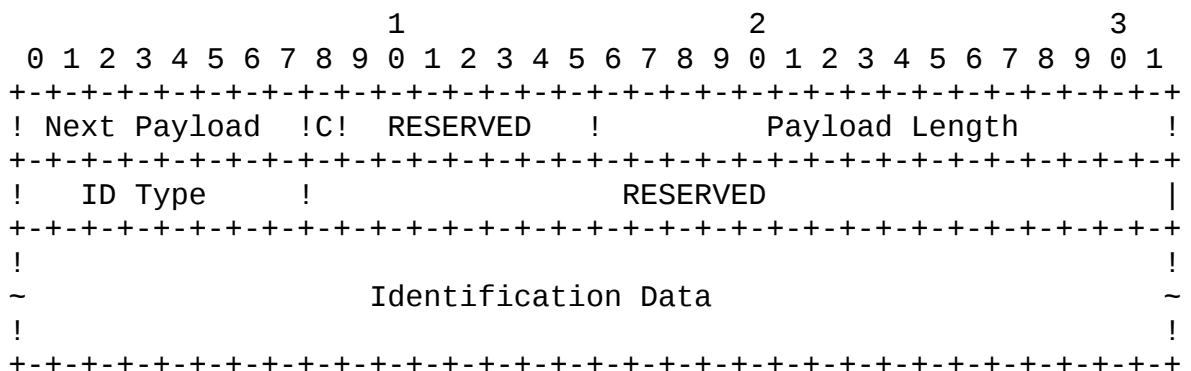


Figure 11: Identification Payload Format

- o ID Type (1 octet) - Specifies the type of Identification being used.
- o RESERVED - MUST be sent as zero; MUST be ignored.
- o Identification Data (variable length) - Value, as indicated by the Identification Type. The length of the Identification Data is computed from the size in the ID payload header.

The payload type for the Identification Payload is five (5).

The following table lists the assigned values for the Identification Type field, followed by a description of the Identification Data which follows:

ID Type	Value
-----	-----
RESERVED	0
ID_IPV4_ADDR	1

A single four (4) octet IPv4 address.

ID_FQDN 2

A fully-qualified domain name string. An example of a ID_FQDN is, "lounge.org". The string MUST not contain any terminators (e.g. NULL, CR, etc.).

ID_RFC822_ADDR 3

A fully-qualified [RFC822](#) email address string, An example of a ID_RFC822_ADDR is, "lizard@lounge.org". The string MUST not contain any terminators.

ID_IPV6_ADDR 5

A single sixteen (16) octet IPv6 address.

ID_DER_ASN1_DN 9

The binary DER encoding of an ASN.1 X.500 Distinguished Name [X.501].

ID_DER_ASN1_GN 10

The binary DER encoding of an ASN.1 X.500 GeneralName [X.509].

ID_KEY_ID 11

An opaque octet stream which may be used to pass an account name or to pass vendor-specific information necessary to do certain proprietary forms of identification.

Two implementations will interoperate only if each can generate a form of ID acceptable to the other. To assure maximum interoperability, implementations MUST be configurable to send at least one of ID_IPV4_ADDR, ID_FQDN, ID_RFC822_ADDR, or ID_KEY_ID, and MUST be configurable to accept all of these forms. Implementations SHOULD be capable of generating and accepting all of these forms.

[3.6](#) Certificate Payload

The Certificate Payload, denoted CERT in this memo, provides a means to transport certificates or other authentication related information via IKE. Certificate payloads SHOULD be included in an exchange if certificates are available to the sender unless the peer has

indicated an ability to retrieve this information from elsewhere. Note that the term "Certificate Payload" is somewhat misleading, because not all authentication mechanisms use certificates and data other than certificates may be passed in this payload.

The Certificate Payload is defined as follows:

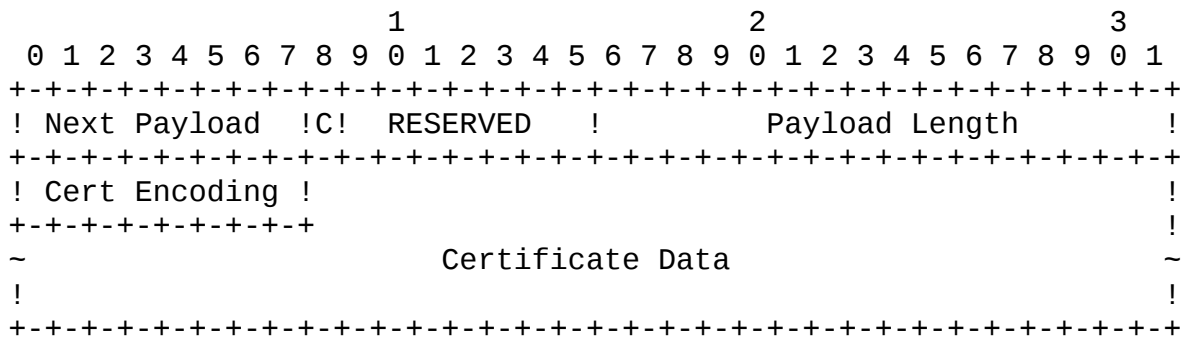


Figure 12: Certificate Payload Format

- o Certificate Encoding (1 octet) - This field indicates the type of certificate or certificate-related information contained in the Certificate Data field.

Certificate Encoding	Value
-----	-----
RESERVED	0
PKCS #7 wrapped X.509 certificate	1
PGP Certificate	2
DNS Signed Key	3
X.509 Certificate - Signature	4
Kerberos Token	6
Certificate Revocation List (CRL)	7
Authority Revocation List (ARL)	8
SPKI Certificate	9
X.509 Certificate - Attribute	10
Raw RSA Key	11
Hash and URL of PKIX certificate	12
Hash and URL of PKIX bundle	13
RESERVED	14 - 200
PRIVATE USE	201 - 255

- o Certificate Data (variable length) - Actual encoding of certificate data. The type of certificate is indicated by the Certificate Encoding field.

The payload type for the Certificate Payload is six (6).

Specific syntax is for some of the certificate type codes above is not defined in this document. The types whose syntax is defined in this document are:

X.509 Certificate - Signature (4) contains a BER encoded X.509 certificate.

Certificate Revocation List (7) contains a BER encoded X.509 certificate revocation list.

Raw RSA Key (11) contains a PKCS #1 encoded RSA key.

Hash and URL of PKIX certificate (12) contains a 20 octet SHA-1 hash of a PKIX certificate followed by a variable length URL that resolves to the BER encoded certificate itself.

Hash and URL of PKIX bundle (13) contains a 20 octet SHA-1 hash of a PKIX certificate bundle followed by a variable length URL the resolves to the BER encoded certificate bundle itself. The bundle is a BER encoded SEQUENCE of certificates and CRLs.

Implementations MUST be capable of being configured to send and accept up to four X.509 certificates in support of authentication. Implementations SHOULD be capable of being configured to send and accept Raw RSA keys and the two Hash and URL formats. If multiple certificates are sent, the first certificate MUST contain the public key used to sign the AUTH payload.

3.7 Certificate Request Payload

The Certificate Request Payload, denoted CERTREQ in this memo, provides a means to request preferred certificates via IKE and can appear in the second and/or third message of the initial exchanges. Certificate Request payloads SHOULD be included in an exchange whenever the peer may have multiple certificates, some of which might be trusted while others are not or when multiple formats might be acceptable. If multiple root CAs are trusted, then multiple Certificate Request payloads SHOULD be transmitted.

Empty (zero length) CA names MUST NOT be generated and SHOULD be ignored.

The Certificate Request Payload is defined as follows:

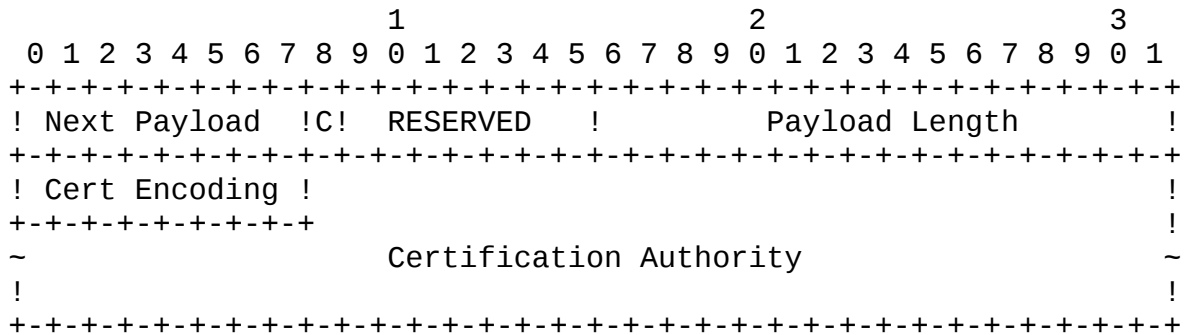


Figure 13: Certificate Request Payload Format

- o Certificate Encoding (1 octet) - Contains an encoding of the type or format of certificate requested. Values are listed in [section 3.6](#).
- o Certification Authority (variable length) - Contains an encoding of an acceptable certification authority for the type of certificate requested.

The payload type for the Certificate Request Payload is seven (7).

The Certificate Encoding field has the same values as those defined in [section 3.6](#). The value field contains an indicator of trusted authorities for this certificate type. For certificate encoding four (4) (X.509 signing certificate), the CA value is a concatenated list of SHA-1 hashes of the public keys of trusted root CAs.

Note that the term "Certificate Request" is somewhat misleading, in that values other than certificates are defined in a "Certificate" payload and requests for those values can be present in a Certificate Request Payload.

The Certificate Request Payload is processed by inspecting the "Cert Encoding" field to determine whether the processor has any certificates of this type. If so the "Certification Authority" field is inspected to determine if the processor has any certificates which can be validated up to the specified certification authority. This can be a chain of certificates. If a certificate exists which satisfies the criteria specified in the Certificate Request Payload it MUST be sent back to the certificate requestor; if a certificate chain exists which goes back to the certification authority specified in the request the entire chain SHOULD be sent back to the certificate requestor. If no certificates exist then no further processing is performed-- this is not an error condition of the

protocol. There may be cases where there is a preferred CA, but an alternate might be acceptable (perhaps after prompting a human operator).

3.8 Authentication Payload

The Authentication Payload, denoted AUTH in this memo, contains data used for authentication purposes. The syntax of the Authentication data varies according to the Auth Method as specified below.

The Authentication Payload is defined as follows:



Figure 14: Authentication Payload Format

- o Auth Method (1 octet) - Specifies the method of authentication used. Values defined are:

RSA Digital Signature (1) - Computed as specified in [section 2.15](#) using an RSA private key over a PKCS#1 padded hash.

Shared Key Message Integrity Code (2) - Computed as specified in [section 2.15](#) using the shared key associated with the identity in the ID payload and the negotiated prf function

DSS Digital Signature (3) - Computed as specified in [section 2.15](#) using a DSS private key over a SHA-1 hash.

The values 0 and 4-200 are reserved to IANA. The values 201-255 are available for private use.

- o Authentication Data (variable length) - see [section 2.15](#).

The payload type for the Authentication Payload is nine (9).

3.9 Nonce Payload

The Nonce Payload, denoted N_i and N_r in this memo for the Initiator's and Responder's nonce respectively, contains random data used to guarantee liveness during an exchange and protect against replay attacks.

The Nonce Payload is defined as follows:

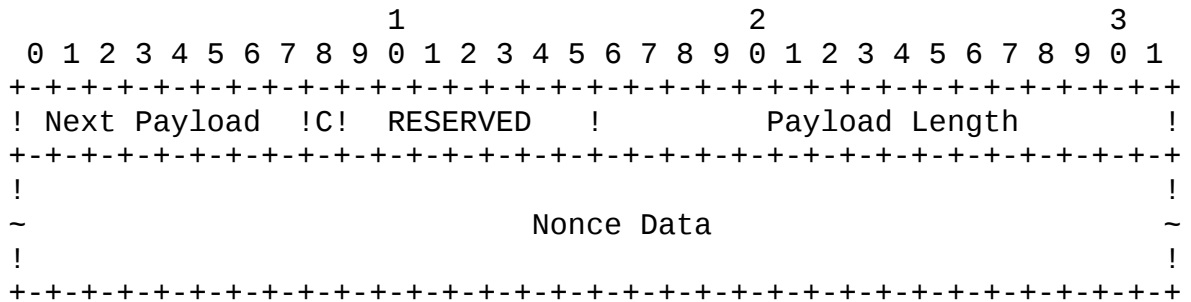


Figure 15: Nonce Payload Format

- o Nonce Data (variable length) - Contains the random data generated by the transmitting entity.

The payload type for the Nonce Payload is ten (10).

The size of a Nonce MUST be between 8 and 256 octets inclusive. Nonce values MUST NOT be reused.

3.10 Notify Payload

The Notify Payload, denoted N in this document, is used to transmit informational data, such as error conditions and state transitions, to an IKE peer. A Notify Payload may appear in a response message (usually specifying why a request was rejected), in an INFORMATIONAL Exchange (to report an error not in an IKE request), or in any other message to indicate sender capabilities or to modify the meaning of the request.

The Notify Payload is defined as follows:

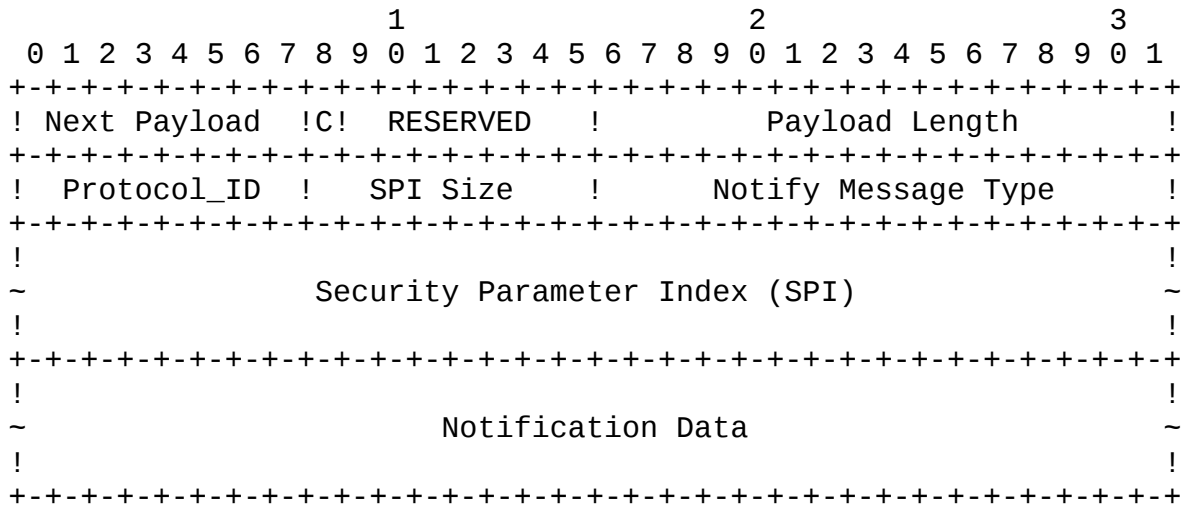


Figure 16: Notification Payload Format

- o Protocol_Id (1 octet) - Specifies the protocol about which this notification is being sent. For IKE_SA notifications, this field MUST be zero (0). For notifications concerning IPsec SAs this field will contain either (1) to indicate ESP or (2) to indicate AH. For notifications for which no protocol ID is relevant, this field MUST be sent as zero and MUST be ignored.
- o SPI Size (1 octet) - Length in octets of the SPI as defined by the Protocol_Id or zero if no SPI is applicable. For a notification concerning the IKE_SA, the SPI Size MUST be zero.
- o Notify Message Type (2 octets) - Specifies the type of notification message.
- o SPI (variable length) - Security Parameter Index.
- o Notification Data (variable length) - Informational or error data transmitted in addition to the Notify Message Type. Values for this field are message specific, see below.

The payload type for the Notification Payload is eleven (11).

3.10.1 Notify Message Types

Notification information can be error messages specifying why an SA could not be established. It can also be status data that a process managing an SA database wishes to communicate with a peer process.

The table below lists the Notification messages and their corresponding values. The number of different error statuses was greatly reduced from IKE V1 both for simplification and to avoid giving configuration information to probers.

Types in the range 0 - 16383 are intended for reporting errors. An implementation receiving a Notify payload with one of these types that it does not recognise in a response MUST assume that the corresponding request has failed entirely. Unrecognised error types in a request and status types in a request or response MUST be ignored except that they SHOULD be logged.

Notify payloads with status types MAY be added to any message and MUST be ignored if not recognised. They are intended to indicate capabilities, and as part of SA negotiation are used to negotiate non-cryptographic parameters.

NOTIFY MESSAGES - ERROR TYPES	Value
-----	-----
UNSUPPORTED_CRITICAL_PAYLOAD	1

Sent if the payload has the "critical" bit set and the payload type is not recognised. Notification Data contains the one octet payload type.

INVALID_IKE_SPI	4
-----------------	---

Indicates an IKE message was received with an unrecognized destination SPI. This usually indicates that the recipient has rebooted and forgotten the existence of an IKE_SA.

INVALID_MAJOR_VERSION	5
-----------------------	---

Indicates the recipient cannot handle the version of IKE specified in the header. The closest version number that the recipient can support will be in the reply header.

INVALID_SYNTAX	7
----------------	---

Indicates the IKE message was received was invalid because some type, length, or value was out of range or because the request was rejected for policy reasons. To avoid a denial of service attack using forged messages, this status may only be returned for and in an encrypted packet if the MESSAGE_ID and cryptographic checksum were valid. To avoid leaking information to someone probing a node, this status MUST be sent in response to any error not covered by one of the other status codes. To aid debugging, more detailed

error information SHOULD be written to a console or log.

INVALID_MESSAGE_ID 9

Sent when an IKE MESSAGE_ID outside the supported window is received. This Notify MUST NOT be sent in a response; the invalid request MUST NOT be acknowledged. Instead, inform the other side by initiating an INFORMATIONAL exchange with Notification data containing the four octet invalid MESSAGE_ID. Sending this notification is optional, MUST be rate limited, and MUST NOT be sent unless an IKE_SA exists to the sending address and port.

INVALID_SPI 11

MAY be sent in an IKE INFORMATIONAL Exchange when a node receives an ESP or AH packet with an invalid SPI. The Notification Data contains the SPI of the invalid packet. This usually indicates a node has rebooted and forgotten an SA. If this Informational Message is sent outside the context of an IKE_SA, it should only be used by the recipient as a "hint" that something might be wrong (because it could easily be forged).

NO_PROPOSAL_CHOSEN 14

None of the proposed crypto suites was acceptable.

AUTHENTICATION_FAILED 24

Sent in the response to an IKE_AUTH message when for some reason the authentication failed. There is no associated data.

SINGLE_PAIR_REQUIRED 34

This error indicates that a CREATE_CHILD_SA request is unacceptable because the Responder is willing to accept traffic selectors specifying a single pair of addresses. The Initiator is expected to respond by requesting an SA for only the specific traffic he is trying to forward.

NO_ADDITIONAL_SAS 35

This error indicates that a CREATE_CHILD_SA request is unacceptable because the Responder is unwilling to accept any more CHILD_SAs on this IKE_SA. Some minimal implementations may only accept a single CHILD_SA setup in

the context of an initial IKE exchange and reject any subsequent attempts to add more.

INTERNAL_ADDRESS_FAILURE	36
Indicates an error assigning an internal address (i.e., INTERNAL_IP4_ADDRESS or INTERNAL_IP6_ADDRESS) during the processing of a Configuration Payload by a Responder. If this error is generated within an IKE_AUTH exchange no CHILD_SA will be created.	
FAILED_CP_REQUIRED	37
Sent by responder in the case where CP(CFG_REQUEST) was expected but not received, and so is a conflict with locally configured policy. There is no associated data.	
TS_UNACCEPTABLE	38
Indicates that none of the addresses/protocols/ports in the supplied traffic selectors is acceptable.	
RESERVED TO IANA - Errors	39 - 8191
Private Use - Errors	8192 - 16383
NOTIFY MESSAGES - STATUS TYPES	Value
-----	-----
RESERVED TO IANA - STATUS	16384 - 24577
INITIAL_CONTACT	24578
This notification asserts that this IKE_SA is the only IKE_SA currently active between the authenticated identities. It MAY be sent when an IKE_SA is established after a crash, and the recipient MAY use this information to delete any other IKE_SAs it has to the same authenticated identity without waiting for a timeout. This notification MUST NOT be sent by an entity that may be replicated (e.g. a roaming user's credentials where the user is allowed to connect to the corporate firewall from two remote systems at the same time).	
SET_WINDOW_SIZE	24579
This notification asserts that the sending endpoint is capable of keeping state for multiple outstanding exchanges, permitting the recipient to send multiple requests before	

getting a response to the first. The data associated with a SET_WINDOW_SIZE notification MUST be 4 octets long and contain the big endian representation of the number of messages the sender promises to keep. Window size is always one until the initial exchanges complete.

ADDITIONAL_TS_POSSIBLE

24580

This notification asserts that the sending endpoint narrowed the proposed traffic selectors but that other traffic selectors would also have been acceptable, though only in a separate SA. There is no data associated with this notify type. It may only be sent as an additional payload in a message including accepted TSs.

IPCOMP_SUPPORTED

24581

This notification may only be included in a message containing an SA payload negotiating a CHILD_SA and indicates a willingness by its sender to use IPcomp on this SA. The data associated with this notification includes a two octet IPcomp CPI followed by a one octet transform ID optionally followed by attributes whose length and format is defined by that transform ID. A message proposing an SA may contain multiple IPCOMP_SUPPORTED notifications to indicate multiple supported algorithms. A message accepting an SA may contain at most one.

The transform IDs currently defined are:

NAME	NUMBER	DEFINED IN
-----	-----	-----
RESERVED	0	
IPCOMP_OUI	1	
IPCOMP_DEFLATE	2	RFC 2394
IPCOMP_LZS	3	RFC 2395

values 4-240 are reserved to IANA. Values 241-255 are for private use among mutually consenting parties.

NAT_DETECTION_SOURCE_IP

24582

This notification is used to by its recipient to determine whether the source is behind a NAT box. The data associated with this notification is a SHA-1 digest of the SPIs, IP address and port on which this packet was sent. There MAY be multiple notify payloads of this type in a message if the sender does not know which of several network attachments

will be used to send the packet. The recipient of this notification MAY compare the supplied value to a hash of the source IP address and port and if they don't match it MAY invoke NAT specific handling (like using UDP encapsulation of ESP packets and subsequent IKE packets). Alternately, it MAY reject the connection attempt if NAT traversal is not supported.

NAT_DETECTION_DESTINATION_IP 24583

This notification is used to by its recipient to determine whether it is behind a NAT box. The data associated with this notification is a SHA-1 digest of the SPIs, IP address and port to which this packet was sent. The recipient of this notification MAY compare the supplied value to a hash of the destination IP address and port and if they don't match it MAY invoke NAT specific handling (like using UDP encapsulation of ESP packets and subsequent IKE packets). Alternately, it MAY reject the connection attempt if NAT traversal is not supported.

COOKIE 24584

This notification MAY be included in an IKE_SA_INIT request or response. In the response, it indicates that the request should be retried with the COOKIE included in the request. That data associated with this notification MUST be between 1 and 64 octets in length (inclusive).

USE_TRANSPORT_MODE 24585

This notification MAY be included in a request message that also includes an SA requesting a CHILD_SA. It requests that the CHILD_SA use transport mode rather than tunnel mode for the SA created. If the request is accepted, the response MUST also include a notification of type USE_TRANSPORT_MODE. If the responder declines the request, the CHILD_SA can still be established, but will use tunnel mode. If this is unacceptable to the initiator, the initiator MUST delete the SA. Note: except when using this option to negotiate transport mode, all CHILD_SAs will use tunnel mode.

HTTP_CERT_LOOKUP_SUPPORTED 24586

This notification MAY be included any message that can include a CERTREQ payload and indicates that the sender is capable of looking up certificates based on an HTTP-based URL (and hence presumeably would prefer to receive

certificate specifications in that format).

RESERVED TO IANA - STATUS	24587 - 40959
Private Use - STATUS	40960 - 65535

3.11 Delete Payload

The Delete Payload, denoted D in this memo, contains a protocol specific security association identifier that the sender has removed from its security association database and is, therefore, no longer valid. Figure 17 shows the format of the Delete Payload. It is possible to send multiple SPIs in a Delete payload, however, each SPI MUST be for the same protocol. Mixing of Protocol Identifiers MUST NOT be performed in a the Delete payload. It is permitted, however, to include multiple Delete payloads in a single INFORMATIONAL Exchange where each Delete payload lists SPIs for a different protocol.

Deletion of the IKE_SA is indicated by a Protocol_Id of 0 (IKE) but no SPIs. Deletion of a CHILD_SA, such as ESP or AH, will contain the Protocol_Id of that protocol (1 for ESP, 2 for AH) and the SPI is the SPI the sending endpoint would expect in inbound ESP or AH packets.

The Delete Payload is defined as follows:

```

          1             2             3
    0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
! Next Payload !C!  RESERVED   !          Payload Length          !
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
! Protocol-Id  !  SPI Size    !          # of SPIs                !
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
!
~                      Security Parameter Index(es) (SPI)          ~
!
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+

```

Figure 17: Delete Payload Format

- o Protocol_Id (1 octet) - Must be zero for an IKE_SA, 1 for ESP, or 2 for AH.
- o SPI Size (1 octet) - Length in octets of the SPI as defined by the Protocol_Id. Zero for IKE (SPI is in message header) or four for AH and ESP.
- o # of SPIs (2 octets) - The number of SPIs contained in the Delete

payload. The size of each SPI is defined by the SPI Size field.

- o Security Parameter Index(es) (variable length) - Identifies the specific security association(s) to delete. The length of this field is determined by the SPI Size and # of SPIs fields.

The payload type for the Delete Payload is twelve (12).

3.12 Vendor ID Payload

The Vendor ID Payload contains a vendor defined constant. The constant is used by vendors to identify and recognize remote instances of their implementations. This mechanism allows a vendor to experiment with new features while maintaining backwards compatibility.

A Vendor ID payload MAY announce that the sender is capable to accepting certain extensions to the protocol, or it MAY simply identify the implementation as an aid in debugging. If parameter values "reserved for use by consenting parties" are used, they must be preceded by a Vendor ID payload that disambiguates them. A Vendor ID payload MUST NOT change the interpretation of any information defined in this specification (i.e. it MUST be non-critical). Multiple Vendor ID payloads MAY be sent. An implementation is NOT REQUIRED to send any Vendor ID payload at all.

A Vendor ID payload may be sent as part of any message. Reception of a familiar Vendor ID payload allows an implementation to make use of Private USE numbers described throughout this memo-- private payloads, private exchanges, private notifications, etc. Unfamiliar Vendor IDs MUST be ignored.

Writers of Internet-Drafts who wish to extend this protocol MUST define a Vendor ID payload to announce the ability to implement the extension in the Internet-Draft. It is expected that Internet-Drafts which gain acceptance and are standardized will be given "magic numbers" out of the Future Use range by IANA and the requirement to use a Vendor ID will go away.

The Vendor ID Payload fields are defined as follows:

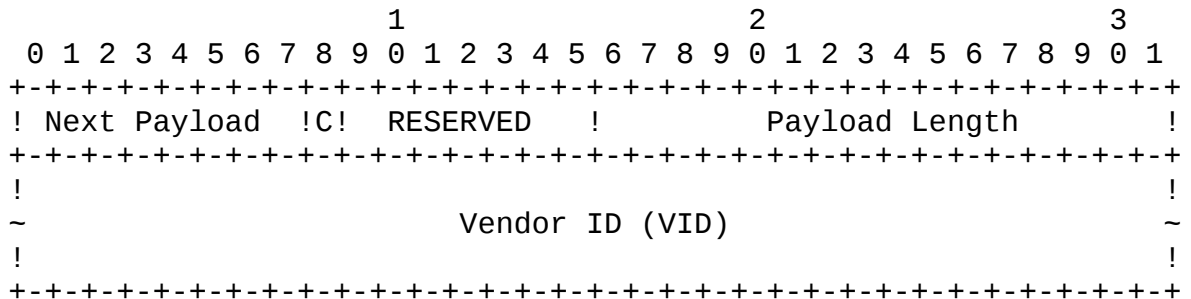


Figure 18: Vendor ID Payload Format

- o Vendor ID (variable length) - It is the responsibility of the person choosing the Vendor ID to assure its uniqueness in spite of the absence of any central registry for IDs. Good practice is to include a company name, a person name or some such. If you want to show off, you might include the latitude and longitude and time where you were when you chose the ID and some random input. A message digest of a long unique string is preferable to the long unique string itself.

The payload type for the Vendor ID Payload is thirteen (13).

3.13 Traffic Selector Payload

The Traffic Selector Payload, denoted TS in this memo, allows peers to identify packet flows for processing by IPsec security services. The Traffic Selector Payload consists of the IKE generic header followed by individual traffic selectors as follows:

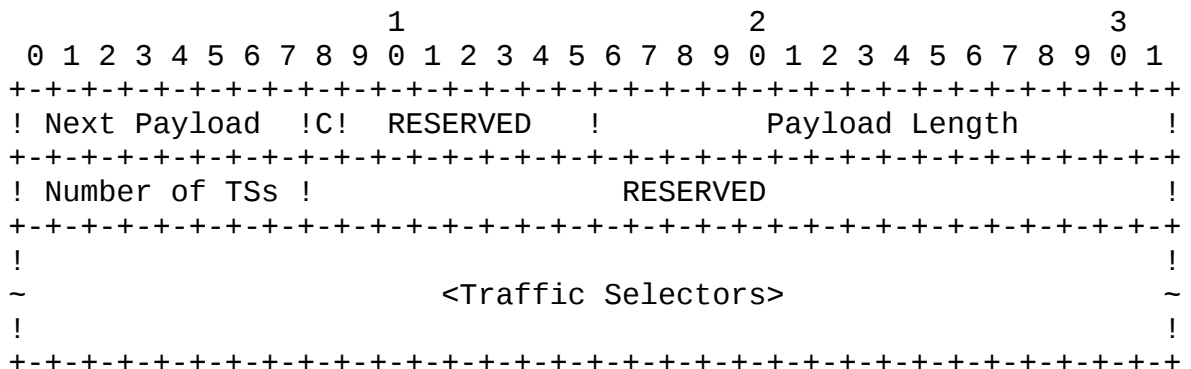


Figure 19: Traffic Selectors Payload Format

- o Number of TSS (1 octet) - Number of traffic selectors being provided.
- o RESERVED - This field MUST be sent as zero and MUST be ignored.
- o Traffic Selectors (variable length) - one or more individual traffic selectors.

The length of the Traffic Selector payload includes the TS header and all the traffic selectors.

The payload type for the Traffic Selector payload is fourteen (14).

[3.13.1](#) Traffic Selector

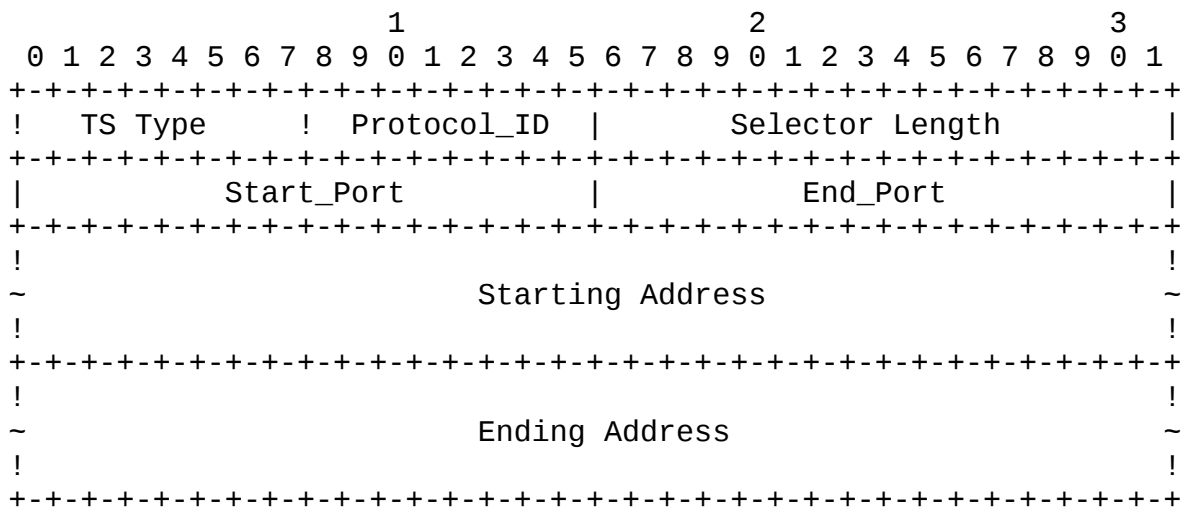


Figure 20: Traffic Selector

- o TS Type (one octet) - Specifies the type of traffic selector.
- o Protocol ID (1 octet) - Value specifying an associated IP protocol ID (e.g. UDP/TCP). A value of zero means that the Protocol ID is not relevant to this traffic selector-- the SA can carry all protocols.
- o Selector Length - Specifies the length of this Traffic Selector Substructure including the header.
- o Start_Port (2 octets) - Value specifying the smallest port number allowed by this Traffic Selector. For protocols for which port is undefined, or if all ports are allowed by this Traffic Selector, this field MUST be zero.

- o End_Port (2 octets) - Value specifying the largest port number allowed by this Traffic Selector. For protocols for which port is undefined, or if all ports are allowed by this Traffic Selector, this field MUST be 65535.
- o Starting Address - The smallest address included in this Traffic Selector (length determined by TS type).
- o Ending Address - The largest address included in this Traffic Selector (length determined by TS type).

The following table lists the assigned values for the Traffic Selector Type field and the corresponding Address Selector Data.

TS Type	Value
-----	-----
RESERVED	0
TS_IPV4_ADDR_RANGE	7

A range of IPv4 addresses, represented by two four (4) octet values. The first value is the beginning IPv4 address (inclusive) and the second value is the ending IPv4 address (inclusive). All addresses falling between the two specified addresses are considered to be within the list.

TS_IPV6_ADDR_RANGE	8
--------------------	---

A range of IPv6 addresses, represented by two sixteen (16) octet values. The first value is the beginning IPv6 address (inclusive) and the second value is the ending IPv6 address (inclusive). All addresses falling between the two specified addresses are considered to be within the list.

[3.14](#) Encrypted Payload

The Encrypted Payload, denoted SK{...} in this memo, contains other payloads in encrypted form. The Encrypted Payload, if present in a message, must be the last payload in the message. Often, it is the only payload in the message.

The algorithms for encryption and integrity protection are negotiated during IKE_SA setup, and the keys are computed as specified in sections [2.14](#) and [2.18](#).

The encryption and integrity protection algorithms are modelled after the ESP algorithms described in RFCs 2104, 2406, 2451. This document completely specifies the cryptographic processing of IKE data, but

those documents should be consulted for design rationale. We assume a block cipher with a fixed block size and an integrity check algorithm that computes a fixed length checksum over a variable size message.

The Payload Type for an Encrypted payload is fifteen (15). The Encrypted Payload consists of the IKE generic header followed by individual fields as follows:

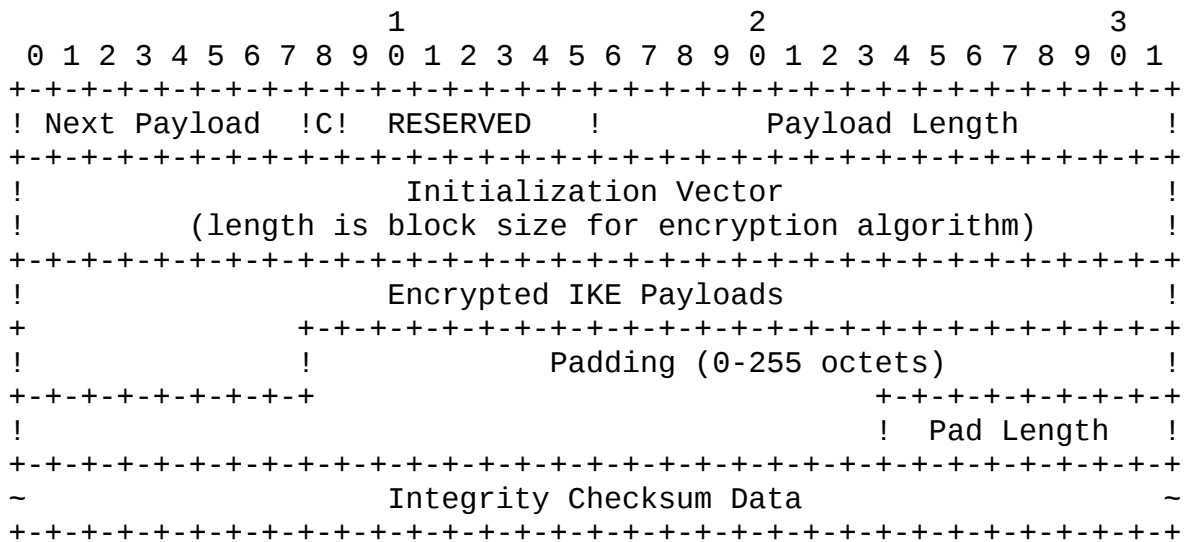


Figure 21: Encrypted Payload Format

- o Next Payload - The payload type of the first embedded payload. Since the Encrypted payload must be last in a message, there is no need to specify a payload type for a payload beyond it.
- o Payload Length - Includes the lengths of the IV, Padding, and Authentication data.
- o Initialization Vector - A randomly chosen value whose length is equal to the block length of the underlying encryption algorithm. Recipients MUST accept any value. Senders SHOULD either pick this value pseudo-randomly and independently for each message or use the final ciphertext block of the previous message sent. Senders MUST NOT use the same value for each message, use a sequence of values with low hamming distance (e.g. a sequence number), or use ciphertext from a received message.
- o IKE Payloads are as specified earlier in this section. This field is encrypted with the negotiated cipher.
- o Padding may contain any value chosen by the sender, and must

have a length that makes the combination of the Payloads, the Padding, and the Pad Length to be a multiple of the encryption block size. This field is encrypted with the negotiated cipher.

- o Pad Length is the length of the Padding field. The sender SHOULD set the Pad Length to the minimum value that makes the combination of the Payloads, the Padding, and the Pad Length a multiple of the block size, but the recipient MUST accept any length that results in proper alignment. This field is encrypted with the negotiated cipher.
- o Integrity Checksum Data is the cryptographic checksum of the entire message starting with the Fixed IKE Header through the Pad Length. The checksum MUST be computed over the encrypted message.

3.15 Configuration Payload

The Configuration payload, denoted CP in this document, is used to exchange configuration information between IKE peers. Currently, the only defined uses for this exchange is for an IRAC to request an internal IP address from an IRAS or for either party to request version information from the other, but this payload is intended as a likely place for future extensions.

Configuration payloads are of type CFG_REQUEST/CFG_REPLY or CFG_SET/CFG_ACK (see CFG Type in the payload description below). CFG_REQUEST and CFG_SET payloads may optionally be added to any IKE request. The IKE response MUST include either a corresponding CFG_REPLY or CFG_ACK or a Notify payload with an error code indicating why the request could not be honored. An exception is that a minimal implementation MAY ignore all CFG_REQUEST and CFG_SET payloads, so a response message without a corresponding CFG_REPLY or CFG_ACK MUST be accepted as an indication that the request was not supported.

"CFG_REQUEST/CFG_REPLY" allows an IKE endpoint to request information from its peer. If an attribute in the CFG_REQUEST Configuration Payload is not zero length it is taken as a suggestion for that attribute. The CFG_REPLY Configuration Payload MAY return that value, or a new one. It MAY also add new attributes and not include some requested ones. Requestors MUST ignore returned attributes that they do not recognise.

Some attributes MAY be multi-valued, in which case multiple attribute values of the same type are sent and/or returned. Generally, all values of an attribute are returned when the attribute is requested.

For some attributes (in this version of the specification only internal addresses), multiple requests indicates a request that multiple values be assigned. For these attributes, the number of values returned SHOULD NOT exceed the number requested.

If the data type requested in a CFG_REQUEST is not recognised or not supported, the responder MUST NOT return an error code but rather MUST either send a CFG_REPLY which MAY be empty or a reply not containing a CFG_REPLY payload at all. Error returns are reserved for cases where the request is recognised but cannot be performed as requested or the request is badly formatted.

"CFG_SET/CFG_ACK" allows an IKE endpoint to push configuration data to its peer. In this case the CFG_SET Configuration Payload contains attributes the initiator wants its peer to alter. The responder MUST return a Configuration Payload if it accepted any of the configuration data and it MUST contain the attributes that the responder accepted with zero length data. Those attributes that it did not accept MUST NOT be in the CFG_ACK Configuration Payload. If no attributes were accepted, the responder MUST return either an empty CFG_ACK payload or a response message without a CFG_ACK payload. There are currently no defined uses for the CFG_SET/CFG_ACK exchange, though they may be used in connection with extensions based on Vendor IDs. An minimal implementation of this specification MAY ignore CFG_SET payloads.

Extensions via the CP payload SHOULD NOT be used for general purpose management. Its main intent is to provide a bootstrap mechanism to exchange information within IPsec from IRAS to IRAC. While it MAY be useful to use such a method to exchange information between some Security Gateways (SGW) or small networks, existing management protocols such as DHCP [[DHCP](#)], RADIUS [[RADIUS](#)], SNMP or LDAP [[LDAP](#)] should be preferred for enterprise management as well as subsequent information exchanges.

The Configuration Payload is defined as follows:

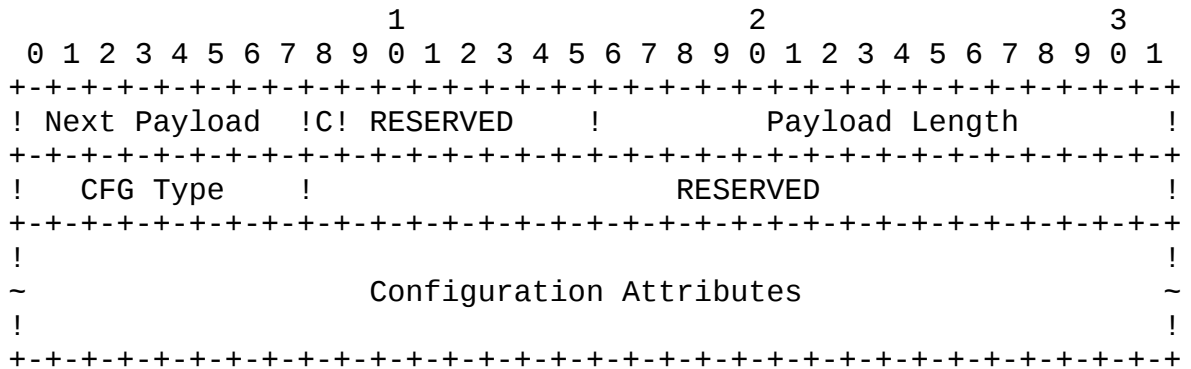


Figure 22: Configuration Payload Format

The payload type for the Configuration Payload is 16.

- o CFG Type (1 octet) - The type of exchange represented by the Configuration Attributes.

CFG Type	Value
=====	=====
RESERVED	0
CFG_REQUEST	1
CFG_REPLY	2
CFG_SET	3
CFG_ACK	4

values 5-127 are reserved to IANA. Values 128-255 are for private use among mutually consenting parties.

- o RESERVED (3 octets) - MUST be sent as zero; MUST be ignored.
- o Configuration Attribute (variable length) - These are type length values specific to the Configuration Payload and are defined below. There may be zero or more Configuration Attributes in this payload.

3.15.1 Configuration Attributes

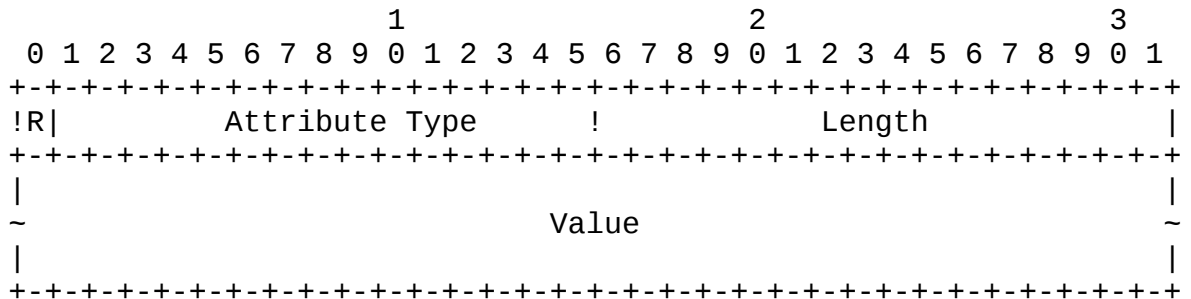


Figure 23: Configuration Attribute Format

- o Reserved (1 bit) - This bit MUST be set to zero and MUST be ignored.
- o Attribute Type (7 bits) - A unique identifier for each of the Configuration Attribute Types.
- o Length (2 octets) - Length in octets of Value.
- o Value (0 or more octets) - The variable length value of this Configuration Attribute.

The following attribute types have been defined:

Attribute Type	Value	Multi-Valued	Length
=====	=====	=====	=====
RESERVED	0		
INTERNAL_IP4_ADDRESS	1	YES*	0 or 4 octets
INTERNAL_IP4_NETMASK	2	NO	0 or 4 octets
INTERNAL_IP4_DNS	3	YES	0 or 4 octets
INTERNAL_IP4_NBNS	4	YES	0 or 4 octets
INTERNAL_ADDRESS_EXPIRY	5	NO	0 or 4 octets
INTERNAL_IP4_DHCP	6	YES	0 or 4 octets
APPLICATION_VERSION	7	NO	0 or more
INTERNAL_IP6_ADDRESS	8	YES*	0 or 16 octets
INTERNAL_IP6_NETMASK	9	NO	0 or 16 octets
INTERNAL_IP6_DNS	10	YES	0 or 16 octets
INTERNAL_IP6_NBNS	11	YES	0 or 16 octets
INTERNAL_IP6_DHCP	12	YES	0 or 16 octets
INTERNAL_IP4_SUBNET	13	NO	0 or 8 octets
SUPPORTED_ATTRIBUTES	14	NO	Multiple of 2
INTERNAL_IP6_SUBNET	15	NO	17 octets

* These attributes may be multi-valued on return only if

multiple values were requested.

Types 16-16383 are reserved to IANA. Values 16384-32767 are for private use among mutually consenting parties.

- o INTERNAL_IP4_ADDRESS, INTERNAL_IP6_ADDRESS - An address on the internal network, sometimes called a red node address or private address and MAY be a private address on the Internet. Multiple internal addresses MAY be requested by requesting multiple internal address attributes. The responder MAY only send up to the number of addresses requested.

The requested address is valid until the expiry time defined with the INTERNAL_ADDRESS EXPIRY attribute or there are no IKE_SAs between the peers.

- o INTERNAL_IP4_NETMASK, INTERNAL_IP6_NETMASK - The internal network's netmask. Only one netmask is allowed in the request and reply messages (e.g. 255.255.255.0) and it MUST be used only with an INTERNAL_ADDRESS attribute.
- o INTERNAL_IP4_DNS, INTERNAL_IP6_DNS - Specifies an address of a DNS server within the network. Multiple DNS servers MAY be requested. The responder MAY respond with zero or more DNS server attributes.
- o INTERNAL_IP4_NBNS, INTERNAL_IP6_NBNS - Specifies an address of a NetBios Name Server (WINS) within the network. Multiple NBNS servers MAY be requested. The responder MAY respond with zero or more NBNS server attributes.
- o INTERNAL_ADDRESS_EXPIRY - Specifies the number of seconds that the host can use the internal IP address. The host MUST renew the IP address before this expiry time. Only one of these attributes MAY be present in the reply.
- o INTERNAL_IP4_DHCP, INTERNAL_IP6_DHCP - Instructs the host to send any internal DHCP requests to the address contained within the attribute. Multiple DHCP servers MAY be requested. The responder MAY respond with zero or more DHCP server attributes.
- o APPLICATION_VERSION - The version or application information of the IPsec host. This is a string of printable ASCII characters that is NOT null terminated.
- o INTERNAL_IP4_SUBNET - The protected sub-networks that this edge-device protects. This attribute is made up of two fields; the first being an IP address and the second being a netmask.

Multiple sub-networks MAY be requested. The responder MAY respond with zero or more sub-network attributes.

- o **SUPPORTED_ATTRIBUTES** - When used within a Request, this attribute must be zero length and specifies a query to the responder to reply back with all of the attributes that it supports. The response contains an attribute that contains a set of attribute identifiers each in 2 octets. The length divided by 2 (octets) would state the number of supported attributes contained in the response.
- o **INTERNAL_IP6_SUBNET** - The protected sub-networks that this edge-device protects. This attribute is made up of two fields; the first being a 16 octet IPv6 address the second being a one octet prefix-mask as defined in [ADDRIPv6]. Multiple sub-networks MAY be requested. The responder MAY respond with zero or more sub-network attributes.

Note that no recommendations are made in this document how an implementation actually figures out what information to send in a reply. i.e. we do not recommend any specific method of an IRAS determining which DNS server should be returned to a requesting IRAC.

[3.16](#) Extended Authentication Protocol (EAP) Payload

The Extended Authentication Protocol Payload, denoted EAP in this memo, allows IKE SAs to be authenticated using the protocol defined in [RFC 2284](#) [EAP] and subsequent extensions to that protocol. The full set of acceptable values for the payload are defined elsewhere, but a short summary of [RFC 2284](#) is included here to make this document stand alone in the common cases.

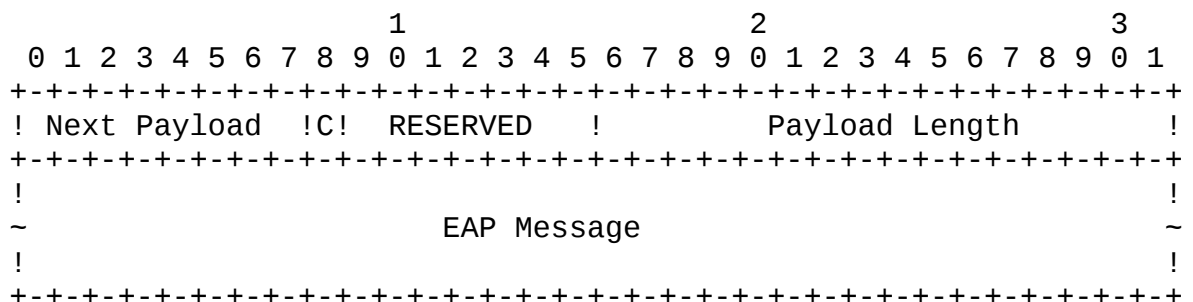


Figure 24: EAP Payload Format

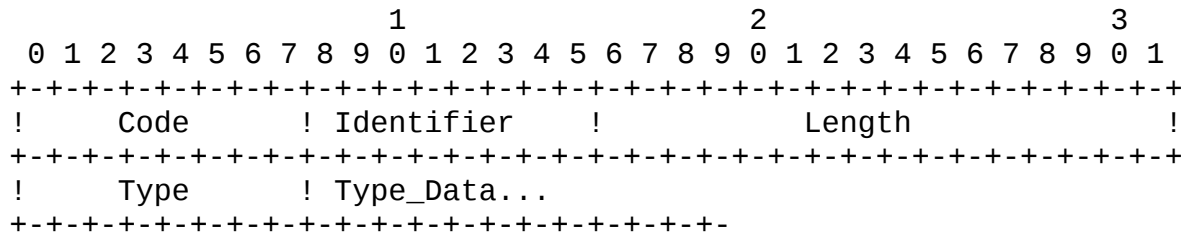


Figure 25: EAP Message Format

- o Code (one octet) indicates whether this message is a Request (1), Response (2), Success (3), or Failure (4).
- o Identifier (one octet) is used in PPP to distinguish replayed messages from repeated ones. Since in IKE, EAP runs over a reliable protocol, it serves no function here. In a response message this octet **MUST** be set to match the identifier in the corresponding request. In other messages, this field **MAY** be set to any value.
- o Length (two octets) is the length of the EAP message and **MUST** be four less than the Payload Length of the encapsulating payload.
- o Type (one octet) is present only if the Code field is Request (1) or Response (2). For other types, the EAP message length **MUST** be four octets and the Type and Type_Data fields **MUST NOT** be present. In a Request (1) message, Type indicates the data being requested. In a Response (2) message, Type must either be NAK or match the type of the data requested. The following types are defined in [RFC 2284](#):
 - 1 Identity
 - 2 Notification
 - 3 NAK (Response Only)
 - 4 MD5-Challenge
 - 5 One-Time Password (OTP)
 - 6 Generic Token Card
- o Type_Data (Variable Length) contains data depending on the Code and Type. In Requests other than MD5-Challenge, this field contains a prompt to be displayed to a human user. For NAK, it contains one octet suggesting the form of authentication the Initiator would prefer to use. For most other responses, it contains the authentication code typed by the human user.

Note that since IKE passes an indication of initiator identity in message 3 of the protocol, EAP based prompts for Identity **SHOULD NOT**

be used.

3.17 Other Payload Types

Payload type values 17-127 are reserved to IANA for future assignment in IKEv2 (see [section 10](#)). Payload type values 128-255 are for private use among mutually consenting parties.

4 Conformance Requirements

In order to assure that all implementations of IKEv2 can interoperate, there are MUST support requirements in addition to those listed elsewhere. Of course, IKEv2 is a security protocol, and one of its major functions is preventing the bad guys from interoperating with one's systems. So a particular implementation may be configured with any of a number of restrictions concerning algorithms and trusted authorities that will prevent universal interoperability.

IKEv2 is designed to permit minimal implementations that can interoperate with all compliant implementations. There are a series of optional features that can easily be ignored by a particular implementation if it does not support that feature. Those features include:

Ability to negotiate SAs through a NAT and tunnel the resulting ESP SA over UDP.

Ability to request (and respond to a request for) a temporary IP address on the remote end of a tunnel.

Ability to support various forms of legacy authentication.

Ability to support window sizes greater than one.

Ability to establish multiple ESP and/or AH SAs within a single IKE SA.

Ability to rekey SAs.

To assure interoperability, all implementations MUST be capable of parsing all payload types (if only to skip over them) and to ignore payload types that it does not support unless the critical bit is set in the payload header. If the critical bit is set in an unsupported payload header, all implementations MUST reject the messages containing those payloads.

Every implementation MUST be capable of doing four message

IKE_SA_INIT and IKE_AUTH exchanges establishing two SAs (one for IKE, one for ESP and/or AH). Implementations MAY be initiate-only or respond-only if appropriate for their platform. Every implementation MUST be capable of responding to an INFORMATIONAL exchange, but a minimal implementation MAY respond to any INFORMATIONAL message with an empty INFORMATIONAL reply. A minimal implementation MAY support the CREATE_CHILD_SA exchange only in so far as to recognise requests and reject them with a Notify payload of type NO_ADDITIONAL_SAS. A minimal implementation need not be able to initiate CREATE_CHILD_SA or INFORMATIONAL exchanges. When an SA expires (based on either lifetime or octets passed), and implementation MAY either try to renew it with a CREATE_CHILD_SA exchange or it MAY delete (close) the old SA and create a new one. If the responder rejects the CREATE_CHILD_SA request with a NO_ADDITIONAL_SAS notification, the implementation MUST be capable of instead closing the old SA and creating a new one.

Implementations are not required to support requesting temporary IP addresses or responding to such requests. If an implementation does support issuing such requests, it MUST include a CP payload in message 3 containing at least a field of type INTERNAL_IP4_ADDRESS or INTERNAL_IP6_ADDRESS. All other fields are optional. If an implementation supports responding to such requests, it MUST parse the CP payload of type CFG_REQUEST in message 3 and recognise a field of type INTERNAL_IP4_ADDRESS or INTERNAL_IP6_ADDRESS. If it supports leasing an address of the appropriate type, it MUST return a CP payload of type CFG_REPLY containing an address of the requested type. The responder SHOULD include all of the other related attributes if it has them.

A minimal responder implementation will ignore the contents of the CP payload except to determine that it includes an INTERNAL_IP4_ADDRESS attribute and will respond with the address and other related attributes regardless of whether the initiator requested them.

A minimal initiator will generate a CP payload containing only an INTERNAL_IP4_ADDRESS attribute and will parse the response ignoring attributes it does not know how to use. The only attribute it MUST be able to process is INTERNAL_ADDRESS_EXPIRY, which it must use to bound the lifetime of the SA unless it successfully renews the lease before it expires. Minimal initiators need not be able to request lease renewals and minimal responders need not respond to them.

For an implementation to be called conforming to this specification, it MUST be possible to configure it to accept the following:

PKIX Certificates containing and signed by RSA keys of size 1024 or 2048 bits, where the ID passed is any of ID_KEY_ID, ID_FQDN,

ID_RFC822_ADDR, or ID_DER_ASN1_DN.

Shared key authentication where the ID passes is any of ID_KEY_ID, ID_FQDN, or ID_RFC822_ADDR.

Authentication where the responder authenticates using PKIX Certificates and the initiator authenticates using shared key authentication.

5 Security Considerations

Repeated re-keying using CREATE_CHILD_SA without PFS leave all SAs vulnerable to cryptanalysis of a single key or overrun of either endpoint. Implementers should take note of this fact and set a limit on CREATE_CHILD_SA exchanges between exponentiations. This memo does not prescribe such a limit.

The strength of a key derived from a Diffie-Hellman exchange using any of the groups defined here depends on the inherent strength of the group, the size of the exponent used, and the entropy provided by the random number generator used. Due to these inputs it is difficult to determine the strength of a key for any of the defined groups. Diffie-Hellman group number two when used with a strong random number generator and an exponent no less than 200 bits is sufficient to use for 3DES. Groups three through five provide greater security. Group one is for historic purposes only and does not provide sufficient strength to the required cipher (although it is sufficient for use with DES, which is also for historic use only). Implementations should make note of these conservative estimates when establishing policy and negotiating security parameters.

Note that these limitations are on the Diffie-Hellman groups themselves. There is nothing in IKE which prohibits using stronger groups nor is there anything which will dilute the strength obtained from stronger groups (limited by the strength of the other algorithms negotiated including the prf function). In fact, the extensible framework of IKE encourages the definition of more groups; use of elliptical curve groups may greatly increase strength using much smaller numbers.

It is assumed that the Diffie-Hellman exponents in this exchange are erased from memory after use. In particular, these exponents MUST NOT be derived from long-lived secrets like the seed to a pseudo-random generator that is not erased after use.

The security of this protocol is critically dependent on the randomness of the randomly chosen parameters. These should be generated by a strong random or properly seeded pseudo-random source

(see [[RFC1715](#)]).

6 IANA Considerations

This document contains many "magic numbers" to be maintained by the IANA. This section explains the criteria to be used by the IANA to assign additional numbers in each of these lists.

Cryptographic Algorithm types, codes, and attributes

Error Codes

Status Codes

IPcomp Transform IDs

Configuration request types

Configuration attribute types

Payload Types

IKE Exchange Types

Values of the Cryptographic Suite-ID define a set of cryptographic algorithms to be used in an IKE, ESP, or AH SA. Requests for assignment of new values must be accompanied by a reference to an RFC that describes how to use these algorithms.

This memo defines four exchange types for use with IKEv2. Requests for assignment of new exchange types MUST be accompanied by an RFC which defines the following:

- the purpose of and need for the new exchange.
- the payloads (mandatory and optional) that accompany messages in the exchange.
- when the exchange may take place.
- requirements the new exchange has on existing exchanges which have assigned numbers.

Payloads are defined in this memo to convey information between peers. New payloads may be required when defining a new authentication method or exchange. Requests for new payload types MUST be accompanied by an RFC which defines the physical layout of the payload and the fields it contains. All payloads MUST use the same generic header defined in Figure 5.

7 Acknowledgements

This document is a collaborative effort of the entire IPsec WG. If there were no limit to the number of authors that could appear on an RFC, the following, in alphabetical order, would have been listed: Bill Aiello, Stephane Beaulieu, Steve Bellovin, Sara Bitan, Matt Blaze, Ran Canetti, Darren Dukes, Dan Harkins, Paul Hoffman, J.

Ioannidis, Steve Kent, Angelos Keromytis, Tero Kivinen, Hugo Krawczyk, Andrew Krywaniuk, Radia Perlman, O. Reingold. Many other people contributed to the design. It is an evolution of IKEv1, ISAKMP, and the IPsec DOI, each of which has its own list of authors. Hugh Daniel suggested the feature of having the initiator, in message 3, specify a name for the responder, and gave the feature the cute name "You Tarzan, Me Jane". David Faucher and Valery Smyzlov helped refine the design of the traffic selector negotiation.

8 References

8.1 Normative References

- [Bra96] Bradner, S., "The Internet Standards Process -- Revision 3", [BCP 9](#), [RFC 2026](#), October 1996.
- [Bra97] Bradner, S., "Key Words for use in RFCs to indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [EAP] Blunk, L. and Volzbrecht, J., "PPP Extensible Authentication Protocol (EAP)", [RFC 2284](#), March 1998.
- [ESPCBC] Pereira, R., Adams, R., "The ESP CBC-Mode Cipher Algorithms", [RFC 2451](#), November 1998.

8.2 Non-normative References

- [Ble98] Bleichenbacher, D., "Chosen Ciphertext Attacks against Protocols Based on RSA Encryption Standard PKCS#1", Advances in Cryptology Eurocrypt '98, Springer-Verlag, 1998.
- [BR94] Bellare, M., and Rogaway P., "Optimal Asymmetric Encryption", Advances in Cryptology Eurocrypt '94, Springer-Verlag, 1994.
- [DES] ANSI X3.106, "American National Standard for Information Systems-Data Link Encryption", American National Standards Institute, 1983.
- [DH] Diffie, W., and Hellman M., "New Directions in Cryptography", IEEE Transactions on Information Theory, V. IT-22, n. 6, June 1977.
- [DHCP] R. Droms, "Dynamic Host Configuration Protocol", [RFC2131](#)
- [DSS] NIST, "Digital Signature Standard", FIPS 186, National

Institute of Standards and Technology, U.S. Department of Commerce, May, 1994.

- [HC98] Harkins, D., Carrel, D., "The Internet Key Exchange (IKE)", [RFC 2409](#), November 1998.
- [IDEA] Lai, X., "On the Design and Security of Block Ciphers," ETH Series in Information Processing, v. 1, Konstanz: Hartung-Gorre Verlag, 1992
- [Ker01] Keromytis, A., Sommerfeld, B., "The 'Suggested ID' Extension for IKE", [draft-keromytis-ike-id-00.txt](#), 2001
- [KBC96] Krawczyk, H., Bellare, M., and R. Canetti, "HMAC: Keyed-Hashing for Message Authentication", [RFC 2104](#), February 1997.
- [LDAP] M. Wahl, T. Howes, S. Kille., "Lightweight Directory Access Protocol (v3)", [RFC2251](#)
- [MD5] Rivest, R., "The MD5 Message Digest Algorithm", [RFC 1321](#), April 1992.
- [MSST98] Maughan, D., Schertler, M., Schneider, M., and Turner, J. "Internet Security Association and Key Management Protocol (ISAKMP)", [RFC 2408](#), November 1998.
- [Orm96] Orman, H., "The Oakley Key Determination Protocol", [RFC 2412](#), November 1998.
- [PFKEY] McDonald, D., Metz, C., and Phan, B., "PFKEY Key Management API, Version 2", [RFC2367](#), July 1998.
- [PKCS1] Kaliski, B., and J. Staddon, "PKCS #1: RSA Cryptography Specifications Version 2", September 1998.
- [PK01] Perlman, R., and Kaufman, C., "Analysis of the IPsec key exchange Standard", WET-ICE Security Conference, MIT, 2001, <http://sec.femto.org/wetice-2001/papers/radia-paper.pdf>.
- [Pip98] Piper, D., "The Internet IP Security Domain Of Interpretation for ISAKMP", [RFC 2407](#), November 1998.
- [RADIUS] C. Rigney, A. Rubens, W. Simpson, S. Willens, "Remote Authentication Dial In User Service (RADIUS)", [RFC2138](#)
- [RFC1715]

- [RSA] Rivest, R., Shamir, A., and Adleman, L., "A Method for Obtaining Digital Signatures and Public-Key Cryptosystems", Communications of the ACM, v. 21, n. 2, February 1978.
- [SHA] NIST, "Secure Hash Standard", FIPS 180-1, National Institute of Standards and Technology, U.S. Department of Commerce, May 1994.
- [SIGMA] Krawczyk, H., "SIGMA: the `SIGn-and-MAC' Approach to Authenticated Diffie-Hellman and its Use in the IKE Protocols", Nov. 2002.
<http://www.ee.technion.ac.il/~hugo/sigma.html>
- [SKEME] Krawczyk, H., "SKEME: A Versatile Secure Key Exchange Mechanism for Internet", from IEEE Proceedings of the 1996 Symposium on Network and Distributed Systems Security.

Appendix A: Summary of changes from IKEv1

The goals of this revision to IKE are:

- 1) To define the entire IKE protocol in a single document, replacing RFCs 2407, 2408, and 2409 and incorporating subsequent changes to support NAT Traversal, Extended Authentication, and Remote Address acquisition.
- 2) To simplify IKE by replacing the eight different initial exchanges with a single four message exchange (with changes in authentication mechanisms affecting only a single AUTH payload rather than restructuring the entire exchange);
- 3) To remove the Domain of Interpretation (DOI), Situation (SIT), and Labeled Domain Identifier fields, and the Commit and Authentication only bits;
- 4) To decrease IKE's latency in the common case by making the initial exchange be 2 round trips (4 messages), and allowing the ability to piggyback setup of a CHILD-SA on that exchange;
- 5) To replace the cryptographic syntax for protecting the IKE messages themselves with one based closely on ESP to simplify implementation and security analysis;
- 6) To reduce the number of possible error states by making the protocol reliable (all messages are acknowledged) and sequenced. This allows shortening CREATE_CHILD_SA exchanges from 3 messages to 2;
- 7) To increase robustness by allowing the responder to not do significant processing until it receives a message proving that the initiator can receive messages at its claimed IP address, and not commit any state to an exchange until the initiator can be cryptographically authenticated;
- 8) To fix bugs such as the hash problem documented in [[draft-ietf-ipsec-ike-hash-revised-02.txt](#)];
- 9) To specify Traffic Selectors in their own payloads type rather than overloading ID payloads, and making more flexible the Traffic Selectors that may be specified;
- 10) To specify required behavior under certain error conditions or when data that is not understood is received in order to make it easier to make future revisions in a way that does not break backwards compatibility;

- 11) To incorporate ideas from [draft-ietf-ipsec-nat-reqts-02.txt](#) to allow IKE to negotiate through NAT gateways;
- 12) To simplify and clarify how shared state is maintained in the presence of network failures and Denial of Service attacks; and
- 13) To maintain existing syntax and magic numbers to the extent possible to make it likely that implementations of IKEv1 can be enhanced to support IKEv2 with minimum effort.

Appendix B: Diffie-Hellman Groups

There are 5 groups different Diffie-Hellman groups defined for use in IKE. These groups were generated by Richard Schroepel at the University of Arizona. Properties of these primes are described in [Orm96].

The strength supplied by group one may not be sufficient for the mandatory-to-implement encryption algorithm and is here for historic reasons.

Additional Diffie-Hellman groups have been defined in [ADDGROUP]. Future IANA-registered and private use Suite-IDs MAY use Diffie-Hellman groups that have modulus values and generators that are different than those in this document or in [ADDGROUP].

B.1 Group 1 - 768 Bit MODP

IKE implementations MAY support a MODP group with the following prime and generator. This group is assigned id 1 (one).

The prime is: $2^{768} - 2^{704} - 1 + 2^{64} * \{ [2^{638} p_i] + 149686 \}$
 Its hexadecimal value is:

```
FFFFFFFF FFFFFFFF C90FDAA2 2168C234 C4C6628B 80DC1CD1 29024E08
8A67CC74 020BBEA6 3B139B22 514A0879 8E3404DD EF9519B3 CD3A431B
302B0A6D F25F1437 4FE1356D 6D51C245 E485B576 625E7EC6 F44C42E9
A63A3620 FFFFFFFF FFFFFFFF
```

The generator is 2.

B.2 Group 2 - 1024 Bit MODP

IKE implementations SHOULD support a MODP group with the following prime and generator. This group is assigned id 2 (two).

The prime is $2^{1024} - 2^{960} - 1 + 2^{64} * \{ [2^{894} \text{ pi}] + 129093 \}$.
Its hexadecimal value is:

```

FFFFFFFF FFFFFFFF C90FDAA2 2168C234 C4C6628B 80DC1CD1 29024E08
8A67CC74 020BBEA6 3B139B22 514A0879 8E3404DD EF9519B3 CD3A431B
302B0A6D F25F1437 4FE1356D 6D51C245 E485B576 625E7EC6 F44C42E9
A637ED6B 0BFF5CB6 F406B7ED EE386BFB 5A899FA5 AE9F2411 7C4B1FE6
49286651 ECE65381 FFFFFFFF FFFFFFFF

```

The generator is 2.

B.3 Group 3 - 155 Bit EC2N

IKE implementations MAY support a EC2N group with the following characteristics. This group is assigned id 3 (three). The curve is based on the Galois Field $GF[2^{155}]$. The field size is 155. The irreducible polynomial for the field is:

$$u^{155} + u^{62} + 1.$$

The equation for the elliptic curve is:

$$y^2 + xy = x^3 + ax^2 + b.$$

```
Field Size: 155
Group Prime/Irreducible Polynomial:
        0x0800000000000000000000000000000040000000000000001
Group Generator One: 0x7b
Group Curve A: 0x0
Group Curve B: 0x07338f
Group Order: 0x08000000000000000000000057db5698537193aef944
```

The data in the KE payload when using this group is the value x from the solution (x, y) , the point on the curve chosen by taking the randomly chosen secret K_a and computing $K_a * P$, where $*$ is the repetition of the group addition and double operations, P is the curve point with x coordinate equal to generator 1 and the y coordinate determined from the defining equation. The equation of curve is implicitly known by the Group Type and the A and B coefficients. There are two possible values for the y coordinate; either one can be used successfully (the two parties need not agree on the selection).

B.4 Group 4 - 185 Bit EC2N

IKE implementations MAY support a EC2N group with the following characteristics. This group is assigned id 4 (four). The curve is based on the Galois Field $GF[2^{185}]$. The field size is 185. The irreducible polynomial for the field is:

$$u^{185} + u^{69} + 1.$$

The equation for the elliptic curve is:
 $y^2 + xy = x^3 + ax^2 + b.$

Field Size: 185
 Group Prime/Irreducible Polynomial:
 $0x020000000000000000000000000000000200000000000000001$
 Group Generator One: $0x18$
 Group Curve A: $0x0$
 Group Curve B: $0x1ee9$
 Group Order: $0x01ffffffffffffffffffffffffdbf2f889b73e484175f94ebc$

The data in the KE payload when using this group will be identical to that as when using Oakley Group 3 (three).

[B.5](#) Group 5 - 1536 Bit MODP

IKE implementations MUST support a MODP group with the following prime and generator. This group is assigned id 5 (five).

The prime is $2^{1536} - 2^{1472} - 1 + 2^{64} * \{[2^{1406} \text{ pi}] + 741804\}.$
 Its hexadecimal value is

```

FFFFFFFF FFFFFFFF C90FDAA2 2168C234 C4C6628B 80DC1CD1 29024E08
8A67CC74 020BBEA6 3B139B22 514A0879 8E3404DD EF9519B3 CD3A431B
302B0A6D F25F1437 4FE1356D 6D51C245 E485B576 625E7EC6 F44C42E9
A637ED6B 0BFF5CB6 F406B7ED EE386BFB 5A899FA5 AE9F2411 7C4B1FE6
49286651 ECE45B3D C2007CB8 A163BF05 98DA4836 1C55D39A 69163FA8
FD24CF5F 83655D23 DCA3AD96 1C62F356 208552BB 9ED52907 7096966D
670C354E 4ABC9804 F1746C08 CA237327 FFFFFFFF FFFFFFFF

```

The generator is 2.

Change History

H.1 Changes from IKEv2-00 to IKEv2-01 February 2002

- 1) Changed [Appendix B](#) to specify the encryption and authentication processing for IKE rather than referencing ESP. Simplified the format by removing idiosyncracies not needed for IKE.
- 2) Added option for authentication via a shared secret key.
- 3) Specified different keys in the two directions of IKE messages. Removed requirement of different cookies in the two directions since now no longer required.
- 4) Change the quantities signed by the two ends in AUTH fields to assure the two parties sign different quantities.
- 5) Changed reference to AES to AES_128.
- 6) Removed requirement that Diffie-Hellman be repeated when rekeying IKE_SA.
- 7) Fixed typos.
- 8) Clarified requirements around use of port 500 at the remote end in support of NAT.
- 9) Clarified required ordering for payloads.
- 10) Suggested mechanisms for avoiding DoS attacks.
- 11) Removed claims in some places that the first phase 2 piggybacked on phase 1 was optional.

H.2 Changes from IKEv2-01 to IKEv2-02 April 2002

- 1) Moved the Initiator CERTREQ payload from message 1 to message 3.
- 2) Added a second optional ID payload in message 3 for the Initiator to name a desired Responder to support the case where multiple named identities are served by a single IP address.
- 3) Deleted the optimization whereby the Diffie-Hellman group did not need to be specified in phase 2 if it was the same as in phase 1 (it complicated the design with no meaningful benefit).
- 4) Added a section on the implications of reusing Diffie-Hellman exponentials

5) Changed the specification of sequence numbers to being at 0 in both directions.

6) Many editorial changes and corrections, the most significant being a global replace of "byte" with "octet".

H.3 Changes from IKEv2-02 to IKEv2-03 October 2002

1) Reorganized the document moving introductory material to the front.

2) Simplified the specification of Traffic Selectors to allow only IPv4 and IPv6 address ranges, as was done in the JFK spec.

3) Fixed the problem brought up by David Faucher with the fix suggested by Valery Smyslov. If Bob needs to narrow the selector range, but has more than one matching narrower range, then if Alice's first selector is a single address pair, Bob chooses the range that encompasses that.

4) To harmonize with the JFK spec, changed the exchange so that the initial exchange can be completed in four messages even if the responder must invoke an anti-clogging defense and the initiator incorrectly anticipates the responder's choice of Diffie-Hellman group.

5) Replaced the hierarchical SA payload with a simplified version that only negotiates suites of cryptographic algorithms.

H.4 Changes from IKEv2-03 to IKEv2-04 January 2003

1) Integrated NAT traversal changes (including [Appendix A](#)).

2) Moved the anti-clogging token (cookie) from the SPI to a NOTIFY payload; changed negotiation back to 6 messages when a cookie is needed.

3) Made capitalization of IKE_SA and CHILD_SA consistent.

4) Changed how IPcomp was negotiated.

5) Added usage scenarios.

6) Added configuration payload for acquiring internal addresses on remote networks.

7) Added negotiation of tunnel vs transport mode.

[H.5](#) Changes from IKEv2-04 to IKEv2-05 February 2003

- 1) Shortened Abstract
- 2) Moved NAT Traversal from Appendix to [section 2](#). Moved changes from IKEv2 to [Appendix A](#). Renumbered sections.
- 3) Made language more consistent. Removed most references to Phase 1 and Phase 2.
- 4) Made explicit the requirements for support of NAT Traversal.
- 5) Added support for Extended Authentication Protocol methods.
- 6) Added Response bit to message header.
- 7) Made more explicit the encoding of Diffie-Hellman numbers in key expansion algorithms.
- 8) Added ID payloads to AUTH payload computation.
- 9) Expanded set of defined cryptographic suites.
- 10) Added text for MUST/SHOULD support for ID payloads.
- 11) Added new certificate formats and added MUST/SHOULD text.
- 12) Clarified use of CERTREQ.
- 13) Deleted "MUST SUPPORT" column in CP payload specification (it was inconsistent with surrounding text).
- 14) Extended and clarified Conformance Requirements section, including specification of a minimal implementation.
- 15) Added text to specify ECN handling.

[H.6](#) Changes from IKEv2-05 to IKEv2-06 March 2003

- 1) Changed the suite based crypto negotiation back to ala carte.
- 2) Eliminated some awkward page breaks, typographical errors, and other formatting issues.
- 3) Tightened language describing cryptographic strength.
- 4) Added references.

5) Added more specific error codes.

6) Added rationale for unintuitive key generation hash with shared secret based authentication.

7) Changed the computation of the authenticating AUTH payload as proposed by Hugo Krawczyk.

8) Changed the dashes (-) to underscores (_) in the names of fields and constants.

Editor's Address

Charlie Kaufman
charlie_kaufman@notesdev.ibm.com
IBM

Full Copyright Statement

"Copyright (C) The Internet Society (2003). All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this paragraph are included on all such copies and derivative works. However, this document itself may not be modified in any way, such as by removing the copyright notice or references to the Internet Society or other Internet organizations, except as needed for the purpose of developing Internet standards in which case the procedures for copyrights defined in the Internet Standards process must be followed, or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by the Internet Society or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE."