

IPv6 Working Group  
INTERNET DRAFT  
Expires: June 2005

J-S. Park  
ETRI  
M-K. Shin  
ETRI/NIST  
H-J. Kim  
ETRI  
December 2004

Link Scoped IPv6 Multicast Addresses  
<[draft-ietf-ipv6-link-scoped-mcast-07.txt](#)>

## Status of this Memo

By submitting this Internet-Draft, I certify that any applicable patent or other IPR claims of which I am aware have been disclosed, and any of which I become aware will be disclosed, in accordance with [RFC 3668](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups June also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and June be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/lid-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on June 2005.

## Abstract

This document specifies an extension to the multicast addressing architecture of the IPv6 protocol. The extension allows for the use of Interface Identifiers (IIDs) to allocate multicast addresses. When a link-local unicast address is configured at each interface of a node, an IID is uniquely determined. After that, each node can generate their unique multicast addresses automatically without conflicts. Basically, this document proposes an alternative method for creating link-local multicast addresses over a known method like unicast-prefix-based IPv6 multicast addresses. It is preferred

to use this method for link-local scope rather than unicast-prefix-based IPv6 multicast addresses. This memo update [RFC3306](#).

Table of Contents:

<a href="#">1.</a>	Introduction.....	<a href="#">2</a>
<a href="#">2.</a>	Applicability.....	<a href="#">2</a>
<a href="#">3.</a>	Link Scoped Multicast Address Format.....	<a href="#">3</a>
<a href="#">4.</a>	Example .....	<a href="#">4</a>
<a href="#">5.</a>	Consideration of Lifetime .....	<a href="#">4</a>
<a href="#">6.</a>	Security Considerations.....	<a href="#">4</a>
<a href="#">7.</a>	Acknowledgments.....	<a href="#">4</a>
<a href="#">8.</a>	References.....	<a href="#">5</a>
	Author's Addresses.....	<a href="#">5</a>

[1.](#) Introduction

This document defines an extension to the multicast portion of the IPv6 addressing architecture [[RFC 3513](#)]. The current architecture does not contain any built-in support for dynamic address allocation. The extension allows for use of IIDs to allocate multicast addresses. When a link-local unicast address is configured at each interface of a node, an IID is uniquely determined. After that, each node can generate their unique multicast addresses automatically without conflicts. That is, these addresses could safely be configured at any time after DAD (Duplicate Address Detection) has completed.

Basically, it is preferred to use this method for the link-local scope rather than unicast-prefix-based IPv6 multicast addresses [[RFC 3306](#)]. This document restricts the usage of defined fields such as scop, plen and network prefix fields of [[RFC 3306](#)]. Therefore, this document specifies encoded information for link-local scope in multicast addresses.

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "June", and "OPTIONAL" in this document are to be interpreted as described in [[RFC 2119](#)].

## 2. Applicability

The allocation technique in this document is designed to be used in any environment in which link-local scope IPv6 multicast addresses are assigned or selected. Especially, this method goes well with nodes supplying multicast services in a zeroconf/serverless environment. For example, multicast addresses less than or equal to link-local scope are themselves generated by nodes supplying multicast services without conflicts. Also, hosts which are supplied multicast services from multicast servers then make multicast addresses of multicast servers using ND (address resolution) and well-known group IDs.

Consequently, this technique MUST only be used for link scoped multicast addresses. If you want to use multicast addresses greater than link-local scope, you need to use other methods as described in [[RFC 3306](#)].

## 3. Link Scoped Multicast Address Format

This document specifies a new format that incorporates IID information in the multicast addresses. The idea of delegating multicast addresses can be applicable to link-local scope.

Figure 1 illustrates the new format for link scoped multicast addresses.

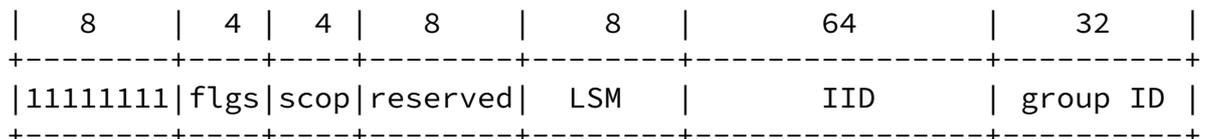


Figure 1: Link scoped multicast IPv6 address format

flgs MUST be "0011". (The first two bits set to zero by the sending node and ignored on receipt). "flgs" MUST use the same flag defined in [section 4 of \[RFC 3306\]](#).

scop MUST be  $\leq 2$ . It is preferred to use this method for the link-local scope rather than unicast-prefix-based IPv6 multicast addresses [[RFC 3306](#)]. But, the users can choose whichever they wish and deem appropriate.

The reserved field MUST be zero.

LSM field MUST be "1111 1111" which maps to the plen field in [[RFC 3306](#)], whereas the plen field in [[RFC 3306](#)] MUST NOT be greater than 64.

That is, flgs, scop, and plen fields are used to identify whether an address is a multicast address as specified in this document.

The IID field is used to distinguish each node from others. And this value is obtained from the IEEE EUI-64 based interface identifier of the link-local unicast IPv6 address. Given the use of this method for link-local scope, the IID embedded in the multicast address MUST only come from the IID of the link-local unicast address on the interface after DAD has completed. That is, the creation of the multicast address MUST only occur after DAD has completed as part of the auto-configuration process.

Group ID is generated to indicate a multicast application and is used to guarantee its uniqueness only in the host. It June also be

set on the basis of the guidelines outlined in [[RFC 3307](#)].

#### [4. Example](#)

This is an example of link scoped IPv6 multicast addresses. For example in an ethernet environment, if the link-local unicast address is FE80::A12:34FF:FE56:7890, the link scoped multicast prefix of the node is FF32:00FF:A12:34FF:FE56:7890::/96.

#### [5. Consideration of Lifetime](#)

Generally, Link scoped multicast addresses have no lifetime because link-local unicast addresses also have no lifetime. But, it is not true in environment of mobile. Even though multicast addresses are created from the unique IID of unicast address, their useful lifetime is linked to the period during which the IID is known to be unique. Thus, it is possible to conflict between IIDs, due to a new node in merged network that uses the same IID and a powered node. The document does not consider this case at this phase. It is another challenging issue and out of scope of this document.

## 6. Security Considerations

The uniqueness of multicast addresses using this method is guaranteed by the DAD process. So, it is needed to get a secure DAD process for stability of this method. This document proposes the mechanism in [[RFC 3041](#)] for this purpose.

[RFC 3041] describes the privacy extension to IPv6 stateless address autoconfiguration for an IID and how to configure the global-scope unicast addresses. The privacy extension method in [[RFC 3041](#)] is triggered when a host receives a router advertisement with a prefix information option carrying a global-scope prefix for the purpose of address auto-configuration. That is, [[RFC 3041](#)] can not be used for making a link-local unicast address. Since the IID embedded in the link scoped multicast address MUST only come from the IID of the link-local unicast address on the interface after DAD has completed, the secure IID, generated by [[RFC 3041](#)], can not be used for consisting of a link scoped multicast address. But, it is possible to use secure IID for expanding the intensity of security regardless of a difficulty of acquisition of multicast server addresses.

## 7. Acknowledgements

We would like to thank Dave Thaler and Brian Haberman for his comments related to the consistency between the unicast prefix-

based multicast draft and this one. Special thanks are due to Erik Nordmark and Pekka Savola for valuable comments.

## 8. References

### Normative

- [RFC 2119] S. Bradner, "Key words for use in RFCs to indicate Requirement Levels", [RFC 2119](#), March 1997.
- [RFC 2461] T. Narten, E. Nordmark and W. Simpson, "Neighbor Discovery for IP Version 6 (IPv6)", [RFC 2461](#), December 1998.
- [RFC 3041] T. Narten and R. Draves, "Privacy Extensions for Stateless Address Autoconfiguration in IPv6," [RFC 3041](#), April 2001.
- [RFC 3306] B. Haberman and D. Thaler, "Unicast-Prefix-based IPv6 Multicast Addresses," [RFC 3306](#), August 2002.
- [RFC 3307] B. Haberman, "Allocation Guidelines for IPv6 Multicast Addresses," [RFC 3307](#), August 2002.
- [RFC 3513] R. Hinden and S. Deering, "IP Version 6 Addressing Architecture", [RFC 3513](#), April 2003.

### Informative

- [RFC 3956] P. Savola and B. Haberman, "Embedding the Rendezvous Point (RP) Address in an IPv6 Multicast Address
- [SSM ARCH] H. Holbrook and B. Cain, "Source-Specific Multicast for IP", Work In Progress, September 2004.

### Authors' Addresses

Jung-Soo Park  
ETRI PEC  
161 Gajeong-Dong, Yuseong-Gu, Daejeon 305-350, Korea  
Phone: +82 42 860 6514  
Email: jspark@pec.etri.re.kr

Myung-Ki Shin  
ETRI/NIST  
820 West Diamond Avenue  
Gaithersburg, MD 20899, USA

---

INTERNET-DRAFT      Link Scoped IPv6 Multicast Addresses      November 2004

Tel : +1 301 975-3613  
Fax : +1 301 590-0932  
E-mail : mshin@nist.gov

Hyoung-Jun Kim  
ETRI PEC  
161 Gajeong-Dong, Yuseong-Gu, Daejeon 305-350, Korea  
Phone: +82 42 860 6576  
Email: khj@etri.re.kr

#### Intellectual Property Statement

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that June cover technology that June be required to implement this standard. Please address the information to the IETF at [ietf-ipr@ietf.org](mailto:ietf-ipr@ietf.org).

#### Disclaimer of Validity

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE

REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

#### Copyright Statement

Copyright (C) The Internet Society (2004). This document is

Park et al.

Expires June 2005

[Page 6]

---

INTERNET-DRAFT

Link Scoped IPv6 Multicast Addresses

November 2004

subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

#### Acknowledgment

Funding for the RFC Editor function is currently provided by the Internet Society.

