

INTERNET-DRAFT  
Nokia  
June 15, 2007  
APNIC  
Intended status: Proposed Standard  
IBM

R. Hinden,  
G. Huston,  
T. Narten,

Centrally Assigned  
Unique Local IPv6 Unicast Addresses

[<draft-ietf-ipv6-ula-central-02.txt>](#)

Status of this Memo

By submitting this Internet-Draft, each author represents that any applicable patent or other IPR claims of which he or she is aware have been or will be disclosed, and any of which he or she becomes aware will be disclosed, in accordance with [Section 6 of BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on December 21, 2007.

Abstract

This document defines Centrally allocated IPv6 Unique Local addresses. These addresses are globally unique and are intended for local communications, usually inside of a site. They are not expected to be routable on the global Internet.



Table of Contents

<a href="#">1.0</a>	<a href="#">Introduction.....</a>	<a href="#">2</a>
<a href="#">2.0</a>	<a href="#">Acknowledgments.....</a>	<a href="#">3</a>
<a href="#">3.0</a>	<a href="#">Local IPv6 Unicast Addresses.....</a>	<a href="#">3</a>
<a href="#">3.1</a>	<a href="#">Format.....</a>	<a href="#">3</a>
<a href="#">3.2</a>	<a href="#">Global ID.....</a>	<a href="#">4</a>
<a href="#">3.2.1</a>	<a href="#">Allocation of Centrally Assigned Global IDs.....</a>	<a href="#">5</a>
<a href="#">3.2.2</a>	<a href="#">Sample Code for Pseudo-Random Global ID Algorithm.....</a>	<a href="#">5</a>
<a href="#">3.3</a>	<a href="#">Public Registration Services.....</a>	<a href="#">6</a>
<a href="#">4.0</a>	<a href="#">Operational Guideliens.....</a>	<a href="#">6</a>
<a href="#">5.0</a>	<a href="#">Global Routing Considerations.....</a>	<a href="#">7</a>
<a href="#">6.0</a>	<a href="#">Security Considerations.....</a>	<a href="#">7</a>
<a href="#">7.0</a>	<a href="#">IANA Considerations.....</a>	<a href="#">7</a>
<a href="#">8.0</a>	<a href="#">References.....</a>	<a href="#">8</a>
<a href="#">8.1</a>	<a href="#">Normative References.....</a>	<a href="#">8</a>
<a href="#">8.2</a>	<a href="#">Informative References.....</a>	<a href="#">8</a>
<a href="#">9.0</a>	<a href="#">Authors' Addresses.....</a>	<a href="#">9</a>
<a href="#">10.0</a>	<a href="#">Change Log.....</a>	<a href="#">10</a>
<a href="#">11.0</a>	<a href="#">Full Copyright.....</a>	<a href="#">10</a>
<a href="#">12.0</a>	<a href="#">Intellectual Property.....</a>	<a href="#">10</a>

**[1.0 Introduction](#)**

This document defines the characteristics and technical allocation requirements for centrally assigned Local IPv6 addresses in the framework defined in [\[ULA\]](#). They are not expected to be routable on the global Internet. They are routable inside of a more limited area such as a site. They may also be routed between a limited set of sites.

Local IPv6 unicast addresses, as defined in [[ULA](#)], have the following characteristics:

- Globally unique prefix.
- Well known prefix to allow for easy filtering at site boundaries.
- Internet Service Provider independent and can be used for communications inside of a site without having any permanent or intermittent Internet connectivity.
- In practice, applications may treat these addresses like global scoped addresses.

It is a highly desirable property of ULAs that they are unique, as ULA uniqueness would allow sites to be combined or privately interconnected without creating any address conflicts.

Topics that are general to all Local IPv6 address can be found in the following sections of [ULA]:

- 3.3 Scope Definition
- 4.0 Operational Guidelines \*\*
- 4.1 Routing
- 4.2 Renumbering and Site Merging
- 4.3 Site Border Router and Firewall Packet Filtering
- 4.5 Application and Higher Level Protocol Issues
- 4.6 Use of Local IPv6 Addresses for Local Communications
- 4.7 Use of Local IPv6 Addresses with VPNs
- 5.0 Global Routing Concerns
- 6.0 Advantages and Disadvantages

\*\* Note: Operational guidelines specific to centrally assigned Local IPv6 addresses are in [Section 4.0](#) of this document.

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119](#).


## [2.0 Acknowledgments](#)

The authors would like to thank Alan Beard, Alex Zinin, Bill Fenner, Brian Carpenter, Brian Haberman Charlie Perkins, Christian Huitema, Hans Kruse, Harald Alvestrand, Keith Moore, Leslie Daigle, Margaret Wasserman, Pekka Savola, Shannon Behrens, Steve Bellovin, Tim Chown, and Tony Hain for their comments and suggestions on this document.

## [3.0 Centrally Assigned Local IPv6 Unicast Addresses](#)

### [3.1 Format](#)

The Centrally assigned Local IPv6 addresses, based on Unique Local Addresses [\[ULA\]](#), have the following format:

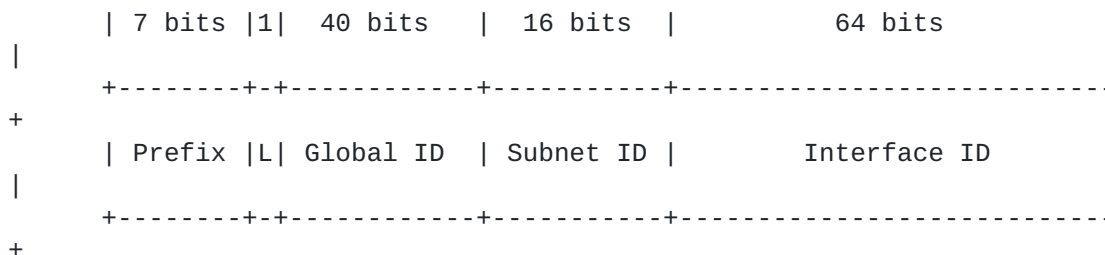

Where:

Prefix                      FC00::/7 prefix to identify Local IPv6 unicast addresses.

Hinden, et. al.  
3]

Expires December 21, 2007

[Page

L	Set to 0 if the prefix is centrally assigned, Note: [ULA] defined L=1 for locally assigned ULAs. This document defines L=0 for centrally assigned ULA addresses. See <a href="#">Section 3.2</a> for additional information.
Global ID	40-bit global identifier used to create a globally unique prefix. See <a href="#">Section 3.2</a> for additional information.
Subnet ID	16-bit Subnet ID is an identifier of a subnet within the site.
Interface ID	64-bit Interface ID as defined in [ <a href="#">ADDARCH</a> ].

### **[3.2](#) Global ID**

The allocation of Global IDs should be pseudo-random [[RANDOM](#)]. They MUST not be assigned sequentially. They MUST not be allocated in a manner where there is a relationship between allocations that would make it easy to aggregate the resulting prefixes. This is done to make clear that these prefixes are not intended to be routed globally.

The major difference between the locally assigned Unique Local Addresses defined in [[ULA](#)] and the centrally assigned Unique Local Addresses, as defined in this document, is that they are uniquely assigned and the assignments are registered in a public database.

It is expected that large managed sites will prefer central assignments and small or disconnected sites will prefer local assignments. It is recommended that sites planning to use Local IPv6 addresses for extensive inter-site communication, initially or as a future possibility, use a centrally assigned prefix as there is no possibility of assignment conflicts. Sites are free to choose either approach.

This document defines the allocation procedure for creating global-IDs for centrally assigned local IPv6 addresses (i.e., L=0). The allocation procedure for locally assigned local IPv6 addresses (i.e., L=1) is defined in [[ULA](#)].

#### **[3.2.1](#) Allocation of Centrally Assigned Global IDs**

Global IDs should be allocated by a new registry function such that each allocation is unique and that the assignment is recorded and





published in a public database to verify that that allocation was unique.

Global IDs may be assigned under the authority of a single allocation organization or by multiple organizations. If there are multiple organizations, there MUST be an operating procedure that ensures that the entire allocation space maintains its property of uniqueness and that the allocations are recorded in a single public database.

The requirements for centrally assigned Global ID allocations are:

- Globally unique.
- Available to anyone in an unbiased manner.

The allocation function must include the ability to make an allocation on a permanent basis, without any need for renewal and without any procedure for de-allocation. Other forms of allocation, including periodic renewable allocations and explicit provision for de-allocation may also be provided.

The allocation service should include sufficient provisions to mitigate attempts to artificially reduce the number pool through hoarding of numbers. The mechanism used by the registration authority should not include onerous provisions that reduce the intent that these allocations should be available to anyone in an unbiased manner, and should not attempt to perform rationing or impose quotas upon allocations.

The registration authority may cover its costs through registration fees and may also use registration agreements to clearly set forth the terms conditions and liabilities associated with registration of such allocations. The payments and conditions associated with this function should not be unreasonably onerous to the extent that the availability of allocations is impaired.

### **3.2.2 Sample Code for Pseudo-Random Global ID Algorithm**

The algorithm described below is intended to be used for centrally assigned Global IDs. In each case the resulting global ID will be used in the appropriate prefix as defined in [Section 3.2](#).

- 1) Obtain the current time of day in 64-bit NTP format [[NTP](#)].
- 2) Obtain an EUI-64 identifier from the system running this algorithm. If an EUI-64 does not exist, one can be created

from

a 48-bit MAC address as specified in [[ADDARCH](#)]. If an EUI-64 cannot be obtained or created, a suitably unique identifier, local to the node, should be used (e.g. system serial number).



- 3) Concatenate the time of day with the system-specific identifier creating a key.
- 4) Compute an SHA-1 digest on the key as specified in [[FIPS, SHA1](#)];  
the resulting value is 160 bits.
- 5) Use the least significant 40 bits as the Global ID.
- 6) Verify that the computed Global ID is not already assigned. If it is, discard the value and rerun the algorithm.
- 7) Concatenate FC00::/7, the L bit set to 0, and the 40 bit Global ID to create a centrally assigned Local IPv6 address prefix.

This algorithm will result in a Global ID that is unique and can be used to create a centrally assigned local IPv6 address prefix.

### **3.3 Public Registration Services**

The registration of centrally assigned ULAs should be available in a public database. This function should support a query of a specific ULA prefix and then return the registrant's provided detail. Information should be provided in a robust fashion, consistent with the current state of similar registration services provided by address and domain name registration authorities.

## **4.0 Operational Guidelines**

### **4.1 DNS Issues**

AAAA and PTR records for centrally assigned local IPv6 addresses may be installed in the global DNS. This may be useful if these addresses are being used for site to site or VPN style applications, or for sites that wish to avoid separate DNS systems for inside and outside traffic.

The operational issues relating to this are beyond the scope of this document.

## **5.0 Global Routing Considerations**

Since [[ULA](#)] was first published, the Regional Internet Address Registries (RIR) created a new policy to allocate IPv6 Provider Independent Addresses [[RIR-PI](#)]. Given the availability of RIR allocated provider-independent addresses the authors believe that there is considerably less concern that ULAs of either type will be used as IPv6 provider-independent addresses.



The operational guidelines regarding routing of centrally assigned local addresses is that such address prefixes should be readily routed within a site or comparable administrative routing domain.

By default, such prefixes should not be announced beyond such a local scope, due to the non-aggregateability of these prefixes within the routing system and the potential negative impact on the total size of the routing space in large scale internet environments.

Entities wishing to use IPv6 Provider Independent Addresses (PI Space) in such larger routing contexts should consult the Regional Internet Registries policies relating to the allocation of PI Space [[RIR-PI](#)].

## **6.0 Security Considerations**

Local IPv6 addresses do not provide any inherent security to the nodes that use them. They may be used with filters at site boundaries to keep Local IPv6 traffic inside of the site, but this is no more or less secure than filtering any other type of global IPv6 unicast addresses.

Local IPv6 addresses do allow for address-based security mechanisms, including IPSEC, across end to end VPN connections.

## **7.0 IANA Considerations**

The IANA is instructed to designate an allocation authority for centrally assigned Unique Local IPv6 unicast addresses. This allocation authority shall comply with the requirements described in [Section 3.2](#) of this document, including in particular allocation on a permanent basis and with sufficient provisions to avoid hoarding of numbers. If deemed appropriate, the authority may also consist of multiple organizations performing the allocation authority duties.

The Regional Internet Address registries are expected to be the allocation authority for centrally assigned Unique Local IPv6 addresses.

The designated allocation authority is required to document how they will meet the requirements described in [Section 3.2](#) of this document in an RFC.



## **8.0 References**

### **8.1 Normative References**

- [ADDARCH] Hinden, R., S. Deering, S., "IP Version 6 Addressing Architecture", [RFC 3515](#), April 2003.
- [FIPS] "Federal Information Processing Standards Publication", (FIPS PUB) 180-1, Secure Hash Standard, 17 April 1995.
- [NTP] Mills, David L., "Network Time Protocol (Version 3) Specification, Implementation and Analysis", [RFC 1305](#), March 1992.
- [RANDOM] Eastlake, D. 3rd, J. Schiller, S. Crocker, "Randomness Recommendations for Security", [RFC 4086](#), June 2005.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [RFC 2119](#), [BCP14](#), March 1997.
- [SHA1] D. Eastlake 3rd, P. Jones, "US Secure Hash Algorithm 1 (SHA1)", [RFC 3174](#), September 2001.
- [ULA] Hinden, R., B. Haberman, "Unique Local IPv6 Unicast Addresses", [RFC-4193](#), October 2005.

### **8.2 Informative References**

- [RIR-PI] O. DeLong, K. Loch, A. Dul, "Policy Proposal 2005-1: Provider-independent IPv6 Assignments for End Sites", [http://www.arin.net/policy/proposals/2005\\_1.html](http://www.arin.net/policy/proposals/2005_1.html), May 2006.

## **9.0 Authors' Addresses**

Robert M. Hinden  
Nokia  
313 Fairchild Drive  
Mountain View, CA 94043  
USA

phone: +1 650 625-2004  
email: bob.hinden@nokia.com

Geoff Huston





APNIC

Thomas Narten  
IBM Corporation  
3039 Cornwallis Ave.  
PO Box 12195 - BRQA/502  
Research Triangle Park, NC 27709-2195

Phone: +1 919 254 7798  
email: narten@us.ibm.com



## **10.0 Change Log**

Draft <[draft-hinden-ipv6-global-local-addr-02.txt](#)>

- o Major revision based on experience to date with [[ULA](#)] and later input from the RIR community

Draft <[draft-hinden-ipv6-global-local-addr-01.txt](#)>

- o Revised to keep consistent with [[ULA](#)]. This includes single prefix, L bit, change to SHA-1 algorithm, and clarifications to suggested algorithm.
- o Revised IANA considerations section based on feedback from the IAB.
- o Added new DNS operational guidelines sections specific to centrally assigned local IPv6 addresses.
- o Editorial changes.

Draft <[draft-hinden-ipv6-global-local-addr-00.txt](#)>

- o Initial Draft created from [[ULA](#)]. This draft defines the centrally assigned Local IPv6 addresses.

## **11. Full Copyright Statement**

Copyright (C) The IETF Trust (2007).

This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

This document and the information contained herein are provided on an

"AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS

OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY, THE IETF TRUST AND

THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE

OF

THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

## **12. Intellectual Property**

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to

pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has

made any independent effort to identify any such rights.  
Information

Hinden, et. al.  
10]

Expires December 21, 2007

[Page

on the procedures with respect to rights in RFC documents can be found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at [ietf-ipr@ietf.org](mailto:ietf-ipr@ietf.org).

#### Acknowledgment

Funding for the RFC Editor function is provided by the IETF Administrative Support Activity (IASA).

