

Working Group  
Internet-Draft  
Intended status: Standards Track  
Expires: August 14, 2014

U. Chunduri  
W. Lu  
A. Tian  
Ericsson Inc.  
N. Shen  
Cisco Systems, Inc.  
February 10, 2014

IS-IS Extended Sequence number TLV  
draft-ietf-isis-extended-sequence-no-tlv-02

## Abstract

This document defines Extended Sequence number TLV to protect Intermediate System to Intermediate System (IS-IS) PDUs from replay attacks.

## Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on August 14, 2014.

## Copyright Notice

Copyright (c) 2014 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in [Section 4.e](#) of

the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	<a href="#">Introduction</a>	<a href="#">2</a>
<a href="#">1.1.</a>	<a href="#">Requirements Language</a>	<a href="#">3</a>
<a href="#">1.2.</a>	<a href="#">Acronyms</a>	<a href="#">3</a>
<a href="#">2.</a>	<a href="#">Replay attacks and Impact on IS-IS networks</a>	<a href="#">4</a>
<a href="#">2.1.</a>	<a href="#">IIHs</a>	<a href="#">4</a>
<a href="#">2.2.</a>	<a href="#">LSPs</a>	<a href="#">4</a>
<a href="#">2.3.</a>	<a href="#">SNPs</a>	<a href="#">4</a>
<a href="#">3.</a>	<a href="#">Extended Sequence Number TLV</a>	<a href="#">4</a>
<a href="#">3.1.</a>	<a href="#">Sequence Number Wrap</a>	<a href="#">5</a>
<a href="#">4.</a>	<a href="#">Mechanism and Packet Encoding</a>	<a href="#">6</a>
<a href="#">4.1.</a>	<a href="#">IIHs</a>	<a href="#">6</a>
<a href="#">4.2.</a>	<a href="#">SNPs</a>	<a href="#">6</a>
<a href="#">5.</a>	<a href="#">Backward Compatibility and Deployment</a>	<a href="#">6</a>
<a href="#">5.1.</a>	<a href="#">IIH and SNPs</a>	<a href="#">7</a>
<a href="#">6.</a>	<a href="#">IANA Considerations</a>	<a href="#">7</a>
<a href="#">7.</a>	<a href="#">Security Considerations</a>	<a href="#">7</a>
<a href="#">8.</a>	<a href="#">Contributors</a>	<a href="#">7</a>
<a href="#">9.</a>	<a href="#">Acknowledgements</a>	<a href="#">7</a>
<a href="#">10.</a>	<a href="#">Appendix A</a>	<a href="#">8</a>
<a href="#">10.1.</a>	<a href="#">Appendix A.1</a>	<a href="#">8</a>
<a href="#">10.2.</a>	<a href="#">Appendix A.2</a>	<a href="#">8</a>
<a href="#">11.</a>	<a href="#">Appendix B</a>	<a href="#">9</a>
<a href="#">11.1.</a>	<a href="#">Operational/Implementation consideration</a>	<a href="#">9</a>
<a href="#">12.</a>	<a href="#">References</a>	<a href="#">9</a>
<a href="#">12.1.</a>	<a href="#">Normative References</a>	<a href="#">9</a>
<a href="#">12.2.</a>	<a href="#">Informative References</a>	<a href="#">9</a>
	<a href="#">Authors' Addresses</a>	<a href="#">10</a>

## [1.](#) Introduction

With the rapid development of new data center infrastructures, due to its flexibility and scalability attributes, IS-IS has been adopted widely in various L2 and L3 routing deployment of the data centers for critical business operations. At the meantime the SDN-enabled networks even though put more power to Internet applications and also make network management easier, it does raise the security requirement of network routing infrastructure to another level.

A replayed IS-IS PDU can potentially cause many problems in the IS-IS networks ranging from bouncing adjacencies to black hole or even some form of Denial of Service (DoS) attacks as explained in [Section 2](#). This problem is also discussed in security consideration section, in

the context of cryptographic authentication work as described in [\[RFC5304\]](#) and in [\[RFC5310\]](#).

Currently, there is no mechanism to protect IS-IS HELLO PDUs (IIHs) and Sequence number PDUs (SNPs) from the replay attacks. However, Link State PDUs (LSPs) have sequence number in the LSP header as defined in [\[ISO10589\]](#), with which it can effectively mitigate the intra-session replay attacks. But, LSPs are still susceptible to inter-session replay attacks.

This document defines Extended Sequence number (ESN) TLV to protect Intermediate System to Intermediate System (IS-IS) PDUs from replay attacks.

The new ESN TLV defined here thwart these threats and can be deployed with authentication mechanism as specified in [\[RFC5304\]](#) and in [\[RFC5310\]](#) for a more secure network.

Replay attacks can be effectively mitigated by deploying a group key management protocol (being developed as defined in [\[I-D.yeung-g-ikev2\]](#) and [\[I-D.hartman-karp-mrkmp\]](#)) with a frequent key change policy. Currently, there is no such mechanism defined for IS-IS. Even if such a mechanism is defined, usage of this TLV can be helpful to avoid replays before the keys are changed.

Also, it is believed, even when such key management system is deployed, there always will be some manual key based systems that co-exist with KMP (Key Management Protocol) based systems. The ESN TLV defined in this document is more helpful for such deployments.

### [1.1](#). Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [\[RFC2119\]](#).

## [1.2.](#) Acronyms

CSNP	-	Complete Sequence Number PDU
ESN	-	Extended Sequence Number
IIH	-	IS-IS Hello PDU
KMP	-	Key Management Protocol (auto key management)
LSP	-	IS-IS Link State PDU

MKM	-	Manual Key management Protocols
PDU	-	Protocol Data Unit
PSNP	-	Partial Sequence Number PDU
SNP	-	Sequence Number PDU

## [2.](#) Replay attacks and Impact on IS-IS networks

Replaying a captured protocol packet to cause damage is a common threat for any protocol. Securing the packet with cryptographic authentication information alone cannot mitigate this threat completely. This section explains the replay attacks and the applicability of the same for each IS-IS PDU.

### [2.1.](#) IIHs

At the time of adjacency bring up an IS sends IIH packet with empty neighbor list (TLV 6) and with or without the authentication information as per provisioned authentication mechanism. If this packet is replayed later on the broadcast network all ISes in the broadcast network can bounce the adjacency to create a huge churn in the network.

### [2.2.](#) LSPs

Normal operation of the IS-IS update Process as specified in [IS010589] provides timely recovery from all LSP replay

attacks. Therefore the use of the extensions defined in this document are prohibited in LSPs. Further discussion of the vulnerability of LSPs to replay attacks can be found in [I-D.ietf-karp-isis-analysis].

### 2.3. SNPs

A replayed CSNP can result in the sending of unnecessary PSNPs on a given link. A replayed CSNP or PSNP can result in unnecessary LSP flooding on the link.

### 3. Extended Sequence Number TLV

The Extended Sequence Number (ESN) TLV is composed of 1 octet for the Type, 1 octet that specifies the number of bytes in the Value field and a 12 byte Value field. This TLV is defined only for IIH and SNP PDUs.

x CODE - TBD.

x LENGTH - total length of the value field, which is 12 bytes.

x Value - 64-bit Extended Session Sequence Number (ESSN), which is followed by a 32 bit monotonically increasing per Packet Sequence Number (PSN).

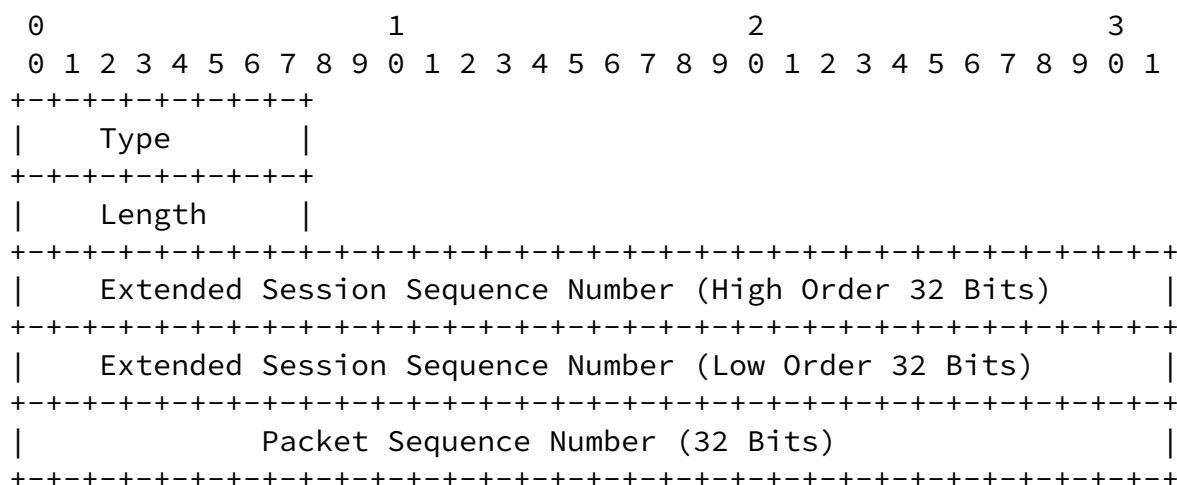


Figure 1: Extended Sequence Number (ESN) TLV

The ESN TLV defined here is optional. Though this is an optional TLV, this can be mandatory on a link when 'verify' mode is enabled as specified in [Section 5.1](#). The ESN TLV MAY be present only in any IIH and SNP PDUs. A PDU with multiple ESN TLVs is invalid and MUST be discarded on receipt.

The 64 bit ESSN MUST be non-zero and MUST contain ever increasing number whenever it is changed due any situation as specified in [Section 3.1](#). For each PDU which contains the ESN TLV the 96 bit unsigned integer value consisting of the 64 bit ESSN and 32 bit Packet Sequence Number (PSN) – where ESSN is the 64 MSBs – MUST be greater than the most recently received value in a PDU of the same type originated by the same IS.

### [3.1](#). Sequence Number Wrap

If the 32-bit Packet Sequence Number in ESN TLV wraps or for the cold restart of the router, the 64-bit ESSN value MUST be set higher than the previous value. IS-IS implementations MAY use guidelines provided in [Section 10](#) for accomplishing this.

## [4](#). Mechanism and Packet Encoding

The encoding of ESN TLV in each IS-IS PDU is applicable is detailed below. Also refer, when to ignore processing of the ESN TLV as described in [Section 5](#) for appropriate operation in the face of legacy node(s) in the network, which do not support the extensions defined in this document. If the received PDU with ESN TLV is accepted then the stored value for the corresponding originator, PDU type and level MUST be updated with the latest value received.

### [4.1](#). IIHs

ESN TLV information is maintained for each type of IIH PDU being sent on a given circuit. The procedures for encoding, verification and sequence number wrap scenarios are explained in [Section 3](#).

#### [4.2.](#) SNPs

A separate CSNP/PSNP ESN TLV information is maintained per PDU type and per link. The procedures for encoding, verification and sequence number wrap scenarios are explained in [Section 3](#).

### [5.](#) Backward Compatibility and Deployment

The implementation and deployment of the ESN TLV can be done to support backward compatibility and gradual deployment in the network without requiring a flag day. This feature can also be deployed for the links in a certain area of the network where the maximum security mechanism is needed, or it can be deployed for the entire network.

The implementation SHOULD allow the configuration of ESN TLV feature on each IS-IS link level. The implementation SHOULD also allow operators to control the configuration of 'send' and/or 'verify' the feature of IS-IS PDUs for the links and for the node. In this document, the 'send' operation is to include the ESN TLV in its own IS-IS PDUs; and the 'verify' operation is to process the ESN TLV in the receiving IS-IS PDUs from neighbors.

In the face of an adversary doing an active attack, it is possible to have inconsistent data view in the network, if there is a considerable delay in enabling ESN TLV 'verify' operation from first node to the last node in the network. This can happen primarily because, replay PDUs can potentially be accepted by the nodes where 'verify' operation is still not provisioned at the time of the attack. To minimize such a window it is recommended that provisioning of 'verify' SHOULD be done in a timely fashion by the network operators.

#### [5.1.](#) IIH and SNPs

On the link level, ESN TLV involves the IIH PDUs and SNPs (both CSNP and PSNP). The "send" and "verify" modes described above can be set independently on each link and in the case of a broadcast network independently for each level.

To introduce ESN support without disrupting operations, ISs on a

given interface are first configured to operate in 'send' mode. Once all routers operating on an interface are operating in 'send' mode 'verify' mode can be enabled on each IS. Once 'verify' mode is set for an interface all the IIH and SNP PDUs being sent on that interface MUST contain the ESN TLV. Any such PDU received without an ESN TLV MUST be discarded when 'verify' mode is enabled

## [6.](#) IANA Considerations

This document requests that IANA allocate from the IS-IS TLV Codepoints Registry a new TLV, referred to as the "Extended Sequence Number" TLV, with the following attributes:

Type	Description	IIH	LSP	SNP	Purge
----	-----	---	---	---	-----
TBD	ESN TLV	Y	N	Y	N

Figure 2: IS-IS Codepoints Registry Entry

## [7.](#) Security Considerations

This document describes a mechanism to the replay attack threat as discussed in the Security Considerations section of [[RFC5304](#)] and in [[RFC5310](#)]. This document does not introduce any new security concerns to IS-IS or any other specifications referenced in this document.

## [8.](#) Contributors

Authors would like to thank Les Ginsberg for his significant contribution in detailed reviews and suggestions.

## [9.](#) Acknowledgements

As some sort of sequence number mechanism to thwart protocol replays is a old mechanism, authors of this document do not make any claims on the originality of the overall protection idea described. Authors are thankful for the review and the valuable feedback provided by Acee Lindem and Joel Halpern.

## [10.](#) [Appendix A](#)



IS-IS nodes implementing this specification SHOULD use available mechanisms to preserve the 64-bit Extended Session Sequence Number's strictly increasing property, whenever it is changed for the deployed life of the IS-IS node (including cold restarts).

This Appendix provides only guidelines for achieving the same and implementations can resort to any similar method as far as strictly increasing property of the 64-bit ESSN in ESN TLV is maintained.

#### 10.1. [Appendix A.1](#)

One mechanism for accomplishing this is by encoding 64-bit ESSN as system time represented in 64-bit unsigned integer value. This MAY be similar to the system timestamp encoding for NTP long format as defined in [Appendix A.4 of \[RFC5905\]](#). New current time MAY be used when the IS-IS node loses its sequence number state including in Packet Sequence Number wrap scenarios.

Implementations MUST make sure while encoding the 64-bit ESN value with current system time, it should not default to any previous value or some default node time of the system; especially after cold restarts or any other similar events. In general system time must be preserved across cold restarts in order for this mechanism to be feasible. One example of such implementation is to use a battery backed real-time clock (RTC).

#### 10.2. [Appendix A.2](#)

One other mechanism for accomplishing this would be similar to the one as specified in [\[I-D.ietf-ospf-security-extension-manual-keying\]](#), to use the 64-bit ESSN as a wrap/boot count stored in non-volatile storage. This value is incremented anytime the IS-IS node loses its sequence number state including in Packet Sequence Number wrap scenarios.

The drawback of this approach per [Section 6](#) of [\[I-D.ietf-ospf-security-extension-manual-keying\]](#), if used is applicable here. The only drawback is, it requires the IS-IS implementation to be able to save its boot count in non-volatile storage. If the non-volatile storage is ever repaired or upgraded such that the contents are lost, keys MUST be changed to prevent replay attacks.

## [11. Appendix B](#)

### [11.1. Operational/Implementation consideration](#)

Since the ESN is maintained per interface, per level and per PDU type, this scheme can be useful for monitoring the health of the IS-IS adjacency. A Packet Sequence Number skip on IIH can be recorded by the neighbors which can be used later to correlate with adjacency state changes over the interface. For instance in a multi-access media, all the neighbors have the skips from the same IIH sender or only one neighbor has the Packet Sequence Number skips can indicate completely different issues on the network. Effective usage of the TLV defined in this document for operational issues MAY also need more system information before making concrete conclusions and defining all that information is beyond the scope of this document.

## [12. References](#)

### [12.1. Normative References](#)

[ISO.10589.1992]

International Organization for Standardization,  
"Intermediate system to intermediate system intra-domain-  
routing routine information exchange protocol for use in  
conjunction with the protocol for providing the  
connectionless-mode Network Service (ISO 8473)", ISO/  
IEC 10589:2002, Second Edition, Nov. 2002.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate  
Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.

[RFC5905] Mills, D., Martin, J., Burbank, J., and W. Kasch, "Network  
Time Protocol Version 4: Protocol and Algorithms  
Specification", [RFC 5905](#), June 2010.

### [12.2. Informative References](#)

[I-D.hartman-karp-mrkmp]

Hartman, S., Zhang, D., and G. Lebovitz, "Multicast Router  
Key Management Protocol (MaRK)", [draft-hartman-karp-  
mrkmp-05](#) (work in progress), September 2012.

[I-D.ietf-karp-isis-analysis]

Chunduri, U., Tian, A., and W. Lu, "KARP IS-IS security  
analysis", [draft-ietf-karp-isis-analysis-02](#) (work in  
progress), February 2014.

Internet-Draft

IS-IS Extended Sequence number TLV

February 2014

[I-D.ietf-ospf-security-extension-manual-keying]

Bhatia, M., Hartman, S., Zhang, D., and A. Lindem,  
"Security Extension for OSPFv2 when using Manual Key  
Management", [draft-ietf-ospf-security-extension-manual-keying-06](#) (work in progress), November 2013.

[I-D.weis-gdoi-mac-tek]

Weis, B. and S. Rowles, "GDOI Generic Message  
Authentication Code Policy", [draft-weis-gdoi-mac-tek-03](#)  
(work in progress), September 2011.

[RFC5304] Li, T. and R. Atkinson, "IS-IS Cryptographic  
Authentication", [RFC 5304](#), October 2008.

[RFC5310] Bhatia, M., Manral, V., Li, T., Atkinson, R., White, R.,  
and M. Fanto, "IS-IS Generic Cryptographic  
Authentication", [RFC 5310](#), February 2009.

[RFC6518] Lebovitz, G. and M. Bhatia, "Keying and Authentication for  
Routing Protocols (KARP) Design Guidelines", [RFC 6518](#),  
February 2012.

#### Authors' Addresses

Uma Chunduri  
Ericsson Inc.  
300 Holger Way,  
San Jose, California 95134  
USA

Phone: 408 750-5678  
Email: [uma.chunduri@ericsson.com](mailto:uma.chunduri@ericsson.com)

Wenhu Lu  
Ericsson Inc.  
300 Holger Way,  
San Jose, California 95134  
USA

Email: wenhu.lu@ericsson.com

Chunduri, et al.

Expires August 14, 2014

[Page 10]

---

Internet-Draft

IS-IS Extended Sequence number TLV

February 2014

Albert Tian  
Ericsson Inc.  
300 Holger Way,  
San Jose, California 95134  
USA

Phone: 408 750-5210  
Email: albert.tian@ericsson.com

Naiming Shen  
Cisco Systems, Inc.  
225 West Tasman Drive,  
San Jose, California 95134  
USA

Email: naiming@cisco.com

