

Network Working Group  
Internet Draft  
Category: Proposed Standard  
Expiration Date: January 2014

R. Aggarwal (Editor)  
Juniper Networks

Y. Kamite  
NTT Communications

L. Fang  
Cisco Systems, Inc

July 2 2013

## Multicast in VPLS

[draft-ietf-l2vpn-vpls-mcast-14.txt](#)

### Status of this Memo

This Internet-Draft is submitted to IETF in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

### Copyright and License Notice

Copyright (c) 2013 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must

include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

This document may contain material from IETF Documents or IETF Contributions published or made publicly available before November 10, 2008. The person(s) controlling the copyright in some of this material may not have granted the IETF Trust the right to allow modifications of such material outside the IETF Standards Process. Without obtaining an adequate license from the person(s) controlling the copyright in such materials, this document may not be modified outside the IETF Standards Process, and derivative works of it may not be created outside the IETF Standards Process, except to format it for publication as an RFC or to translate it into languages other than English.

#### Abstract

[RFC4761] and [[RFC4762](#)] describe a solution for Virtual Private LAN Service (VPLS) multicast that relies on the use of point-to-point or multipoint-to-point unicast Label Switched Paths (LSPs) for carrying multicast traffic. This solution has certain limitations for certain VPLS multicast traffic profiles. For example, it may result in highly non-optimal bandwidth utilization when large amount of multicast traffic is to be transported.

This document describes a solution for overcoming a subset of the limitations of existing VPLS multicast solution. It describes procedures for VPLS multicast that utilize multicast trees in the service provider (SP) network. The solution described in this document allows sharing of one such multicast tree among multiple VPLS instances. Furthermore, the solution described in this document allows a single multicast tree in the SP network to carry traffic belonging only to a specified set of one or more IP multicast streams from one or more VPLS instances.

## Table of Contents

<a href="#">1</a>	Specification of requirements .....	<a href="#">4</a>
<a href="#">2</a>	Contributors .....	<a href="#">4</a>
<a href="#">3</a>	Terminology .....	<a href="#">5</a>
<a href="#">4</a>	Introduction .....	<a href="#">5</a>
<a href="#">5</a>	Overview .....	<a href="#">6</a>
<a href="#">5.1</a>	Inclusive and Selective Multicast Trees .....	<a href="#">7</a>
<a href="#">5.2</a>	BGP-Based VPLS Membership Auto-Discovery .....	<a href="#">8</a>
<a href="#">5.3</a>	IP Multicast Group Membership Discovery .....	<a href="#">8</a>
<a href="#">5.4</a>	Advertising P-Multicast Tree to VPLS/C-Multicast Binding ..	<a href="#">9</a>
<a href="#">5.5</a>	Aggregation .....	<a href="#">10</a>
<a href="#">5.6</a>	Inter-AS VPLS Multicast .....	<a href="#">11</a>
<a href="#">6</a>	Intra-AS Inclusive P-Multicast Tree Auto-discovery/Binding	<a href="#">12</a>
<a href="#">6.1</a>	Originating intra-AS VPLS A-D routes .....	<a href="#">13</a>
<a href="#">6.2</a>	Receiving intra-AS VPLS A-D routes .....	<a href="#">14</a>
<a href="#">7</a>	Demultiplexing P-Multicast Tree Traffic .....	<a href="#">15</a>
<a href="#">7.1</a>	One P-Multicast Tree - One VPLS Mapping .....	<a href="#">15</a>
<a href="#">7.2</a>	One P-Multicast Tree - Many VPLS Mapping .....	<a href="#">15</a>
<a href="#">8</a>	Establishing P-Multicast Trees .....	<a href="#">16</a>
<a href="#">8.1</a>	Common Procedures .....	<a href="#">16</a>
<a href="#">8.2</a>	RSVP-TE P2MP LSPs .....	<a href="#">17</a>
<a href="#">8.2.1</a>	P2MP TE LSP - VPLS Mapping .....	<a href="#">17</a>
<a href="#">8.3</a>	Receiver Initiated P2MP LSP .....	<a href="#">18</a>
<a href="#">8.3.1</a>	P2MP LSP - VPLS Mapping .....	<a href="#">18</a>
<a href="#">8.4</a>	Encapsulation of Aggregate P-Multicast Trees .....	<a href="#">18</a>
<a href="#">9</a>	Inter-AS Inclusive P-Multicast Tree A-D/Binding .....	<a href="#">19</a>
<a href="#">9.1</a>	VSI on the ASBRs .....	<a href="#">19</a>
<a href="#">9.1.1</a>	Option (a): VSIs on the ASBRs .....	<a href="#">19</a>
<a href="#">9.1.2</a>	Option (e): VSIs on the ASBRs .....	<a href="#">20</a>
<a href="#">9.2</a>	Option (b) - Segmented Inter-AS Trees .....	<a href="#">20</a>
<a href="#">9.2.1</a>	Segmented Inter-AS Trees VPLS Inter-AS A-D/Binding ....	<a href="#">21</a>
<a href="#">9.2.2</a>	Propagating BGP VPLS A-D routes to other ASes: Overview	<a href="#">21</a>
<a href="#">9.2.2.1</a>	Propagating Intra-AS VPLS A-D routes in EBGp .....	<a href="#">23</a>
<a href="#">9.2.2.2</a>	Inter-AS A-D route received via EBGp .....	<a href="#">23</a>
<a href="#">9.2.2.3</a>	Leaf A-D Route received via EBGp .....	<a href="#">25</a>
<a href="#">9.2.2.4</a>	Inter-AS A-D Route received via IBGP .....	<a href="#">26</a>
<a href="#">9.3</a>	Option (c): Non-Segmented Tunnels .....	<a href="#">27</a>
<a href="#">10</a>	<b>Optimizing Multicast Distribution via Selective Trees</b> .	<a href="#">27</a>
<a href="#">10.1</a>	Protocol for Switching to Selective Trees .....	<a href="#">29</a>
<a href="#">10.2</a>	Advertising (C-S, C-G) Binding to a Selective Tree ....	<a href="#">30</a>
<a href="#">10.3</a>	Receiving S-PMSI A-D routes by PEs .....	<a href="#">32</a>

<a href="#">10.4</a>	Inter-AS Selective Tree .....	<a href="#">35</a>
<a href="#">10.4.1</a>	VSI on the ASBRs .....	<a href="#">35</a>
<a href="#">10.4.1.1</a>	VPLS Inter-AS Selective Tree A-D Binding .....	<a href="#">35</a>
<a href="#">10.4.2</a>	Inter-AS Segmented Selective Trees .....	<a href="#">36</a>
<a href="#">10.4.2.1</a>	Handling S-PMSI A-D routes by ASBRs .....	<a href="#">36</a>
<a href="#">10.4.2.1.1</a>	Merging Selective Tree into an Inclusive Tree .....	<a href="#">37</a>
<a href="#">10.4.3</a>	Inter-AS Non-Segmented Selective trees .....	<a href="#">38</a>
<a href="#">11</a>	BGP Extensions .....	<a href="#">39</a>
<a href="#">11.1</a>	Inclusive Tree/Selective Tree Identifier .....	<a href="#">39</a>
<a href="#">11.2</a>	MCAST-VPLS NLRI .....	<a href="#">39</a>
<a href="#">11.2.1</a>	S-PMSI A-D route .....	<a href="#">40</a>
<a href="#">11.2.2</a>	Leaf A-D route .....	<a href="#">41</a>
<a href="#">12</a>	Aggregation Considerations .....	<a href="#">42</a>
<a href="#">13</a>	Data Forwarding .....	<a href="#">43</a>
<a href="#">13.1</a>	MPLS Tree Encapsulation .....	<a href="#">43</a>
<a href="#">13.1.1</a>	Mapping multiple VPLS instances to a P2MP LSP .....	<a href="#">43</a>
<a href="#">13.1.2</a>	Mapping one VPLS instance to a P2MP LSP .....	<a href="#">44</a>
<a href="#">14</a>	VPLS Data Packet Treatment .....	<a href="#">45</a>
<a href="#">15</a>	Security Considerations .....	<a href="#">46</a>
<a href="#">16</a>	IANA Considerations .....	<a href="#">47</a>
<a href="#">17</a>	Acknowledgments .....	<a href="#">47</a>
<a href="#">18</a>	Normative References .....	<a href="#">48</a>
<a href="#">19</a>	Informative References .....	<a href="#">48</a>
<a href="#">20</a>	Author's Address .....	<a href="#">49</a>

## **1. Specification of requirements**

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

## **2. Contributors**

Yakov Rekhter  
Juniper Networks  
Chaitanya Kodeboniya

### **3. Terminology**

This document uses terminology described in [[RFC4761](#)] and [[RFC4762](#)].

In this document we refer to various auto-discovery routes, as "A-D routes".

This document uses the prefix 'C' to refer to the customer control or data packets and 'P' to refer to the provider control or data packets. An IP (multicast source, multicast group) tuple is abbreviated to (S, G).

### **4. Introduction**

[[RFC4761](#)] and [[RFC4762](#)] describe a solution for VPLS multicast/broadcast that relies on the use of pseudowires transported over unicast point-to-point (P2P) RSVP-TE or multipoint-to-point (MP2P) LDP Label Switched Paths (LSPs) ([[RFC3209](#)], [[RFC3036](#)]). In this document we refer to this solution as "ingress replication".

With ingress replication when an ingress PE of a given VPLS instance receives a multicast/broadcast packet from one of the CEs that belong to that instance, the ingress PE replicates the packet for each egress PE that belong to that instance, and sends the packet to each such egress PE using unicast tunnels.

The solution based on ingress replication has certain limitations for certain VPLS multicast/broadcast traffic profiles. For example, it may result in highly non-optimal bandwidth utilization in the MPLS network when large amount of multicast/broadcast traffic is to be transported (for more see [[RFC5501](#)]).

Ingress replication may be an acceptable model when the bandwidth of the multicast/broadcast traffic is low and/or there is a small number of replications performed on each outgoing interface for a particular VPLS customer multicast stream. If this is not the case, it is desirable to utilize multicast trees in the SP network to transmit VPLS multicast and/or broadcast packets [[RFC5501](#)].

This document describes procedures for overcoming the limitations of existing VPLS multicast solutions. It describes procedures for using MPLS point-to-multipoint (P2MP) LSPs in the Service Provider (SP) network to transport VPLS multicast and/or broadcast packets, where these LSPs are signaled by either P2MP RSVP-PE [[RFC4875](#)] or mLDP [[RFC6388](#)].

The procedures described in this document are applicable to both

[RFC4761] and [[RFC4762](#)].

## **5. Overview**

Procedures described in this document provide mechanisms that allow a single multicast distribution tree in the Service Provider (SP) network to carry all the multicast traffic from one or more VPLS sites connected to a given PE, irrespective of whether these sites belong to the same or different VPLS instances. We refer to such a tree as an "Inclusive tree" if it carries multicast traffic from one VPLS instance on a given PE. We refer to such a tree as an "Aggregate Inclusive tree" if it carries multicast traffic from more than one VPLS instance on a given PE. See section "Inclusive and Selective Multicast Trees" for further discussion on Inclusive trees.

To further improve bandwidth utilization for IP multicast streams, this document also provides procedures by which a single multicast distribution tree in the SP network can be used to carry traffic belonging only to a specified set of IP multicast streams, originated in one or more VPLS sites connected to a given PE, irrespective of whether these sites belong to the same or different VPLS instances. We refer to such a tree as a "Selective tree" if it carries the IP multicast stream(s) that belong to the same VPLS instance on a given PE. We refer to such a tree as as an "Aggregate Selective tree" if it carries the IP multicast streams that belong to different VPLS instances on a given PE. Use of Selective and/or Aggregate Selective trees allows multicast traffic, by default, to be carried on an Inclusive tree, while traffic from some specific IP multicast streams, e.g., high bandwidth streams, could be carried on one of the Selective trees. See section "Inclusive and Selective Multicast Trees" for further discussion on Selective trees.

Note that this document covers the use of Selective trees only for carrying IP multicast streams. Any other use of such trees is outside the scope of this document.

Unicast packets destined to unknown MAC addresses (i.e., not learned yet at the ingress PE) in a given VPLS instance are flooded to remote PEs participating in the same VPLS instance. This flooding MAY still use ingress replication (as specified in [[RFC4761](#)], [[RFC4762](#)]), or MAY use the procedures defined in this document to optimize flooding across the SP core.

While the use of multicast trees in the SP network can be beneficial when the bandwidth of the multicast traffic is high, or when it is desirable to optimize the number of copies of a multicast packet transmitted on a given link, this benefit comes at a cost of state in

the SP network to build multicast trees and overhead to maintain this state.

### **5.1. Inclusive and Selective Multicast Trees**

Multicast trees used for VPLS can be of two types:

- + Inclusive trees. This option supports the use of a single multicast distribution tree, referred to as an Inclusive P-Multicast tree, in the SP network to carry all the multicast traffic from a specified set of VPLS sites connected to a given PE. There is no assumption made with respect to whether this traffic is IP encapsulated or not. A particular P-Multicast tree can be set up to carry the traffic originated by sites belonging to a single VPLS instance, or to carry the traffic originated by sites belonging to different VPLS instances. The ability to carry the traffic of more than one VPLS instance on the same tree is termed Aggregation. The tree needs to include every PE that is a member of any of the VPLS instances that are using the tree. This implies that a PE may receive multicast traffic for a multicast stream even if it doesn't have any receivers that are interested in receiving traffic for that stream.

An Inclusive P-Multicast tree as defined in this document is a P2MP tree. Thus, a P2MP tree is used to carry traffic only from VPLS sites that are connected to the PE that is the root of the tree.

- + Selective trees. A Selective P-Multicast tree is used by a PE to send IP multicast traffic for one or more specific IP multicast streams, received by the PE over PE-CE interfaces that belong to the same or different VPLS instances, to a subset of the PEs that belong to those VPLS instances. Each of the PEs in the subset should be on the path to a receiver of one or more multicast streams that are mapped onto the tree. The ability to use the same tree for multicast streams that belong to different VPLS instances is termed Aggregation. The reason for having Selective P-Multicast trees is to provide a PE the ability to create separate SP multicast trees for specific multicast streams, e.g. high bandwidth multicast streams. This allows traffic for these multicast streams to reach only those PE routers that have receivers for these streams. This avoids flooding other PE routers in the VPLS instance.

A SP can use both Inclusive P-Multicast trees and Selective P-Multicast trees or either of them for a given VPLS on a PE, based on local configuration. Inclusive P-Multicast trees can be used for both IP and non-IP data multicast traffic, while Selective P-Multicast trees, as previously state, must be used only for IP multicast data traffic. The use of Selective P-Multicast trees for non-IP multicast traffic is outside the scope of this document.

P-Multicast trees in the SP network can be realized via a variety of technologies. For both inclusive and selective P-Multicast trees, these technologies include P2MP LSPs created by RSVP-TE or mLDP. This document also describes the data plane encapsulations for supporting these technologies. Other technologies for realizing P-Multicast trees are outside the scope of this document.

### **5.2. BGP-Based VPLS Membership Auto-Discovery**

In order to establish Inclusive P-Multicast trees for one or more VPLS instances, when aggregation is performed (with either mLDP or P2MP RSVP-TE as the tunneling technology), or when the tunneling technology is P2MP RSVP-TE, the PE acting as a root of a P2MP LSP must be able to discover the other PEs that have membership these VPLS instances. Once the root PE discovers these other PEs, it includes them as leaves in the P-multicast tree (i.e., P2MP LSP) This document uses the BGP-based procedures described in [[RFC4761](#)] and [[RFC6074](#)] for discovering the VPLS membership of all PEs. For more on aggregation see section "Aggregation Considerations". When no aggregation is performed and the tunneling technology is mLDP, then the root of the P2MP LSP need not discover the other PEs that are the leaves of that LSP.

The leaves of the Inclusive P-Multicast tree must also be able to auto-discover the identifier of the tree (note that this applies when the tree is established by either mLDP or P2MP RSVP-TE). Procedures to accomplish this are described in section "Advertising P-Multicast Tree to VPLS/C-Multicast Binding".

### **5.3. IP Multicast Group Membership Discovery**

The setup of a Selective P-Multicast tree for one or more IP multicast (C-S, C-G)s, requires the ingress PE to learn the PEs that have receivers in one or more of these (C-S, C-G)s, in the following cases:



- + When aggregation is used (with either mLDP or P2MP RSVP-TE as the tunneling technology), OR
- + When the tunneling technology is P2MP RSVP-TE
- + If ingress replication is used and the ingress PE wants to send traffic for (C-S, C-G)s to only those PEs that are on the path to receivers for the (C-S,C-G)s.

For more on aggregation see section "Aggregation Considerations".

For discovering the IP multicast group membership, this document describes procedures that allow an ingress PE to enable explicit tracking of IP multicast membership. Thus, an ingress PE can request the IP multicast membership from egress PEs for one or more C-multicast streams. These procedures are described in section "Optimizing Multicast Distribution via Selective Trees".

These procedures are applicable when IGMP is used as the multicast signaling protocol between the VPLS CEs. They are also applicable when PIM as specified in [\[RFC4601\]](#) is used as the multicast routing protocol between the VPLS CEs and PIM join suppression is disabled on all the CEs. However these procedures do not apply when PIM is used as the multicast routing protocol between the VPLS CEs and PIM join suppression is not disabled on all the CEs. This is because when PIM join suppression is not disabled on all the CEs, PEs connected to these CEs can not rely on PIM to determine IP multicast membership of the receivers behind these CEs. Procedures for this case are outside the scope of this document.

The leaves of the Selective P-Multicast trees must also be able to discover the identifier of these trees. Procedures to accomplish this are described in section "Advertising P-Multicast Tree to VPLS/C-Multicast Binding".

#### **5.4. Advertising P-Multicast Tree to VPLS/C-Multicast Binding**

This document describes procedures based on BGP VPLS Auto-Discovery (A-D) routes ([\[RFC4761\]](#),[\[RFC6074\]](#)) that are used by the root of an Aggregate P-Multicast tree to advertise the Inclusive or Selective P-Multicast tree binding and the de-multiplexing information to the leaves of the tree. This document uses the Provider Multicast Service Interface (PMSI) Tunnel attribute defined [\[RFC6514\]](#) for this purpose.

Once an ingress PE decides to bind a set of VPLS instances or

customer multicast groups to an Inclusive P-Multicast tree or a Selective P-Multicast tree, the PE needs to announce this binding to other PEs in the network. This procedure is referred to as Inclusive P-Multicast tree or Selective P-Multicast tree binding distribution and is performed using BGP. The decision to bind a set of VPLS instances or customer multicast group is local to the ingress PE matter, and is controlled via provisioning/configuration on that PE.

When an Aggregated Inclusive P-Multicast tree is used by an ingress PE, this binding distribution implies that (a) an ingress PE MUST announce the binding of all VPLS instances bound to the Inclusive P-Multicast tree, and (b) other PEs that have these instances receive these announcements. The inner label assigned by the ingress PE for each VPLS MUST be included, if more than one VPLS is bound to the same P-Multicast tree. The Inclusive P-Multicast tree Identifier MUST be included.

For a Selective P-Multicast tree this binding distribution implies announcing all the specific <C-S, C-G> entries bound to this P-Multicast tree along with the Selective P-Multicast tree Identifier. The inner label assigned for each <C-S, C-G> MUST be included if <C-S, C-G>s from different VPLS instances are bound to the same P-Multicast tree. The labels MUST be distinct on a per VPLS basis and MAY be distinct on a per <C-S, C-G> basis. The Selective P-Multicast tree Identifier MUST be included.

### **5.5. Aggregation**

As described earlier in this document, the ability to carry the traffic of more than one VPLS on the same P-Multicast tree is termed aggregation.

Aggregation enables the SP to place a bound on the amount of multicast tree forwarding and control plane state which the P routers must have. Let us call the number of VPLS instances aggregated onto a single P-Multicast tree as the "Aggregation Factor". When Inclusive source P-Multicast trees are used the number of trees that a PE is the root of is proportional to:

+ (Number of VPLS instances on the PE / Aggregation Factor).

In this case the state maintained by a P router, is proportional to:

+ ((Average number of VPLS instances on a PE / Aggregation Factor)  
\* number of PEs) / (Average number of P-Multicast trees that  
transit a given P router)

Thus, the state does not grow linearly with the number of VPLS instances.

Aggregation requires a mechanism for the egresses of the P-Multicast tree to demultiplex the multicast traffic received over the P-Multicast tree. To enable the egress nodes to perform this demultiplexing, upstream-assigned labels [[RFC5331](#)] MUST be assigned and distributed by the root of the aggregate P-multicast tree.

## **5.6. Inter-AS VPLS Multicast**

This document defines four models of inter-AS VPLS service, referred here as option (a), (b), (c), and (e). Options (a), (b), and (c) defined in this document are very similar to the three methods, method (a), method (b), and method (c), described in section "Multi-AS VPLS" [[RFC4761](#)], which in turn extends the concepts of [[RFC4364](#)] to inter-AS VPLS.

For option (a) and option (b) support, this document specifies a model where Inter-AS VPLS service can be offered without requiring a single P-Multicast tree to span multiple ASes. There are two variants of this model and they are described in section "Inter-AS Inclusive P-Multicast Tree A-D/Binding".

For option (c) support this document specifies a model where Inter-AS VPLS service is offered by requiring a single P-Multicast tree to span multiple ASes. This is because in the case of option (c) the ASBRs do not exchange BGP-VPLS NLRI's or A-D routes.

In addition to options (a), (b), and (c), this document also specifies option (e), which one may think of as a variant of option (a).

For more on these inter-AS options see section "Inter-AS Inclusive P-Multicast Tree A-D/Binding".

## **6. Intra-AS Inclusive P-Multicast Tree Auto-discovery/Binding**

This section specifies procedures for the intra-AS auto-discovery of VPLS membership and the distribution of information used to instantiate P-Multicast Tunnels.

VPLS auto-discovery/binding consists of two components: intra-AS and inter-AS. The former provides VPLS auto-discovery/binding within a single AS. The latter provides VPLS auto-discovery/binding across multiple ASes. Inter-AS auto-discovery/binding is described in section "Inter-AS Inclusive P-Multicast Tree A-D/Binding".

VPLS auto-discovery using BGP as described in [RFC4761, [RFC6074](#)] enables a PE to learn the VPLS instance membership of other PEs. A PE that belongs to a particular VPLS instance announces a BGP Network Layer Reachability Information (NLRI) that identifies the Virtual Switch Instance (VSI). This NLRI is constructed from the <Route-Distinguisher (RD), VPLS Edge Device Identifier (VE-ID)> tuple. The NLRI defined in [[RFC4761](#)] comprises the <RD, VE-ID> tuple and label blocks for pseudo-wire (PW) signaling. The VE-ID in this case is a two octet number. The NLRI defined in [[RFC6074](#)] comprises only the <RD, VE-ID> where the VE-ID is a four octet number.

The procedures for constructing Inclusive intra-AS and inter-AS trees as specified in this document require the BGP A-D NLRI to carry only the <RD, VE-ID>. Hence these procedures can be used for both BGP-VPLS and LDP-VPLS with BGP A-D.

It is to be noted that BGP A-D is an inherent feature of BGP-VPLS. However it is not an inherent feature of LDP-VPLS. In fact there are deployments and/or implementations of LDP-VPLS that require configuration to enable a PE in a particular VPLS to determine other PEs in the VPLS and exchange PW labels using FEC 128 [[RFC4447](#)]. The use of BGP A-D for LDP-VPLS [[RFC6074](#)], to enable automatic setup of PWs, requires FEC 129 [[RFC4447](#)]. However FEC 129 is not required in order to use procedures in this document for LDP-VPLS. An LDP-VPLS implementation that supports this document MUST support the BGP A-D procedures to setup P-Multicast trees, as described here, and it MAY support FEC 129 to automate the signaling of PWs.

### **6.1. Originating intra-AS VPLS A-D routes**

To participate in the VPLS auto-discovery/binding a PE router that has a given VSI of a given VPLS instance originates a BGP VPLS intra-AS A-D route and advertises this route in Multi-Protocol (MP) IBGP. The route is constructed as described in [[RFC4761](#)] and [[RFC6074](#)].

The route carries a single L2VPN NLRI with the RD set to the RD of the VSI, and the VE-ID set to the VE-ID of the VSI. The route also carries one or more Route Targets (RTs) as specified in [[RFC4761](#)] and [[RFC6074](#)].

If an Inclusive P-Multicast tree is used to instantiate the provider tunnel for VPLS multicast on the PE, the advertising PE MUST advertise the type and the identity of the P-Multicast tree in the PMSI Tunnel attribute. This attribute is described in section "Inclusive Tree/Selective Tree Identifier".

A PE that uses an Inclusive P-Multicast tree to instantiate the provider tunnel MAY aggregate two or more VPLS instances present on the PE onto the same tree. If the PE decides to perform aggregation after it has already advertised the intra-AS VPLS A-D routes for these VPLS instances, then aggregation requires the PE to re-advertise these routes. The re-advertised routes MUST be the same as the original ones, except for the PMSI Tunnel attribute (the re-advertised route will replace of the previously advertised route). If the PE has not previously advertised intra-AS A-D routes for these VPLS instances, then the aggregation requires the PE to advertise (new) intra-AS A-D routes for these VPLS instances. The PMSI attribute in the newly advertised/re-advertised routes MUST carry the identity of the P-Multicast tree that aggregates the VPLS instances, as well as an MPLS upstream-assigned label [[RFC5331](#)]. Each re-advertised or newly advertised route MUST have a label that is distinct within the scope of the PE that advertises the route.

Discovery of PE capabilities in terms of what tunnels types they support is outside the scope of this document. Within a given AS PEs participating in a VPLS are expected to advertise tunnel bindings whose tunnel types are supported by all other PEs that are participating in this VPLS and are part of the same AS.

## **6.2. Receiving intra-AS VPLS A-D routes**

When a PE receives a BGP Update message that carries an intra-AS A-D route such that (a) the route was originated by some other PE within the same AS as the local PE, (b) at least one of the Route Targets of the route matches one of the import Route Targets configured for a particular VSI on the local PE, (c) the BGP route selection determines that this is the best route with respect to the NLRI carried by the route, and (d) the route carries the PMSI Tunnel attribute, the PE performs the following:

- + If the Tunnel Type in the PMSI Tunnel attribute is set to LDP P2MP LSP, the PE SHOULD join the P-Multicast tree whose identity is carried in the PMSI Tunnel attribute.
- + If the Tunnel Type in the PMSI Tunnel attribute is set to RSVP-TE P2MP LSP, the receiving PE has to establish the appropriate state to properly handle the traffic received over that LSP. The PE that originated the route MUST establish an RSVP-TE P2MP LSP with the local PE as a leaf. This LSP MAY have been established before the local PE receives the route.
- + If the PMSI Tunnel attribute does not carry a label, then all packets that are received on the P-Multicast tree, as identified by the PMSI Tunnel attribute, are forwarded using the VSIs that have at least one of its import Route Targets that matches one of the Route Targets of the received A-D route.
- + If the PMSI Tunnel attribute has the Tunnel Type set to LDP P2MP LSP or RSVP-TE P2MP LSP, and the attribute also carries an MPLS label, then the egress PE MUST treat this as an upstream-assigned label, and all packets that are received on the P-Multicast tree, as identified by the PMSI Tunnel attribute, with that upstream label are forwarded using the VSIs that have at least one of its import Route Target that matches one of the Route Targets of the received intra-AS A-D route.

Furthermore, if the local PE uses RSVP-TE P2MP LSP for sending (multicast) traffic, originated by VPLS sites connected to the PE, to the sites attached to other PEs then the local PE MUST use the Originating Router's IP address information carried in the intra-AS A-D route to add the PE, that originated the route, as a leaf node to the LSP. This MUST be done irrespective of whether the received Intra-AS A-D route carries the PMSI Tunnel attribute or not.

## **7. Demultiplexing P-Multicast Tree Traffic**

Demultiplexing received VPLS traffic requires the receiving PE to determine the VPLS instance the packet belongs to. The egress PE can then perform a VPLS lookup to further forward the packet. It also requires the egress PE to determine the identity of the ingress PE for MAC learning, as described in section "VPLS Data Packet Treatment".

### **7.1. One P-Multicast Tree - One VPLS Mapping**

When a P-Multicast tree is mapped to only one VPLS, determining the tree on which the packet is received is sufficient to determine the VPLS instance on which the packet is received. The tree is determined based on the tree encapsulation. If MPLS encapsulation is used, e.g.,: RSVP-TE P2MP LSPs, the outer MPLS label is used to determine the tree. Penultimate-hop-popping **MUST** be disabled on the MPLS LSP (RSVP-TE P2MP LSP or mLDP P2MP LSP).

### **7.2. One P-Multicast Tree - Many VPLS Mapping**

As traffic belonging to multiple VPLS instances can be carried over the same tree, there is a need to identify the VPLS the packet belongs to. This is done by using an inner label that determines the VPLS for which the packet is intended. The ingress PE uses this label as the inner label while encapsulating a customer multicast data packet. Each of the egress PEs must be able to associate this inner label with the same VPLS and use it to demultiplex the traffic received over the Aggregate Inclusive tree or the Aggregate Selective tree.

If traffic from multiple VPLS instances is carried on a single tree, upstream-assigned labels [[RFC5331](#)] **MUST** be used. Hence the inner label is assigned by the ingress PE. When the egress PE receives a packet over an Aggregate tree, the outer encapsulation (in the case of MPLS P2MP LSPs, the outer MPLS label) specifies the label space to perform the inner label lookup. The same label space **MUST** be used by the egress PE for all P-Multicast trees that have the same root [[RFC5331](#)].

If the tree uses MPLS encapsulation, as in RSVP-TE P2MP LSPs, the outer MPLS label and optionally the incoming interface provides the label space of the label beneath it. This assumes that penultimate-hop-popping is disabled. The egress PE **MUST NOT** advertise IMPLICIT NULL or EXPLICIT NULL for that tree once it is known to the egress PE that the tree is bound to one or more VPLS instances. Once the label

representing the tree is popped off the MPLS label stack, the next label is the demultiplexing information that allows the proper VPLS instance to be determined.

The ingress PE informs the egress PEs about the inner label as part of the tree binding procedures described in section "BGP Extensions".

## **8. Establishing P-Multicast Trees**

This document supports only P2MP P-Multicast trees wherein it is possible for egress PEs to identify the ingress PE to perform MAC learning. Specific procedures are specified only for RSVP-TE P2MP LSPs and mLDP P2MP LSPs. An implementation that supports this document MUST support RSVP-TE P2MP LSPs and mLDP P2MP LSPs.

### **8.1. Common Procedures**

The following procedures apply to both RSVP-TE P2MP and mLDP P2MP LSPs.

Demultiplexing the C-multicast data packets at the egress PE requires that the PE must be able to determine the P2MP LSP that the packets are received on. This enables the egress PE to determine the VPLS instances that the packet belongs to. To achieve this the LSP MUST be signaled with penultimate-hop-popping (PHP) off and a non special purpose MPLS label off as described in section "Demultiplexing P-Multicast Tree Traffic". In other words an egress PE MUST NOT advertise IMPLICIT NULL or EXPLICIT NULL for a P2MP LSP that is carrying traffic for one or more VPLS instances. This is because the egress PE needs to rely on the MPLS label, that it advertises to its upstream neighbor, to determine the P2MP LSP that a C-multicast data packet is received on.

The egress PE also needs to identify the ingress PE to perform MAC learning. When P2MP LSPs are used as P2MP trees, determining the P2MP LSP that the packets are received on, is sufficient to determine the ingress PE. This is because the ingress PE is the root of the P2MP LSP.

The egress PE relies on receiving the PMSI Tunnel attribute in BGP to determine the VPLS instance to P2MP LSP mapping.



## **8.2. RSVP-TE P2MP LSPs**

This section describes procedures that are specific to the usage of RSVP-TE P2MP LSPs for instantiating a P-Multicast tree. Procedures in [[RFC4875](#)] are used to signal the P2MP LSP. The LSP is signaled as the root of the P2MP LSP discovers the leaves. The egress PEs are discovered using the procedures described in section "Intra-AS Inclusive P-Multicast Tree Auto-discovery/Binding". Aggregation as described in this document is supported.

### **8.2.1. P2MP TE LSP - VPLS Mapping**

P2MP TE LSP to VPLS mapping is learned at the egress PEs using BGP based advertisements of the P2MP TE LSP - VPLS mapping. They require that the root of the tree include the P2MP TE LSP identifier as the tunnel identifier in the BGP advertisements. This identifier contains the following information elements:

- The type of the tunnel is set to RSVP-TE P2MP LSP
- RSVP-TE P2MP LSP's SESSION Object

This Tunnel Identifier is described in section "Inclusive Tree/Selective Tree Identifier".

Once the egress PE receives the P2MP TE LSP to VPLS mapping:

- + If the egress PE already has RSVP-TE state for the P2MP TE LSP, it MUST begin to assign an MPLS label from the non special purpose label range, for the P2MP TE LSP and signal this to the previous hop of the P2MP TE LSP. Further it MUST create forwarding state to forward packets received on the P2MP LSP.
- + If the egress PE does not have RSVP-TE state for the P2MP TE LSP, it MUST retain this mapping. Subsequently when the egress PE receives the RSVP-TE P2MP signaling message, it creates the RSVP-TE P2MP LSP state. It MUST then assign an MPLS label from the non-reserved label range, for the P2MP TE LSP, and signal this to the previous hop of the P2MP TE LSP.

Note that if the signaling to set up an RSVP-TE P2MP LSP is completed before a given egress PE learns, via a PMSI Tunnel attribute, of the VPLS or set of VPLS instances to which the LSP is bound, the PE MUST discard any traffic received on that LSP until the binding is received. In order for the egress PE to be able to discard such traffic it needs to know that the LSP is associated with one or more VPLS instances and that the VPLS A-D route that binds the LSP to a VPLS has not yet been received.

This is provided by extending [[RFC4875](#)] with [[RFC6511](#)].

### **8.3. Receiver Initiated P2MP LSP**

Receiver initiated P2MP LSPs can also be used. The mLDP procedures ([\[RFC6388\]](#)) MUST be used to signal such LSPs. The LSP is signaled once the leaves receive the LDP FEC for the tree from the root, as described in section "Intra-AS Inclusive P-Multicast Tree Auto-discovery/Binding". When aggregation is used, an ingress PE is required to discover the egress PEs (see section "Aggregation Considerations" for the rationale), and this is achieved using the procedures in section "Intra-AS Inclusive P-Multicast Tree Auto-discovery/Binding".

#### **8.3.1. P2MP LSP - VPLS Mapping**

P2MP LSP to VPLS mapping is learned at the egress PEs using BGP based advertisements of the P2MP LSP - VPLS mapping. They require that the root of the tree include the P2MP LSP identifier as the tunnel identifier in the BGP advertisements. This identifier contains the following information elements:

- The type of the tunnel is set to LDP P2MP LSP
- LDP P2MP FEC which includes an identifier generated by the root.

Each egress PE SHOULD "join" the P2MP MPLS tree by sending LDP label mapping messages for the LDP P2MP FEC, that was learned in the BGP advertisement, using procedures described in [[RFC6388](#)].

### **8.4. Encapsulation of Aggregate P-Multicast Trees**

An Aggregate Inclusive P-Multicast tree or an Aggregate Selective P-Multicast tree MUST use MPLS encapsulation. The protocol type in the data link header is as described in [[RFC5332](#)].

## **9. Inter-AS Inclusive P-Multicast Tree A-D/Binding**

As stated earlier, this document defines four models of inter-AS VPLS service, referred here as option (a), (b), (c) and (e). This section contains procedures to support these models.

For supporting option (a), (b) and (e) this section specifies a model where inter-AS VPLS service can be offered without requiring a single P-Multicast tree to span multiple ASes. This allows individual ASes to potentially use different P-tunneling technologies. There are two variants of this model. One that requires MAC lookup on the ASBRs, and applies to option (a) and (e). The other is one that does not require MAC lookup on the ASBRs, and instead builds segmented inter-AS Inclusive or Selective trees. This applies only to option (b).

For supporting option (c) this section specifies a model where Inter-AS VPLS service is offered by requiring a single Inclusive P-Multicast tree to span multiple ASes. This is referred to as a non-segmented P-Multicast tree. This is because in the case of option (c) the ASBRs do not exchange BGP-VPLS NLRIs or VPLS A-D routes. Selective inter-AS trees for option (c) support may be segmented or non-segmented.

An implementation MUST support options (a), (b), and (c), and MAY support option(e). When there are multiple ways for implementing one of these options, this section specifies which one is mandatory.

### **9.1. VSIs on the ASBRs**

When VSIs are configured on ASBRs, the ASBRs MUST perform a MAC lookup, in addition to any MPLS lookups, to determine the forwarding decision on a VPLS packet. The P-Multicast trees are confined to an AS. An ASBR on receiving a VPLS packet from another ASBR is required to perform a MAC lookup to determine how to forward the packet. Thus an ASBR is required to keep a VSI for the VPLS instance and MUST be configured with its own VE ID for the VPLS instance. The BGP VPLS A-D routes generated by PEs in an AS MUST NOT be propagated outside the AS.

#### **9.1.1. Option (a): VSIs on the ASBRs**

When VSIs are configured on ASBRs and option (a) is used, then an ASBR in one AS treats an adjoining ASBR in another AS as a CE and determines the VSI for packets received from that ASBR based on the incoming Ethernet interface or VLAN ID. In option (a) the ASBRs do not exchange VPLS A-D routes.

An implementation MUST support option (a).

### **9.1.2. Option (e): VSIs on the ASBRs**

The VSIs on the ASBRs scheme can be used such that the interconnect between the ASBRs is a PW and MPLS encapsulation is used between the ASBRs. An ASBR in one AS determines the VSI for packets received from an adjoining ASBR in another AS based on the incoming MPLS PW label. This is referred to as option (e). The only VPLS A-D routes that are propagated outside the AS are the ones originated by ASBRs. This MPLS PW connects the VSIs on the ASBRs and MUST be signaled using the procedures defined in [[RFC4761](#)] or [[RFC4762](#)].

The P-Multicast trees for a VPLS are confined to each AS and the VPLS auto-discovery/binding MUST follow the intra-AS procedures described in section "Demultiplexing Multicast Tree Traffic".

An implementation MAY support option (e).

### **9.2. Option (b) - Segmented Inter-AS Trees**

In this model, an inter-AS P-Multicast tree, rooted at a particular PE for a particular VPLS instance, consists of a number of "segments", one per AS, which are stitched together at ASBRs. These are known as "segmented inter-AS trees". Each segment of a segmented inter-AS tree may use a different multicast transport technology. In this model, an ASBR is not required to keep a VSI for the VPLS instance, and is not required to perform a MAC lookup in order to forward the VPLS packet. This implies that an ASBR is not required to be configured with a VE ID for the VPLS.

An implementation MUST support option (b) using this model.

The construction of segmented Inter-AS trees requires the BGP-VPLS A-D NLRI described in [[RFC4761](#), [RFC6074](#)]. A BGP VPLS A-D route for a <RD, VE ID> tuple advertised outside the AS, to which the originating PE belongs, will be referred to as an inter-AS VPLS A-D route (though this route is originated by a PE as an intra-AS route, and is referred to as an inter-AS route outside the AS).

In addition to this, segmented inter-AS trees require support for the PMSI Tunnel attribute described in section "Inclusive Tree/Selective Tree Identifier". They also require additional procedures in BGP to signal leaf A-D routes between ASBRs as explained in subsequent sections.

### **9.2.1. Segmented Inter-AS Trees VPLS Inter-AS A-D/Binding**

This section specifies the procedures for inter-AS VPLS A-D/binding for segmented inter-AS trees.

An ASBR must be configured to support a particular VPLS as follows:

- + An ASBR MUST be configured with a set of (import) Route Targets (RTs) that specify the set of VPLS instances supported by the ASBR. These Route Targets control acceptance of BGP VPLS auto-discovery routes by the ASBR. Note that instead of being configured, the ASBR MAY obtain this set of (import) Route Targets (RTs) by using Route Target Constrain [[RFC4684](#)].
- + The ASBR MUST be configured with the tunnel types for the intra-AS segments of the VPLS instances supported by the ASBR, as well as (depending on the tunnel type) the information needed to create the PMSI Tunnel attribute for these tunnel types. Note that instead of being configured, the ASBR MAY derive the tunnel types from the intra-AS A-D routes received by the ASBR from the PEs in its own AS.

If an ASBR is configured to support a particular VPLS instance, the ASBR MUST participate in the intra-AS VPLS auto-discovery/binding procedures for that VPLS instance within the ASBR's own AS, as defined in this document.

Moreover, in addition to the above the ASBR performs procedures specified in section "Propagating BGP VPLS A-D routes to other ASes: Overview".

### **9.2.2. Propagating BGP VPLS A-D routes to other ASes: Overview**

A BGP VPLS A-D route for a given VPLS, originated by a PE within a given AS, is propagated via BGP to other ASes. The precise rules for distributing and processing the inter-AS A-D routes are given in subsequent sections.

Suppose that an ASBR A receives and installs a BGP VPLS A-D route for VPLS "X" and VE ID "V" that originated at a particular PE, PE1, that is in the same AS as A. The BGP next hop of that received route becomes A's "upstream neighbor" on a multicast distribution tree for (X, V) that is rooted at PE1. Likewise, when A re-advertises this route to ASBRs in A's neighboring ASes, from the perspective of these ASBRs A becomes their "upstream neighbor" on the multicast distribution tree for (X, V) that is rooted at PE1.

When the BGP VPLS A-D routes have been distributed to all the necessary ASes, they define a "reverse path" from any AS that supports VPLS X and VE ID V back to PE1. For instance, if AS2 supports VPLS X, then there will be a reverse path for VPLS X and VE ID V from AS2 to AS1. This path is a sequence of ASBRs, the first of which is in AS2, and the last of which is in AS1. Each ASBR in the sequence is the BGP next hop of the previous ASBR in the sequence.

This reverse path information can be used to construct a unidirectional multicast distribution tree for VPLS X and VE ID V, containing all the ASes that support X, and having PE1 at the root. We call such a tree an "inter-AS tree". Multicast data originating in VPLS sites for VPLS X connected to PE1 will travel downstream along the tree which is rooted at PE1.

The path along an inter-AS tree is a sequence of ASBRs. It is still necessary to specify how the multicast data gets from a given ASBR to the set of ASBRs which are immediately downstream of the given ASBR along the tree. This is done by creating "segments": ASBRs in adjacent ASes will be connected by inter-AS segments, ASBRs in the same AS will be connected by "intra-AS segments".

For a given inter-AS tree and a given AS there MUST be only one ASBR within that AS that accepts traffic flowing on that tree. Further for a given inter-AS tree and a given AS there MUST be only one ASBR in that AS that sends the traffic flowing on that tree to a particular adjacent AS. The precise rules for accomplishing this are given in subsequent sections.

An ASBR initiates creation of an intra-AS segment when the ASBR receives an inter-AS A-D route from an EBGP neighbor. Creation of the segment is completed as a result of distributing, via IBGP, this route within the ASBR's own AS.

For a given inter-AS tunnel each of its intra-AS segments could be constructed by its own independent mechanism. Moreover, by using upstream-assigned labels within a given AS multiple intra-AS segments of different inter-AS tunnels of either the same or different VPLS instances may share the same P-Multicast tree.

If the P-Multicast tree instantiating a particular segment of an inter-AS tunnel is created by a multicast control protocol that uses receiver-initiated joins (e.g, mLDP), and this P-Multicast tree does not aggregate multiple segments, then all the information needed to create that segment will be present in the inter-AS A-D routes received by the ASBR from the neighboring ASBR. But if the P-Multicast tree instantiating the segment is created by a protocol that does not use receiver-initiated joins (e.g., RSVP-TE, ingress

unicast replication), or if this P-Multicast tree aggregates multiple segments (irrespective of the multicast control protocol used to create the tree), then the ASBR needs to learn the leaves of the segment. These leaves are learned from A-D routes received from other PEs in the AS, for the same VPLS as the one that the segment belongs to.

The following sections specify procedures for propagation of inter-AS A-D routes across ASes in order to construct inter-AS segmented trees.

#### **9.2.2.1. Propagating Intra-AS VPLS A-D routes in EBGP**

For a given VPLS configured on an ASBR when the ASBR receives intra-AS A-D routes originated by PEs in its own AS, the ASBR MUST propagate each of these route in EBGP. This procedure MUST be performed for each of the VPLS instances configured on the ASBR. Each of these routes is constructed as follows:

- + The route carries a single BGP VPLS A-D NLRI with the RD and VE ID being the same as the NLRI in the received intra-AS A-D route.
- + The Next Hop field of the MP\_REACH\_NLRI attribute is set to a routable IP address of the ASBR.
- + The route carries the PMSI Tunnel attribute with the Tunnel Type set to Ingress Replication; the attribute carries no MPLS labels.
- + The route MUST carry the export Route Target used by the VPLS.

#### **9.2.2.2. Inter-AS A-D route received via EBGP**

When an ASBR receives from one of its EBGP neighbors a BGP Update message that carries an inter-AS A-D route, if (a) at least one of the Route Targets carried in the message matches one of the import Route Targets configured on the ASBR, and (b) the ASBR determines that the received route is the best route to the destination carried in the NLRI of the route, the ASBR re-advertises this inter-AS A-D route to other PEs and ASBRs within its own AS. The best route selection procedures MUST ensure that for the same destination, all ASBRs in an AS pick the same route as the best route. The best route selection procedures are specified in [[RFC4761](#)] and clarified in [[MULTI-HOMING](#)]. The best route procedures ensure that if multiple ASBRs, in an AS, receive the same inter-AS A-D route from their EBGP neighbors, only one of these ASBRs propagates this route in IBGP. This ASBR becomes the root of the intra-AS segment of the inter-AS

tree and ensures that this is the only ASBR that accepts traffic into this AS from the inter-AS tree.

When re-advertising an inter-AS A-D route the ASBR MUST set the Next Hop field of the MP\_REACH\_NLRI attribute to a routable IP address of the ASBR.

Depending on the type of a P-Multicast tunnel used to instantiate the intra-AS segment of the inter-AS tunnel, the PMSI Tunnel attribute of the re-advertised inter-AS A-D route is constructed as follows:

- + If the ASBR uses ingress replication to instantiate the intra-AS segment of the inter-AS tunnel, the re-advertised route MUST NOT carry the PMSI Tunnel attribute.
- + If the ASBR uses a P-Multicast tree to instantiate the intra-AS segment of the inter-AS tunnel, the PMSI Tunnel attribute MUST contain the identity of the tree that is used to instantiate the segment (note that the ASBR could create the identity of the tree prior to the actual instantiation of the segment). If in order to instantiate the segment the ASBR needs to know the leaves of the tree, then the ASBR obtains this information from the A-D routes received from other PEs/ASBRs in ASBR's own AS.
- + An ASBR that uses a P-Multicast tree to instantiate the intra-AS segment of the inter-AS tunnel MAY aggregate two or more VPLS instances present on the ASBR onto the same tree. If the ASBR already advertises inter-AS A-D routes for these VPLS instances, then aggregation requires the ASBR to re-advertise these routes. The re-advertised routes MUST be the same as the original ones, except for the PMSI Tunnel attribute. If the ASBR has not previously advertised inter-AS A-D routes for these VPLS instances, then the aggregation requires the ASBR to advertise (new) inter-AS A-D routes for these VPLS instances. The PMSI Tunnel attribute in the newly advertised/re-advertised routes MUST carry the identity of the P-Multicast tree that aggregates the VPLS instances, as well as an MPLS upstream-assigned label [[RFC5331](#)]. Each newly advertised or re-advertised route MUST have a label that is distinct within the scope of the ASBR.

In addition the ASBR MUST send to the EBGP neighbor, from whom it receives the inter-AS A-D route, a BGP Update message that carries a leaf A-D route. The exact encoding of this route is described in section "BGP Extensions". This route contains the following information elements:



- + The route carries a single NLRI with the Route Key field set to the <RD, VE ID> tuple of the BGP VPLS A-D NLRI of the inter-AS A-D route received from the EBGp neighbor. The NLRI also carries the IP address of the ASBR (this MUST be a routable IP address).
- + The leaf A-D route MUST include the PMSI Tunnel attribute with the Tunnel Type set to Ingress Replication, and the Tunnel Identifier set to a routable address of the advertising router. The PMSI Tunnel attribute MUST carry a downstream assigned MPLS label that is used to demultiplex the VPLS traffic received over a unicast tunnel by the advertising router.
- + The Next Hop field of the MP\_REACH\_NLRI attribute of the route SHOULD be set to the same IP address as the one carried in the Originating Router's IP Address field of the route.
- + To constrain the distribution scope of this route the route MUST carry the NO\_ADVERTISE BGP community ([[RFC1997](#)]).
- + The ASBR constructs an IP-based Route Target extended community by placing the IP address carried in the next hop of the received Inter-AS VPLS A-D route in the Global Administrator field of the community, with the Local Administrator field of this community set to 0, and sets the Extended Communities attribute of the leaf A-D route to that community. Note that this Route Target is the same as the ASBR Import RT of the EBGp neighbor from which the ASBR received the inter-AS VPLS A-D route.

#### **9.2.2.3. Leaf A-D Route received via EBGp**

When an ASBR receives via EBGp a leaf A-D route, the ASBR accepts the route only if (a) at least one of the Route Targets carried in the message matches one of the import Route Targets configured on the ASBR, and (b) the ASBR determines that the received route is the best route to the destination carried in the NLRI of the route.

If the ASBR accepts the leaf A-D route, the ASBR looks for an existing A-D route whose BGP-VPLS A-D NLRI has the same value as the <RD, VE-ID> field of the leaf A-D route just accepted. If such an A-D route is found, then the MPLS label carried in the PMSI Tunnel attribute of the leaf A-D route is used to stitch a one hop ASBR-ASBR LSP to the tail of the intra-AS tunnel segment associated with the found A-D route.

#### **9.2.2.4. Inter-AS A-D Route received via IBGP**

In the context of this section we use the term "PE/ASBR router" to denote either a PE or an ASBR router.

Note that a given inter-AS A-D route is advertised within a given AS by only one ASBR as described above.

When a PE/ASBR router receives from one of its IBGP neighbors a BGP Update message that carries an inter-AS A-D route, if (a) at least one of the Route Targets carried in the message matches one of the import Route Targets configured on the PE/ASBR, and (b) the PE/ASBR determines that the received route is the best route to the destination carried in the NLRI of the route, the PE/ASBR performs the following operations. The best route determination is based as described in [[RFC4761](#)] and clarified in [[MULTI-HOMING](#)].

If the router is an ASBR then the ASBR propagates the route to its EBGP neighbors. When propagating the route to the EBGP neighbors the ASBR MUST set the Next Hop field of the MP\_REACH\_NLRI attribute to a routable IP address of the ASBR.

If the received inter-AS A-D route carries the PMSI Tunnel attribute with the Tunnel Type set to LDP P2MP LSP, the PE/ASBR SHOULD join the P-Multicast tree whose identity is carried in the PMSI Tunnel attribute.

If the received inter-AS A-D route carries the PMSI Tunnel attribute with the Tunnel Identifier set to RSVP-TE P2MP LSP, then the ASBR that originated the route MUST establish an RSVP-TE P2MP LSP with the local PE/ASBR as a leaf. This LSP MAY have been established before the local PE/ASBR receives the route, or MAY be established after the local PE receives the route.

If the received inter-AS A-D route carries the PMSI Tunnel attribute with the Tunnel Type set to LDP P2MP LSP, or RSVP-TE P2MP LSP, but the attribute does not carry a label, then the P-Multicast tree, as identified by the PMSI Tunnel attribute, is an intra-AS LSP segment that is part of the inter-AS Tunnel for the <VPLS, VE ID> advertised by the inter-AS A-D route and rooted at the PE that originated the A-D route. If the PMSI Tunnel attribute carries a (upstream-assigned) label, then a combination of this tree and the label identifies the intra-AS segment. If the receiving router is an ASBR, this intra-AS segment may further be stitched to ASBR-ASBR inter-AS segment of the inter-AS tunnel. If the PE/ASBR has local receivers in the VPLS, packets received over the intra-AS segment must be forwarded to the local receivers using the local VSI.

### **9.3. Option (c): Non-Segmented Tunnels**

In this model, there is a multi-hop EBGP peering between the PEs (or BGP Route Reflector) in one AS and the PEs (or BGP Route Reflector) in another AS. The PEs exchange BGP-VPLS NLRI or BGP-VPLS A-D NLRI, along with PMSI Tunnel attribute, as in the intra-AS case described in section "Demultiplexing P-Multicast Tree Traffic".

The PEs in different ASes use a non-segmented inter-AS P2MP tunnel for VPLS multicast. A non-segmented inter-AS tunnel is a single tunnel which spans AS boundaries. The tunnel technology cannot change from one point in the tunnel to the next, so all ASes through which the tunnel passes must support that technology. In essence, AS boundaries are of no significance to a non-segmented inter-AS P2MP tunnel.

This model requires no VPLS A-D routes in the control plane or VPLS MAC address learning in the data plane on the ASBRs. The ASBRs only need to participate in the non-segmented P2MP tunnel setup in the control plane, and do MPLS label forwarding in the data plane.

When the tunneling technology is P2MP LSP signaled with mLDP, and one does not use [[RFC6512](#)], the setup of non-segmented inter-AS P2MP tunnels requires the P-routers in one AS to have IP reachability to the loopback addresses of the PE routers in another AS. That is, the reachability to the loopback addresses of PE routers in one AS MUST be present in the IGP in another AS.

The data forwarding in this model is the same as in the intra-AS case described in section "Demultiplexing P-Multicast Tree Traffic".

An implementation MUST support this model.

## **10. Optimizing Multicast Distribution via Selective Trees**

Whenever a particular multicast stream is being sent on an Inclusive P-Multicast tree, it is likely that the data of that stream is being sent to PEs that do not require it as the sites connected to these PEs may have no receivers for the stream. If a particular stream has a significant amount of traffic, it may be beneficial to move it to a Selective P-Multicast tree which has at its leaves only those PEs, connected to sites that have receivers for the multicast stream (or at least includes fewer PEs that are attached to sites with no receivers compared to an Inclusive tree).

A PE connected to the multicast source of a particular multicast stream may be performing explicit tracking - i.e., it may know the

PEs that have receivers in the multicast stream. Section "Receiving S-PMSI A-D routes by PEs" describes procedures that enable explicit tracking. If this is the case Selective P-Multicast trees can also be triggered on other criteria. For instance there could be a "pseudo wasted bandwidth" criteria: switching to a Selective tree would be done if the bandwidth multiplied by the number of "uninterested" PEs (PEs that are receiving the stream but have no receivers) is above a specified threshold. The motivation is that (a) the total bandwidth wasted by many sparsely subscribed low-bandwidth groups may be large, and (b) there's no point to moving a high-bandwidth group to a Selective tree if all the PEs have receivers for it.

Switching a (C-S, C-G) stream to a Selective P-Multicast tree may require the root of the tree to determine the egress PEs that need to receive the (C-S, C-G) traffic. This is true in the following cases:

- + If the tunnel is a P2MP tree, such as a RSVP-TE P2MP Tunnel, the PE needs to know the leaves of the tree before it can instantiate the Selective tree.
- + If a PE decides to send traffic for multicast streams, belonging to different VPLS instances, using one P-Multicast Selective tree, such a tree is termed an Aggregate tree with a selective mapping. The setting up of such an Aggregate tree requires the ingress PE to know all the other PEs that have receivers for multicast groups that are mapped onto the tree (see section "Aggregation Considerations" for the rationale).
- + If ingress replication is used and the ingress PE wants to send traffic for (C-S, C-G)s to only those PEs that are on the path to receivers to the (C-S,C-G)s.

For discovering the IP multicast group membership, for the above cases, this document describes procedures that allow an ingress PE to enable explicit tracking. Thus an ingress PE can request the IP multicast membership from egress PEs for one or more C-multicast streams. These procedures are described in section "Receiving S-PMSI A-D routes by PEs".

The root of the Selective P-Multicast tree MAY decide to do explicit tracking of the IP multicast stream only after it has determined to move the stream to a Selective tree, or it MAY have been doing explicit tracking all along. This document also describes explicit tracking for a wildcard source and/or group in section "Receiving S-PMSI A-D routes by PEs", which facilitates a Selective P-Multicast tree only mode in which IP multicast streams are always carried on a Selective P-Multicast tree. In the description on Selective P-

Multicast trees the notation C-S, is intended to represent either a specific source address or a wildcard. Similarly C-G is intended to represent either a specific group address or a wildcard.

The PE at the root of the tree MUST signal the leaves of the tree that the (C-S, C-G) stream is now bound to the Selective Tree. Note that the PE could create the identity of the P-Multicast tree prior to the actual instantiation of the tunnel.

If the Selective tree is instantiated by a RSVP-TE P2MP LSP the PE at the root of the tree MUST establish the P2MP RSVP-TE LSP to the leaves. This LSP MAY have been established before the leaves receive the Selective tree binding, or MAY be established after the leaves receive the binding. A leaf MUST NOT switch to the Selective tree until it receives the binding and the RSVP-TE P2MP LSP is setup to the leaf.

### **10.1. Protocol for Switching to Selective Trees**

Selective trees provide a PE the ability to create separate P-Multicast trees for certain <C-S, C-G> streams. The source PE, that originates the Selective tree, and the egress PEs, MUST use the Selective tree for the <C-S, C-G> streams that are mapped to it. This may require the source and egress PEs to switch to the Selective tree from an Inclusive tree if they were already using an Inclusive tree for the <C-S, C-G> streams mapped to the Selective tree.

Once a source PE decides to setup a Selective tree, it MUST announce the mapping of the <C-S, C-G> streams (which may be in different VPLS instances) that are mapped to the tree to the other PEs using BGP. After the egress PEs receive the announcement they setup their forwarding path to receive traffic on the Selective tree if they have one or more receivers interested in the <C-S, C-G> streams mapped to the tree. Setting up the forwarding path requires setting up the demultiplexing forwarding entries based on the top MPLS label (if there is no inner label) or the inner label (if present) as described in section "Establishing P-Multicast Trees".

When the P2MP LSP is established using mLDP, the egress PEs MAY perform this switch to the Selective tree once the announcement from the ingress PE is received, or MAY wait for a preconfigured timer to do so, after receiving the announcement.

When the P2MP LSP protocol is P2MP RSVP-TE, an egress PE MUST perform this switch to the Selective tree only after the announcement from the ingress PE is received and the RSVP-TE P2MP LSP has been setup to the egress PE. This switch MAY be done after waiting for a

preconfigured timer after these two steps have been accomplished.

A source PE MUST use the following approach to decide when to start transmitting data on the Selective tree, if it is currently using an Inclusive tree. After announcing the <C-S, C-G> stream mapping to a Selective tree, the source PE MUST wait for a "switch-over" delay before sending <C-S, C-G> stream on the Selective tree. It is RECOMMENDED to allow this delay to be configurable. Once the "switch-over" delay has elapsed, the source PE MUST send <C-S, C-G> stream on the Selective tree. In no case is any <C-S, C-G> packet sent on both Selective and Inclusive trees.

When a <C-S, C-G> stream is switched from an Inclusive to a Selective tree, the purpose of running a switch-over timer is to minimize packet loss without introducing packet duplication. However, jitter may be introduced due to the difference in transit delays between the Inclusive and Selective trees.

For best effect, the switch-over timer should be configured to a value that is "just long enough" (a) to allow all the PEs to learn about the new binding of <C-S, C-G> to a Selective tree, and (b) to allow the PEs to construct the P-tunnel associated with the Selective tree, if it doesn't already exist.

## **10.2. Advertising (C-S, C-G) Binding to a Selective Tree**

The ingress PE informs all the PEs that are on the path to receivers of the (C-S, C-G) of the binding of the Selective tree to the (C-S, C-G), using BGP. The BGP announcement is done by sending update for the MCAST-VPLS address family using what we referred to as an "S-PMSI A-D route". The format of the NLRI of this route is described in section "Inclusive Tree/Selective Tree Identifier". The NLRI MUST be constructed as follows:

- + The Route Distinguisher (RD) MUST be set to the RD configured locally for the VPLS. This is required to uniquely identify the <C-S, C-G> as the addresses could overlap between different VPLS instances. This MUST be the same RD value used in the VPLS auto-discovery process.
- + The Multicast Source field MUST contain the source address associated with the C-multicast stream, and the Multicast Source Length field is set appropriately to reflect this. If the source address is a wildcard the source address is set to 0.

- + The Multicast Group field MUST contain the group address associated with the C-multicast stream, and the Multicast Group Length field is set appropriately to reflect this. If the group address is a wildcard the group address is set to 0.
- + The Originating Router's IP Address field MUST be set to the IP address that the (local) PE places in the BGP next-hop of the BGP-VPLS A-D routes. Note that the <RD, Originating Router's IP address> tuple uniquely identifies a given VPLS instance on a PE.

The PE constructs the rest of the Selective A-D route as follows.

Depending on the type of a P-Multicast tree used for the P-tunnel, the PMSI tunnel attribute of the S-PMSI A-D route is constructed as follows:

- + The PMSI tunnel attribute MUST contain the identity of the P-Multicast tree (note that the PE could create the identity of the tree prior to the actual instantiation of the tree).
- + If in order to establish the P-Multicast tree the PE needs to know the leaves of the tree within its own AS, then the PE obtains this information from the leaf A-D routes received from other PEs/ASBRs within its own AS (as other PEs/ASBRs originate leaf A-D routes in response to receiving the S-PMSI A-D route) by setting the Leaf Information Required flag in the PMSI Tunnel attribute to 1. This enables explicit tracking for the multicast stream(s) advertised by the S-PMSI A-D route.
- + If a PE originates S-PMSI A-D routes with the Leaf Information Required flag in the PMSI Tunnel attribute set to 1, then the PE MUST be (auto)configured with an import Route Target, which controls acceptance of leaf A-D routes by the PE. (Procedures for originating leaf A-D routes by the PEs that receive the S-PMSI A-D route are described in section "Receiving S-PMSI A-D routes by PEs.")

This Route Target is IP address specific. The Global Administrator field of this Route Target MUST be set to the IP address carried in the Next Hop of all the S-PMSI A-D routes advertised by this PE (if the PE uses different Next Hops, then the PE MUST be (auto)configured with multiple import RTs, one per each such Next Hop). The Local Administrator field of this Route Target MUST be set to 0.

If the PE supports Route Target Constrain [[RFC4684](#)], the PE SHOULD advertise this import Route Target within its own AS using

Route Target Constrains. To constrain distribution of the Route Target Constrain routes to the AS of the advertising PE these routes SHOULD carry the NO\_EXPORT Community ([\[RFC1997\]](#)).

- + A PE MAY aggregate two or more S-PMSIs originated by the PE onto the same P-Multicast tree. If the PE already advertises S-PMSI A-D routes for these S-PMSIs, then aggregation requires the PE to re-advertise these routes. The re-advertised routes MUST be the same as the original ones, except for the PMSI tunnel attribute. If the PE has not previously advertised S-PMSI A-D routes for these S-PMSIs, then the aggregation requires the PE to advertise (new) S-PMSI A-D routes for these S-PMSIs. The PMSI Tunnel attribute in the newly advertised/re-advertised routes MUST carry the identity of the P-Multicast tree that aggregates the S-PMSIs. If at least some of the S-PMSIs aggregated onto the same P-Multicast tree belong to different VPLS instances, then all these routes MUST carry an MPLS upstream assigned label [\[RFC5331\]](#). If all these aggregated S-PMSIs belong to the same VPLS, then the routes MAY carry an MPLS upstream assigned label [\[RFC5331\]](#). The labels MUST be distinct on a per VPLS instance basis, and MAY be distinct on a per route basis.

The Next Hop field of the MP\_REACH\_NLRI attribute of the route SHOULD be set to the same IP address as the one carried in the Originating Router's IP Address field.

By default the set of Route Targets carried by the route MUST be the same as the Route Targets carried in the BGP-VPLS A-D route originated from the VSI. The default could be modified via configuration.

### **10.3. Receiving S-PMSI A-D routes by PEs**

Consider a PE that receives an S-PMSI A-D route. If one or more of the VSIs on the PE have their import Route Targets that contain one or more of the Route Targets carried by the received S-PMSI A-D route, then for each such VSI the PE performs the following.

Procedures for receiving an S-PMSI A-D route by a PE (both within and outside of the AS of the PE that originates the route) are the same as specified in section "Inter-AS A-D route received via IBGP" except that (a) instead of Inter-AS A-D routes the procedures apply to S-PMSI A-D routes, and (b) the rules for determining whether the received S-PMSI A-D route is the best route to the destination carried in the NLRI of the route, are the same as BGP path selection



rules and may be modified by policy, and (c) a PE performs procedures specified in that section only if in addition to the criteria specified in that section the following is true:

- + If as a result of multicast state snooping on the PE-CE interfaces, the PE has snooped state for at least one multicast join that matches the multicast source and group advertised in the S-PMSI A-D route. Further if the oifs (outgoing interfaces) for this state contains one or more interfaces to the locally attached CEs. When the multicast signaling protocol among the CEs is IGMP, then snooping and associated procedures are defined in [[RFC4541](#)]. The snooped state is determined using these procedures. When the multicast signaling protocol among the CEs is PIM, the procedures in [[RFC4541](#)] are not sufficient to determine the snooped state. The additional details required to determine the snooped state when CE-CE protocol is PIM are for further study. When such procedures are defined it is expected that the procedures in this section will apply to the snooped state created as a result of PIM as PE-CE protocol.

The snooped state is said to "match" the S-PMSI A-D route if any of the following is true:

- + The S-PMSI A-D route carries (C-S, C-G) and the snooped state is for (C-S, C-G) or for (C-\*, C-G), OR
- + The S-PMSI A-D route carries (C-\*, C-G) and (a) the snooped state is for (C-\*, C-G) OR (b) the snooped state is for at least one multicast join with the multicast group address equal to C-G and there doesn't exist another S-PMSI A-D route that carries (C-S, C-G) where C-S is the source address of the snooped state.
- + The S-PMSI A-D route carries (C-S, C-\*) and (a) the snooped state is for at least one multicast join with the multicast source address equal to C-S, and (b) there doesn't exist another S-PMSI A-D route that carries (C-S, C-G) where C-G is the group address of the snooped state.
- + The S-PMSI A-D route carries (C-\*, C-\*) and there is no other S-PMSI A-D route that matches the snooped state as per the above conditions.

Note if the above conditions are true, and if the received S-PMSI A-D route has a PMSI Tunnel attribute with the Leaf Information Required flag set to 1, then the PE originates a leaf A-D route, constructed as follows:

- + The route carries a single MCAST-VPLS NLRI with the Route Key field set to the MCAST-VPLS NLRI of the received S-PMSI A-D route.
- + The Originating Router's IP address set to the IP address of the PE (this MUST be a routable IP address).
- + The PE constructs an IP-based Route Target Extended Community by placing the IP address carried in the Next Hop of the received S-PMSI A-D route in the Global Administrator field of the Community, with the Local Administrator field of this Community set to 0 and setting the Extended Communities attribute of the leaf A-D route to that Community.
- + The Next Hop field of the MP\_REACH\_NLRI attribute of the route MUST be set to the same IP address as the one carried in the Originating Router's IP Address field of the route.
- + To constrain the distribution scope of this route, the route MUST carry the NO\_EXPORT Community [[RFC1997](#)], except for the inter-AS scenario with option (c).

Once the leaf A-D route is constructed, the PE advertises this route into IBGP.

In addition to the procedures specified in section "Inter-AS A-D route received via IBGP" the PE MUST set up its forwarding path to receive traffic, for each multicast stream in the matching snooped state, from the tunnel advertised by the S-PMSI A-D route (the PE MUST switch to the Selective tree).

When a new snooped state is created by a PE then the PE MUST first determine if there is a S-PMSI A-D route that matches the snooped state as per the conditions described above. If such a S-PMSI A-D route is found, then the PE MUST follow the procedures described in this section, for that particular S-PMSI A-D route. If later on the snooped state ages out and is deleted from the PE, the PE SHOULD withdraw the leaf A-D route that it had originated in response to the S-PMSI A-D route.

#### **10.4. Inter-AS Selective Tree**

Inter-AS Selective trees support all three options of inter-AS VPLS service, option (a), (b) and (c), that are supported by Inter-AS Inclusive trees. They are constructed in a manner that is very similar to Inter-AS Inclusive trees.

For option (a) and option (b) support inter-AS Selective trees are constructed without requiring a single P-Multicast tree to span multiple ASes. This allows individual ASes to potentially use different P-tunneling technologies. There are two variants of this. One that requires MAC and IP multicast lookup on the ASBRs and another that does not require MAC/IP multicast lookup on the ASBRs and instead builds segmented inter-AS Selective trees.

Segmented Inter-AS Selective trees can also be used with option (c), unlike Segmented Inter-AS Inclusive trees. This is because the S-PMSI A-D routes can be exchanged via ASBRs (even though BGP VPLS A-D routes are not exchanged via ASBRs).

In the case of Option (c) an Inter-AS Selective tree may also be a non-segmented P-Multicast tree that spans multiple ASes.

##### **10.4.1. VSIs on the ASBRs**

The requirements on ASBRs, when VSIs are present on the ASBRs, include the requirements presented in section "Inter-AS Inclusive P-Multicast Tree A-D/Binding". The source ASBR (that receives traffic from another AS) may independently decide whether it wishes to use Selective trees or not. If it uses Selective trees the source ASBR MUST perform a MAC lookup to determine the Selective tree to forward the VPLS packet on.

##### **10.4.1.1. VPLS Inter-AS Selective Tree A-D Binding**

The mechanisms for propagating S-PMSI A-D routes are the same as the intra-AS case described in section "MCAST-VPLS NLRI". The BGP Selective tree A-D routes generated by PEs in an AS MUST NOT be propagated outside the AS.

### **10.4.2. Inter-AS Segmented Selective Trees**

Inter-AS Segmented Selective trees MUST be used when option (b) is used to provide the inter-AS VPLS service. They MAY be used when option (c) is used to provide the inter-AS VPLS service.

A Segmented inter-AS Selective Tunnel is constructed similar to an inter-AS Segmented Inclusive Tunnel. Namely, such a tunnel is constructed as a concatenation of tunnel segments. There are two types of tunnel segments: an intra-AS tunnel segment (a segment that spans ASBRs within the same AS), and inter-AS tunnel segment (a segment that spans adjacent ASBRs in adjacent ASes). ASes that are spanned by a tunnel are not required to use the same tunneling mechanism to construct the tunnel - each AS may pick up a tunneling mechanism to construct the intra-AS tunnel segment of the tunnel, in its AS.

The PE that decides to set up a Selective tree, advertises the Selective tree to multicast stream binding using an S-PMSI A-D route as per procedures in section "Advertising (C-S, C-G) Binding to a Selective Tree", to the routers in its own AS.

An S-PMSI A-D route advertised outside the AS, to which the originating PE belongs, will be referred to as an inter-AS Selective Tree A-D route (although this route is originated by a PE as an intra-AS route it is referred to as an inter-AS route outside the AS).

#### **10.4.2.1. Handling S-PMSI A-D routes by ASBRs**

Procedures for handling an S-PMSI A-D route by ASBRs (both within and outside of the AS of the PE that originates the route) are the same as specified in section "Propagating VPLS BGP A-D routes to other ASes", except that instead of Inter-AS BGP-VPLS A-D routes and the BGP-VPLS A-D NLRI these procedures apply to S-PMSI A-D routes and the S-PMSI A-D NLRI.

In addition to these procedures an ASBR advertises a leaf A-D route in response to an S-PMSI A-D route only if:

- + The S-PMSI A-D route was received via EBGp from another ASBR and the ASBR merges the S-PMSI A-D route into an Inter-AS BGP VPLS A-D route as described in the next section. OR

- + The ASBR receives a leaf A-D route from a downstream PE or ASBR in response to the S-PMSI A-D route, received from an upstream PE or ASBR, that the ASBR propagated inter-AS to downstream ASBRs and PEs.
- + The ASBR has snooped state from local CEs that matches the NLRI carried in the S-PMSI A-D route as per the following rules:
  - i) The NLRI encodes (C-S, C-G) which is the same as the snooped (C-S, C-G)
  - ii) The NLRI encodes (\*, C-G) and there is snooped state for at least one (C-S, C-G) and there is no other matching S-PMSI A-D route for (C-S, C-G) OR there is snooped state for (\*, C-G)
  - iii) The NLRI encodes (\*, \*) and there is snooped state for at least one (C-S, C-G) or (\*, C-G) and there is no other matching S-PMSI A-D route for that (C-S, C-G) or (\*, C-G) respectively.

The C-multicast data traffic is sent on the Selective tree by the originating PE. When it reaches an ASBR that is on the Inter-AS segmented tree, it is delivered to local receivers, if any. It is then forwarded on any inter-AS or intra-AS segments that exist on the Inter-AS Selective Segmented tree. If the Inter-AS Segmented Selective Tree is merged onto an Inclusive tree, as described in the next section, the data traffic is forwarded onto the Inclusive tree.

#### **10.4.2.1.1. Merging Selective Tree into an Inclusive Tree**

Consider the situation where:

- + An ASBR is receiving (or expecting to receive) inter-AS (C-S, C-G) data from upstream via a Selective tree.
- + The ASBR is sending (or expecting to send) the inter-AS (C-S, C-G) data downstream via an Inclusive tree.

This situation may arise if the upstream providers have a policy of using Selective trees but the downstream providers have a policy of using Inclusive trees. To support this situation, an ASBR MAY, under certain conditions, merge one or more upstream Selective trees into a downstream Inclusive tree. Note that this can be the case only for option (b) and not for option (c) as for option (c) the ASBRs do not

have Inclusive tree state.

A Selective tree (corresponding to a particular S-PMSI A-D route) MAY be merged by a particular ASBR into an Inclusive tree (corresponding to a particular Inter-AS BGP VPLS A-D route) if and only if the following conditions all hold:

- + The S-PMSI A-D route and the Inter-AS BGP VPLS A-D route originate in the same AS. The Inter-AS BGP VPLS A-D route carries the originating AS in the AS\_PATH attribute of the route. The S-PMSI A-D route carries the originating AS in the AS\_PATH attribute of the route.
- + The S-PMSI A-D route and the Inter-AS BGP VPLS A-D route have exactly the same set of RTs.

An ASBR performs merging by stitching the tail end of the P-tunnel, as specified in the PMSI Tunnel attribute of the S-PMSI A-D route received by the ASBR, to the head of the P-tunnel, as specified in the PMSI Tunnel attribute of the Inter-AS BGP VPLS A-D route re-advertised by the ASBR.

An ASBR that merges an S-PMSI A-D route into an Inter-AS BGP VPLS A-D route MUST NOT re-advertise the S-PMSI A-D route.

#### **10.4.3. Inter-AS Non-Segmented Selective trees**

Inter-AS Non-segmented Selective trees MAY be used in the case of option (c).

In this method, there is a multi-hop EBGP peering between the PEs (or a Route Reflector) in one AS and the PEs (or Route Reflector) in another AS. The PEs exchange BGP Selective tree A-D routes, along with PMSI Tunnel attribute, as in the intra-AS case described in section "Option (c): Non-Segmented Tunnels".

The PEs in different ASes use a non-segmented Selective inter-AS P2MP tunnel for VPLS multicast.

This method requires no VPLS information (in either the control or the data plane) on the ASBRs. The ASBRs only need to participate in the non-segmented P2MP tunnel setup in the control plane, and do MPLS label forwarding in the data plane.

The data forwarding in this model is the same as in the intra-AS case described in section "Establishing P-Multicast Trees".

**11. BGP Extensions**

This section describes the encoding of the BGP extensions required by this document.

**11.1. Inclusive Tree/Selective Tree Identifier**

Inclusive P-Multicast tree and Selective P-Multicast tree advertisements carry the P-Multicast tree identifier.

This document reuses the BGP attribute, called PMSI Tunnel attribute that is defined in [[RFC6514](#)].


This document supports only the following Tunnel Types when PMSI Tunnel attribute is carried in VPLS A-D or VPLS S-PMSI A-D routes:

- + 0 - No tunnel information present
- + 1 - RSVP-TE P2MP LSP
- + 2 - LDP P2MP LSP
- + 6 - Ingress Replication

**11.2. MCAST-VPLS NLRI**

This document defines a new BGP NLRI, called the MCAST-VPLS NLRI.

Following is the format of the MCAST-VPLS NLRI:

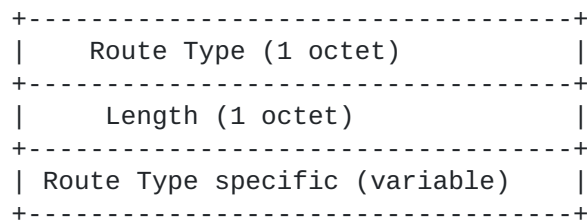

The Route Type field defines encoding of the rest of MCAST-VPLS NLRI (Route Type specific MCAST-VPLS NLRI).

The Length field indicates the length in octets of the Route Type specific field of MCAST-VPLS NLRI.

This document defines the following Route Types for A-D routes:

- + 3 - Selective Tree A-D route;
- + 4 - Leaf A-D route.

The MCAST-VPLS NLRI is carried in BGP using BGP Multiprotocol Extensions [[RFC4760](#)] with an AFI of 25 (L2VPN AFI), and an SAFI of MCAST-VPLS. The NLRI field in the MP\_REACH\_NLRI/MP\_UNREACH\_NLRI attribute contains the MCAST-VPLS NLRI (encoded as specified above).

In order for two BGP speakers to exchange labeled MCAST-VPLS NLRI, they must use BGP Capabilities Advertisement to ensure that they both are capable of properly processing such NLRI. This is done as specified in [[RFC4760](#)], by using capability code 1 (multiprotocol BGP) with an AFI of 25 and a SAFI of MCAST-VPLS.

The following describes the format of the Route Type specific MCAST-VPLS NLRI for various Route Types defined in this document.

### 11.2.1. S-PMSI A-D route

An S-PMSI A-D route type specific MCAST-VPLS NLRI consists of the following:

```

+-----+
|      RD      (8 octets)      |
+-----+
| Multicast Source Length (1 octet) |
+-----+
| Multicast Source (Variable)      |
+-----+
| Multicast Group Length (1 octet) |
+-----+
| Multicast Group (Variable)      |
+-----+
| Originating Router's IP Addr    |
+-----+

```

The RD is encoded as described in [[RFC4364](#)].

The Multicast Source field contains the C-S address i.e the address of the multicast source. If the Multicast Source field contains an IPv4 address, then the value of the Multicast Source Length field is 32. If the Multicast Source field contains an IPv6 address, then the value of the Multicast Source Length field is 128. The value of the Multicast Source Length field may be set to 0 to indicate a wildcard.

The Multicast Group field contains the C-G address i.e. the address of the multicast group. If the Multicast Group field contains an IPv4



address, then the value of the Multicast Group Length field is 32. If the Multicast Group field contains an IPv6 address, then the value of the Multicast Group Length field is 128. The Multicast Group Length field may be set to 0 to indicate a wildcard.


Whether the Originating Router's IP Address field carries an IPv4 or IPv6 address is determined from the value of the Length field of the MCAST-VPLS NLRI. If the Multicast Source field contains an IPv4 address and the Multicast Group field contains an IPv4 address, then the value of the Length field is 22 bytes if the Originating Router's IP address carries an IPv4 address and 34 bytes if it is an IPv6 address. If the Multicast Source and Multicast Group fields contain IPv6 addresses, then the value of the Length field is 46 bytes if the Originating Router's IP address carries an IPv4 address and 58 bytes if it is an IPv6 address. The following table summarizes the above.

Multicast Source	Multicast Group	Originating Router's IP Address	Length
IPv4	IPv4	IPv4	22
IPv4	IPv4	IPv6	34
IPv6	IPv6	IPv4	46
IPv6	IPv6	IPv6	58

Usage of Selective Tree A-D routes is described in section "Optimizing Multicast Distribution via Selective Trees".

**11.2.2. Leaf A-D route**

A leaf A-D route type specific MCAST-VPLS NLRI consists of the following:

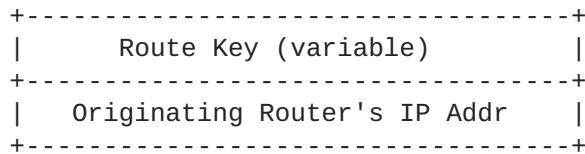

Whether the Originating Router's IP Address field carries an IPv4 or IPv6 address is determined from the Length field of the MCAST-VPLS NLRI and the length of the Route Key field. From these two length fields one can compute the length of the Originating Router's IP Address. If this computed length is 4 then the address is an IPv4 address and if its 16 then the address is an IPv6 address.

Usage of leaf A-D routes is described in sections "Inter-AS Inclusive

P-Multicast tree A-D/Binding" and "Optimizing Multicast Distribution via Selective trees".

## **12. Aggregation Considerations**

This document does not specify the mandatory implementation of any particular set of rules for determining whether or not the Inclusive or Selective trees of two particular VPLS instances are to be instantiated by the same Aggregate Inclusive/Selective Tree. This determination can be made by implementation-specific heuristics, by configuration, or even perhaps by the use of offline tools.

This section discusses potential methodologies with respect to aggregation.

In general the heuristic used to decide which VPLS instances or (C-S, C-G) entries to aggregate is implementation dependent. It is also conceivable that offline tools can be used for this purpose. This section discusses some tradeoffs with respect to aggregation.

The "congruency" of aggregation is defined by the amount of overlap in the leaves of the client trees that are aggregated on an SP tree. For Aggregate Inclusive trees the congruency depends on the overlap in the membership of the VPLS instances that are aggregated on the Aggregate Inclusive tree. If there is complete overlap aggregation is perfectly congruent. As the overlap between the VPLS instances that are aggregated reduces, the congruency reduces.

From the above definition of "congruency" it follows that in order for a given PE to determine the congruency of the client trees that this PE could aggregate, the PE has to know the leaves of these client trees. This is irrespective of whether the aggregated SP tree is established using mLDP or RSVP-TE.

If aggregation is done such that it is not perfectly congruent a PE may receive traffic for VPLS instances to which it doesn't belong. As the amount of multicast traffic in these unwanted VPLS instances increases aggregation becomes less optimal with respect to delivered traffic. Hence there is a tradeoff between reducing multicast state in the core and delivering unwanted traffic.

An implementation should provide knobs to control aggregation based on the congruency of the tree to be aggregated. This will allow an SP to deploy aggregation depending on the VPLS membership and traffic profiles in its network. If different PEs are setting up Aggregate Inclusive trees this will also allow an SP to engineer the maximum amount of unwanted VPLS instances that a particular PE may receive

traffic for.


The state/bandwidth optimality trade-off can be further improved by having a versatile many-to-many association between client trees and provider trees. Thus a VPLS instance can be mapped to multiple Aggregate trees. The mechanisms for achieving this are for further study. Also it may be possible to use both ingress replication and an Aggregate tree for a particular VPLS. Mechanisms for achieving this are also for further study.

**13. Data Forwarding**

**13.1. MPLS Tree Encapsulation**

**13.1.1. Mapping multiple VPLS instances to a P2MP LSP**

The following diagram shows the progression of the VPLS multicast packet as it enters and leaves the SP network when MPLS trees are being used for multiple VPLS instances. RSVP-TE P2MP LSPs are examples of such trees.

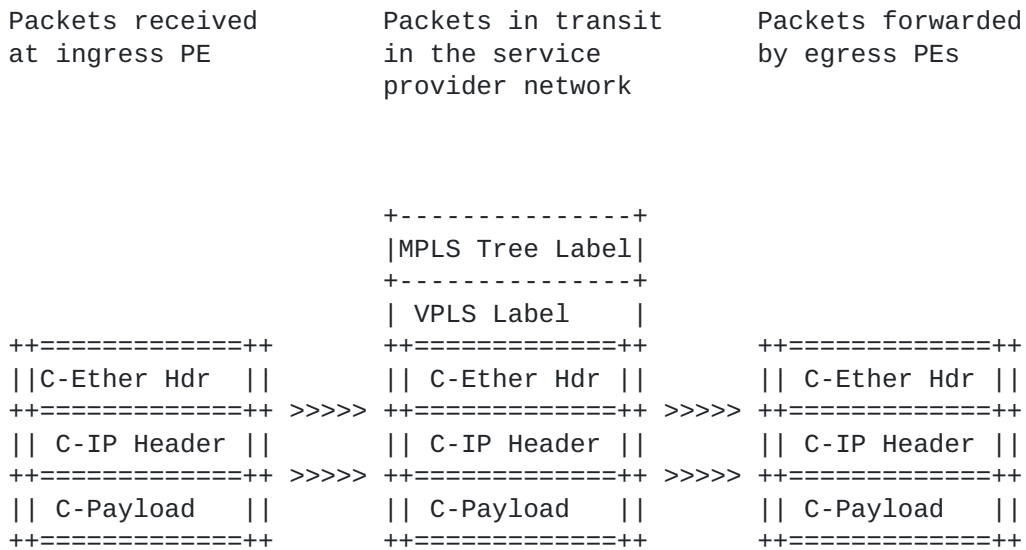

When an ingress PE receives a packet, the ingress PE using the procedures defined in [RFC4261] [RFC4262] determines the VPLS instance associated with the packet. If the packet is an IP multicast packet, and the ingress PE uses an Aggregate Selective tree for the (C-S, C-G) carried in the packet, then the ingress PE pushes the VPLS Label associated with the VPLS instance on the ingress PE and the


MPLS Tree Label associate with the Aggregate Selective tree, and sends the packet over the P2MP LSP associated with the Aggregate Selective tree. Otherwise, if the ingress PE does not use an Aggregate Selective tree for the (C-S, C-G), or the packet is either non-IP multicast or broadcast, the ingress PE pushes the VPLS label associated with the VPLS instance on the ingress PE and the MPLS Tree Label associated with the Aggregate Inclusive tree, and sends the packet over the P2MP LSP associated with the Aggregate Inclusive tree.

The egress PE does a lookup on the outer MPLS tree label, and determines the MPLS forwarding table in which to lookup the inner MPLS label (VPLS label). This table is specific to the tree label space (as identified by the MPLS Tree label). The inner label (VPLS label) is unique within the context of the root of the tree (as it is assigned by the root of the tree, without any coordination with any other nodes). Thus it is not unique across multiple roots. So, to unambiguously identify a particular VPLS one has to know the VPLS label, and the context within which that label is unique. The context is provided by the outer MPLS label (MPLS Tree label) [[RFC5331](#)].

The outer MPLS label is popped. The lookup of the resulting MPLS label determines the VSI in which the egress PE needs to do the C-multicast data packet lookup. It then pops the inner MPLS label and sends the packet to the VSI for multicast data forwarding.

**13.1.2. Mapping one VPLS instance to a P2MP LSP**

The following diagram shows the progression of the VPLS multicast packet as it enters and leaves the SP network when a given MPLS tree is being used for a single VPLS instance. RSVP-TE P2MP LSPs are examples of such trees.

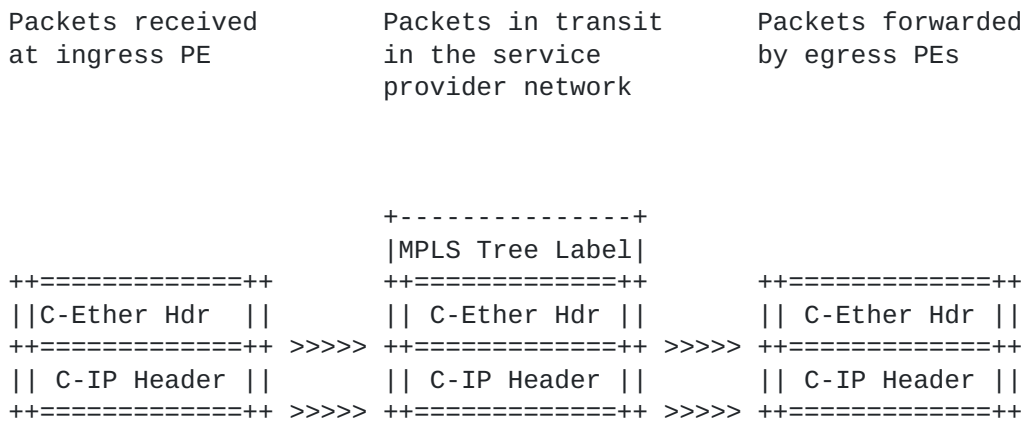

```

|| C-Payload  ||          || C-Payload  ||          || C-Payload  ||
++-----++          ++-----++          ++-----++

```

When an ingress PE receives a packet, the ingress PE using the procedures defined in [[RFC4261](#)] [[RFC4262](#)] determines the VPLS instance associated with the packet. If the packet is an IP multicast packet, and the ingress PE uses a Selective tree for the (C-S, C-G) carried in the packet, then the ingress PE pushes the MPLS Tree Label associate with the Selective tree, and sends the packet over the P2MP LSP associated with the Selective tree. Otherwise, if the ingress PE does not use a Selective tree for the (C-S, C-G), or the packet is either non-IP multicast or broadcast, the ingress PE pushes the MPLS Tree Label associated with the Inclusive tree, and sends the packet over the P2MP LSP associated with the Inclusive tree.

The egress PE does a lookup on the MPLS tree label and determines the VSI in which the receiver PE needs to do the C-multicast data packet lookup. It then pops the MPLS label and sends the packet to the VSI for multicast data forwarding.

#### **14. VPLS Data Packet Treatment**

If the destination MAC address of a VPLS packet received by an ingress PE from a VPLS site is a multicast address, a P-Multicast tree SHOULD be used to transport the packet, if possible. If the packet is an IP multicast packet and a Selective tree exists for that multicast stream, the Selective tree MUST be used. Else if a (C-\*, C-\*) Selective tree exists for the VPLS it SHOULD be used. Else if an Inclusive tree exists for the VPLS, it SHOULD be used.

If the destination MAC address of a VPLS packet is a broadcast address, it is flooded. If a (C-\*, C-\*) Selective tree exists for the VPLS the PE SHOULD flood over it. Else if Inclusive tree exists for the VPLS the PE SHOULD flood over it. Else the PE MUST flood the packet using the procedures in [[RFC4761](#)] or [[RFC4762](#)].

If the destination MAC address of a packet is a unicast address and it has not been learned, the packet MUST be sent to all PEs in the VPLS. Inclusive P-Multicast trees or a Selective P-Multicast tree bound to (C-\*, C-\*) SHOULD be used for sending unknown unicast MAC packets to all PEs. When this is the case the receiving PEs MUST support the ability to perform MAC address learning for packets received on a multicast tree. In order to perform such learning, the receiver PE MUST be able to determine the sender PE when a VPLS packet is received on a P-Multicast tree. This further implies that

the MPLS P-Multicast tree technology MUST allow the egress PE to determine the sender PE from the received MPLS packet.

When a receiver PE receives a VPLS packet with a source MAC address, that has not yet been learned, on a P-Multicast tree, the receiver PE determines the PW to the sender PE. The receiver PE then creates forwarding state in the VPLS instance with a destination MAC address being the same as the source MAC address being learned, and the PW being the PW to the sender PE.

It should be noted that when a sender PE that is sending packets destined to an unknown unicast MAC address over a P-Multicast tree learns the PW to use for forwarding packets destined to this unicast MAC address, it might immediately switch to transport such packets over this particular PW. Since the packets were initially being forwarded using a P-Multicast tree, this could lead to packet reordering. This constraint should be taken into consideration if unknown unicast frames are forwarded using a P-Multicast tree, instead of multiple PWs based on [\[RFC4761\]](#) or [\[RFC4762\]](#).

An implementation SHOULD support the ability to transport unknown unicast traffic over Inclusive P-Multicast trees. Furthermore, an implementation MUST support the ability to perform MAC address learning for packets received on a P-Multicast tree.

## **15. Security Considerations**

Security considerations discussed in [\[RFC4761\]](#) and [\[RFC4762\]](#) apply to this document. This section describes additional considerations.

As mentioned in [\[RFC4761\]](#), there are two aspects to achieving data privacy and protect against denial-of-service attacks in a VPLS: securing the control plane and protecting the forwarding path. Compromise of the control plane could result in a PE sending multicast data belonging to some VPLS to another VPLS, or black-holing VPLS multicast data, or even sending it to an eavesdropper; none of which are acceptable from a data privacy point of view. In addition, compromise of the control plane could result in black-holing VPLS multicast data.

The mechanisms in this document use BGP for the control plane. Hence techniques such as in [\[RFC5925\]](#) help authenticate BGP messages, making it harder to spoof updates (which can be used to divert VPLS traffic to the wrong VPLS) or withdrawals (denial-of-service attacks). In the multi-AS methods (b) and (c) described in section "Inter-AS Inclusive P-Multicast Tree A-D/Binding" this also means protecting the inter-AS BGP sessions, between the ASBRs, the PEs, or

the Route Reflectors.

Note that [[RFC5925](#)] will not help in keeping MPLS labels, associated with P2MP LSPs or the upstream MPLS labels used for aggregation, private -- knowing the labels, one can eavesdrop on VPLS traffic. However, this requires access to the data path within a Service Provider network, which is assumed to be composed of trusted nodes/links.

One of the requirements for protecting the data plane is that the MPLS labels are accepted only from valid interfaces. This applies both to MPLS labels associated with P2MP LSPs and also applies to the upstream assigned MPLS labels. For a PE, valid interfaces comprise links from other routers in PE's own AS. For an ASBR, valid interfaces comprise links from other routers in ASBR's own AS, and links from other ASBRs in ASes that have instances of a given VPLS. It is especially important in the case of multi-AS VPLS instances that one accept VPLS packets only from valid interfaces.

## **16. IANA Considerations**

This document defines a new NLRI, called MCAST-VPLS, to be carried in BGP using multiprotocol extensions. It requires assignment of a new SAFI. This is to be assigned by IANA.

This document defines a BGP optional transitive attribute, called PMSI attribute. This is the same attribute as the one defined in [[RFC6514](#)] and the code point for this attribute has already been assigned by IANA as 22 [[BGP-IANA](#)]. Hence no further action is required from IANA regarding this attribute.

## **17. Acknowledgments**

Many thanks to Thomas Morin for his support of this work.

We would also like to thank authors of [[RFC6514](#)] and [[RFC6513](#)], as the details of the inter-AS segmented tree procedures in this document, as well as some text that describes these procedures have benefited from those in [[RFC6514](#)] and [[RFC6513](#)]. The same applies to the notion of Inclusive and Selective trees, as well as the procedures for switching from Inclusive to Selective trees.

We would also like to thank Nabil Bitar, Stewart Bryant, Wim Henderickx, and Eric Rosen for their review and comments.

## **18. Normative References**

- [RFC2119] S. Bradner, "Key words for use in RFCs to Indicate Requirement Levels.", [RFC 2119](#), March 1997.
- [RFC3036] L. Andersson, et. al., "LDP Specification", [RFC 3036](#), January 2001
- [RFC3209] D. Awduche, et. al., "RSVP-TE: Extensions to RSVP for LSP Tunnels", [RFC 3209](#), December 2001
- [RFC4760] T. Bates, et. al., "Multiprotocol Extensions for BGP-4", [RFC 4760](#), January 2007.
- [RFC4761] K. Kompella, Y. Rekther, "Virtual Private LAN Service using BGP for Auto-Discovery and Signaling", [RFC 4761](#), January 2007.
- [RFC4762] M. Lasserre, V. Kompella, "Virtual Private LAN Services over MPLS Label Distribution Protocol (LDP) Signaling", [RFC 4762](#), January 2007.
- [RFC5331] R. Aggarwal, Y. Rekther, E. Rosen, "MPLS Upstream Label Assignment and Context Specific Label Space", [RFC 5331](#), August 2008.
- [RFC6511] Z. Ali, G. Swallow, R. Aggarwal, "Non PHP behavior and out-of-band mapping for RSVP-TE LSPs", [RFC 6511](#), February 2012.
- [RFC6512] IJ. Wijnands, et. al., "Using Multipoint LDP When the Backbone Has No Route to the Root", [RFC6512](#), February 2012

## **19. Informative References**

- [RFC6514] R. Aggarwal, E. Rosen, Y. Rekther, T. Morin, "BGP Encodings for Multicast in MPLS/BGP IP VPNs". [RFC 6514](#), February 2012.
- [RFC6513] E. Rosen, R. Aggarwal, "Multicast in MPLS/BGP IP VPNs", [RFC 6513](#), February 2012.
- [RFC6388] I. Minei et. al, "Label Distribution Protocol Extensions for Point-to-Multipoint and Multipoint-to-Multipoint Label Switched Paths", [RFC 6388](#), November 2011.
- [RFC6074] E. Rosen et. al., "Provisioning, Autodiscovery, and Signaling in L2VPNs", [RFC 6074](#), January 2011.
- [RFC5501] Y. kamite, et. al., "Requirements for Multicast Support in



Virtual Private LAN Services", [RFC 5501](#), January 2009.

[RFC5332] T. Eckert, E. Rosen, R. Aggarwal, Y. Rekhter, "MPLS Multicast Encapsulations", [RFC 5332](#), August 2008.

[RFC4875] R. Aggarwal et. al., "Extensions to RSVP-TE for Point to Multipoint TE LSPs", [RFC 4857](#), May 2007.

[RFC4684] P. Marques et. al., "Constrained Route Distribution for Border Gateway Protocol/MultiProtocol Label Switching (BGP/MPLS) Internet Protocol (IP) Virtual Private Networks (VPNs)", [RFC 4684](#), November 2006.

[RFC4601] B. Fenner, et. al., "PIM-SM Protocol Specification", [RFC 4601](#), August 2006.

[RFC4541] M. Christensen et. al., "Considerations for Internet Group Management Protocol (IGMP) and Multicast Listener Discovery (MLD) Snooping Switches", [RFC 4541](#), May 2006.

[RFC4447] L. Martini et. al., "Pseudowire Setup and Maintenance Using the Label Distribution Protocol (LDP)", [RFC 4447](#), April 2006.

[RFC4364] "BGP MPLS VPNs", E. Rosen, Y.Rekhter, [RFC4364](#), February 2006.

[RFC5925] J. Touch, et. al., "The TCP Authentication Option", [RFC5925](#), June 2010.

[RFC1997] R. Chandra, et. al., "BGP Communities Attribute", [RFC 1997](#), August 1996.

[MULTI-HOMING] K. Kompella et. al., "Multi-homing in BGP-based Virtual Private LAN Service", [draft-ietf-l2vpn-vpls-multihoming](#) Work in Progress.

[BGP-IANA] <http://www.iana.org/assignments/bgp-parameters>

## **20. Author's Address**

Rahul Aggarwal

998 Lucky Avenue  
Menlo Park, CA 94025  
USA  
Phone: +1-415-806-5527  
Email: raggarwa\_1@yahoo.com

Yuji Kamite  
NTT Communications Corporation  
Tokyo Opera City Tower  
3-20-2 Nishi Shinjuku, Shinjuku-ku,  
Tokyo 163-1421,  
Japan

Email: [y.kamite@ntt.com](mailto:y.kamite@ntt.com)

Luyuan Fang  
Cisco Systems  
111 Wood Avenue South  
Iselin, NJ 08830  
USA

Email: [lufang@cisco.com](mailto:lufang@cisco.com)

Yakov Rekhter  
Juniper Networks  
1194 North Mathilda Ave.  
Sunnyvale, CA 94089  
USA

Email: [yakov@juniper.net](mailto:yakov@juniper.net)

Chaitanya Kodeboniya  
Cisco Systems  
Email: [ckodeboy@cisco.com](mailto:ckodeboy@cisco.com)