

Network Working Group  
Internet-Draft  
Obsoletes: [6834](#) (if approved)  
Intended status: Standards Track  
Expires: November 5, 2022

L. Iannone  
Huawei Technologies France  
D. Saucez  
INRIA  
O. Bonaventure  
Universite catholique de Louvain  
May 4, 2022

Locator/ID Separation Protocol (LISP) Map-Versioning  
draft-ietf-lisp-6834bis-10

## Abstract

This document describes the LISP (Locator/ID Separation Protocol) Map-Versioning mechanism, which provides in-packet information about Endpoint ID to Routing Locator (EID-to-RLOC) mappings used to encapsulate LISP data packets. This approach is based on associating a version number to EID-to-RLOC mappings and the transport of such a version number in the LISP-specific header of LISP-encapsulated packets. LISP Map-Versioning is particularly useful to inform communicating Ingress Tunnel Routers (ITRs) and Egress Tunnel Routers (ETRs) about modifications of the mappings used to encapsulate packets. The mechanism is optional and transparent to implementations not supporting this feature, since in the LISP-specific header and in the Map Records, bits used for Map-Versioning can be safely ignored by ITRs and ETRs that do not support or do not want to use the mechanism.

This document obsoletes [RFC 6834](#) "Locator/ID Separation Protocol (LISP) Map-Versioning", which is the initial experimental specifications of the mechanisms updated by this document.

## Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

Internet-Draft

LISP Map-Versioning

May 2022

This Internet-Draft will expire on November 5, 2022.

## Copyright Notice

Copyright (c) 2022 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](https://trustee.ietf.org/license-info) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	<a href="#">Introduction</a>	<a href="#">3</a>
<a href="#">2.</a>	<a href="#">Requirements Notation</a>	<a href="#">3</a>
<a href="#">3.</a>	<a href="#">Definitions of Terms</a>	<a href="#">4</a>
<a href="#">4.</a>	<a href="#">LISP Header and Map-Version Numbers</a>	<a href="#">4</a>
<a href="#">5.</a>	<a href="#">Map Record and Map-Version</a>	<a href="#">5</a>
<a href="#">6.</a>	<a href="#">EID-to-RLOC Map-Version Number</a>	<a href="#">6</a>
<a href="#">6.1.</a>	<a href="#">The Null Map-Version</a>	<a href="#">7</a>
<a href="#">7.</a>	<a href="#">Dealing with Map-Version Numbers</a>	<a href="#">7</a>
<a href="#">7.1.</a>	<a href="#">Handling Destination Map-Version Number</a>	<a href="#">8</a>
<a href="#">7.2.</a>	<a href="#">Handling Source Map-Version Number</a>	<a href="#">9</a>
<a href="#">8.</a>	<a href="#">Security Considerations</a>	<a href="#">10</a>
<a href="#">9.</a>	<a href="#">Deployment Considerations</a>	<a href="#">10</a>
<a href="#">10.</a>	<a href="#">IANA Considerations</a>	<a href="#">11</a>
<a href="#">11.</a>	<a href="#">References</a>	<a href="#">11</a>
<a href="#">11.1.</a>	<a href="#">Normative References</a>	<a href="#">11</a>
<a href="#">11.2.</a>	<a href="#">Informative References</a>	<a href="#">12</a>
<a href="#">Appendix A.</a>	<a href="#">Benefits and Case Studies for Map-Versioning</a>	<a href="#">13</a>
<a href="#">A.1.</a>	<a href="#">Map-Versioning and Unidirectional Traffic</a>	<a href="#">13</a>
<a href="#">A.2.</a>	<a href="#">Map-Versioning and Interworking</a>	<a href="#">13</a>
<a href="#">A.2.1.</a>	<a href="#">Map-Versioning and Proxy-ITRs</a>	<a href="#">13</a>
<a href="#">A.2.2.</a>	<a href="#">Map-Versioning and LISP-NAT</a>	<a href="#">14</a>
<a href="#">A.2.3.</a>	<a href="#">Map-Versioning and Proxy-ETRs</a>	<a href="#">14</a>
<a href="#">A.3.</a>	<a href="#">RLOC Shutdown/Withdraw</a>	<a href="#">15</a>
	<a href="#">Authors' Addresses</a>	<a href="#">15</a>

## 1. Introduction

This document describes the Map-Versioning mechanism used to provide information on changes in the EID-to-RLLOC (Endpoint ID to Routing Locator) mappings used in the LISP (Locator/ID Separation Protocol [[I-D.ietf-lisp-rfc6830bis](#)][I-D.ietf-lisp-rfc6833bis]) context to perform packet encapsulation. The mechanism is totally transparent to xTRs (Ingress and Egress Tunnel Routers) not supporting or not using such functionality. [[I-D.ietf-lisp-introduction](#)] describes the architecture of the Locator/ID Separation Protocol. It is expected that the reader is familiar with this introductory document.

This document obsoletes [[RFC6834](#)], which is the initial experimental specifications of the mechanisms updated by this document.

The basic mechanism is to associate a Map-Version number to each LISP EID-to-RLLOC mapping and transport such a version number in the LISP-specific header. When a mapping changes, a new version number is assigned to the updated mapping. A change in an EID-to-RLLOC mapping can be a modification in the RLLOCs set such as addition, removal, or change in priority or weight of one or more RLLOCs.

When Map-Versioning is used, LISP-encapsulated data packets contain the version number of the two mappings used to select the RLLOCs in the outer header (i.e., both source and destination RLLOCs). This operation is two-fold. On the one hand, it enables the ETR (Egress Tunnel Router) receiving the packet to know if the ITR (Ingress Tunnel Router) is using the latest mapping version for the destination EID. If this is not the case, the ETR can directly send a Map-Request containing the updated mapping to the ETR, to notify it of the latest version. The ETR can also solicit the ITR to trigger a Map-Request to obtain the latest mapping by sending it a Solicit Map-Request (SMR) message. Both cases are defined in [[I-D.ietf-lisp-rfc6833bis](#)]. On the other hand, it enables an ETR receiving such a packet to know if it has in its EID-to-RLLOC Map-Cache the latest mapping for the source EID. If this is not the

case, a Map-Request can be sent.

Considerations about the deployment of LISP Map-Versioning are discussed in [Section 9](#).

## [2.](#) Requirements Notation

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#) [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

Iannone, et al.

Expires November 5, 2022

[Page 3]

---

Internet-Draft

LISP Map-Versioning

May 2022

## [3.](#) Definitions of Terms

This document uses terms already defined in the main LISP specification ([[I-D.ietf-lisp-rfc6830bis](#)], [[I-D.ietf-lisp-rfc6833bis](#)]). Here, we define the terms that are specific to the Map-Versioning mechanism. Throughout the whole document, Big Endian bit ordering is used.

**Map-Version number:** An unsigned 12-bit integer is assigned to an EID-to-RLOC mapping, indicating its version number ([Section 6](#)).

**Null Map-Version:** A Map-Version number with a value of 0x000 (zero), used to signal that the Map-Version feature is not used and no Map-Version number is assigned to the EID-to-RLOC mapping ([Section 6.1](#)).

**Dest Map-Version number:** Map-Version of the mapping in the EID-to-RLOC Map-Cache used by the ITR to select the RLOC present in the "Destination Routing Locator" field of the outer IP header of LISP-encapsulated packets ([Section 7.1](#)).

**Source Map-Version number:** Map-Version of the mapping in the EID-to-RLOC Database used by the ITR to select the RLOC present in the "Source Routing Locator" field of the outer IP header of LISP-encapsulated packets ([Section 7.2](#)).

## [4.](#) LISP Header and Map-Version Numbers

In order for the versioning approach to work, the LISP-specific

header has to carry both the Source Map-Version number and Dest Map-Version number. This is done by setting the V-bit in the LISP-specific header as specified in [\[I-D.ietf-lisp-rfc6830bis\]](#) and shown in the example in Figure 1. All permissible combinations of the flags when the V-bit is set to 1 are described in [\[I-D.ietf-lisp-rfc6830bis\]](#). Not all of the LISP-encapsulated packets need to carry version numbers. When the V-bit is set, the LISP header has the following encoding:

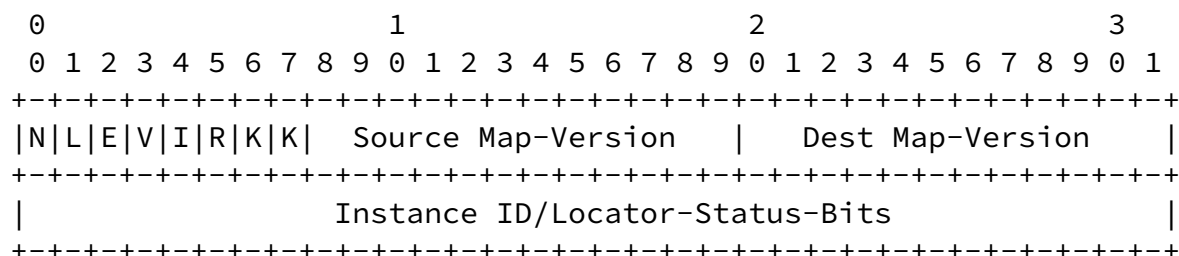



Figure 1: LISP-Specific header example when Map-Versioning is in use.

Source Map-Version number (12 bits): Map-Version of the mapping in the EID-to-RLOC Database used by the ITR to select the RLOC present in the "Source Routing Locator" field of the outer IP header of LISP-encapsulated packets. [Section 7.2](#) describes how to set this value on transmission and handle it on reception.

Dest Map-Version number (12 bits): Map-Version of the mapping in the EID-to-RLOC Map-Cache used by the ITR to select the RLOC present in the "Destination Routing Locator" field of the outer IP header of LISP-encapsulated packets. [Section 7.1](#) describes how to set this value on transmission and handle it on reception.

## 5. Map Record and Map-Version

To accommodate the mechanism, the Map Records that are transported in Map-Request/Map-Reply/Map-Register messages need to carry the Map-Version number as well. For reference, the Map Record (specified in [\[I-D.ietf-lisp-rfc6833bis\]](#)) is reported here as an example in Figure 2.





numbers are expressed on N bits, the following steps MUST be performed (in the same order as shown below) to strictly define their order:

1.  $V1 = V2$  : The Map-Version numbers are the same.

2.  $V2 > V1$  : if and only if

$$V2 > V1 \text{ AND } (V2 - V1) \leq 2^{N-1}$$

OR

$$V1 > V2 \text{ AND } (V1 - V2) > 2^{N-1}$$

3.  $V1 > V2$  : otherwise.

Using 12 bits, as defined in this document, and assuming a Map-Version value of 69, Map-Version numbers in the range [70; 69 + 2048] are greater than 69, while Map-Version numbers in the range [69 + 2049; (69 + 4096) mod 4096] are smaller than 69.

The initial Map-Version number of a new EID-to-RLLOC mapping SHOULD be assigned randomly, but it MUST NOT be set to the Null Map-Version value (0x000), because the Null Map-Version number has a special meaning (see [Section 6.1](#)). Optionally, the initial Map-version number may be configured.

Upon reboot, an ETR will use mappings configured in its EID-to-RLLOC Database. If those mappings have a Map-Version number, it will be used according to the mechanisms described in this document. ETRs MUST NOT automatically generate and assign Map-Version numbers to mappings in the EID-to-RLLOC Database.

### [6.1](#). The Null Map-Version

The value 0x000 (zero) is a special Map-Version number indicating that there is actually no version number associated to the EID-to-RLLOC mapping. Such a value is used for special purposes and is named the Null Map-Version number.

Map Records that have a Null Map-Version number indicate that there

is no Map-Version number associated with the mapping. This means that LISP-encapsulated packets destined to the EID-Prefix referred to by the Map Record MUST NOT contain any Map-Version numbers (V bit set to 0). If an ETR receives LISP-encapsulated packets with the V-bit set, when the original mapping in the EID-to-RLLOC Database has the version number set to the Null Map-Version value, then those packets MUST be silently dropped.

The Null Map-Version may appear in the LISP-specific header as a Source Map-Version number ([Section 7.2](#)). When the Source Map-Version number is set to the Null Map-Version value, it means that no map version information is conveyed for the source site. This means that if a mapping exists for the source EID in the EID-to-RLLOC Map-Cache, then the ETR MUST NOT compare the received Null Map-Version with the content of the EID-to-RLLOC Map-Cache ([Section 7.2](#)).

The fact that the 0 value has a special meaning for the Map-Version number implies that, when updating a Map-Version number because of a change in the mapping, if the next value is 0, then the Map-Version number MUST be incremented by 2 (i.e., set to 1 (0x001), which is the next valid value).

## [7](#). Dealing with Map-Version Numbers

The main idea of using Map-Version numbers is that whenever there is a change in the mapping (e.g., adding/removing RLLOCs, a change in the weights due to Traffic Engineering policies, or a change in the priorities) or a LISP site realizes that one or more of its own RLLOCs are not reachable anymore from a local perspective (e.g., through IGP, or policy changes) the LISP site updates the mapping, also assigning a new Map-Version number.

An ETR receiving a LISP packet with Map-Version numbers SHOULD check the following predicates:

1. The ITR that has sent the packet has an up-to-date mapping in its EID-to-RLLOC Map-Cache for the destination EID and is performing encapsulation correctly.

2. In the case of bidirectional traffic, the mapping in the local



ETR EID-to-RLLOC Map-Cache for the source EID is up to date.

If one or both of the above predicates do not hold, the ETR SHOULD send a Map-Request either to make the ITR aware that a new mapping is available (see [Section 7.1](#)) or to update the mapping in the local EID-to-RLLOC Map-Cache (see [Section 7.2](#)).

### [7.1](#). Handling Destination Map-Version Number

When an ETR receives a packet, the Dest Map-Version number relates to the mapping for the destination EID for which the ETR is an RLLOC. This mapping is part of the ETR EID-to-RLLOC Database. Since the ETR is authoritative for the mapping, it has the correct and up-to-date Dest Map-Version number. A check on this version number SHOULD be done, where the following cases can arise:

1. The packet arrives with the same Dest Map-Version number stored in the EID-to-RLLOC Database. This is the regular case. The ITR sending the packet has in its EID-to-RLLOC Map-Cache an up-to-date mapping. No further actions are needed.
2. The packet arrives with a Dest Map-Version number greater (i.e., newer) than the one stored in the EID-to-RLLOC Database. Since the ETR is authoritative on the mapping, meaning that the Map-Version number of its mapping is the correct one, this implies that someone is not behaving correctly with respect to the specifications. In this case, the packet carries a version number that is not valid and packet MUST be silently dropped.
3. The packets arrive with a Dest Map-Version number smaller (i.e., older) than the one stored in the EID-to-RLLOC Database. This means that the ITR sending the packet has an old mapping in its EID-to-RLLOC Map-Cache containing stale information. The ETR MAY choose to normally process the encapsulated datagram according to [\[I-D.ietf-lisp-rfc6830bis\]](#); however, the ITR sending the packet SHOULD be informed that a newer mapping is available. This is done with a Map-Request message sent back to the ITR, as specified in [\[I-D.ietf-lisp-rfc6833bis\]](#). One feature introduced by Map-Version numbers is the possibility of blocking traffic not using the latest mapping. This is because either the ITR is refusing to use the mapping for which the ETR is authoritative, or (worse) it might be some form of attack. According to rate limitation policy defined in [\[I-D.ietf-lisp-rfc6833bis\]](#) for Map-Request messages, after 10 retries Map-Requests are sent every 30 seconds, if in the meantime the Dest Map-Version number in the packets is not updated, the ETR SHOULD drop packets with a stale Map-Version number, unless the traffic is considered safe (e.g.

in private deployments this can indicate an issue in the ITR, but not malicious traffic).

The rule in the third case may be more restrictive. If the Record TTL of the previous mapping has already expired, all packets arriving with an old Map-Version SHOULD be silently dropped right away without issuing any Map-Request, unless the traffic is considered safe (e.g. private deployment). Such action is permitted because if the new mapping with the updated version number has been unchanged for at least the same time as the Record TTL of the older mapping, all the entries in the EID-to-RLOC Map-Caches of ITRs must have expired. Hence, all ITRs sending traffic should have refreshed the mapping according to [[I-D.ietf-lisp-rfc6833bis](#)]. If packets with old Map-Version numbers are still received, then either someone has not respected the Record TTL or it is a form of spoof/attack. In both cases, this is not valid behavior with respect to the specifications.

LISP-encapsulated packets cannot transport a Dest Map-Version number equal to the Null Map-Version number, because in this case the ETR is signaling that Map-Version numbers are not used for the mapping of the destination EID (see [Section 6.1](#)).

## [7.2](#). Handling Source Map-Version Number

When an ETR receives a packet, the Source Map-Version number relates to the mapping for the source EID for which the ITR that sent the packet is authoritative. If the ETR has an entry in its EID-to-RLOC Map-Cache for the source EID, then a check SHOULD be performed and the following cases can arise:

1. The packet arrives with the same Source Map-Version number as that stored in the EID-to-RLOC Map-Cache. This is the regular case. The ETR has in its EID-to-RLOC Map-Cache an up-to-date copy of the mapping. No further actions are needed.
2. The packet arrives with a Source Map-Version number greater (i.e., newer) than the one stored in the local EID-to-RLOC Map-Cache. This means that the ETR has in its EID-to-RLOC Map-Cache a mapping that is stale and needs to be updated. A Map-Request SHOULD be sent to get the new mapping for the source EID, respecting rate-limitation policies described in [[I-D.ietf-lisp-rfc6833bis](#)].
3. The packet arrives with a Source Map-Version number smaller (i.e., older) than the one stored in the local EID-to-RLOC Map-Cache. Such a case is not valid with respect to the

specifications. Indeed, if the mapping is already present in the EID-to-RLOC Map-Cache, this means that an explicit Map-Request

has been sent and a Map-Reply has been received from an authoritative source. In this situation, the packet SHOULD be silently dropped, unless considered safe to accept the traffic (e.g. private deployments, where it can indicate a misconfiguration).

If the ETR does not have an entry in the EID-to-RLOC Map-Cache for the source EID, then the Source Map-Version number MUST be ignored.

## 8. Security Considerations

Attackers can try to trigger a large number of Map-Requests by simply forging packets with random Map-Versions. The Map-Requests are rate-limited as described in [[I-D.ietf-lisp-rfc6833bis](#)]. With Map-Versioning it is possible to filter packet carrying invalid version numbers before triggering a Map-Request, thus helping to reduce the effects of DoS attacks. However, it might not be enough to really protect from a DDoS attack.

This document builds on the specification and operation of the LISP control and data planes. The Security Considerations of [[I-D.ietf-lisp-rfc6830bis](#)] and [[I-D.ietf-lisp-rfc6833bis](#)] apply. A thorough security analysis of LISP is documented in [[RFC7835](#)].

Map-Versioning MUST NOT be used over the public Internet and SHOULD only be used in trusted and closed deployments.

## 9. Deployment Considerations

LISP requires ETRs to provide the same mapping for the same EID-Prefix to a requester. Map-Versioning does not require additional synchronization mechanisms. Clearly, all the ETRs have to reply with the same mapping including same Map-Version number; otherwise, there can be an inconsistency that creates additional control traffic, instabilities, and traffic disruptions.

There are two ways Map-Versioning is helpful with respect to synchronization. On the one hand, assigning version numbers to mappings helps in debugging, since quick checks on the consistency of

the mappings on different ETRs can be done by looking at the Map-Version number. On the other hand, Map-Versioning can be used to control the traffic toward ETRs that announce the latest mapping.

As an example, let's consider the topology of Figure 3 where ITR A.1 of Domain A is sending unidirectional traffic to Domain B, while A.2 of Domain A exchanges bidirectional traffic with Domain B. In particular, ITR A.2 sends traffic to ETR B, and ETR A.2 receives traffic from ITR B.

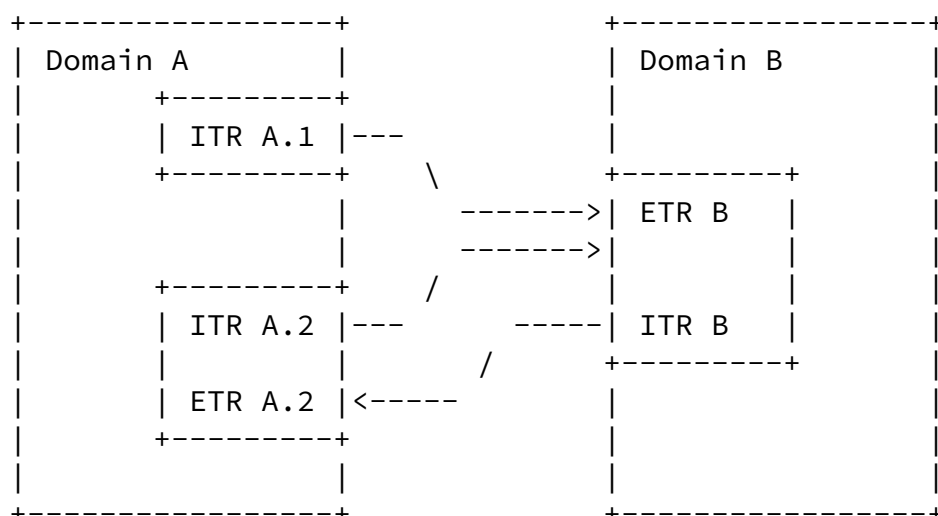


Figure 3: Example topology.

Obviously, in the case of Map-Versioning, both ITR A.1 and ITR A.2 of Domain A must use the same value; otherwise, the ETR of Domain B will start to send Map-Requests.

The same problem can, however, arise without Map-Versioning, for instance, if the two ITRs of Domain A send different Locator-Status-Bits. In this case, either the traffic is disrupted if ETR B does not verify reachability, or if ETR B will start sending Map-Requests to confirm each change in reachability.

So far, LISP does not provide any specific synchronization mechanism but assumes that synchronization is provided by configuring the different xTRs consistently. The same applies for Map-Versioning. If in the future any synchronization mechanism is provided, Map-Versioning will take advantage of it automatically, since it is

included in the Map Record format, as described in [Section 5](#).

## [10.](#) IANA Considerations

This document includes no request to IANA.

## [11.](#) References

### [11.1.](#) Normative References

[I-D.ietf-lisp-rfc6830bis]

Farinacci, D., Fuller, V., Meyer, D., Lewis, D., and A. Cabellos-Aparicio, "The Locator/ID Separation Protocol (LISP)", [draft-ietf-lisp-rfc6830bis-36](#) (work in progress), November 2020.

Iannone, et al.

Expires November 5, 2022

[Page 11]

---

Internet-Draft

LISP Map-Versioning

May 2022

[I-D.ietf-lisp-rfc6833bis]

Farinacci, D., Maino, F., Fuller, V., and A. Cabellos-Aparicio, "Locator/ID Separation Protocol (LISP) Control-Plane", [draft-ietf-lisp-rfc6833bis-30](#) (work in progress), November 2020.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.

[RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.

### [11.2.](#) Informative References

[I-D.ietf-lisp-introduction]

Cabellos-Aparicio, A. and D. Saucez, "An Architectural Introduction to the Locator/ID Separation Protocol (LISP)", [draft-ietf-lisp-introduction-13](#) (work in progress), April 2015.

[RFC6832] Lewis, D., Meyer, D., Farinacci, D., and V. Fuller, "Interworking between Locator/ID Separation Protocol

(LISP) and Non-LISP Sites", [RFC 6832](#),  
DOI 10.17487/RFC6832, January 2013,  
<<https://www.rfc-editor.org/info/rfc6832>>.

[RFC6834] Iannone, L., Saucez, D., and O. Bonaventure, "Locator/ID Separation Protocol (LISP) Map-Versioning", [RFC 6834](#),  
DOI 10.17487/RFC6834, January 2013,  
<<https://www.rfc-editor.org/info/rfc6834>>.

[RFC7835] Saucez, D., Iannone, L., and O. Bonaventure, "Locator/ID Separation Protocol (LISP) Threat Analysis", [RFC 7835](#),  
DOI 10.17487/RFC7835, April 2016,  
<<https://www.rfc-editor.org/info/rfc7835>>.

## [Appendix A](#). Benefits and Case Studies for Map-Versioning

In the following sections, we provide more discussion on various aspects and uses of Map-Versioning. Security observations are grouped in [Section 8](#).

### [A.1](#). Map-Versioning and Unidirectional Traffic

When using Map-Versioning, the LISP-specific header carries two Map-Version numbers, for both source and destination mappings. This can raise the question on what will happen in the case of unidirectional flows, for instance, in the case presented in Figure 4, since the LISP specifications do not mandate that the ETR have a mapping from the source EID.

+-----+	+-----+
Domain A	Domain B
+-----+	+-----+

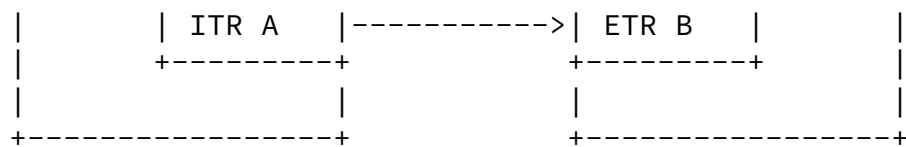


Figure 4: Unidirectional traffic between LISP domains.

An ITR is able to put both the source and destination version numbers in the LISP header since the Source Map-Version number is in its database while the Destination Map-Version number is in its cache.

The ETR checks only the Dest Map-Version number as described in [Section 7](#), ignoring the Source Map-Version number.

## A.2. Map-Versioning and Interworking

Map-Versioning is compatible with the LISP interworking between LISP and non-LISP sites as defined in [\[RFC6832\]](#). LISP interworking defines three techniques to make LISP sites and non-LISP sites, namely Proxy-ITR, LISP-NAT, and Proxy-ETR. The following text describes how Map-Versioning relates to these three mechanisms.

### A.2.1. Map-Versioning and Proxy-ITRs

The purpose of the Proxy-ITR (PITR) is to encapsulate traffic originating in a non-LISP site in order to deliver the packet to one of the ETRs of the LISP site (cf. Figure 5). This case is very similar to the unidirectional traffic case described in [Appendix A.1](#); hence, similar rules apply.

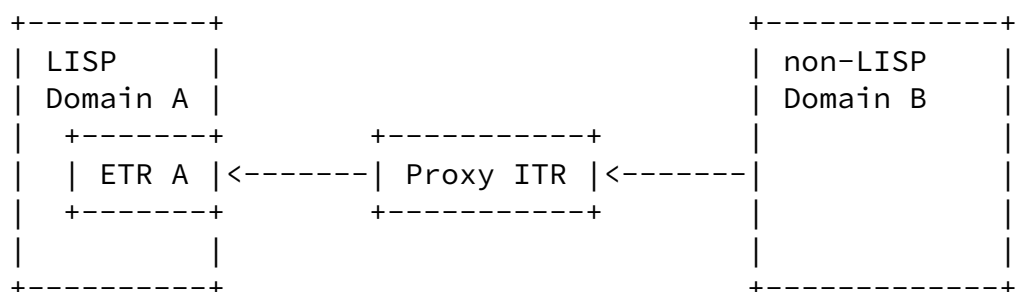


Figure 5: Unidirectional traffic from non-LISP domain to LISP domain.

The main difference is that a Proxy-ITR does not have any mapping, since it just encapsulates packets arriving from the non-LISP site, and thus cannot provide a Source Map-Version. In this case, the proxy-ITR will just put the Null Map-Version value as the Source Map-Version number, while the receiving ETR will ignore the field.

With this setup, LISP Domain A is able to check whether or not the PITR is using the latest mapping.

[A.2.2.](#) Map-Versioning and LISP-NAT

The LISP-NAT mechanism is based on address translation from non-routable EIDs to routable EIDs and does not involve any form of encapsulation. As such, Map-Versioning does not apply in this case.

[A.2.3.](#) Map-Versioning and Proxy-ETRs

The purpose of the Proxy-ETR (PETR) is to decapsulate traffic originating in a LISP site in order to deliver the packet to the non-LISP site (cf. Figure 6). One of the main reasons to deploy PETRs is to bypass uRPF (Unicast Reverse Path Forwarding) checks on the provider edge.

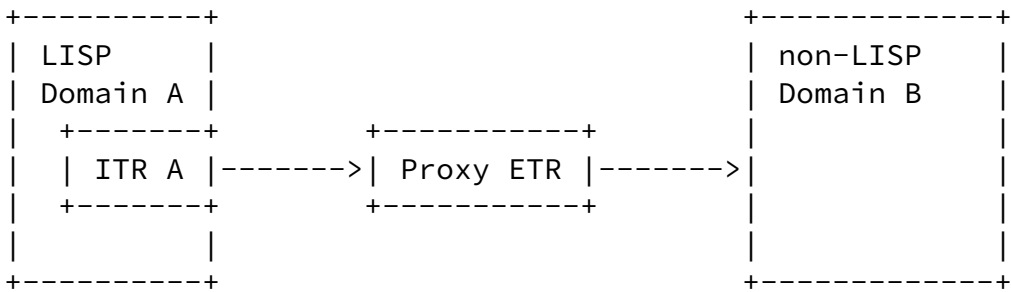


Figure 6: Unidirectional traffic from LISP domain to non-LISP domain.

A Proxy-ETR does not have any mapping, since it just decapsulates packets arriving from the LISP site. In this case, the ITR can interchangeably put a Map-Version value or the Null Map-Version value

as the Dest Map-Version number since the receiving Proxy-ETR will ignore the field.

With this setup, the Proxy-ETR is able to check whether or not the



mapping has changed.

### [A.3.](#) RLOC Shutdown/Withdraw

Map-Versioning can also be used to perform a graceful shutdown or withdraw of a specific RLOC. This is achieved by simply issuing a new mapping, with an updated Map-Version number where the specific RLOC to be shut down is withdrawn or announced as unreachable (via the R bit in the Map Record; see [[I-D.ietf-lisp-rfc6833bis](#)]), but without actually turning it off.

Once no more traffic is received by the RLOC, it can be shut down gracefully, because all sites actively using the mapping have updated it.

### Authors' Addresses

Luigi Iannone  
Huawei Technologies France

EMail: [luigi.iannone@huawei.com](mailto:luigi.iannone@huawei.com)

Damien Saucez  
INRIA

EMail: [damien.saucez@inria.fr](mailto:damien.saucez@inria.fr)

Olivier Bonaventure  
Universite catholique de Louvain

EMail: [olivier.bonaventure@uclouvain.be](mailto:olivier.bonaventure@uclouvain.be)