

Light-Weight Implementation Guidance (lwig)  
Internet-Draft  
Intended status: Informational  
Expires: October 4, 2019

D. Migault  
Ericsson  
T. Guggemos  
LMU Munich  
April 2, 2019

Minimal ESP  
draft-ietf-lwig-minimal-esp-00

## Abstract

This document describes a minimal implementation of the IP Encapsulation Security Payload (ESP) defined in [RFC 4303](#). Its purpose is to enable implementation of ESP with a minimal set of options to remain compatible with ESP as described in [RFC 4303](#). A minimal version of ESP is not intended to become a replacement of the [RFC 4303](#) ESP, but instead to enable a limited implementation to interoperate with implementations of [RFC 4303](#) ESP.

This document describes what is required from [RFC 4303](#) ESP as well as various ways to optimize compliance with [RFC 4303](#) ESP.

This document does not update or modify [RFC 4303](#), but provides a compact description of how to implement the minimal version of the protocol. If this document and [RFC 4303](#) conflicts then [RFC 4303](#) is the authoritative description.

## Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on October 4, 2019.

Internet-Draft

Minimal ESP

April 2019

## Copyright Notice

Copyright (c) 2019 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

### 1. Requirements notation

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

### 2. Introduction

ESP [[RFC4303](#)] is part of the IPsec suite protocol [[RFC4301](#)]. IPsec is used to provide confidentiality, data origin authentication, connectionless integrity, an anti-replay service (a form of partial sequence integrity) and limited traffic flow confidentiality.

Figure 1 describes an ESP Packet. Currently ESP is implemented in the kernel of major multi purpose Operating Systems (OS). The ESP and IPsec suite is usually implemented in a complete way to fit multiple purpose usage of these OS. However, completeness of the IPsec suite as well as multi purpose scope of these OS is often performed at the expense of resources, or a lack of performance. As a result, constraint devices are likely to have their own implementation of ESP optimized and adapted to their specificities. With the adoption of IPsec by IoT devices with minimal IKEv2 [[RFC7815](#)] and ESP Header Compression (EHC) with [[I-D.mglt-ipsecme-diet-esp](#)] or [[I-D.mglt-ipsecme-ikev2-diet-esp-extension](#)], it becomes crucial that ESP implementation designed for constraint devices remain interoperable with the standard ESP implementation to avoid a fragmented usage of ESP. This document describes the the minimal properties and

ESP implementation needs to meet.

For each field of the ESP packet represented in Figure 1 this document provides recommendations and guidance for minimal implementations. The primary purpose of Minimal ESP is to remain

interoperable with other nodes implementing [RFC 4303](#) ESP, while limiting the standard complexity of the implementation.

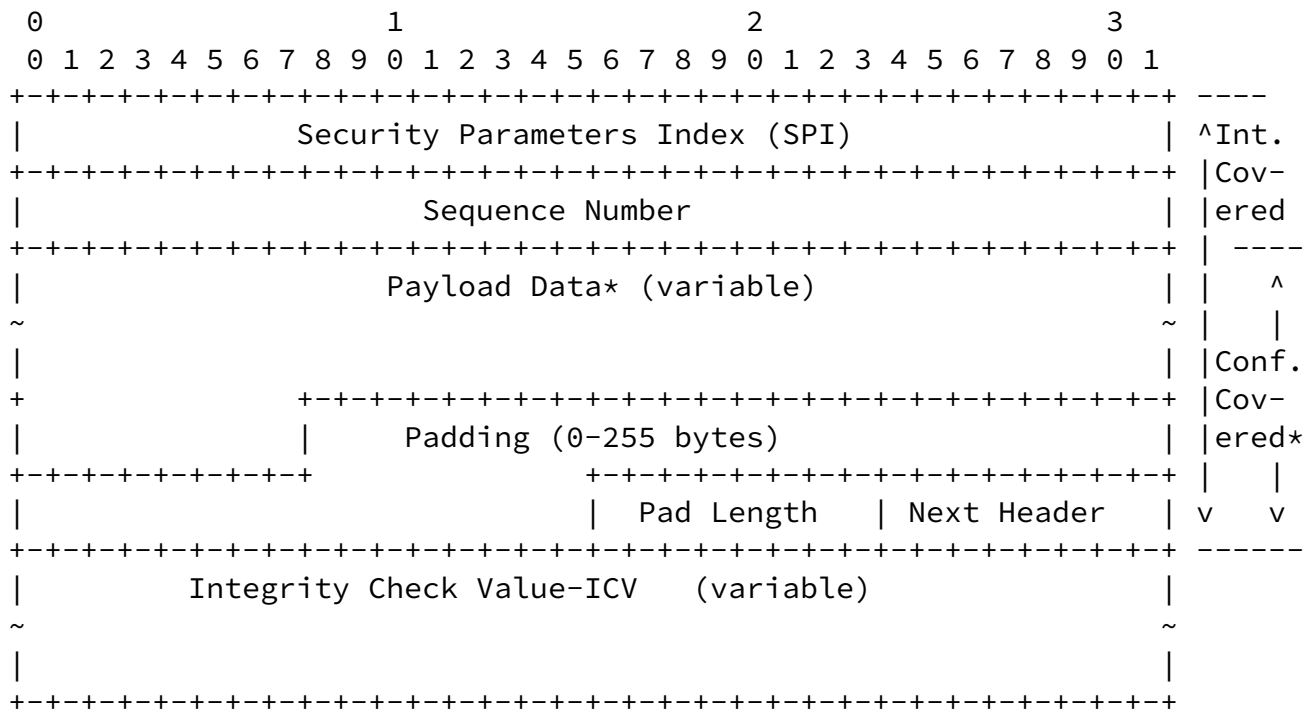


Figure 1: ESP Packet Description

### 3. Security Parameter Index (SPI) (32 bit)

According to the [\[RFC4303\]](#), the SPI is a mandatory 32 bits field and is not allowed to be removed.

The SPI has a local significance to index the Security Association (SA). From [\[RFC4301\] section 4.1](#), nodes supporting only unicast communications can index their SA only using the SPI. On the other hand, nodes supporting multicast communications must also use the IP addresses and thus SA lookup needs to be performed using the longest match.

For nodes supporting only unicast communications, it is RECOMMENDED to index SA with the SPI only. Some other local constraints on the node may require a combination of the SPI as well as other parameters to index the SA.

It is RECOMMENDED to randomly generate the SPI indexing each inbound session. A random generation provides a stateless way to generate the SPIs, while keeping the probability of collision between SPIs relatively low. In case of collision, the SPI is simply re-generated.

However, for some constraint nodes, generating a random SPI may consume too much resource, in which case SPI can be generated using predictable functions or even a fix value. In fact, the SPI does not need to be random. Generating non random SPI MAY lead to privacy and security concerns. As a result, this alternative should be considered for devices that would be strongly impacted by the generation of a random SPI and after understanding the privacy and security impact of generating non random SPI.

When a constraint node uses fix value for SPIs, it imposes some limitations on the number of inbound SA. This limitation can be alleviated by how the SA look up is performed. When fix SPI are used, it is RECOMMENDED the constraint node has as many SPI values as ESP session per host IP address, and that SA lookup includes the IP addresses.

Note that SPI value is used only for inbound traffic, as such the SPI negotiated with IKEv2 [[RFC7296](#)] or [[RFC7815](#)] by a peer, is the value used by the remote peer when it sends traffic. As SPI are only used for inbound traffic by the peer, this allows each peer to manage the set of SPIs used for its inbound traffic.

The use of fix SPI MUST NOT be considered as a way to avoid strong random generators. Such generator will be required in order to provide strong cryptographic protection and follow the randomness requirements for security described in [[RFC4086](#)]. Instead, the use of a fix SPI should only be considered as a way to overcome the resource limitations of the node, when this is feasible.

The use of a limited number of fix SPI or non random SPIs come with security or privacy drawbacks. Typically, a passive attacker may derive information such as the number of constraint devices connecting the remote peer, and in conjunction with data rate, the attacker may eventually determine the application the constraint device is associated to. If the SPI is fixed by a manufacturer or by some software application, the SPI may leak in an obvious way the type of sensor, the application involved or the model of the constraint device. When identification of the application or the hardware is associated to privacy, the SPI MUST be randomly generated. However, one needs to realize that in this case this is likely to be sufficient and a thorough privacy analysis is required. More specifically, traffic pattern MAY leak sufficient information in itself. In other words, privacy leakage is a complex and the use of random SPI is unlikely to be sufficient.

As the general recommendation is to randomly generate the SPI, constraint device that will use a limited number of fix SPI are expected to be very constraint devices with very limited

capabilities, where the use of randomly generated SPI may prevent them to implement IPsec. In this case the ability to provision non random SPI enables these devices to secure their communications. These devices, due to there limitations, are expected to provide limited information and how the use of non random SPI impacts privacy requires further analysis. Typically temperature sensors, wind sensors, used outdoor do not leak privacy sensitive information. When used indoor, the privacy information is stored in the encrypted data and as such does not leak privacy.

As far as security is concerned, revealing the type of application or model of the constraint device could be used to identify the vulnerabilities the constraint device is subject to. This is especially sensitive for constraint devices where patches or software updates will be challenging to operate. As a result, these devices may remain vulnerable for relatively long period. In addition, predictable SPI enable an attacker to forge packets with a valid SPI. Such packet will not be rejected due to an SPI mismatch, but instead after the signature check which requires more resource and thus make DoS more efficient, especially for devices powered by batteries.

Values 0-255 SHOULD NOT be used. Values 1-255 are reserved and 0 is

only allowed to be used internal and it MUST NOT be send on the wire.

[RFC4303] mentions :

"The SPI is an arbitrary 32-bit value that is used by a receiver to identify the SA to which an incoming packet is bound. The SPI field is mandatory. [...]"

"For a unicast SA, the SPI can be used by itself to specify an SA, or it may be used in conjunction with the IPsec protocol type (in this case ESP). Because the SPI value is generated by the receiver for a unicast SA, whether the value is sufficient to identify an SA by itself or whether it must be used in conjunction with the IPsec protocol value is a local matter. This mechanism for mapping inbound traffic to unicast SAs MUST be supported by all ESP implementations."

#### 4. Sequence Number(SN) (32 bit)

According to [[RFC4303](#)], the Sequence Number (SN) is a mandatory 32 bits field in the packet.

The SN is set by the sender so the receiver can implement anti-replay protection. The SN is derived from any strictly increasing function that guarantees: if packet B is sent after packet A, then SN of packet B is strictly greater then the SN of packet A.

Some constraint devices may establish communication with specific devices, like a specific gateway, or nodes similar to them. As a result, the sender may know whereas the receiver implements anti-replay protection or not. Even though the sender may know the receiver does not implement anti replay protection, the sender MUST implement a always increasing function to generate the SN.

Usually, SN is generated by incrementing a counter for each packet sent. A constraint device may avoid maintaining this context and use another source that is known to always increase. Typically, constraint nodes using 802.15.4 Time Slotted Channel Hopping (TSCH), whose communication is heavily dependent on time, can take advantage of their clock to generate the SN. This would guarantee a strictly increasing function, and avoid storing any additional values or context related to the SN. When the use of a clock is considered,

one should take care that packets associated to a given SA are not sent with the same time value.

For inbound traffic, it is RECOMMENDED to provide a anti-replay protection, and the size of the window depends on the ability of the network to deliver packet out of order. As a result, in environment where out of order packets is not possible the window size can be set to one. However, while RECOMMENDED, there is no requirements to implement an anti replay protection mechanism implemented by IPsec. A node MAY drop anti-replay protection provided by IPsec, and instead implement its own internal mechanism.

[RFC4303] mentions :

"This unsigned 32-bit field contains a counter value that increases by one for each packet sent, i.e., a per-SA packet sequence number. For a unicast SA or a single-sender multicast SA, the sender MUST increment this field for every transmitted packet. Sharing an SA among multiple senders is permitted, though generally not recommended. [...] The field is mandatory and MUST always be present even if the receiver does not elect to enable the anti-replay service for a specific SA."

## 5. Padding

The purpose of padding is to respect the 32 bit alignment of ESP. ESP MUST have at least one padding byte Pad Length that indicates the padding length. ESP padding bytes are generated by a succession of unsigned bytes starting with 1, 2, 3 with the last byte set to Pad Length, where Pad Length designates the length of the padding bytes.

Checking the padding structure is not mandatory, so the constraint device may not proceed to such checks, however, in order to

interoperate with existing ESP implementations, it MUST build the padding bytes as recommended by ESP.

In some situation the padding bytes may take a fix value. This would typically be the case when the Data Payload is of fix size.

[RFC4303] mentions :

"If Padding bytes are needed but the encryption algorithm does not specify the padding contents, then the following default processing MUST be used. The Padding bytes are initialized with a series of (unsigned, 1-byte) integer values. The first padding byte appended to the plaintext is numbered 1, with subsequent padding bytes making up a monotonically increasing sequence: 1, 2, 3, .... When this padding scheme is employed, the receiver SHOULD inspect the Padding field. (This scheme was selected because of its relative simplicity, ease of implementation in hardware, and because it offers limited protection against certain forms of "cut and paste" attacks in the absence of other integrity measures, if the receiver checks the padding values upon decryption.)"

ESP [[RFC4303](#)] also provides Traffic Flow Confidentiality (TFC) as a way to perform padding to hide traffic characteristics, which differs from respecting a 32 bit alignment. TFC is not mandatory and MUST be negotiated with the SA management protocol. TFC has not yet being widely adopted for standard ESP traffic. One possible reason is that it requires to shape the traffic according to one traffic pattern that needs to be maintained. This is likely to require extra processing as well as providing a "well recognized" traffic shape which could end up being counterproductive. As such TFC is not expected to be supported by a minimal ESP implementation.

As a result, TFC cannot not be enabled with minimal, and communication protection that were relying on TFC will be more sensitive to traffic shaping. This could expose the application as well as the devices used to a passive monitoring attacker. Such information could be used by the attacker in case a vulnerability is disclosed on the specific device. In addition, some application use - such as health applications - may also reveal important privacy oriented informations.

Some constraint nodes that have limited battery life time may also prefer avoiding sending extra padding bytes. However the same nodes may also be very specific to an application and device. As a result, they are also likely to be the main target for traffic shaping. In most cases, the payload carried by these nodes is quite small, and the standard padding mechanism may also be used as an alternative to TFC, with a sufficient trade off between the require energy to send

additional payload and the exposure to traffic shaping attacks. In



addition, the information leaked by the traffic shaping may also be addressed by the application level. For example, it is preferred to have a sensor sending some information at regular time interval, rather when an specific event is happening. Typically a sensor monitoring the temperature, or a door is expected to send regularly the information - i.e. the temperature of the room or whether the door is closed or open) instead of only sending the information when the temperature has raised or when the door is being opened.

## 6. Next Header (8 bit)

According to [[RFC4303](#)], the Next Header is a mandatory 8 bits field in the packet. Next header is intended to specify the data contained in the payload as well as dummy packet. In addition, the Next Header may also carry an indication on how to process the packet [[I-D.nikander-esp-beet-mode](#)].

The ability to generate and receive dummy packet is required by [[RFC4303](#)]. For interoperability, it is RECOMMENDED a minimal ESP implementation discards dummy packets. Note that such recommendation only applies for nodes receiving packets, and that nodes designed to only send data may not implement this capability.

As the generation of dummy packets is subject to local management and based on a per-SA basis, a minimal ESP implementation may not generate such dummy packet. More especially, in constraint environment sending dummy packets may have too much impact on the device life time, and so may be avoided. On the other hand, constraint nodes may be dedicated to specific applications, in which case, traffic pattern may expose the application or the type of node. For these nodes, not sending dummy packet may have some privacy implication that needs to be measured. However, for the same reasons exposed in [Section 5](#) traffic shaping at the IPsec layer may also introduce some traffic pattern, and on constraint devices the application is probably the most appropriated layer to limit the risk of leaking information by traffic shaping.

In some cases, devices are dedicated to a single application or a single transport protocol, in which case, the Next Header has a fix value.

Specific processing indications have not been standardized yet [[I-D.nikander-esp-beet-mode](#)] and is expected to result from an agreement between the peers. As a result, it is not expected to be part of a minimal implementation of ESP.

[RFC4303] mentions :

---

"The Next Header is a mandatory, 8-bit field that identifies the type of data contained in the Payload Data field, e.g., an IPv4 or IPv6 packet, or a next layer header and data. [...] the protocol value 59 (which means "no next header") MUST be used to designate a "dummy" packet. A transmitter MUST be capable of generating dummy packets marked with this value in the next protocol field, and a receiver MUST be prepared to discard such packets, without indicating an error."

## 7. ICV

The ICV depends on the crypto-suite used. Currently recommended [RFC8221] only recommend crypto-suites with an ICV which makes the ICV a mandatory field.

As detailed in [Section 8](#) we recommend to use authentication, the ICV field is expected to be present that is to say with a size different from zero. This makes it a mandatory field which size is defined by the security recommendations only.

[RFC4303] mentions :

"The Integrity Check Value is a variable-length field computed over the ESP header, Payload, and ESP trailer fields. Implicit ESP trailer fields (integrity padding and high-order ESN bits, if applicable) are included in the ICV computation. The ICV field is optional. It is present only if the integrity service is selected and is provided by either a separate integrity algorithm or a combined mode algorithm that uses an ICV. The length of the field is specified by the integrity algorithm selected and associated with the SA. The integrity algorithm specification MUST specify the length of the ICV and the comparison rules and processing steps for validation."

## 8. Cryptographic Suites

The cryptographic suites implemented are an important component of ESP. The recommended suites to use are expected to evolve over time and implementer SHOULD follow the recommendations provided by [RFC8221] and updates. Recommendations are provided for standard nodes as well as constraint nodes.

This section lists some of the criteria that may be considered. The list is not expected to be exhaustive and may also evolve overtime. As a result, the list is provided as indicative:

1. Security: Security is the criteria that should be considered first for the selection of encryption algorithm transform. The

security of encryption algorithm transforms is expected to evolve over time, and it is of primary importance to follow up-to-date security guidances and recommendations. The chosen encryption algorithm transforms MUST NOT be known vulnerable or weak (see [[RFC8221](#)] for outdated ciphers). ESP can be used to authenticate only or to encrypt the communication. In the later case, authenticated encryption must always be considered [[RFC8221](#)].

2. Interoperability: Interoperability considers the encryption algorithm transforms shared with the other nodes. Note that it is not because a encryption algorithm transform is widely deployed that is secured. As a result, security SHOULD NOT be weakened for interoperability. [[RFC8221](#)] and successors consider the life cycle of encryption algorithm transforms sufficiently long to provide interoperability. Constraint devices may have limited interoperability requirements which makes possible to reduces the number of encryption algorithm transforms to implement.
3. Power Consumption and Cipher Suite Complexity: Complexity of the encryption algorithm transform or the energy associated to it are especially considered when devices have limited resources or are using some batteries, in which case the battery determines the life of the device. The choice of a cryptographic function may consider re-using specific libraries or to take advantage of hardware acceleration provided by the device. For example if the device benefits from AES hardware modules and uses AES-CTR, it may prefer AUTH\_AES-XCBC for its authentication. In addition, some devices may also embed radio modules with hardware acceleration for AES-CCM, in which case, this mode may be preferred.
4. Power Consumption and Bandwidth Consumption: Similarly to the encryption algorithm transform complexity, reducing the payload sent, may significantly reduce the energy consumption of the device. As a result, encryption algorithm transforms with low overhead may be considered. To reduce the overall payload size one may for example:

1. Use of counter-based ciphers without fixed block length (e.g. AES-CTR, or ChaCha20-Poly1305).
2. Use of ciphers with capability of using implicit IVs [[I-D.ietf-ipsecme-implicit-iv](#)].
3. Use of ciphers recommended for IoT [[RFC8221](#)].

4. Avoid Padding by sending payload data which are aligned to the cipher block length - 2 for the ESP trailer.

## [9.](#) IANA Considerations

There are no IANA consideration for this document.

## [10.](#) Security Considerations

Security considerations are those of [[RFC4303](#)]. In addition, this document provided security recommendations and guidances over the implementation choices for each fields.

## [11.](#) Acknowledgment

The authors would like to thank Daniel Palomares, Scott Fluhrer, Tero Kivinen, Valery Smyslov, Yoav Nir, Michael Richardson for their valuable comments.

## [12.](#) References

### [12.1.](#) Normative References

[I-D.ietf-ipsecme-implicit-iv]

Migault, D., Guggemos, T., and Y. Nir, "Implicit IV for Counter-based Ciphers in Encapsulating Security Payload (ESP)", [draft-ietf-ipsecme-implicit-iv-06](#) (work in progress), November 2018.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997,

<<https://www.rfc-editor.org/info/rfc2119>>.

- [RFC4086] Eastlake 3rd, D., Schiller, J., and S. Crocker, "Randomness Requirements for Security", [BCP 106](#), [RFC 4086](#), DOI 10.17487/RFC4086, June 2005, <<https://www.rfc-editor.org/info/rfc4086>>.
- [RFC4301] Kent, S. and K. Seo, "Security Architecture for the Internet Protocol", [RFC 4301](#), DOI 10.17487/RFC4301, December 2005, <<https://www.rfc-editor.org/info/rfc4301>>.
- [RFC4303] Kent, S., "IP Encapsulating Security Payload (ESP)", [RFC 4303](#), DOI 10.17487/RFC4303, December 2005, <<https://www.rfc-editor.org/info/rfc4303>>.

Migault & Guggemos

Expires October 4, 2019

[Page 11]

---

Internet-Draft

Minimal ESP

April 2019

- [RFC7296] Kaufman, C., Hoffman, P., Nir, Y., Eronen, P., and T. Kivinen, "Internet Key Exchange Protocol Version 2 (IKEv2)", STD 79, [RFC 7296](#), DOI 10.17487/RFC7296, October 2014, <<https://www.rfc-editor.org/info/rfc7296>>.
- [RFC7815] Kivinen, T., "Minimal Internet Key Exchange Version 2 (IKEv2) Initiator Implementation", [RFC 7815](#), DOI 10.17487/RFC7815, March 2016, <<https://www.rfc-editor.org/info/rfc7815>>.
- [RFC8221] Wouters, P., Migault, D., Mattsson, J., Nir, Y., and T. Kivinen, "Cryptographic Algorithm Implementation Requirements and Usage Guidance for Encapsulating Security Payload (ESP) and Authentication Header (AH)", [RFC 8221](#), DOI 10.17487/RFC8221, October 2017, <<https://www.rfc-editor.org/info/rfc8221>>.

## [12.2.](#) Informative References

- [I-D.mglt-ipsecme-diet-esp]  
Migault, D., Guggemos, T., Bormann, C., and D. Schinazi, "ESP Header Compression and Diet-ESP", [draft-mglt-ipsecme-diet-esp-07](#) (work in progress), March 2019.
- [I-D.mglt-ipsecme-ikev2-diet-esp-extension]

Migault, D., Guggemos, T., and D. Schinazi, "Internet Key Exchange version 2 (IKEv2) extension for the ESP Header Compression (EHC) Strategy", [draft-mglt-ipsecme-ikev2-diet-esp-extension-01](#) (work in progress), June 2018.

[I-D.nikander-esp-beet-mode]

Nikander, P. and J. Melen, "A Bound End-to-End Tunnel (BEET) mode for ESP", [draft-nikander-esp-beet-mode-09](#) (work in progress), August 2008.

## [Appendix A](#). Document Change Log

[RFC Editor: This section is to be removed before publication]

-00: First version published.

-01: Clarified description

-02: Clarified description

Migault & Guggemos

Expires October 4, 2019

[Page 12]

---

Internet-Draft

Minimal ESP

April 2019

### Authors' Addresses

Daniel Migault  
Ericsson  
8400 boulevard Decarie  
Montreal, QC H4P 2N2  
Canada

Email: [daniel.migault@ericsson.com](mailto:daniel.migault@ericsson.com)

Tobias Guggemos  
LMU Munich  
MNM-Team  
Oettingenstr. 67  
80538 Munich, Bavaria  
Germany

Email: [guggemos@mnm-team.org](mailto:guggemos@mnm-team.org)