

LWIG
Internet-Draft
Intended status: Informational
Expires: August 25, 2019

R. Jadhav, Ed.
R. Sahoo
Huawei
S. Duquennoy
Inria
J. Eriksson
Yanzi Networks
February 21, 2019

**Neighbor Management Policy for 6LoWPAN
draft-ietf-lwig-nbr-mgmt-policy-03**

Abstract

This document describes the problems associated with neighbor cache management in multihop networks involving resource-constrained devices. Thereafter, it also presents a sample neighbor management policy that allows efficient cache management in multihop LLNs (low-power and lossy networks such as LoWPAN) with resource-constrained devices.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on August 25, 2019.

Copyright Notice

Copyright (c) 2019 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents

carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	2
1.1.	Requirements Language and Terminology	4
2.	Neighbor Management	5
2.1.	Significance of Neighbor management policy	5
2.2.	Trivial neighbor management policies	6
2.3.	Lifecycle of a NCE	7
2.3.1.	NCE Insertion	7
2.3.2.	NCE Deletion	10
2.3.3.	NCE Eviction	11
	2.3.3.1. Eviction for directly connected routing entries .	11
2.3.4.	NCE Reinforcement	12
2.4.	Requirements of a good neighbor management policy	12
2.5.	Approaches to neighbor management policy	13
2.5.1.	Reactive Approach	13
2.5.2.	Proactive Approach	13
3.	Reservation based Neighbor Management Policy	14
3.1.	Limitations of such a policy	16
4.	Acknowledgements	16
5.	IANA Considerations	17
6.	Security Considerations	17
7.	References	17
7.1.	Normative References	17
7.2.	Informative References	18
Appendix A.	Performance Result	19
	Authors' Addresses	20

[1. Introduction](#)

In a wireless multihop LLN, the node densities (maximum nodes reachable on the same hop) may vary significantly depending upon deployments and scenarios. Examples of such networks is LoWPAN [REF] networks. While there is some policy control possible with regards to the network size in terms of maximum number of devices connected, it is especially difficult to set a figure on what will be the maximum node density given a deployment. For e.g. A network can put an upper limit on max 1000 devices but it is impossible to state what the node density will be in this 1000 node network.

A neighbor cache is used for populating neighboring one-hop connected nodes information such as MAC address, link local IP address and

other reachability state information. Node density has direct implications on the neighbor cache and in constrained network scenario the size of the neighbor cache will be limited. Thus there are chances that a node may not be able to fit all the neighboring nodes in its cache in which case it has to prioritize entries and thus needs a neighbor management policy.

This draft presents problems related to neighbor management policies by considering a security-enabled multi-hop 6Lo network. This document considers RPL [[RFC6550](#)] as a routing protocol and PANA (EAP-PANA) [[RFC5191](#)] as a network access protocol. For RPL, both the storing and non-storing mode of operations are considered. We also provide a sample neighbor management policy which can be used in such networks and its limitations. The aim of such a policy is to retain set of neighbor cache entries with high quality links such that routing adjacencies are stabilized.

The problem statement and the proposed solution described is also relevant to other multihop constrained scenarios such as 6TiSCH [[I-D.ietf-6tisch-architecture](#)]. [[I-D.ietf-6tisch-minimal-security](#)] talks about a pledge (new joiner) node authenticating via a Join Proxy. The considerations mentioned in this document are applicable for such networks as well.

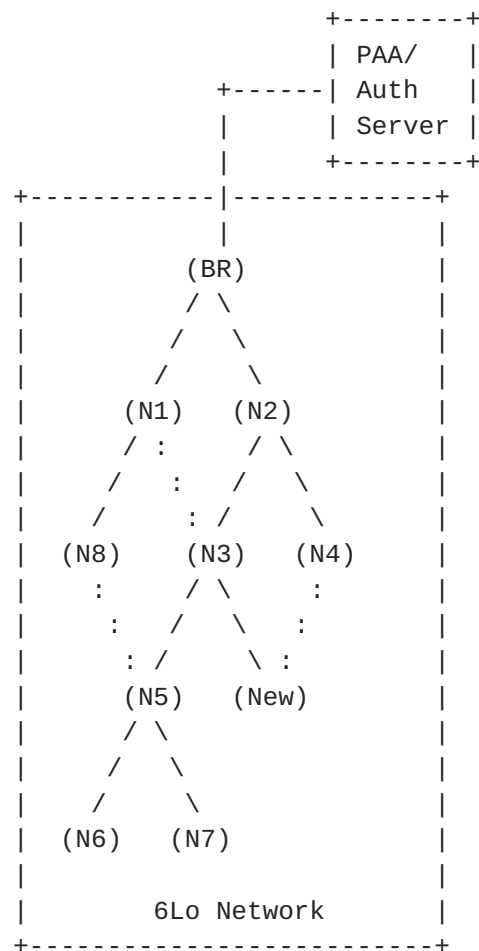


Figure 1: Sample Topology

1.1. Requirements Language and Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [RFC2119].

NDP: Neighbor Discovery protocol [REF]

NS: Neighbor Solicitation

NA: Neighbor Advertisement

LLN: Low Power and Lossy Networks

RPL: Routing Protocol for LLNs [REF]

DAO: DODAG Advertisement Object

DIO: DODAG Information Object

ARO: Address Registration Option defined as part of IPv6 NDP

PaC (PANA Client): New joining node which is yet to be authenticated.

PRE (PANA Relay Element): An already authenticated and network joined node which is willing to act as a relay element for PaCs to complete their authentication procedure on multi-hop networks. [[RFC6345](#)] describes the details of PRE.

PAA (PANA Auth Agent): Auth server which hosts the credentials database. PaC will handshake with PAA to complete authentication procedure.

PCI: PANA Client Initiation is the first message sent by the PaC which initiates the authentication procedure

Routing Child: A downstream node who is part of the routing table of the parent. For e.g. in the sample topology above N5 is the directly connected routing child for N3. N6 and N7 are also part of N3 routing table, they are routing child nodes but not directly connected. For N6 and N7 the document might alternatively use a term grand-child.

Routing Parent: In Figure 1, N1 and N2 are possible routing parents for N3.

Neighbor Cache Entry (NCE): A neighbor entry managed on behalf of directly connected peer.

This document also uses terminology described in [[RFC6550](#)] and [[RFC6775](#)].

2. Neighbor Management

2.1. Significance of Neighbor management policy

Multihop mesh networks present unique challenges to neighbor management especially with resource constrained nodes. In cases where the node density is higher than the neighbor cache size, the entries have to be prioritized. [[Woo et al](#)] and [[Dawans et al](#)] talk about prioritization of neighbor entries by using link quality estimation techniques. But prioritization alone may not necessarily be optimal in all cases. The reason or function why neighbor entry was added also needs to be taken in consideration. For example, evicting a routing direct child might have a ripple effect in turn impacting all the sub-children as well.

In case of key management protocols deployed above MAC layer in multihop network, the neighbor management kicks in early even before the routing adjacencies are established. Since a new joining node needs to discover/attach to a relay element for completing its authentication procedure, the neighbor cache entries have to be appropriately populated both on a PaC and on the PRE. If a neighbor entry whose authentication is in progress is evicted, it will negatively impact the authentication procedure.

Another important consideration is that with increased node density, the prioritization based on link estimation parameters might not help since there might be more well connected peers. In dense deployments the number of directly attached neighbors with good quality links might still be higher than the max entries in neighbor cache size.

2.2. Trivial neighbor management policies

This section investigates policies which are used by most of the current operating systems for constrained nodes. While such policies are trivial to implement they may not be able to deal with the constrained network scenario. Note that such policies can still be used if it is known apriori that the neighbor cache can hold entries for maximum node density.

- a. First Come First Serve (FCFS) policy
- b. Least Recently Used (LRU) policy

The primary distinction between these policies is how it treats a new entry when the neighbor cache is full. In case of FCFS policy, the new entry is simply rejected while with LRU, the new entry replaces the least recently used entry.

RPL works by initiating a downstream multicast DIO to establish upstream network path. Subsequently DAO messages might be sent by the nodes to establish downstream paths to the nodes. Thus the network is flooded with multicast DIO messages initially and similarly there are chances that the same node is ended up been selected as a preferred parent by most of the child nodes and thus receives a DAO message from all these child nodes. Note that once a node establishes a parent entry or a routing entry on behalf of a directly connected node then it has to also provision a neighbor cache entry for it for subsequent unicast traffic.

In case of FCFS policy, a node might end up hosting all the neighbor entries based on DIO or DAO messages. Once the cache is full all the subsequent attempts to add an NCE will fail.

In case of LRU policy, a node might end up churning lot of neighbor entries because once the cache gets full and there is a request for new entry, it would result in evicting the least recently used (but active) entry. If at later point of time, there is a traffic for the evicted entry then the old entry has to be reinstated using IPv6 NDP procedure. This would mean reinstating the entry by evicting another least recently used entry. If the node density is very high, then this churn would be substantially high to extent that it would disrupt any routing adjacencies to be established in the network in a stable way.

2.3. Lifecycle of a NCE

2.3.1. NCE Insertion

IPv6 NDP [[RFC6775](#)] defines signaling involved in resolving the IPv6 addresses to its corresponding MAC addresses which gets populated in the neighbor cache. In case of constrained network, it is desired that such control traffic is minimized and thus the neighbor cache entries are populated as part of existing messaging. One example would be when the node receives a DAO message from its immediate child node, it not only makes an addition to the routing table but also creates a neighbor cache entry for the node. Thus it eliminates need for additional IPv6 NDP NS/NA messaging involved to resolve MAC address. Similar heuristic is used to add neighbor entries in other cases as well. [Section 10.3.2 of \[RFC6775\]](#) describes update and addition of such NCEs based on routing information packets.

Following are the possible signaling scenarios in which case a neighbor entry may get added.

Node Joining procedure: A new joinee node discovers a relay element to initiate its auth procedure. At the end of the discovery phase the new joinee node would have known the link local IP address of the relay element. The joinee node will send an unsecured-NS to the relay element to solicit its NA. The PRE may send a NA with the suitable status code as defined in [section 6.5.3 of \[RFC6775\]](#).

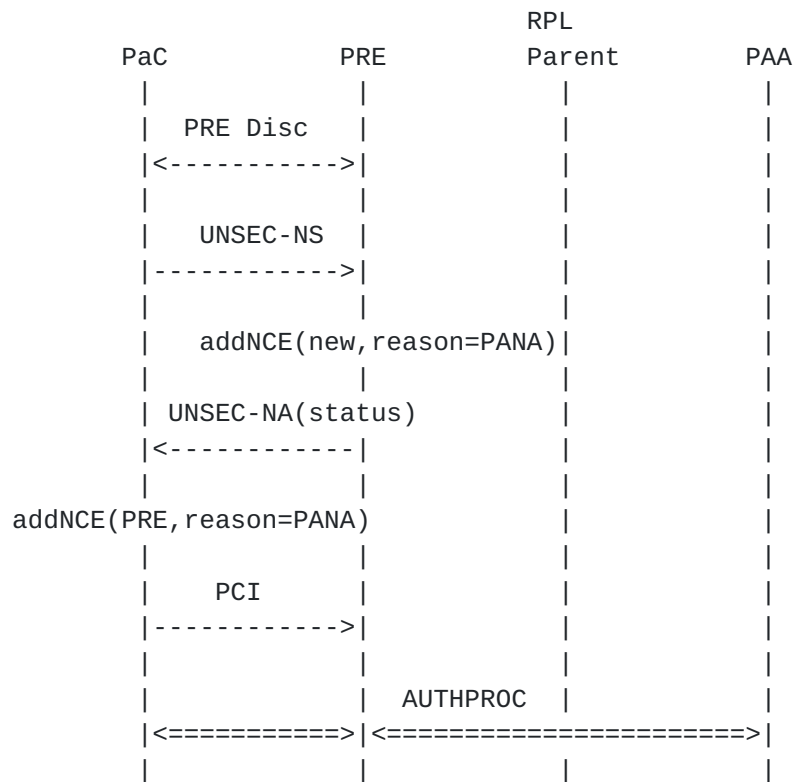


Figure 2: NCE creation between PaC and PRE during relay discovery process

Relay element does not hold any state information on behalf of the new joinee node except for its neighbor cache entry. Thus in the Figure 1 the new joinee node may select node N3 as its PRE, in which case N3 has to add a neighbor entry on behalf of the new joinee node.

Post authentication the node enters into network discovery phase. The node selects one or more of its neighboring peer as its preferred parent based on the DIO received from these peers. Note that the node's selected relay element and its preferred parent may not be same. The preferred parent serves as a default router node to which all its upstream traffic is directed. Thus an NCE on behalf of preferred parent needs to be added. In Figure 1 node N5 selects N3 as its preferred parent. N5 needs to add neighbor entry on behalf of N3 which is its directly connected RPL preferred parent.

In case of RPL storing MOP (mode of operation), the node may send a DAO message containing its reachability information to its preferred parent. The parent node in turn may pass this information upstream to its parent by generating a DAO retaining the child node's reachability information, establishing a downstream routing path towards the node who originated the DAO. The preferred parent has to maintain a neighbor entry on behalf of the directly connected child

node. For example, in the Figure 1, node N3 needs to maintain a neighbor entry on behalf of N5 which is its directly connected child node. Nodes N6 and N7 are grand-child nodes for node N3 for whom no neighbor entry is required.

As mentioned in [Section 10.3.2 of \[RFC6775\]](#), the NCEs on parent and child can be added directly as a result of RPL DIO/DAO signalling without any explicit NS/NA messaging.

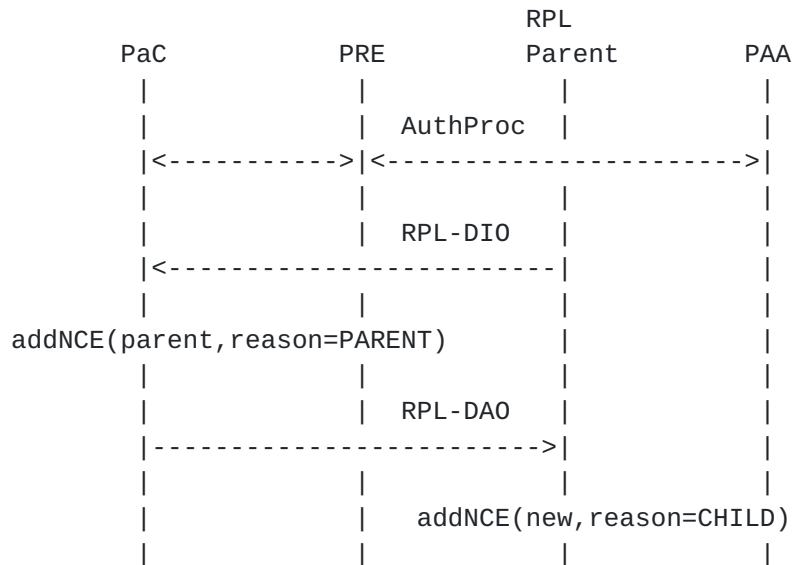


Figure 3: NCE creation call Flow for RPL storing MOP

In case of non-storing MOP, the parent node needs to know the global IPv6 address of the immediate child nodes. This is needed since the source routing header carries the global addresses and thus the NCE of the child node should contain the global address. Secondly, the RPL DAO is addressed directly to the root node in case of non-storing mode. Thus RPL messaging cannot be used for creating NCE entries on parent and child, unlike storing MOP. The child node may send a secure unicast NS with ARO option containing its global address to be registered on the parent node. The child node can still use RPL DIO to create an NCE on behalf of the parent node.

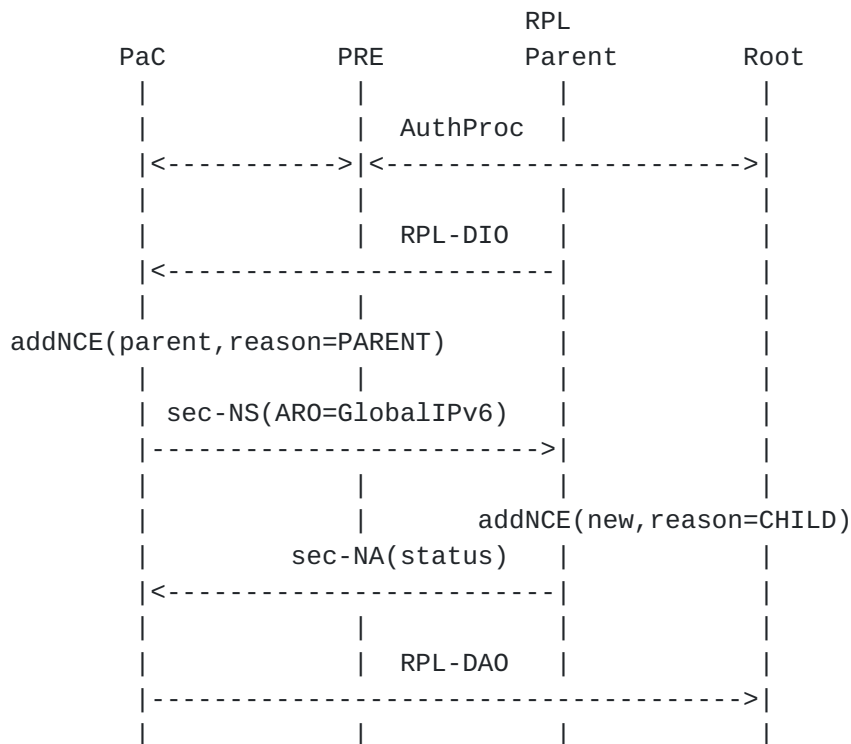


Figure 4: NCE creation call Flow for non-storing MOP

This document expects the neighbor management policy to remember the reason why the neighbor entry is inserted. Secondly, the router may remember whether the NS received was secured or unsecured and accordingly use it to prioritize eviction entries. As described in the next sections, this reason will help the policy to prioritize the entries in case an eviction is required.

2.3.2. NCE Deletion

It is imperative that an unwanted neighbor entry be removed as soon as possible. This section talks about different cases in which neighbor entry can be deleted.

Route Invalidation: In case of storing MOP, when the child node decides to switch its preferred parent, the RPL specifications allows the node to send a no-path DAO message to invalidate the route along the previous path(s). A directly connected parent node can use this message to clear the NCE. While the entry can be immediately cleared, usually the implementations choose to wait a small amount of time before clearing the entry. This is to avoid any impact on the in-transit traffic. Thus this also establishes the importance of route invalidation to achieve optimized neighbor cache utilization.

Efficient neighbor cache management depends upon efficient route invalidation since the neighbor cache entries are associated with routing entries. With regards to RPL, issues with the route invalidation has been highlighted in [[I-D.ietf-roll-efficient-npdao](#)]. [[I-D.ietf-roll-efficient-npdao](#)] also defines a new mechanism for improved route invalidation in storing MOP which helps optimized cleanup of neighbor cache entries.

In case of non-storing mode, the no-path DAO cannot be not employed since the previous parent does not having any routing information to be invalidated. But the previous parent may still contain the NCE on behalf of the child node. This document recommends use of [[RFC6775](#)] [section 6.5.3](#). which allows sending a zero lifetime ARO option in NS for deregistering the corresponding neighbor entry.

[[RFC6775](#)], ND optimizations for 6LoWPANs, [section 5.5.3](#). talks about deleting the entries in case the NUD (neighbor unreachability detection) fails either due to no response to NS messages or due to failure response. NCEs in such cases should be deleted. An example where NUD NS would fail because of no response is the case where the child node switches its parent due to link unavailability. The parent in such a case would not receive the no-path DAO message or any other traffic from the child node. Thus on NCE lifetime expiry, the parent node would send NS which would fail with no response, thus triggering entry deletion.

[2.3.3](#). NCE Eviction

The eviction rules have a major impact on the neighbor management policy. Eviction rules are used when the policy has to forcibly remove an active neighbor entry from the cache to make space for the new (hopefully higher priority) entry. The eviction policy may take into account several considerations such as the reason why the entry was made, is the entry in active use currently, how good (for e.g., based on link estimation) the entry currently is.

[2.3.3.1](#). Eviction for directly connected routing entries

This section talks about implications of an eviction in which a parent node decides of evicting a directly connected routing child NCE. In the sample topology Figure 1, lets assume N3 needs to evict N5 from its neighbor cache. In case of RPL's storing MOP, eviction of directly connected routing child NCE also has impact on all the sub-children. Thus not only will it result in impacting N5 but also nodes N6 and N7. It is important to note that such an eviction has less impact on RPL's non-storing MOP i.e. in case of non-storing mode N5 might end up selecting alternate parent N8 and does not result in any additional control overhead for node N6 and N7.

Thus RPL's non-storing MOP provides additional eviction flexibility for a neighbor management policy in terms evicting directly connected child entries.

2.3.4. NCE Reinforcement

It is expected that the latest reachability state and metric information be maintained in context to the NCE. With wireless networks, the neighbor cache entries prioritization may change over a period of time especially the link quality estimation parameters or the routing metrics. Reinforcement refers to updating the parameters in context to the NCEs which helps in prioritizing the entries when it comes to handling eviction. In wireless networks, on reception of incoming packet, the receiver node's physical and MAC layer may derive certain signal reception parameters (such as RSSI, LQI) which can be considered for reinforcement purpose if the corresponding transmitter/source entry in neighbor cache is found. It should be noted that the signal quality parameters may have high variance in 6Lo networks and thus statistical techniques (such as weighted averaging) are usually employed for deciding about a link quality over a period of time. Reinforcement can be achieved using one or more of the following techniques:

Passive Monitoring: Reinforcing the quality parameters using packets received from the source. TrickleD DIO, periodic beacons, application traffic etc can be used for such monitoring.

Active Probing: A node may select subset of entries for active probing wherein it sends a message to the neighbor entry's target and can expect a response message back. An example of such probing is [[CONTIKI](#)] where unicast DIS is sent to solicit a unicast DIO without impacting the trickle timers. Though it adds a control overhead on the link, periodic probing can help to ascertain connectivity in the absence of any other traffic from the neighboring node.

2.4. Requirements of a good neighbor management policy

Route Stability: Stable NCEs will result in stable routing adjacencies. Thus it is important to avoid unnecessary NCE churn for routing path stability.

Control overhead: A neighbor management policy may have to use signalling messages for policy handling (such as rejection of NCE). It is required that such overhead be kept as low as possible.

Scalability: Scalability with respect to large and uneven node densities in the network.

2.5. Approaches to neighbor management policy

Neighbor management policy depends upon the neighbor cache space availability and the same can be advertised proactively or can be handled reactively.

2.5.1. Reactive Approach

In this approach, the nodes select their RPL parent or the relay element purely based on link metrics and subsequently when they try to allocate their NCE in the target node, it may fail due to unavailability of the cache space. The failure can be communicated depending upon the signaling involved:

NS failure: [Section 6.5.3 of \[RFC6775\]](#) defines a procedure for NS failure handling in case the router's neighbor cache is full. It results in a unicast NA with ARO status field set to two.

DAO NACK: [Section 9.3](#) of RPL [[RFC6550](#)] specifies on how can the parent node react to DAOs from child. In case the parent could not make a NCE on behalf of the child node, a negative ACK with status (between 127-255) should be sent to the child node. The natural reaction of the child node would be to switch to an alternate parent.

PANA Failure: PaC's auth session starts with a PaC discovering a PRE. The discovery procedure is not standardized and can be based upon various factors including signal strength of discovery messages from PRE. Post discovery, the PaC needs to send an unsecured unicast NS message with an ARO containings its link-local IPv6 address. NS helps to determine whether the PRE can allocate an NCE for the PaC. PRE accordingly sends a NA response with appropriate status field.

2.5.2. Proactive Approach

Neighbor cache availability could be proactively advertised by the parent nodes in the DIO messages and in the PRE discovery messages. A child RPL node may additionally use this information from DIO as part of parent selection process.

[I-D.richardson-6tisch-roll-enrollment-priority] defines a signalling change in DIO messages to inform child nodes of the priority of the 6LR. The priority field signals whether the 6LR is ready and has enough resources to serve new child nodes. If 6LR's neighbor cache

gets full it can set the min priority to 0x7f(127) to stop the joining process via it. When a LR or leaf node receives DIO from a parent LR with min priority set to 127 the below actions

1. If its not yet joined the DODAG don't choose this LR as preferred parent to join the DODAG.
2. If the node is already in the DODAG and this LR is not in the parent list don't add it to parent list.
3. If node is already in the DODAG and the LR is in its standby parent list remove the LR from its standby parent list.

In case of new joinee node, the node may use PRE discovery messages with space availability information to select an appropriate PRE. Proactive signaling of neighbor cache space availability will help the nodes to select the parent node or relay node such that the failure signaling due to cache full event can be reduced.

Currently there is no standard way of signaling such neighbor cache space availability information. RPL's DIO messages carry metric information and can be augmented with neighbor cache space as an additional metric. In case of PRE discovery however there is no standard way of defining this information since the PRE discovery procedure itself is not standardized.

In a wireless or shared bus network, a multicast DIO metric advertisement may reach several child nodes eventually everyone responding by selecting the same parent node causing neighbor cache to be exhausted. Thus the failure handling approaches defined in the Reactive Approach section applies here as well. But importantly the failure signaling will be significantly reduced because of proactive advertisement.

3. Reservation based Neighbor Management Policy

This section defines a sample neighbor management policy, with the primary objective to reduce NCE churn and to ensure stability of routing adjacencies. The scheme uses a reservation based policy to reserve NCEs for:

NCE Entry for	MAX count	Reason
Routing Parent	MAX_ROUTING_PARENT_NCE_NUM	PARENT
Routing child	MAX_ROUTING_CHILD_NCE_NUM	CHILD
Others such as pre-auth sessions	MAX_OTHER_NCE_NUM	OTHER

Table 1: Neighbor Cache Entry reservation

Table 1 denotes that the NCEs are reserved depending upon the reason for its addition. MAX_ROUTING_PARENT_NCE_NUM specifies maximum number of parent entries a node should allow. MAX_ROUTING_CHILD_NCE_NUM specifies maximum number of child entries that are allowed after which the node SHOULD decline the DAO signalling. MAX_OTHER_NCE_NUM specifies any other entries that might be created. Pre-auth session entries are usually short-lived and should be considered part of this category.

Note that reservation policy depends upon identification of the reason behind making an NCE. In case of pre-auth sessions, the corresponding NCE is created based on unsecured NS/NA. In case of storing MOP, CHILD NCEs are created either based on DAO (as shown in Figure 3) or based on secured NS/NA messaging (as shown in Figure 4). In case of non-storing MOP, a secured NS/NA messaging as shown in Figure 4 needs to be used.

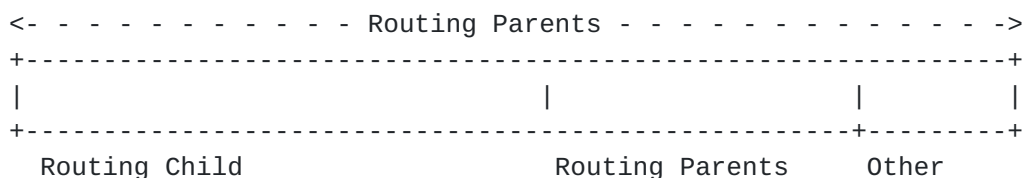


Figure 5: Reservation of NCEs in neighbor table

As shown in the Figure 5, the neighbor cache is partitioned into different entry types. The routing parents can possibly occupy any entry type if found vacant since in case an eviction is sought the non-preferred routing parent could be evicted without much impact on the functioning or on the control traffic. The eviction could be done based on reasons specified in [Section 2.3.3](#).

Routing Child entries are made in context to directly connected peers and these entries are not deleted unless they are unreachabile or there is any reason for the parent node to believe that it is no longer the

preferred parent for the child node. Deletion may happen based on reasons mentioned in [Section 2.3.2](#).

Other entries (OTHER) may be made in response to temporary requirement of making an NCE. One such case is the pre authentication phase where in the relay node makes an entry of the PaC temporarily till the time the authentication phase is completed. The NCE made thus is garbage collected at the end of the lifetime. Also an implementation may choose to keep a lower lifetime for such NCEs depending upon the time taken to complete the authentication process.

[3.1. Limitations of such a policy](#)

The reservation based policy mentioned in this section may result in sub-optimal path selection due to lack of NCE resource on the parent nodes. Also the restriction of maximum pre-auth sessions in the form of MAX_OTHER_NCE_NUM limits the maximum relay sessions that can be supported on the relay node.

The reservation policy allows the parent node to reject the child node's DAO or NS. But the child node cannot remember this rejection and may reattempt the same parent after some time depending upon triggers such as reception of DIO from the same parent who rejected it previously. One of the only way to stop the child node from reattempting such parent selection would be to also include a proactive approach wherein the parent node signals its resource availability in the DIO message as mentioned in [Section 2.5.2](#). Such a scheme of signalling parent node's resource availability is currently not standardized.

RPL's storing MOP imposes additional restrictions. One such case is where a child node may have a given parent node as its only parent and that parent node's NCE are all used up. In such a case, the child node would keep on retrying and failing to send a DAO through the parent node. Ideally the parent node could have evicted a least used child node or a child node who has an alternate parent available. Evicting such a child node is a complex process and may increase the control overhead as described in [Section 2.3.3.1](#). Thus the reservation based policy requires that the minimum node density is sufficiently high so that every child finds a parent node in its vicinity with enough resources.

[4. Acknowledgements](#)

Thanks to Mohit Sethi for the review and feedback. Thanks to Malisa Vucinic for pointing towards security aspects of un-authenticated nodes neighbor cache management.

5. IANA Considerations

This memo includes no request to IANA.

6. Security Considerations

The Join Relay or the PANA Relay Element allows the un-authenticated nodes to join the network. Since the NS/NA signaling is unencrypted, it is possible that a malicious node may try to spoof and occupy all the entries. This draft explains the use of reservation based policy for managing such entries. Following points try to reduce the impact of such attacks:

- a. Only a subset of entries are reserved for un-authenticated nodes doing plain-text NS/NA.
- b. It is recommended that NCE timeout be configured a lower value to evict such entries as soon as possible. New joining nodes are supposed to use these entries and thus are only needed during the time the authentication is in progress. Thus a short-duration NCE timeout will help reduce the impact of DoS attacks.

7. References

7.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC6550] Winter, T., Ed., Thubert, P., Ed., Brandt, A., Hui, J., Kelsey, R., Levis, P., Pister, K., Struik, R., Vasseur, JP., and R. Alexander, "RPL: IPv6 Routing Protocol for Low-Power and Lossy Networks", [RFC 6550](#), DOI 10.17487/RFC6550, March 2012, <<https://www.rfc-editor.org/info/rfc6550>>.
- [RFC6775] Shelby, Z., Ed., Chakrabarti, S., Nordmark, E., and C. Bormann, "Neighbor Discovery Optimization for IPv6 over Low-Power Wireless Personal Area Networks (6LoWPANs)", [RFC 6775](#), DOI 10.17487/RFC6775, November 2012, <<https://www.rfc-editor.org/info/rfc6775>>.

7.2. Informative References

- [CONTIKI] Thingsquare, "Contiki: The Open Source OS for IoT", 2012, <<http://www.contiki-os.org>>.
- [Dawans_et_al]
Dawans, S., Duquennoy, S., and O. Bonaventure, "On Link Estimation in Dense RPL Deployments", 2012.
- [I-D.ietf-6tisch-architecture]
Thubert, P., "An Architecture for IPv6 over the TSCH mode of IEEE 802.15.4", [draft-ietf-6tisch-architecture-19](#) (work in progress), December 2018.
- [I-D.ietf-6tisch-minimal-security]
Vucinic, M., Simon, J., Pister, K., and M. Richardson, "Minimal Security Framework for 6TiSCH", [draft-ietf-6tisch-minimal-security-09](#) (work in progress), November 2018.
- [I-D.ietf-roll-efficient-npdao]
Jadhav, R., Thubert, P., Sahoo, R., and Z. Cao, "Efficient Route Invalidation", [draft-ietf-roll-efficient-npdao-09](#) (work in progress), October 2018.
- [I-D.richardson-6tisch-roll-enrollment-priority]
Richardson, M., "Enabling secure network enrollment in RPL networks", [draft-richardson-6tisch-roll-enrollment-priority-02](#) (work in progress), February 2019.
- [LWIP] "lwIP: A Lightweight TCP/IP stack", <<https://savannah.nongnu.org/projects/lwip/>>.
- [RFC5191] Forsberg, D., Ohba, Y., Ed., Patil, B., Tschofenig, H., and A. Yegin, "Protocol for Carrying Authentication for Network Access (PANA)", [RFC 5191](#), DOI 10.17487/RFC5191, May 2008, <<https://www.rfc-editor.org/info/rfc5191>>.
- [RFC6345] Duffy, P., Chakrabarti, S., Cragie, R., Ohba, Y., Ed., and A. Yegin, "Protocol for Carrying Authentication for Network Access (PANA) Relay Element", [RFC 6345](#), DOI 10.17487/RFC6345, August 2011, <<https://www.rfc-editor.org/info/rfc6345>>.
- [WHITEFIELD]
"Whitefield Framework", <<https://github.com/whitefield-framework/whitefield>>.

[Woo_et_al]

Woo, A., Tong, T., and D. Culler, "Taming the Underlying Challenges of Reliable Multihop Routing in Sensor Networks", 2003.

Appendix A. Performance Result

This appendix provides the details of the performance evaluation of this draft.

Setup: To perform the test [[WHITEFIELD](#)] framework was used with LwIP [[LWIP](#)] as the network stack. A version of this draft is implemented in the lwip to provide efficient neighbor cache management policy that will work with relatively lower neighbor cache size. RPL is used as routing protocol to form mesh network. The available neighbor table size was split 60%, 30% and 10% among direct child entries, parent entries and others respectively.

Topology: Test was performed with a 64 nodes network including the border router. Grid topology based network was used and all the nodes were in close range with each other simulating a dense condition. 802.15.4 in 2.4GHz range with single channel and un-slotted CSMA wireless RF was used.

Steps: Experiment has been conducted with different neighbor cache sizes 10, 20 and 40. For each NC size we have collected sample readings for packet delivery rate by enabling and disabling the new neighbor Cache Management Policy.

Data transmission frequency: Each node in the network sends 104 bytes (IPv6 Header + RPI + UDP + Data) of UDP request to BR at each 10 second interval. udp Server running at BR process these requests and sends the response back , which is also of same size 104 bytes. A duration of 2 minutes delay is added, for network to get stable, before nodes starts sending request messages at 10 sec interval. To calculate PDR one request and response pair is considered as one successful transaction.

Packet Delivery Rate Performance

Neighbor Cache Size	PDR With New policy	PDR Without New policy
10	96.3	7.8
20	97.5	31.3
40	98.7	98.6

Table 2: Packet delivery rate

Authors' Addresses

Rahul Arvind Jadhav (editor)
 Huawei
 Kundalahalli Village, Whitefield,
 Bangalore, Karnataka 560037
 India

Phone: +91-080-49160700
 Email: rahul.ietf@gmail.com

Rabi Narayan Sahoo
 Huawei
 Kundalahalli Village, Whitefield,
 Bangalore, Karnataka 560037
 India

Phone: +91-080-49160700
 Email: rabinarayans@huawei.com

Simon Duquennoy
 Inria
 40 Avenue Halley
 Building A
 Villeneuve d'Ascq
 France

Phone: +33 768227731
 Email: simon.duquennoy@inria.fr

Joakim Eriksson
 Yanzi Networks

Email: joakime@sics.se

