

Internet Engineering Task Force
Internet-Draft
Intended status: Experimental
Expires: March 6, 2014

R. Cole
US Army CERDEC
J. Macker
B. Adamson
Naval Research Laboratory
September 2, 2013

**Definition of Managed Objects for the Manet Simplified Multicast
Framework Relay Set Process
draft-ietf-manet-smf-mib-08**

Abstract

This memo defines a portion of the Management Information Base (MIB) for use with network management protocols in the Internet community. In particular, it describes objects for configuring aspects of the Simplified Multicast Forwarding (SMF) process for Mobile Ad-Hoc Networks (MANETs). The SMF-MIB also reports state information, performance metrics, and notifications. In addition to configuration, the additional state and performance information is useful to operators troubleshooting multicast forwarding problems.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on March 6, 2014.

Copyright Notice

Copyright (c) 2013 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of

publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

- [1. Introduction](#) [3](#)
- [2. The Internet-Standard Management Framework](#) [3](#)
- [3. Conventions](#) [3](#)
- [4. Overview](#) [3](#)
 - [4.1. SMF Management Model](#) [4](#)
 - [4.2. Terms](#) [5](#)
- [5. Structure of the MIB Module](#) [5](#)
 - [5.1. Textual Conventions](#) [6](#)
 - [5.2. The Capabilities Group](#) [6](#)
 - [5.3. The Configuration Group](#) [7](#)
 - [5.4. The State Group](#) [7](#)
 - [5.5. The Performance Group](#) [7](#)
 - [5.6. The Notifications Group](#) [8](#)
 - [5.7. Tables and Indexing](#) [8](#)
- [6. Relationship to Other MIB Modules](#) [9](#)
 - [6.1. Relationship to the SNMPv2-MIB](#) [9](#)
 - [6.2. MIB modules required for IMPORTS](#) [10](#)
 - [6.3. Relationship to the Future RSSA-MIBs](#) [10](#)
- [7. Definitions](#) [10](#)
- [8. Security Considerations](#) [50](#)
- [9. Applicability Statement](#) [53](#)
- [10. IANA Considerations](#) [54](#)
- [11. Contributors](#) [54](#)
- [12. Acknowledgements](#) [54](#)
- [13. References](#) [54](#)
 - [13.1. Normative References](#) [54](#)
 - [13.2. Informative References](#) [55](#)
- [Appendix A.](#) [56](#)

1. Introduction

This memo defines a portion of the Management Information Base (MIB) for use with network management protocols in the Internet community. In particular, it describes objects for configuring aspects of a process implementing Simplified Multicast Forwarding (SMF) [[RFC6621](#)] for Mobile Ad-Hoc Networks (MANETs). SMF provides multicast Duplicate Packet Detection (DPD) and supports algorithms for constructing an estimate of a MANET Minimum Connected Dominating Set (MCDS) for efficient multicast forwarding. The SMF-MIB also reports state information, performance information, and notifications. In addition to configuration, this additional state and performance information is useful to operators troubleshooting multicast forwarding problems.

2. The Internet-Standard Management Framework

For a detailed overview of the documents that describe the current Internet-Standard Management Framework, please refer to [section 7 of RFC 3410](#) [[RFC3410](#)].

Managed objects are accessed via a virtual information store, termed the Management Information Base or MIB. MIB objects are generally accessed through the Simple Network Management Protocol (SNMP). Objects in the MIB are defined using the mechanisms defined in the Structure of Management Information (SMI). This memo specifies a MIB module that is compliant to the SMIV2, which is described in STD 58, [RFC 2578](#) [[RFC2578](#)], STD 58, [RFC 2579](#) [[RFC2579](#)] and STD 58, [RFC 2580](#) [[RFC2580](#)].

3. Conventions

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

4. Overview

SMF provides methods for implementing Duplicate Packet Detection (DPD)-based multicast forwarding with the optional use of Connected Dominating Set (CDS)-based relay sets. The CDS provides a complete connected coverage of the nodes comprising the MANET. The Minimum CDS (MCDS) is the smallest set of MANET nodes (comprising a connected cluster) which cover all the nodes in the cluster with their transmissions. As the density of the MANET nodes increase, the fraction of nodes required in an MCDS decreases. Using the MCDS as a multicast forwarding set then becomes an efficient multicast mechanism for MANETs.

Various algorithms for the construction of estimates of the MCDS exist. The Simplified Multicast Framework [[RFC6621](#)] describes some of these. It further defines various operational modes for a node which is participating in the collective creation of the MCDS estimates. These modes depend upon the set of related MANET routing and discovery protocols and mechanisms in operation in the specific MANET node.

A SMF router's MIB contains SMF process configuration parameters (e.g. specific CDS algorithm), state information (e.g., current membership in the CDS), performance counters (e.g., packet counters), and notifications.

[4.1.](#) SMF Management Model

This section describes the management model for the SMF node process.

Figure 1 (reproduced from Figure 4 of [[RFC6621](#)]) shows the relationship between the SMF Relay Set selection algorithm and the related algorithms, processes and protocols running in the MANET nodes. The Relay Set Selection Algorithm (RSSA) can rely upon topology information gotten from the MANET Neighborhood Discovery Protocol (NHDP), from the specific MANET routing protocol running on the node, or from Layer 2 information passed up to the higher layer protocol processes.

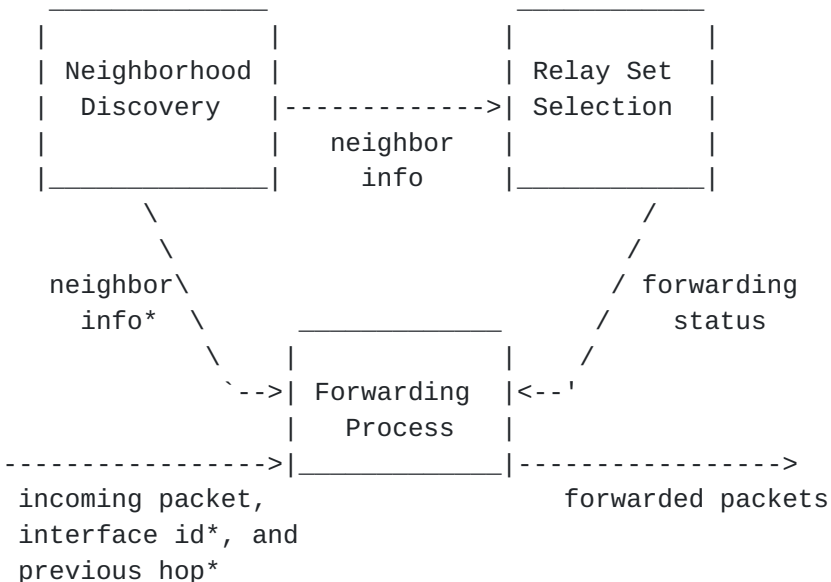


Figure 1: SMF Router Architecture

4.2. Terms

The following definitions apply throughout this document:

- o Configuration Objects - switches, tables, objects which are initialized to default settings or set through the management interfaces such as defined by this MIB.
- o Tunable Configuration Objects - objects whose values affect timing or attempt bounds on the SMF Relay Set (RS) process.
- o State Objects - automatically generated values which define the current operating state of the SMF RS process in the router.
- o Performance Objects - automatically generated values which help an administrator or automated tool to assess the performance of the CDS multicast process on the router and the overall multicast performance within the MANET routing domain.

5. Structure of the MIB Module

This section presents the structure of the SMF-MIB module. The objects are arranged into the following groups:

- o smfMIBNotifications - defines the notifications associated with the SMF process.

- o smfMIBObjects - defines the objects forming the basis for the SMF-MIB. These objects are divided up by function into the following groups:
 - * Capabilities Group - This group contains the SMF objects that the device uses to advertise its local capabilities with respect to, e.g., the supported RSSAs.
 - * Configuration Group - This group contains the SMF objects that configure specific options that determine the overall operation of the SMF process and the resulting multicast performance.
 - * State Group - Contains information describing the current state of the SMF process such as the Neighbor Table.
 - * Performance Group - Contains objects which help to characterize the performance of the SMF process, typically counters for statistical computations.
- o smfMIBConformance - defines two, i.e., minimal and full, conformance implementations for the SMF-MIB.

5.1. Textual Conventions

The textual conventions defined within the SMF-MIB are:

- o The SmfStatus is defined within the SMF-MIB. This contains the current operational status of the SMF process on an interface.
- o The SmfOpModeID represents an index that identifies a specific SMF operational mode.
- o The SmfRssaID represents an index that identifies, through reference, a specific RSSA available for operation on the device.

5.2. The Capabilities Group

The SMF device supports a set of capabilities. The list of capabilities which the device can advertise are:

- o Operational Mode - topology information from NHDP, CDS-aware unicast routing or Cross-layer from Layer 2.
- o SMF RSSA - the specific RSSA operational on the device. Note that configuration, state and performance objects related to a specific RSSA must be defined within a separate MIB.

5.3. The Configuration Group

The SMF device is configured with a set of controls. Some of the prominent configuration controls for the SMF device are:

- o Operational Mode - determines where topology information is derived from, e.g., NHDP, CDS-aware unicast routing or Cross-layer from Layer 2.
- o SMF RSSA - the specific RSSA operational on the device.
- o Duplicate Packet detection for IPv4 - Identification-based or Hash-based DPD.
- o Duplicate Packet detection for IPv6 - Identification-based or Hash-based DPD.
- o SMF Type Message TLV - if NHDP mode is selected, then the SMF Type Message TLV MAY be included in the NHDP exchanges.
- o SMF Address Block TLV - if NHDP mode is selected, then the SMF Address Block TLV SHOULD be included in the NHDP exchanges.

5.4. The State Group

The State sub-tree reports current state information, e.g.,

- o Node RSSA State - identifies whether the node is currently in or out of the Relay Set.
- o Neighbors Table - a table containing current one-hop neighbors and their operational RSSA.

5.5. The Performance Group

The Performance sub-tree reports primarily counters that relate to SMF RSSA performance. The SMF performance counters consists of per node and per interface objects:

- o Total multicast packets received.
- o Total multicast packets forwarded.
- o Total duplicate multicast packets detected.
- o Per interface statistics table with the following entries:

- * Multicast packets received.
- * Multicast packets forwarded.
- * Duplicate multicast packets detected.

5.6. The Notifications Group

The Notifications Sub-tree contains the list of notifications supported within the SMF-MIB and their intended purpose and utility.

5.7. Tables and Indexing

The SMF-MIB module contains a number of tables which record data related to:

- o configuration and operation of packet forwarding on the local router,
- o configuration and operation of local MANET interfaces on the router, and
- o configuration and operation of various RSSA algorithms for packet forwarding.

The SMF-MIB module's tables are indexed via the following constructs:

- o `smfOpModeCapabilitiesID` - the index identifying the SMF modes.
- o `smfRssaCapabilitiesID` - the index identifying the RSSAs supported by this specific device.
- o `smfConfiguredAddrForwardingAddrType` and `smfConfiguredAddrForwardingFirstAddr` - indexes to configured multicast addresses which are forwarded by the SMF process.
- o `smfIfIndex` - the `IfIndex` of the interface on the local router on which SMF is configured.
- o `smfDiscoveredAddrForwardingAddrType` and `smfDiscoveredAddrForwardingFirstAddr` - indexes to discovered multicast addresses which are forwarded by the SMF process.
- o `smfNeighborIpAddrType`, `smfNeighborIpAddr`, and `smfNeighborPrefixLen` - the interface index set of specific one-hop neighbor nodes to this local router.

These tables and their associated indexing are:

- o smfOpModeCapabilitiesTable - identifies the resident set of SMF Operational Modes on this router. This table has 'INDEX { smfOpModeCapabilitiesID }'.
- o smfRssaCapabilitiesTable - contains reference to the specific set of RSSAs currently supported on this device. This table has 'INDEX { smfRssaCapabilitiesID }'.
- o smfConfiguredAddrForwardingTable - contains information on multicast addresses which are to be forwarded by the SMF process on this device. This table has 'INDEX { smfConfiguredAddrForwardingAddrType, smfConfiguredAddrForwardingFirstAddr, smfConfiguredAddrForwardingLastAddr }'.
- o smfInterfaceTable - describes the SMF interfaces on this device that are participating in the SMF packet forwarding process. This table has 'INDEX { smfIfIndex }'.
- o smfDiscoveredAddrForwardingTable - contains discovered address for SMF packet forwarding. This table has 'INDEX { smfDiscoveredAddrForwardingAddrType, smfDiscoveredAddrForwardingFirstAddr }'.
- o smfNeighborTable - describes the current neighbor nodes, their addresses and the SMF RSSA and the interface on which they can be reached. This table has 'INDEX { smfNeighborIpAddrType, smfNeighborIpAddr, smfNeighborPrefixLen }'.
- o smfIpv4InterfaceTable - contains the IPv4 related SMF statistics per each SMF interface on this device. This table has 'INDEX { smfIfIndex }'.
- o smfIpv6InterfaceTable - contains the IPv6 related SMF statistics per each SMF interface on this device. This table has 'INDEX { smfIfIndex }'.

6. Relationship to Other MIB Modules

6.1. Relationship to the SNMPv2-MIB

The 'system' group in the SNMPv2-MIB [[RFC3418](#)] is defined as being mandatory for all systems, and the objects apply to the entity as a whole. The 'system' group provides identification of the management entity and certain other system-wide data. The SMF-MIB does not duplicate those objects.

6.2. MIB modules required for IMPORTS

The textual conventions imported for use in the SMF-MIB are as follows. The MODULE-IDENTITY, OBJECT-TYPE, NOTIFICATION-TYPE, Counter32, Unsigned32, Integer32 and mib-2 textual conventions are imported from [RFC 2578](#) [[RFC2578](#)]. The TEXTUAL-CONVENTION, RowStatus and TruthValue textual conventions are imported from [RFC 2579](#) [[RFC2579](#)]. The MODULE-COMPLIANCE, OBJECT-GROUP and NOTIFICATION-GROUP textual conventions are imported from [RFC 2580](#) [[RFC2580](#)]. The InterfaceIndexOrZero textual convention is imported from [RFC 2863](#) [[RFC2863](#)]. The SnmpAdminString textual convention is imported from [RFC 3411](#) [[RFC3411](#)]. The InetAddress, InetAddressType and InetAddressPrefixLength textual conventions are imported from [RFC 4001](#) [[RFC4001](#)].

6.3. Relationship to the Future RSSA-MIBs

In a sense, the SMF-MIB is a general front-end to a set of, yet to be developed, RSSA-specific MIBs. These RSSA-specific MIBs will define the objects for the configuration, state, performance and notification required for the operation of these specific RSSAs. The SMF-MIB Capabilities Group allows the remote management station the ability to query the router to discover the set of supported RSSAs.

7. Definitions

```
SMF-MIB DEFINITIONS ::= BEGIN
```

```
IMPORTS
```

```
    MODULE-IDENTITY, OBJECT-TYPE, NOTIFICATION-TYPE,  
    Counter32, Integer32, TimeTicks, experimental  
    FROM SNMPv2-SMI -- [RFC2578]
```

```
    TEXTUAL-CONVENTION, RowStatus, TruthValue,  
    DisplayString  
    FROM SNMPv2-TC -- [RFC2579]
```

```
    MODULE-COMPLIANCE, OBJECT-GROUP,  
    NOTIFICATION-GROUP  
    FROM SNMPv2-CONF -- [RFC2580]
```

```
    InterfaceIndexOrZero  
    FROM IF-MIB -- [RFC2863]
```

```
    SnmpAdminString
```


FROM SNMP-FRAMEWORK-MIB -- [[RFC3411](#)]

InetAddress, InetAddressType,
InetAddressPrefixLength

FROM INET-ADDRESS-MIB -- [[RFC4001](#)]

;

smfMIB MODULE-IDENTITY

LAST-UPDATED "201309011300Z" -- September 01, 2013

ORGANIZATION "IETF MANET Working Group"

CONTACT-INFO

"WG E-Mail: manet@ietf.org

WG Chairs: sratliff@cisco.com
jmacker@nrl.navy.mil

Editors: Robert G. Cole
US Army CERDEC
Space and Terrestrial Communications
6010 Frankford Road
Aberdeen Proving Ground, MD 21005
USA
+1 443 395-8744
robert.g.cole@us.army.mil

Joseph Macker
Naval Research Laboratory
Washington, D.C. 20375
USA
macker@itd.nrl.navy.mil

Brian Adamson
Naval Research Laboratory
Washington, D.C. 20375
USA
adamson@itd.nrl.navy.mil

DESCRIPTION

"This MIB module contains managed object definitions for the Manet SMF RSSA process defined in:

[SMF] Macker, J.(ed.),
Simplified Multicast Forwarding, [RFC 6621](#),
May 2012.

Copyright (C) The IETF Trust (2012). This version
of this MIB module is part of RFC xxxx; see the RFC


```
        itself for full legal notices."

-- Revision History
REVISION    "201309011300Z"    -- September 01, 2013
DESCRIPTION
    "The first version of this MIB module,
      published as RFC xxxx.
    "
-- RFC-Editor assigns xxxx
 ::= { experimental xxxx }    -- to be assigned by IANA

--
-- TEXTUAL CONVENTIONS
--

SmfStatus ::= TEXTUAL-CONVENTION
    STATUS      current
    DESCRIPTION
        "An indication of the operability of a SMF
        function or feature.  For example, the status
        of an interface: 'enabled' indicates that
        this interface is performing SMF functions,
        and 'disabled' indicates that it is not.
        Similarly for the status of the device:
        'enabled' indicates that the device has
        enabled the SMF functions on the device and
        'disabled' means that the device and all interfaces
        have disabled all SMF functions."
    SYNTAX      INTEGER {
                        enabled (1),
                        disabled (2)
                    }

SmfOpModeID ::= TEXTUAL-CONVENTION
    STATUS      current
    DESCRIPTION
        "An index that identifies through reference to a specific
        SMF operations mode.  There are basically three styles
        of SMF operation with reduced relay sets:

            Independent operation 'independent(1)' -
                SMF performs its own relay
                set selection using information from an associated
                MANET NHDP process.

            CDS-aware unicast routing operation 'routing(2)' -
                a coexistent unicast routing
```


protocol provides dynamic relay
set state based upon its own control plane
CDS or neighborhood discovery information.

Cross-layer operation 'crossLayer(3)' -
SMF operates using neighborhood
status and triggers from a
cross-layer information base for dynamic relay
set selection and maintenance."

REFERENCE

"[RFC 6621](#) - Simplified Multicast Forwarding
(SMF), Macker, J., May 2012."

```
SYNTAX  INTEGER {  
        independent (1),  
        routing (2),  
        crossLayer (3)  
        -- future (4-255)  
}
```

SmfRssaID ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"An index that identifies through reference to a specific
RSSA algorithms. Several are currently defined
in the appendix of [RFC 6621](#)."

REFERENCE

"[RFC 6621](#) - Simplified Multicast Forwarding
(SMF), Macker, J., May 2012."

```
SYNTAX  INTEGER {  
        cF(1),  
        SMPR(2),  
        eCDS(3),  
        mprCDS(4)  
        -- future(5-127)  
        -- noStdAction(128-239)  
        -- experimental(240-255)  
}
```

--

-- Top-Level Object Identifier Assignments

--

```
smfMIBNotifications OBJECT IDENTIFIER ::= { smfMIB 0 }  
smfMIBObjects       OBJECT IDENTIFIER ::= { smfMIB 1 }  
smfMIBConformance  OBJECT IDENTIFIER ::= { smfMIB 2 }
```



```

--
-- smfMIBObjects Assignments:
--     smfCapabilitiesGroup - 1
--     smfConfigurationGroup - 2
--     smfStateGroup - 3
--     smfPerformanceGroup - 4
--
--
-- smfCapabilitiesGroup
--
--     This group contains the SMF objects that identify specific
--     capabilities within this device related to SMF functions.
--
smfCapabilitiesGroup OBJECT IDENTIFIER ::= { smfMIBObjects 1 }

--
-- SMF Operational Mode Capabilities Table
--
smfOpModeCapabilitiesTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF SmfOpModeCapabilitiesEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The smfOpModeCapabilitiesTable identifies the
        resident set of SMF Operational Modes on this
        router."
    REFERENCE
        "RFC 6621 - Simplified Multicast Forwarding
        (SMF), Macker, J., May 2012."
    ::= { smfCapabilitiesGroup 1 }

smfOpModeCapabilitiesEntry OBJECT-TYPE
    SYNTAX      SmfOpModeCapabilitiesEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Information about a particular operational
        mode.
        "
    INDEX      { smfOpModeCapabilitiesID }
    ::= { smfOpModeCapabilitiesTable 1 }

SmfOpModeCapabilitiesEntry ::= SEQUENCE {
    smfOpModeCapabilitiesID          SmfOpModeID,
    smfOpModeCapabilitiesName       SnmpAdminString,

```



```
        smfOpModeCapabilitiesReference      SnmpAdminString
    }
```

```
smfOpModeCapabilitiesID      OBJECT-TYPE
    SYNTAX      SmfOpModeID
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The index for this entry.  This object identifies
        the particular operational mode for this device."
    ::= { smfOpModeCapabilitiesEntry 1 }
```

```
smfOpModeCapabilitiesName OBJECT-TYPE
    SYNTAX      SnmpAdminString
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The textual name of this operational
        mode.  Current operational modes include:
        'independent',
        'routing', and
        'crossLayer' Mode.
        Others may be defined
        in future revisions of [SMF]."
    ::= { smfOpModeCapabilitiesEntry 2 }
```

```
smfOpModeCapabilitiesReference OBJECT-TYPE
    SYNTAX      SnmpAdminString
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "This object contains a reference to the document
        that defines this operational mode."
    ::= { smfOpModeCapabilitiesEntry 3 }
```

```
--
-- SMF RSSA Capabilities Table
--
```

```
smfRssaCapabilitiesTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF SmfRssaCapabilitiesEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The smfRssaCapabilitiesTable contains
        reference to the specific set of RSSAs
        currently supported on this device."
```



```

"
REFERENCE
  "RFC 6621 - Simplified Multicast Forwarding
  (SMF), Macker, J., May 2012."
 ::= { smfCapabilitiesGroup 2 }

smfRssaCapabilitiesEntry OBJECT-TYPE
SYNTAX      SmfRssaCapabilitiesEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
  "Information about a particular RSSA
  algorithm.

  By default, the agent should support at least the
  Classical Flooding 'cF' algorithm. All compliant
  SMF forwarders must support Classical Flooding.
  Hence, at least one entry in this table must
  exist with the smfRssaCapabilitiesID indicating
  'cF'."
INDEX       { smfRssaCapabilitiesID }
 ::= { smfRssaCapabilitiesTable 1 }

SmfRssaCapabilitiesEntry ::= SEQUENCE {
    smfRssaCapabilitiesID      SmfRssaID,
    smfRssaCapabilitiesName    SnmpAdminString,
    smfRssaCapabilitiesReference SnmpAdminString
}

smfRssaCapabilitiesID      OBJECT-TYPE
SYNTAX      SmfRssaID
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
  "The index for this entry. This object identifies
  the particular RSSA algorithm in this MIB
  module. Example RSSAs are found in the
  appendix of RFC 6621."
REFERENCE
  "RFC 6621 - Simplified Multicast Forwarding
  (SMF), Macker, J., May 2012."
 ::= { smfRssaCapabilitiesEntry 1 }

smfRssaCapabilitiesName OBJECT-TYPE
SYNTAX      SnmpAdminString
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION

```



```

        "The textual name of this RSSA algorithm.
        Currently defined names are:
            'cF',
            'sMPR',
            'eCDS',
            'mprCDS'.
        "
 ::= { smfRssaCapabilitiesEntry 2 }

smfRssaCapabilitiesReference OBJECT-TYPE
    SYNTAX      SnmpAdminString
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "This object contains a published reference
        to the document that defines this algorithm.
        "
 ::= { smfRssaCapabilitiesEntry 3 }

--
-- smfConfigurationGroup
--
-- This group contains the SMF objects that configure specific
-- options that determine the overall performance and operation
-- of the multicast forwarding process for the router device
-- and its interfaces.
--

smfConfigurationGroup OBJECT IDENTIFIER ::= { smfMIBObjects 2 }

smfAdminStatus OBJECT-TYPE
    SYNTAX      SmfStatus
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "The configured status of the SMF process
        on this device. 'enabled(1)' means that
        SMF is configured to run on this device.
        'disabled(2)' mean that the SMF process
        is configured off.

        Prior to SNM functions being performed over
        specific interfaces, this object must first
        be 'enabled'. If this object is 'disabled',
        then no SMF functions SHOULD be performed on

```


the device and all smfIfAdminStatus objects SHOULD also be set to 'disabled'. When this object is changed from 'enabled' to 'disabled', then all smfIfAdminStatus objects SHOULD also be set to 'disabled'.

The default value for this object SHOULD be 'enabled'.

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

DEFVAL { enabled }

::= { smfConfigurationGroup 1 }

smfRouterIDAddrType OBJECT-TYPE

SYNTAX InetAddressType { ipv4(1), ipv6(2) }

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The address type of the address used for SMF ID of this router as specified in the 'smfRouterID' next.

Only the values ipv4(1) and ipv6(2) are supported.

This can be set by the management station, the smfRouterID must be a routable address assigned to this router. If the management station does not assign this value, then the router should choose the highest routable IP address assigned to this router.

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

DEFVAL { ipv4 }

::= { smfConfigurationGroup 2 }

smfRouterID OBJECT-TYPE

SYNTAX InetAddress (SIZE(4|16))

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The IP address used as the SMF router ID. This can be set by the management station. If not explicitly set, then the device

should select a routable IP address assigned to this router for use as the 'smfRouterID'.

The smfRouterID is a logical identification that MUST be consistent across interoperable SMF neighborhoods and it is RECOMMENDED to be chosen as the numerically largest address contained in a node's 'Neighbor Address List' as defined in NHDP. A smfRouterID MUST be unique within the scope of the operating MANET network regardless of the method used for selecting it.

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

REFERENCE

"[RFC 6621](#) - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

::= { smfConfigurationGroup 3 }

smfConfiguredOpMode OBJECT-TYPE

SYNTAX SmfOpModeID

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The SMF RSS node operational mode as defined in the TEXTUAL CONVENTION for `SmfOpModeID' and in this MIB module.

The default value for this object is 'independent(1)'.

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

REFERENCE

"[RFC 6621](#) - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

DEFVAL { independent }

::= { smfConfigurationGroup 4 }

smfConfiguredRssa OBJECT-TYPE

SYNTAX SmfRssaID

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The SMF RSS currently operational algorithm as defined in the TEXTUAL CONVENTION for `SmfRssaID' and in [RFC 6621](#).

The default value for this object is 'cF(1)', i.e., Classical Flooding.

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

REFERENCE

"[RFC 6621](#) - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

DEFVAL { cF }

::= { smfConfigurationGroup 5 }

smfRssaMember OBJECT-TYPE

SYNTAX INTEGER {
 potential(1),
 always(2),
 never(3)
 }

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The RSSA downselects a set of forwarders for multicast forwarding. Sometimes it is useful to force an agent to be included or excluded from the resulting RSS. This object is a switch to allow for this behavior.

The value 'potential(1)' allows the selected RSSA to determine if this agent is included or excluded from the RSS.

The value 'always(1)' forces the selected RSSA include this agent in the RSS.

The value 'never(3)' forces the selected RSSA to exclude this agent from the RSS.

The default setting for this object is 'potential(1)'. Other settings could pose operational risks under certain conditions.

This object is persistent and when written the entity SHOULD save the change to


```
        non-volatile storage."
REFERENCE
    "RFC 6621 - Simplified Multicast Forwarding
    (SMF), Macker, J., May 2012."
DEFVAL { potential }
 ::= { smfConfigurationGroup 6 }

smfIpv4Dpd OBJECT-TYPE
    SYNTAX      INTEGER {
                    hashBased(1),
                    identificationBased(2)
                }
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "The current method for IPv4 duplicate packet
        detection.

        The value 'hashBased(1)' indicates that the
        routers duplicate packet detection is based
        upon comparing a hash over the packet fields.
        This is the default setting for this object.

        The value 'identificationBased(2)'
        indicates that the duplicate packet
        detection relies upon header information
        in the multicast packets to identify
        previously received packets.

        This object is persistent and when written
        the entity SHOULD save the change to
        non-volatile storage."
REFERENCE
    "RFC 6621 - Simplified Multicast Forwarding
    (SMF), Macker, J., May 2012."
DEFVAL { hashBased }
 ::= { smfConfigurationGroup 7 }

smfIpv6Dpd OBJECT-TYPE
    SYNTAX      INTEGER {
                    hashBased(1),
                    identificationBased(2)
                }
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "The current method for IPv6 duplicate packet
        detection.
```


The values indicate the type of method used for duplicate packet detection as described the previous description for the object `smfIpv4Dpd`.

The default value for this object is 'hashBased(1)'.

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

REFERENCE

"[RFC 6621](#) - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

DEFVAL { hashBased }

::= { smfConfigurationGroup 8 }

smfMaxPktLifetime OBJECT-TYPE

SYNTAX Integer32 (0..65535)

UNITS "Seconds"

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The estimate of the network packet traversal time.

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

REFERENCE

"[RFC 6621](#) - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

DEFVAL { 60 }

::= { smfConfigurationGroup 9 }

smfDpdMaxMemorySize OBJECT-TYPE

SYNTAX Integer32 (0..65535)

UNITS "Kilo-Bytes"

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The locally reserved memory for storage of cached DPD records for both IPv4 and IPv6 methods.

The local SMF device should protect itself against the SNMP manager from requesting too large a memory value. If this is the case,

an error indication should be returned in response to the SNMP SET request.

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

REFERENCE

"[RFC 6621](#) - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

DEFVAL { 1024 }

::= { smfConfigurationGroup 10 }

smfDpdEntryMaxLifetime OBJECT-TYPE

SYNTAX Integer32 (0..65525)

UNITS "Seconds"

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The maximum lifetime of a cached DPD record in the local device storage.

If the memory is running low prior to the MaxLifetimes being exceeded, the local SMF devices should purge the oldest records first.

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

REFERENCE

"[RFC 6621](#) - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

DEFVAL { 600 }

::= { smfConfigurationGroup 11 }

--

-- Configuration of messages to be included in
-- NHDP message exchanges in support of SMF
-- operations.

--

smfNhdpRssaMesgTLVIncluded OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"Indicates whether the associated NHDP messages include the RSSA Message TLV, or not. This

is an optional SMF operational setting.
 The value 'true(1)' indicates that this TLV is included; the value 'false(2)' indicates that it is not included.

It is RECOMMENDED that the RSSA Message TLV be included in the NHDP messages.

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

REFERENCE

"[RFC 6621](#) - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

DEFVAL { true }

::= { smfConfigurationGroup 12 }

smfNhdprssaAddrBlockTLVIncluded OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"Indicates whether the associated NHDP messages include the RSSA Address Block TLV, or not. This is an optional SMF operational setting. The value 'true(1)' indicates that this TLV is included; the value 'false(2)' indicates that it is not included.

The smfNhdprssaAddrBlockTLVIncluded is optional in all cases as it depends on the existence of an address block which may not be present. If this SMF device is configured with NHDP, then this object SHOULD be set to 'true(1)'.

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

REFERENCE

"[RFC 6621](#) - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

DEFVAL { true }

::= { smfConfigurationGroup 13 }

--

-- Table identifying configured multicast addresses to be forwarded.

--

```
smfConfiguredAddrForwardingTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF SmfConfiguredAddrForwardingEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The (conceptual) table containing information on multicast
        addresses which are to be forwarded by the SMF process.

        Entries in this table are configured. As well, addresses
        to be forwarded by the SMF device can be dynamically
        discovered by other means. The corresponding state
        table, smfDiscoveredAddrForwardingTable, contains
        these additional, dynamically discovered address for
        forwarding.

        Each row is associated with a range of multicast
        addresses, and ranges for different rows must be disjoint.

        The objects in this table are persistent and when written
        the entity SHOULD save the change to
        non-volatile storage."
    REFERENCE
        "RFC 6621 - Simplified Multicast Forwarding
        (SMF), Macker, J., May 2012."
    ::= { smfConfigurationGroup 15 }

smfConfiguredAddrForwardingEntry OBJECT-TYPE
    SYNTAX      SmfConfiguredAddrForwardingEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "An entry (conceptual row) containing the information on a
        particular multicast scope."
    INDEX { smfConfiguredAddrForwardingAddrType,
            smfConfiguredAddrForwardingFirstAddr,
            smfConfiguredAddrForwardingLastAddr }
    ::= { smfConfiguredAddrForwardingTable 1 }

SmfConfiguredAddrForwardingEntry ::= SEQUENCE {
    smfConfiguredAddrForwardingAddrType      InetAddressType,
    smfConfiguredAddrForwardingFirstAddr     InetAddress,
    smfConfiguredAddrForwardingLastAddr      InetAddress,
    smfConfiguredAddrForwardingStatus        RowStatus
}

smfConfiguredAddrForwardingAddrType OBJECT-TYPE
```


SYNTAX InetAddressType { ipv4(1), ipv6(2) }

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"The type of the addresses in the multicast forwarding range. Legal values correspond to the subset of address families for which multicast address allocation is supported.

Only the values ipv4(1) and ipv6(2) are supported.

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

::= { smfConfiguredAddrForwardingEntry 1 }

smfConfiguredAddrForwardingFirstAddr OBJECT-TYPE

SYNTAX InetAddress (SIZE(4|16))

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"The first address in the multicast scope range. The type of this address is determined by the value of the smfConfiguredAddrForwardingAddrType object.

The value for this object must be less than or equal to the value entered for the smfConfiguredAddrForwardingLastAddr.

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

::= { smfConfiguredAddrForwardingEntry 2 }

smfConfiguredAddrForwardingLastAddr OBJECT-TYPE

SYNTAX InetAddress (SIZE(4|16))

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"The last address in the multicast scope range. The type of this address is determined by the value of the smfConfiguredAddrForwardingAddrType object.

The value for this object must be greater than or equal to the value entered for the smfConfiguredAddrForwardingFirstAddr.

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

```
::= { smfConfiguredAddrForwardingEntry 3 }
```

smfConfiguredAddrForwardingStatus OBJECT-TYPE

SYNTAX RowStatus

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"The status of this row, by which new entries may be created, or old entries deleted from this table."

```
::= { smfConfiguredAddrForwardingEntry 4 }
```

```
--  
-- SMF Interfaces Configuration Table  
--
```

smfInterfaceTable OBJECT-TYPE

SYNTAX SEQUENCE OF SmfInterfaceEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"The SMF Interface Table describes the SMF interfaces that are participating in the SMF packet forwarding process. The ifIndex is from the interfaces group defined in the Interfaces Group MIB ([RFC 2863](#)). As such, this table 'sparse augments' the ifTable specifically when SMF is to be configured to operate over this interface.

A conceptual row in this table exists if and only if either a manager has explicitly created the row or there is an interface on the managed device that supports and runs SMF.

The manager can create a row by setting rowStatus to 'createAndGo' or 'createAndWait'. Row objects having associated DEFVAL clauses are automatically defined by the agent with these values during row creation, unless the manager explicitly defines these object values during the row creation.

If the corresponding entry with ifIndex value

is deleted from the Interface Table, then the entry in this table is automatically deleted and SMF is disabled on this interface, and all configuration and state information related to this interface is to be removed from memory.

If the value of the smfAdminStatus object is changed from 'enabled' to 'disabled', then all rows in this table are to be deleted and all configuration and state information related to this interface is to be removed from memory."

REFERENCE

"[RFC 2863](#) - The Interfaces Group MIB, McCloghrie, K., and F. Kastenholz, June 2000."

```
::= { smfConfigurationGroup 16 }
```

smfInterfaceEntry OBJECT-TYPE

SYNTAX SmfInterfaceEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"The SMF interface entry describes one SMF interface as indexed by its ifIndex.

The objects in this table are persistent and when written the device SHOULD save the change to non-volatile storage. For further information on the storage behavior for these objects, refer to the description for the smfIfRowStatus object."

INDEX { smfIfIndex }

```
::= { smfInterfaceTable 1 }
```

SmfInterfaceEntry ::=

SEQUENCE {

smfIfIndex InterfaceIndexOrZero,

smfIfName DisplayString,

smfIfAdminStatus SmfStatus,

smfIfRowStatus RowStatus

}

smfIfIndex OBJECT-TYPE

SYNTAX InterfaceIndexOrZero

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"The ifIndex for this SMF interface. This value MUST correspond to an ifIndex referring to a valid entry in The Interfaces Table."

REFERENCE

"[RFC 2863](#) - The Interfaces Group MIB, McCloghrie, K., and F. Kastenholz, June 2000."

::= { smfInterfaceEntry 1 }

smfIfName OBJECT-TYPE

SYNTAX DisplayString

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The textual name of the interface. The value of this object should be the name of the interface as assigned by the local device and should be suitable for use in commands entered at the device's `console'. This might be a text name, such as `le0' or a simple port number, such as `1', depending on the interface naming syntax of the device.

If there is no local name, or this object is otherwise not applicable, then this object contains a zero-length string."

::= { smfInterfaceEntry 2 }

smfIfAdminStatus OBJECT-TYPE

SYNTAX SmfStatus

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"The SMF interface's administrative status. The value 'enabled' denotes that the interface is running the SMF forwarding process. The value 'disabled' denotes that the interface is currently external to the SMF forwarding process.

The default value for this object is 'enabled(1)'.

This object SHOULD be persistent and when written the device SHOULD save the change to non-volatile storage."

DEFVAL { enabled }

::= { smfInterfaceEntry 3 }

smfIfRowStatus OBJECT-TYPE

SYNTAX RowStatus

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"This object permits management of the table by facilitating actions such as row creation, construction, and destruction. The value of this object has no effect on whether other objects in this conceptual row can be modified.

An entry may not exist in the active(1) state unless all objects in the entry have a defined appropriate value. For objects with DEFVAL clauses, the management station does not need to specify the value of this object in order for the row to transit to the active(1) state; the default value for this object is used. For objects that do not have DEFVAL clauses, then the network manager MUST specify the value of this object prior to this row transitioning to the active(1) state.

When this object transitions to active(1), all objects in this row SHOULD be written to non-volatile (stable) storage. Read-create objects in this row MAY be modified. When an object in a row with smfIfRowStatus of active(1) is changed, then the updated value MUST be reflected in SMF and this new object value MUST be written to non-volatile storage.

If this object is not equal to active(1), all associated entries in the smfIpv4InterfaceperfTable and the smfIpv6InterfacePerfTable MUST be deleted."

```
::= { smfInterfaceEntry 4 }
```

```
--
```

```
-- smfStateGroup
```

```
--
```

```
-- Contains information describing the current state of the SMF
-- process such as the current inclusion in the RS or not.
```

```
--
```

```
smfStateGroup OBJECT IDENTIFIER ::= { smfMIBObjects 3 }
```

```
smfNodeRsStatusIncluded OBJECT-TYPE
```

```
SYNTAX TruthValue
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

"The current status of the SMF node in the context of the MANETs relay set. A value of 'true(1)' indicates

that the node is currently part of the MANET Relay Set. A value of 'false(2)' indicates that the node is currently not part of the MANET Relay Set."

REFERENCE

"[RFC 6621](#) - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

::= { smfStateGroup 1 }

smfDpdMemoryOverflow OBJECT-TYPE

SYNTAX Counter32
UNITS "Overruns"
MAX-ACCESS read-only
STATUS current

DESCRIPTION

"The number of times that the memory for caching records for DPD overran and records had to be flushed. The number of records to be flushed upon a buffer overflow is an implementation specific decision."

REFERENCE

"[RFC 6621](#) - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

::= { smfStateGroup 2 }

--

-- Dynamically Discovered Multicast Addr Table

--

smfDiscoveredAddrForwardingTable OBJECT-TYPE

SYNTAX SEQUENCE OF SmfDiscoveredAddrForwardingEntry
MAX-ACCESS not-accessible
STATUS current

DESCRIPTION

"This state table, smfDiscoveredAddrForwardingTable, contains additional, dynamically discovered addresses for forwarding.

Each row is associated with a range of multicast addresses, and ranges for different rows must be disjoint."

REFERENCE

"[RFC 6621](#) - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

::= { smfStateGroup 3 }

smfDiscoveredAddrForwardingEntry OBJECT-TYPE

SYNTAX SmfDiscoveredAddrForwardingEntry


```
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
    "An entry (conceptual row) containing the information on a
    particular multicast scope."
INDEX { smfDiscoveredAddrForwardingAddrType,
        smfDiscoveredAddrForwardingFirstAddr,
        smfDiscoveredAddrForwardingLastAddr }
 ::= { smfDiscoveredAddrForwardingTable 1 }
```

```
SmfDiscoveredAddrForwardingEntry ::= SEQUENCE {
    smfDiscoveredAddrForwardingAddrType InetAddressType,
    smfDiscoveredAddrForwardingFirstAddr InetAddress,
    smfDiscoveredAddrForwardingLastAddr InetAddress,
    smfDiscoveredAddrForwardingSource SnmpAdminString
}
```

```
smfDiscoveredAddrForwardingAddrType OBJECT-TYPE
SYNTAX InetAddressType { ipv4(1), ipv6(2) }
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
    "The type of the addresses in the multicast forwarding
    range. Legal values correspond to the subset of
    address families for which multicast address allocation
    is supported.

    Only the values ipv4(1) and
    ipv6(2) are supported."
 ::= { smfDiscoveredAddrForwardingEntry 1 }
```

```
smfDiscoveredAddrForwardingFirstAddr OBJECT-TYPE
SYNTAX InetAddress (SIZE(4|16))
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
    "The first address in the multicast scope range. The type
    of this address is determined by the value of the
    smfConfiguredAddrForwardingAddrType object.

    The value for this object must be less than or
    equal to the value entered for the
    smfDiscoveredAddrForwardingLastAddr."
 ::= { smfDiscoveredAddrForwardingEntry 2 }
```

```
smfDiscoveredAddrForwardingLastAddr OBJECT-TYPE
SYNTAX InetAddress (SIZE(4|16))
MAX-ACCESS not-accessible
```


STATUS current

DESCRIPTION

"The last address in the multicast scope range.
The type of this address is determined by the
value of the smfConfiguredAddrForwardingAddrType
object.

The value for this object must be greater than or
equal to the value entered for the
smfDiscoveredAddrForwardingFirstAddr."

::= { smfDiscoveredAddrForwardingEntry 3 }

smfDiscoveredAddrForwardingSource OBJECT-TYPE

SYNTAX SnmpAdminString

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The textual description of the method by which
this multicast address range was discovered."

::= { smfDiscoveredAddrForwardingEntry 4 }

--

-- SMF Neighbor Table

--

smfNeighborTable OBJECT-TYPE

SYNTAX SEQUENCE OF SmfNeighborEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"The SMF NeighborTable describes the
current one-hop neighbor nodes, their address
and SMF RSSA and the interface on which
they can be reached."

REFERENCE

"[RFC 6621](#) - Simplified Multicast Forwarding
(SMF), Macker, J., May 2012.
[Section 7](#): SMF Neighborhood Discovery
Requirements."

::= { smfStateGroup 4 }

smfNeighborEntry OBJECT-TYPE

SYNTAX SmfNeighborEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION


```
"The SMF Neighbor Table contains the
  set of one-hop neighbors, the interface
  they are reachable on and the SMF RSSA
  they are currently running."
INDEX { smfNeighborIpAddrType,
        smfNeighborIpAddr,
        smfNeighborPrefixLen }
 ::= { smfNeighborTable 1 }

SmfNeighborEntry ::=
  SEQUENCE {
    smfNeighborIpAddrType      InetAddressType,
    smfNeighborIpAddr          InetAddress,
    smfNeighborPrefixLen       InetAddressPrefixLength,
    smfNeighborRSSA            SmfRssaID,
    smfNeighborNextHopInterface InterfaceIndexOrZero
  }

smfNeighborIpAddrType OBJECT-TYPE
  SYNTAX      InetAddressType { ipv4(1), ipv6(2) }
  MAX-ACCESS  not-accessible
  STATUS      current
  DESCRIPTION
    "The one-hop neighbor IP address type.

    Only the values 'ipv4(1)' and
    'ipv6(2)' are supported."
 ::= { smfNeighborEntry 1 }

smfNeighborIpAddr OBJECT-TYPE
  SYNTAX      InetAddress (SIZE(4|16))
  MAX-ACCESS  not-accessible
  STATUS      current
  DESCRIPTION
    "The one-hop neighbor Inet IPv4 or IPv6
    address.

    Only IPv4 and IPv6 addresses
    are supported."
 ::= { smfNeighborEntry 2 }

smfNeighborPrefixLen OBJECT-TYPE
  SYNTAX      InetAddressPrefixLength
  UNITS       "bits"
  MAX-ACCESS  not-accessible
  STATUS      current
  DESCRIPTION
    "The prefix length. This is a decimal value that
```



```
        indicates the number of contiguous, higher-order
        bits of the address that make up the network
        portion of the address."
 ::= { smfNeighborEntry 3 }

smfNeighborRSSA OBJECT-TYPE
    SYNTAX      SmfRssaID
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The current RSSA running on the neighbor.
        The list is identical to that described
        above for the smfRssa object."
 ::= { smfNeighborEntry 4 }

smfNeighborNextHopInterface OBJECT-TYPE
    SYNTAX      InterfaceIndexOrZero
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The interface ifIndex over which the
        neighbor is reachable in one-hop."
 ::= { smfNeighborEntry 5 }

--
-- SMF Performance Group
--
-- Contains objects which help to characterize the
-- performance of the SMF RSSA process, such as statistics
-- counters. There are two types of SMF RSSA statistics:
-- global counters and per interface counters.
--

smfPerformanceGroup OBJECT IDENTIFIER ::= { smfMIBObjects 4 }

smfGlobalPerfGroup OBJECT IDENTIFIER ::= { smfPerformanceGroup 1 }

--
-- IPv4 packet counters
--

smfIpv4MultiPktsRecvTotal OBJECT-TYPE
    SYNTAX      Counter32
    UNITS       "Packets"
    MAX-ACCESS  read-only
```


STATUS current

DESCRIPTION

"A counter of the total number of multicast IPv4 packets received by the device and delivered to the SMF process."

REFERENCE

"[RFC 6621](#) - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

::= { smfGlobalPerfGroup 1 }

smfIpv4MultiPktsForwardedTotal OBJECT-TYPE

SYNTAX Counter32

UNITS "Packets"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"A counter of the total number of multicast IPv4 packets forwarded by the device."

REFERENCE

"[RFC 6621](#) - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

::= { smfGlobalPerfGroup 2 }

smfIpv4DuplMultiPktsDetectedTotal OBJECT-TYPE

SYNTAX Counter32

UNITS "Packets"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"A counter of the total number of duplicate multicast IPv4 packets detected by the device."

REFERENCE

"[RFC 6621](#) - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

::= { smfGlobalPerfGroup 3 }

smfIpv4DroppedMultiPktsTTLExceededTotal OBJECT-TYPE

SYNTAX Counter32

UNITS "Packets"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"A counter of the total number of dropped multicast IPv4 packets by the device due to TTL exceeded."

REFERENCE


```
    "RFC 6621 - Simplified Multicast Forwarding
      (SMF), Macker, J., May 2012."
 ::= { smfGlobalPerfGroup 4 }

smfIpv4TTLLargerThanPreviousTotal  OBJECT-TYPE
    SYNTAX      Counter32
    UNITS       "Packets"
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "A counter of the total number of IPv4 packets
         recieved which have a TTL larger than that
         of a previously received identical packet."
    REFERENCE
        "RFC 6621 - Simplified Multicast Forwarding
         (SMF), Macker, J., May 2012."
 ::= { smfGlobalPerfGroup 5 }

--
-- IPv6 packet counters
--

smfIpv6MultiPktsRecvTotal  OBJECT-TYPE
    SYNTAX      Counter32
    UNITS       "Packets"
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "A counter of the total number of
         multicast IPv6 packets received by the
         device and delivered to the SMF process."
    REFERENCE
        "RFC 6621 - Simplified Multicast Forwarding
         (SMF), Macker, J., May 2012."
 ::= { smfGlobalPerfGroup 6 }

smfIpv6MultiPktsForwardedTotal  OBJECT-TYPE
    SYNTAX      Counter32
    UNITS       "Packets"
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "A counter of the total number of
         multicast IPv6 packets forwarded by the
         device."
    REFERENCE
        "RFC 6621 - Simplified Multicast Forwarding
         (SMF), Macker, J., May 2012."
```



```
::= { smfGlobalPerfGroup 7 }
```

```
smfIpv6DuplMultiPktsDetectedTotal OBJECT-TYPE
```

```
SYNTAX Counter32
```

```
UNITS "Packets"
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

```
"A counter of the total number of duplicate  
multicast IPv6 packets detected by the  
device."
```

```
REFERENCE
```

```
"RFC 6621 - Simplified Multicast Forwarding  
(SMF), Macker, J., May 2012."
```

```
::= { smfGlobalPerfGroup 8 }
```

```
smfIpv6DroppedMultiPktsTTLExceededTotal OBJECT-TYPE
```

```
SYNTAX Counter32
```

```
UNITS "Packets"
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

```
"A counter of the total number of dropped  
multicast IPv6 packets by the  
device due to TTL exceeded."
```

```
REFERENCE
```

```
"RFC 6621 - Simplified Multicast Forwarding  
(SMF), Macker, J., May 2012."
```

```
::= { smfGlobalPerfGroup 9 }
```

```
smfIpv6TTLLargerThanPreviousTotal OBJECT-TYPE
```

```
SYNTAX Counter32
```

```
UNITS "Packets"
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

```
"A counter of the total number of IPv6 packets  
recieved which have a TTL larger than that  
of a previously recived identical packet."
```

```
REFERENCE
```

```
"RFC 6621 - Simplified Multicast Forwarding  
(SMF), Macker, J., May 2012."
```

```
::= { smfGlobalPerfGroup 10 }
```

```
smfIpv6HAVAssistsReqdTotal OBJECT-TYPE
```

```
SYNTAX Counter32
```

```
UNITS "Packets"
```

```
MAX-ACCESS read-only
```



```
STATUS      current
DESCRIPTION
  "A counter of the total number of IPv6 packets
  received which required the HAV assist for DPD."
REFERENCE
  "RFC 6621 - Simplified Multicast Forwarding
  (SMF), Macker, J., May 2012."
 ::= { smfGlobalPerfGroup 11 }

smfIpv6DpdHeaderInsertionsTotal OBJECT-TYPE
SYNTAX      Counter32
UNITS       "Packets"
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
  "A counter of the total number of IPv6 packets
  recieved which the device inserted the
  DPD header option."
REFERENCE
  "RFC 6621 - Simplified Multicast Forwarding
  (SMF), Macker, J., May 2012."
 ::= { smfGlobalPerfGroup 12 }

--
-- Per SMF Interface Performance Table
--

smfInterfacePerfGroup OBJECT IDENTIFIER ::= { smfPerformanceGroup 2 }

smfIpv4InterfacePerfTable OBJECT-TYPE
SYNTAX      SEQUENCE OF SmfIpv4InterfacePerfEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
  "The SMF Interface Performance Table
  describes the SMF counters per
  interface."
REFERENCE
  "RFC 6621 - Simplified Multicast Forwarding
  (SMF), Macker, J., May 2012."
 ::= { smfInterfacePerfGroup 1 }

smfIpv4InterfacePerfEntry OBJECT-TYPE
SYNTAX      SmfIpv4InterfacePerfEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
```


"The SMF Interface Performance entry describes the statistics for a particular node interface."

```
INDEX { smfIfIndex }  
 ::= { smfIpv4InterfacePerfTable 1 }
```

```
SmfIpv4InterfacePerfEntry ::=  
 SEQUENCE {  
     smfIpv4MultiPktsRecvPerIf          Counter32,  
     smfIpv4MultiPktsForwardedPerIf     Counter32,  
     smfIpv4DuplMultiPktsDetectedPerIf  Counter32,  
     smfIpv4DroppedMultiPktsTTLExceededPerIf Counter32,  
     smfIpv4TTLLargerThanPreviousPerIf  Counter32  
 }
```

```
smfIpv4MultiPktsRecvPerIf OBJECT-TYPE  
 SYNTAX      Counter32  
 UNITS       "Packets"  
 MAX-ACCESS  read-only  
 STATUS      current  
 DESCRIPTION  
     "A counter of the number of  
     multicast IP packets received by the  
     SMF process on this device on  
     this interface."  
 ::= { smfIpv4InterfacePerfEntry 1 }
```

```
smfIpv4MultiPktsForwardedPerIf OBJECT-TYPE  
 SYNTAX      Counter32  
 UNITS       "Packets"  
 MAX-ACCESS  read-only  
 STATUS      current  
 DESCRIPTION  
     "A counter of the number of  
     multicast IP packets forwarded by the  
     SMF process on this device  
     on this interface."  
 ::= { smfIpv4InterfacePerfEntry 2 }
```

```
smfIpv4DuplMultiPktsDetectedPerIf OBJECT-TYPE  
 SYNTAX      Counter32  
 UNITS       "Packets"  
 MAX-ACCESS  read-only  
 STATUS      current  
 DESCRIPTION  
     "A counter of the number of duplicate  
     multicast IP packets detected by the  
     SMF process on this device"
```



```
        on this interface."
 ::= { smfIpv4InterfacePerfEntry 3 }

smfIpv4DroppedMultiPktsTTLExceededPerIf  OBJECT-TYPE
    SYNTAX      Counter32
    UNITS       "Packets"
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "A counter of the total number of dropped
        multicast IPv4 packets by the SMF process
        on this device on this interface
        due to TTL exceeded."
 ::= { smfIpv4InterfacePerfEntry 4 }

smfIpv4TTLLargerThanPreviousPerIf  OBJECT-TYPE
    SYNTAX      Counter32
    UNITS       "Packets"
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "A counter of the total number of IPv4 packets
        received by the SMF process on this device
        on this interface which have a TTL larger than
        that of a previously recived identical packet."
 ::= { smfIpv4InterfacePerfEntry 5 }

smfIpv6InterfacePerfTable  OBJECT-TYPE
    SYNTAX      SEQUENCE OF SmfIpv6InterfacePerfEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The SMF Interface Performance Table
        describes the SMF counters per
        interface."
    REFERENCE
        "RFC 6621 - Simplified Multicast Forwarding
        (SMF), Macker, J., May 2012."
 ::= { smfInterfacePerfGroup 2 }

smfIpv6InterfacePerfEntry  OBJECT-TYPE
    SYNTAX      SmfIpv6InterfacePerfEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The SMF Interface Performance entry
        describes the counters for a particular
```



```
node interface."
INDEX { smfIfIndex }
 ::= { smfIpv6InterfacePerfTable 1 }

SmfIpv6InterfacePerfEntry ::=
SEQUENCE {
    smfIpv6MultiPktsRecvPerIf          Counter32,
    smfIpv6MultiPktsForwardedPerIf     Counter32,
    smfIpv6DuplMultiPktsDetectedPerIf  Counter32,
    smfIpv6DroppedMultiPktsTTLExceededPerIf Counter32,
    smfIpv6TTLargerThanPreviousPerIf   Counter32,
    smfIpv6HAVAssistsReqdPerIf         Counter32,
    smfIpv6DpdHeaderInsertionsPerIf    Counter32
}

smfIpv6MultiPktsRecvPerIf OBJECT-TYPE
SYNTAX      Counter32
UNITS       "Packets"
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "A counter of the number of
    multicast IP packets received by the
    SMF process on this device
    on this interface."
 ::= { smfIpv6InterfacePerfEntry 1 }

smfIpv6MultiPktsForwardedPerIf OBJECT-TYPE
SYNTAX      Counter32
UNITS       "Packets"
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "A counter of the number of
    multicast IP packets forwarded by the
    SMF process on this device
    on this interface."
 ::= { smfIpv6InterfacePerfEntry 2 }

smfIpv6DuplMultiPktsDetectedPerIf OBJECT-TYPE
SYNTAX      Counter32
UNITS       "Packets"
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "A counter of the number of duplicate
    multicast IP packets detected by the
    SMF process on this device"
```



```
        on this interface."
 ::= { smfIpv6InterfacePerfEntry 3 }

smfIpv6DroppedMultiPktsTTLExceededPerIf  OBJECT-TYPE
    SYNTAX      Counter32
    UNITS       "Packets"
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "A counter of the number of dropped
        multicast IP packets by the
        SMF process on this device
        on this interface due to TTL
        exceeded."
 ::= { smfIpv6InterfacePerfEntry 4 }

smfIpv6TTLlargerThanPreviousPerIf  OBJECT-TYPE
    SYNTAX      Counter32
    UNITS       "Packets"
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "A counter of the total number of IPv6 packets
        received which have a TTL larger than that
        of a previously received identical packet
        by the SMF process on this device on this
        interface."
 ::= { smfIpv6InterfacePerfEntry 5 }

smfIpv6HAVAssistsReqdPerIf  OBJECT-TYPE
    SYNTAX      Counter32
    UNITS       "Packets"
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "A counter of the total number of IPv6 packets
        received by the SMF process on this device
        on this interface which required the
        HAV assist for DPD."
 ::= { smfIpv6InterfacePerfEntry 6 }

smfIpv6DpdHeaderInsertionsPerIf  OBJECT-TYPE
    SYNTAX      Counter32
    UNITS       "Packets"
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "A counter of the total number of IPv6 packets
```



```
    received by the SMF process on this device
    on this interface which the device inserted the
    DPD header option."
 ::= { smfIpv6InterfacePerfEntry 7 }
```

```
--
-- Notifications
--
```

```
smfMIBNotifObjects OBJECT IDENTIFIER ::= { smfMIBNotifications 0 }
smfMIBNotifControl OBJECT IDENTIFIER ::= { smfMIBNotifications 1 }
```

```
-- smfMIBNotifObjects
```

```
smfAdminStatusChange NOTIFICATION-TYPE
```

```
    OBJECTS { smfRouterIDAddrType, -- The originator of
              -- the notification.
              smfRouterID,        -- The originator of
              -- the notification.
              smfAdminStatus      -- The new status of the
              -- SMF process.
    }
```

```
    STATUS current
```

```
    DESCRIPTION
```

```
        "smfAdminStatusChange is a notification sent when a
        the 'smfAdminStatus' object changes."
```

```
 ::= { smfMIBNotifObjects 1 }
```

```
smfConfiguredOpModeChange NOTIFICATION-TYPE
```

```
    OBJECTS { smfRouterIDAddrType, -- The originator of
              -- the notification.
              smfRouterID,        -- The originator of
              -- the notification.
              smfConfiguredOpMode -- The new Operations
              -- Mode of the SMF
              -- process.
    }
```

```
    STATUS current
```

```
    DESCRIPTION
```

```
        "smfConfiguredOpModeChange is a notification
        sent when a the 'smfConfiguredOpMode' object
        changes."
```

```
 ::= { smfMIBNotifObjects 2 }
```

```
smfConfiguredRssaChange NOTIFICATION-TYPE
```



```
OBJECTS { smfRouterIDAddrType, -- The originator of
          smfRouterID,          -- the notification.
          smfConfiguredRssa     -- The originator of
                                -- the notification.
          smfConfiguredRssa     -- The new RSSA for
                                -- the SMF process.
        }
STATUS      current
DESCRIPTION
    "smfAdminStatusChange is a notification sent when a
     the 'smfConfiguredRssa' object changes."
 ::= { smfMIBNotifObjects 3 }

smfIfAdminStatusChange NOTIFICATION-TYPE
OBJECTS { smfRouterIDAddrType, -- The originator of
          smfRouterID,          -- the notification.
          smfIfName,           -- The originator of
                                -- the notification.
          smfIfAdminStatus     -- The interface whose
                                -- status has changed.
          smfIfAdminStatus     -- The new status of the
                                -- SMF interface.
        }
STATUS      current
DESCRIPTION
    "smfIfAdminStatusChange is a notification sent when a
     the 'smfIfAdminStatus' object changes."
 ::= { smfMIBNotifObjects 4 }

smfDpdMemoryOverflowEvent NOTIFICATION-TYPE
OBJECTS { smfRouterIDAddrType, -- The originator of
          smfRouterID,          -- the notification.
          smfDpdMemoryOverflow -- The originator of
                                -- the notification.
          smfDpdMemoryOverflow -- The counter of
                                -- the overflows.
        }
STATUS      current
DESCRIPTION
    "smfDpdMemoryOverflowEvents is sent when the
     number of memory overflow events exceeds the
     the 'smfDpdMemoryOverflowThreshold' within the
     previous number of seconds defined by the
     'smfDpdMemoryOverflowWindow'."
 ::= { smfMIBNotifObjects 5 }
```



```
-- smfMIBNotifControl
smfDpdMemoryOverflowThreshold OBJECT-TYPE
    SYNTAX      Integer32 (0..255)
    UNITS       "Events"
    MAX-ACCESS   read-write
    STATUS      current
    DESCRIPTION
        "A threshold value for the
        `smfDpdmemoryOverflowEvents' object.
        If the number of occurrences exceeds
        this threshold within the previous
        number of seconds
        'smfDpdMemoryOverflowWindow',
        then the `smfDpdMemoryOverflowEvent'
        notification is sent.

        The default value for this object is
        '1'."
    DEFVAL { 1 }
    ::= { smfMIBNotifControl 1 }

smfDpdMemoryOverflowWindow OBJECT-TYPE
    SYNTAX      TimeTicks
    MAX-ACCESS   read-write
    STATUS      current
    DESCRIPTION
        "A time window value for the
        `smfDpdmemoryOverflowEvents' object.
        If the number of occurrences exceeds
        the `smfDpdMemoryOverflowThreshold'
        within the previous number of seconds
        'smfDpdMemoryOverflowWindow',
        then the `smfDpdMemoryOverflowEvent'
        notification is sent.

        The default value for this object is
        '1'."
    DEFVAL { 1 }
    ::= { smfMIBNotifControl 2 }

--
-- Compliance Statements
--

smfCompliances OBJECT IDENTIFIER ::= { smfMIBConformance 1 }
smfMIBGroups   OBJECT IDENTIFIER ::= { smfMIBConformance 2 }
```



```
smfBasicCompliance MODULE-COMPLIANCE
  STATUS current
  DESCRIPTION "The basic implementation requirements for
              managed network entities that implement
              the SMF RSSA process."
  MODULE -- this module
  MANDATORY-GROUPS { smfCapabObjectsGroup,
                    smfConfigObjectsGroup }
 ::= { smfCompliances 1 }
```

```
smfFullCompliance MODULE-COMPLIANCE
  STATUS current
  DESCRIPTION "The full implementation requirements for
              managed network entities that implement
              the SMF RSSA process."
  MODULE -- this module
  MANDATORY-GROUPS { smfCapabObjectsGroup,
                    smfConfigObjectsGroup,
                    smfStateObjectsGroup,
                    smfPerfObjectsGroup,
                    smfNotifObjectsGroup,
                    smfNotificationsGroup
                    }
 ::= { smfCompliances 2 }
```

```
--
-- Units of Conformance
--
```

```
smfCapabObjectsGroup OBJECT-GROUP
  OBJECTS {
    smfOpModeCapabilitiesName,
    smfOpModeCapabilitiesReference,

    smfRssaCapabilitiesName,
    smfRssaCapabilitiesReference
  }
  STATUS current
  DESCRIPTION
    "Set of SMF configuration objects implemented
    in this module."
 ::= { smfMIBGroups 1 }
```

```
smfConfigObjectsGroup OBJECT-GROUP
  OBJECTS {
    smfAdminStatus,
    smfRouterIDAddrType,
    smfRouterID,
```



```
    smfIfName,
    smfConfiguredOpMode,
    smfConfiguredRssa,
    smfRssaMember,
    smfIpv4Dpd,
    smfIpv6Dpd,
    smfMaxPktLifetime,
    smfDpdMaxMemorySize,
    smfDpdEntryMaxLifetime,
    smfNhdpRssaMesgTLVIncluded,
    smfNhdpRssaAddrBlockTLVIncluded,

    smfConfiguredAddrForwardingStatus,

    smfIfAdminStatus,
    smfIfRowStatus
}
STATUS current
DESCRIPTION
    "Set of SMF configuration objects implemented
    in this module."
 ::= { smfMIBGroups 2 }

smfStateObjectsGroup OBJECT-GROUP
OBJECTS {
    smfNodeRsStatusIncluded,
    smfDpdMemoryOverflow,

    smfDiscoveredAddrForwardingSource,

    smfNeighborRSSA,
    smfNeighborNextHopInterface
}
STATUS current
DESCRIPTION
    "Set of SMF state objects implemented
    in this module."
 ::= { smfMIBGroups 3 }

smfPerfObjectsGroup OBJECT-GROUP
OBJECTS {
    smfIpv4MultiPktsRecvTotal,
    smfIpv4MultiPktsForwardedTotal,
    smfIpv4DuplMultiPktsDetectedTotal,
    smfIpv4DroppedMultiPktsTTLExceededTotal,
    smfIpv4TTLLargerThanPreviousTotal,

    smfIpv6MultiPktsRecvTotal,
```



```
    smfIpv6MultiPktsForwardedTotal,
    smfIpv6DuplMultiPktsDetectedTotal,
    smfIpv6DroppedMultiPktsTTLExceededTotal,
    smfIpv6TTLLargerThanPreviousTotal,
    smfIpv6HAVAssistsReqdTotal,
    smfIpv6DpdHeaderInsertionsTotal,

    smfIpv4MultiPktsRecvPerIf,
    smfIpv4MultiPktsForwardedPerIf,
    smfIpv4DuplMultiPktsDetectedPerIf,
    smfIpv4DroppedMultiPktsTTLExceededPerIf,
    smfIpv4TTLLargerThanPreviousPerIf,

    smfIpv6MultiPktsRecvPerIf,
    smfIpv6MultiPktsForwardedPerIf,
    smfIpv6DuplMultiPktsDetectedPerIf,
    smfIpv6DroppedMultiPktsTTLExceededPerIf,
    smfIpv6TTLLargerThanPreviousPerIf,
    smfIpv6HAVAssistsReqdPerIf,
    smfIpv6DpdHeaderInsertionsPerIf
}
STATUS current
DESCRIPTION
    "Set of SMF performance objects implemented
    in this module by total and per interface."
 ::= { smfMIBGroups 4 }

smfNotifObjectsGroup OBJECT-GROUP
    OBJECTS {
        smfDpdMemoryOverflowThreshold,
        smfDpdMemoryOverflowWindow
    }
    STATUS current
    DESCRIPTION
        "Set of SMF notification control
        objects implemented in this module."
 ::= { smfMIBGroups 5 }

smfNotificationsGroup NOTIFICATION-GROUP
    NOTIFICATIONS {
        smfAdminStatusChange,
        smfConfiguredOpModeChange,
        smfConfiguredRssaChange,
        smfIfAdminStatusChange,
        smfDpdMemoryOverflowEvent
    }
    STATUS current
    DESCRIPTION
```



```
"Set of SMF notifications implemented
  in this module."
 ::= { smfMIBGroups 6 }
```

END

8. Security Considerations

This section discusses security implications of the choices made in this SMF-MIB module.

There are a number of management objects defined in this MIB module with a MAX-ACCESS clause of read-write and/or read-create. Such objects may be considered sensitive or vulnerable in some network environments. The support for SET operations in a non-secure environment without proper protection can have a negative effect on network operations. These are the tables and objects and their sensitivity/vulnerability:

- o 'smfAdminStatus' - this writable configuration object controls the operational status of the SMF process. If this setting is configured inconsistently across the MANET multicast domain, then delivery of multicast data may be inconsistent across the domain; some nodes may not receive multicast data intended for them.
- o 'smfRouterIDAddrType' and 'smfRouterID' - these writable configuration objects define the ID of the SMF process. These objects should be configured with a routable address defined on the local SMF device. The smfRouterID is a logical identification that MUST be configured as unique across inter-operating SMF neighborhoods and it is RECOMMENDED to be chosen as the numerically largest address contained in a node's 'Neighbor Address List' as defined in NHDP. A smfRouterID MUST be unique within the scope of the operating MANET network regardless of the method used for selecting it.
- o 'smfConfiguredOpMode' - this writable configuration objects define the operational mode of the SMF process. The operational mode defines how the SMF process develops its local estimate of the CDS.
- o 'smfConfiguredRssa' - this writable configuration object sets the specific Reduced Set Selection Algorithm (RSSA) for the SMF process. If this object is set inconsistently across the MANET domain, multicast delivery of data will fail.

- o 'smfRssaMember' - this writable configuration object sets the 'interest' of the local SMF node in participating in the CDS. Setting this object to 'never(3)' on a highly highly connected device could lead to frequent island formation. Setting this object to 'always(2)' could support data ex-filtration from the MANET domain.
- o 'smfIpv4Dpd' - this writable configuration object sets the duplicate packet detection method for forwarding of IPv4 multicast packets.
- o 'smfIpv6Dpd' - this writable configuration object sets the duplicate packet detection method for forwarding of IPv6 multicast packets.
- o 'smfMaxPktLifetime' - this writable configuration object sets the estimate of the network packet traversal time. If set too small, this could lead to poor multicast data delivery ratios throughout the MANET domain.
- o 'smfDpdMaxMemorySize' - this writable configuration object sets the memory storage size (in Kilo-Bytes) for the cached DPD records for the combined IPv4 and IPv6 methods. If set too small this could lead to poor performance of the duplicate packet protection algorithms and lead to inefficient resource, e.g., link, utilization within the MANET domain. The local SMF device should protect itself against memory overruns in the event that too large a setting is requested.
- o 'smfDpdEntryMaxLifetime' - this writable configuration object sets the maximum lifetime (in seconds) for the cached DPD records for the combined IPv4 and IPv6 methods. If the memory is running low prior to the MaxLifetimes being exceeded, the local SMF devices should purge the oldest records first.
- o 'smfNhdpRssaMesgTLVIncluded' - this writable configuration object indicates whether the associated NHDP messages include the the RSSA Message TLV, or not. It is highly RECOMMENDED that this object be set to 'true(1)'.
- o 'smfNhdpRssaAddrBlockTLVIncluded' - this writable configuration object indicates whether the associated NHDP messages include the the RSSA Address Block TLV, or not. The smfNhdpRssaAddrBlockTLVIncluded is optional in all cases as it depends on the existence of an address block which may not be present. If this SMF device is configured with NHDP, then this object should be set to 'true(1)'.

- o 'smfConfiguredAddrForwardingTable' - the writable configuration objects in this table indicate which multicast IP address are to be forwarded by this SMF node. Misconfiguration of rows within this table can limit the ability of this SMF device to forward multicast data.
- o 'smfInterfaceTable' - the writable configuration objects in this table indicate which SMF node interfaces are participating in the SMF packet forwarding process. Misconfiguration of rows within this table can limit the ability of this SMF device to forward multicast data.

Some of the readable objects in this MIB module (i.e., objects with a MAX-ACCESS other than not-accessible) may be considered sensitive or vulnerable in some network environments. It is thus important to control even GET and/or NOTIFY access to these objects and possibly to even encrypt the values of these objects when sending them over the network via SNMP. These are the tables and objects and their sensitivity/vulnerability:

- o 'smfNodeRsStatusIncluded' - this readable state object indicates that this SMF node is part of the CDS, or not. Being part of the CDS makes this node a distinguished device. It could be exploited for data ex-filtration, or denial of service attacks.
- o 'smfDiscoveredAddrForwardingTable' - the readable state objects in this table indicate which, dynamically discovered, multicast IP address are to be forwarded by this SMF node.
- o 'smfNeighborTable' - the readable state objects in this table indicate current neighbor nodes to this SMF node. Exposing this information to an attacker could allow the attacker easier access to the larger MANET domain.

The remainder of the objects in the SMF-MIB are performance counter objects. While these give an indication of the activity of the SMF process on this node, it is not expected that exposing these values pose a security risk to the MANET network.

SNMP versions prior to SNMPv3 did not include adequate security. Even if the network itself is secure (for example by using IPSec), even then, there is no control as to who on the secure network is allowed to access and GET/SET (read/change/create/delete) the objects in this MIB module.

Implementations MUST provide the security features described by the SNMPv3 framework (see [[RFC3410](#)]), including full support for authentication and privacy via the User-based Security Model (USM)

[RFC3414] with the AES cipher algorithm [[RFC3826](#)]. Implementations MAY also provide support for the Transport Security Model (TSM) [[RFC5591](#)] in combination with a secure transport such as SSH [[RFC5592](#)] or TLS/DTLS [[RFC6353](#)].

Further, deployment of SNMP versions prior to SNMPv3 is NOT RECOMMENDED. Instead, it is RECOMMENDED to deploy SNMPv3 and to enable cryptographic security. It is then a customer/operator responsibility to ensure that the SNMP entity giving access to an instance of this MIB module is properly configured to give access to the objects only to those principals (users) that have legitimate rights to indeed GET or SET (change/create/delete) them.

9. Applicability Statement

This document describes objects for configuring parameters of the Simplified Multicast Forwarding [[RFC6621](#)] process on a Mobile Ad-Hoc Network (MANET) router. This MIB module, denoted SMF-MIB, also reports state and performance information and notifications. This section provides some examples of how this MIB module can be used in MANET network deployments. A fuller discussion of MANET network management use cases and challenges will be provided elsewhere.

SMF is designed to allow MANET routers to forward IPv4 and IPv6 packets over the MANET and cover the MANET nodes through the automatic discovery of efficient estimates of the Minimum Connected Dominating Set (MCDS) of nodes within the MANET. The MCDS are estimated using the Relay Set Selection Algorithms (RSSAs) discussed within this document. In the following, three scenarios are listed where this MIB module is useful, i.e.,

- o For a Parking Lot Initial Configuration Situation - it is common for the vehicles comprising the MANET being forward deployed at a remote location, e.g., the site of a natural disaster, to be off-loaded in a parking lot where an initial configuration of the networking devices is performed. The configuration is loaded into the devices from a fixed location Network Operation Center (NOC) at the parking lot and the vehicles are stationary at the parking lot while the configuration changes are made. Standards-based methods for configuration management from the co-located NOC are necessary for this deployment option. The set of interesting configuration objects for the SMF process are listed within this MIB module.
- o For Mobile vehicles with Low Bandwidth Satellite Link to a Fixed NOC - Here the vehicles carrying the MANET routers carry multiple wireless interfaces, one of which is a relatively low-bandwidth on-the-move satellite connection which interconnects a fix NOC to

the nodes of the MANET. Standards-based methods for monitoring and fault management from the fixed NOC are necessary for this deployment option.

- o For Fixed NOC and Mobile Local Manager in Larger Vehicles - for larger vehicles, a hierarchical network management arrangement is useful. Centralized network management is performed from a fixed NOC while local management is performed locally from within the vehicles. Standards-based methods for configuration, monitoring and fault management are necessary for this deployment option.

10. IANA Considerations

The MIB module in this document uses the following IANA-assigned OBJECT IDENTIFIER value recorded in the SMI Numbers registry:

| | |
|---|-------------------------|
| Descriptor | OBJECT IDENTIFIER value |
| ----- | ----- |
| SMF-MIB | { experimental XXXX } |
| IANA EDITOR NOTE: please assign XXXX, and remove this note. | |

11. Contributors

This MIB document uses the template authored by D. Harrington which is based on contributions from the MIB Doctors, especially Juergen Schoenwaelder, Dave Perkins, C.M.Heard and Randy Presuhn.

12. Acknowledgements

The authors would like to acknowledge the valuable comments from Sean Harnedy in the early phases of the development of this MIB-module. The authors would like to thank James Nguyen for his careful review and comments on this MIB-module and his work on the definitions of the follow on MIB-modules to configure specific RSSA algorithms related to SMF. Further, the authors would like to acknowledge to work of James Nguyen, Brian Little, Ryan Morgan and Justin Dean on their software development of the SMF-MIB.

13. References

13.1. Normative References

[RFC2863] McCloghrie, K. and F. Kastenholz, "The Interfaces Group MIB", [RFC 2863](#), June 2000.

[RFC3411] Harrington, D., Presuhn, R., and B. Wijnen, "An Architecture for Describing Simple Network Management Protocol (SNMP) Management Frameworks", STD 62, [RFC 3411](#),

December 2002.

- [RFC3418] Presuhn, R., "Management Information Base (MIB) for the Simple Network Management Protocol (SNMP)", STD 62, [RFC 3418](#), December 2002.
- [RFC4001] Daniele, M., Haberman, B., Routhier, S., and J. Schoenwaelder, "Textual Conventions for Internet Network Addresses", [RFC 4001](#), February 2005.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC2578] McCloghrie, K., Ed., Perkins, D., Ed., and J. Schoenwaelder, Ed., "Structure of Management Information Version 2 (SMIV2)", STD 58, [RFC 2578](#), April 1999.
- [RFC2579] McCloghrie, K., Ed., Perkins, D., Ed., and J. Schoenwaelder, Ed., "Textual Conventions for SMIV2", STD 58, [RFC 2579](#), April 1999.
- [RFC2580] McCloghrie, K., Perkins, D., and J. Schoenwaelder, "Conformance Statements for SMIV2", STD 58, [RFC 2580](#), April 1999.
- [RFC6621] Macker, J., "Simplified Multicast Forwarding", [RFC 6621](#), May 2012.

13.2. Informative References

- [RFC3410] Case, J., Mundy, R., Partain, D., and B. Stewart, "Introduction and Applicability Statements for Internet-Standard Management Framework", [RFC 3410](#), December 2002.
- [RFC3414] Blumenthal, U. and B. Wijnen, "User-based Security Model (USM) for version 3 of the Simple Network Management Protocol (SNMPv3)", STD 62, [RFC 3414](#), December 2002.
- [RFC3826] Blumenthal, U., Maino, F., and K. McCloghrie, "The Advanced Encryption Standard (AES) Cipher Algorithm in the SNMP User-based Security Model", [RFC 3826](#), June 2004.
- [RFC5591] Harrington, D. and W. Hardaker, "Transport Security Model for the Simple Network Management Protocol (SNMP)", [RFC 5591](#), June 2009.
- [RFC5592] Harrington, D., Salowey, J., and W. Hardaker, "Secure Shell Transport Model for the Simple Network Management

Protocol (SNMP)", [RFC 5592](#), June 2009.

[RFC6353] Hardaker, W., "Transport Layer Security (TLS) Transport Model for the Simple Network Management Protocol (SNMP)", [RFC 6353](#), July 2011.

Appendix A.

```

*****
* Note to the RFC Editor (to be removed prior to publication) *
*
* The reference to RFC xxxx within the DESCRIPTION clauses
* of the MIB module point to this draft and are to be
* assigned by the RFC Editor.
*
*****

```

Authors' Addresses

Robert G. Cole
 US Army CERDEC
 6010 Frankford Road
 Aberdeen Proving Ground, Maryland 21005
 USA

Phone: +1 443 395 8744
 EMail: robert.g.cole@us.army.mil

Joseph Macker
 Naval Research Laboratory
 Washington, D.C. 20375
 USA

EMail: macker@itd.nrl.navy.mil

Brian Adamson
 Naval Research Laboratory
 Washington, D.C. 20375
 USA

EMail: adamson@itd.nrl.navy.mil

