

MIP6 Working Group
Internet-Draft
Intended status: Standards Track
Expires: August 25, 2007

V. Devarapalli
Azaire Networks
February 21, 2007

Mobile IPv6 Experimental Messages
draft-ietf-mip6-experimental-messages-01.txt

Status of this Memo

By submitting this Internet-Draft, each author represents that any applicable patent or other IPR claims of which he or she is aware have been or will be disclosed, and any of which he or she becomes aware will be disclosed, in accordance with [Section 6 of BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/lid-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on August 25, 2007.

Copyright Notice

Copyright (C) The IETF Trust (2007).

Abstract

This document defines a new experimental Mobility header message and a mobility option that can be used for experimental extensions to the Mobile IPv6 protocol.

Internet-Draft

MIPv6 Experimental Messages

February 2007

Table of Contents

- [1. Introduction](#) [3](#)
- [2. Terminology](#) [3](#)
- [3. Experimental Mobility Header message](#) [4](#)
- [4. Experimental Mobility Option](#) [4](#)
- [5. Security Considerations](#) [5](#)
- [6. IANA Considerations](#) [5](#)
- [7. Acknowledgements](#) [6](#)
- [8. References](#) [6](#)
 - [8.1. Normative References](#) [6](#)
 - [8.2. Informative References](#) [6](#)
- [Author's Address](#) [6](#)
- [Intellectual Property and Copyright Statements](#) [7](#)

1. Introduction

When experimenting with a protocol or defining a new extension to a protocol, one needs either a protocol number, a new message or an option to carry the information related to the experiment. Most implementations end up using unassigned values for the new messages. Many times this creates problems when the same value is assigned through the IETF standards action, by IANA or if the implementation gets deployed with these messages. Therefore it is considered a good practice to set aside some messages for experimental purposes. The need for experimental messages is shown in [3].

This document defines new messages for experimenting with extensions to the Mobile IPv6 protocol. These messages should be strictly used for experiments. Experiments that are successful should be standardized in the IETF. An implementation MUST NOT be released or deployed with the experimental messages.

This document defines a new Mobility Header message, the Experimental Mobility message that can be sent at any time by the mobile node, the home agent or the correspondent node. Since Mobility Header messages cannot be combined and sent in one packet, there is always only one Mobility Header message in any Mobile IPv6 packet. Home agent or correspondent node implementations that do not recognize the mobility message type, discard the message and send Binding Error message as described in [2], with the Status field set to 2 (unrecognized MH Type value). Mobile nodes that do not recognize the mobility message type should discard the message and send an ICMP Parameter problem with code 0.

This document also defines a new mobility option, the Experimental Mobility option, which can be carried in any Mobility Header message. Mobility options, by definition, can be skipped if an implementation does not recognize the mobility option type [2].

The messages defined in this document can also be used for NEMO [4]

and Proxy MIPv6 [5] since these protocols also use Mobility Header messages.


2. Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [1].

3. Experimental Mobility Header message

The following illustrates the message format for the Experimental Mobility Header message. The 'MH Type' field in the Mobility Header indicates that it is an Experimental Mobility Header message.

If no data is present in this message, padding is not necessary and since the first 8 octets are excluded while calculating the length of the message, the 'Header Len' field in the Mobility Header is set to 0.

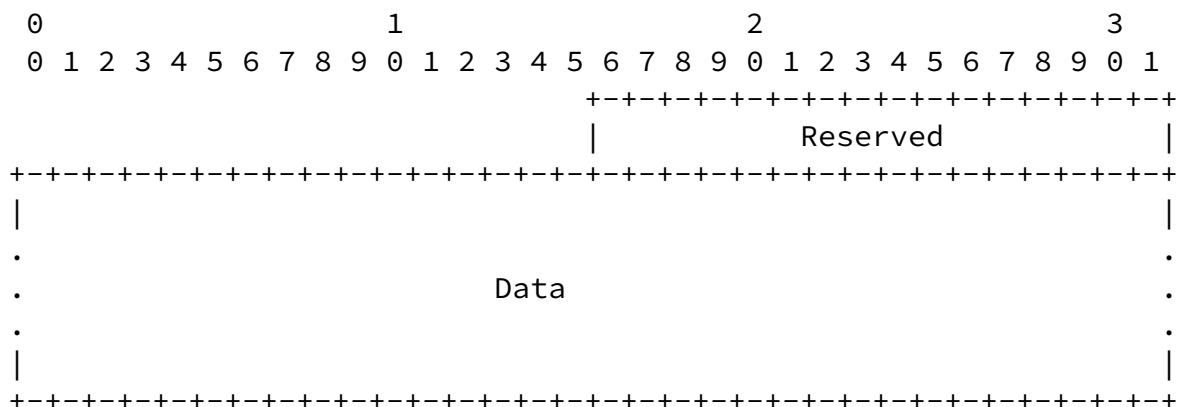

Reserved


A 16-bit reserved field set to zero by the sender and ignored by the receiver.

Data

Data specific to the experimental protocol extension. The total length is indicated by the 'Header Len' field in the Mobility Header.

4. Experimental Mobility Option

The Experimental mobility option can be included in any Mobility Header message. If the Mobility Header message includes a Binding Authorization Data option [2], then the Experimental Mobility Option should appear before the Binding Authorization Data option.

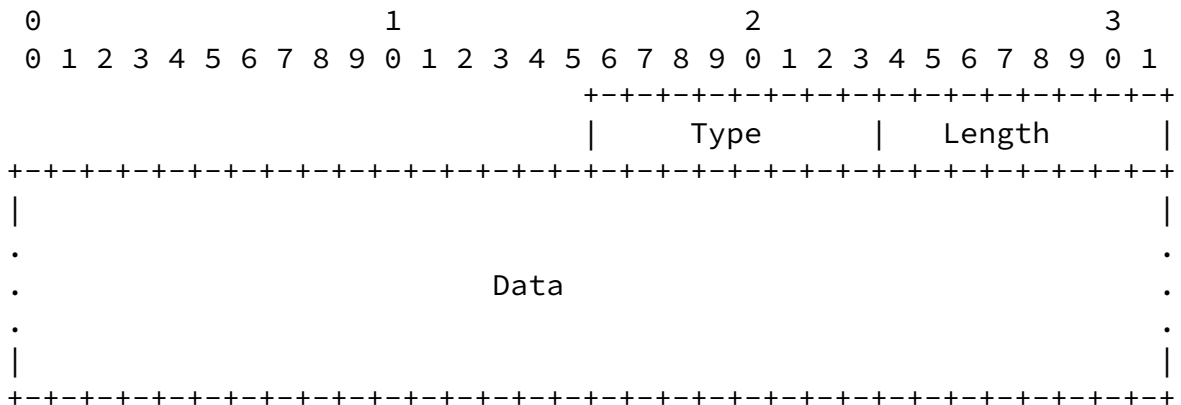

Type

A 8-bit field indicating that it is an experimental mobility option.

Length

A 8-bit indicating the length of the option in octets excluding the Type and Length fields.

Data

Data related to the experimental protocol extension.

[5.](#) Security Considerations

Protection for the Experimental Mobility Header message and mobility option depends on the experiment that is being carried out and the kind of information that is being carried in the messages. If these messages carry information that should not be revealed on the wire or that can affect the binding cache entry at the home agent or the correspondent node, they should be protected in a manner similar to Binding Updates and Binding Acknowledgements.

[6.](#) IANA Considerations

The Experimental Mobility Header message defined in [Section 3](#), should have the type value allocated from the same space as the 'MH Type' field in the Mobility Header [\[2\]](#).

The Experimental mobility option defined in [Section 4](#), should have the type value allocated from the same space as Mobility Options [\[2\]](#).

[7.](#) Acknowledgements

The author would like to thank Jari Arkko and Basavaraj Patil with whom the contents of this document were discussed first.

[8.](#) References

[8.1.](#) Normative References

- [1] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [2] Johnson, D., Perkins, C., and J. Arkko, "Mobility Support in IPv6", [RFC 3775](#), June 2004.

[8.2.](#) Informative References

- [3] Narten, T., "Assigning Experimental and Testing Numbers Considered Useful", [BCP 82](#), [RFC 3692](#), January 2004.
- [4] Devarapalli, V., Wakikawa, R., Petrescu, A., and P. Thubert, "Network Mobility (NEMO) Basic Support Protocol", [RFC 3963](#), January 2005.
- [5] Gundavelli, S., "Proxy Mobile IPv6", [draft-sgundave-mip6-proxymip6-01](#) (work in progress), January 2007.

Author's Address

Vijay Devarapalli
Azaire Networks
4800 Great America Pkwy
Santa Clara, CA 95054
USA

Email: vijay.devarapalli@azairenet.com

Full Copyright Statement

Copyright (C) The IETF Trust (2007).

This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY, THE IETF TRUST AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Intellectual Property

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at ietf-ipr@ietf.org.

Acknowledgment

Funding for the RFC Editor function is provided by the IETF Administrative Support Activity (IASA).