

MMUSIC
Internet-Draft
Updates: [4756](#), [3388bis](#), 5576
(if approved)
Intended status: Standards Track
Expires: August 15, 2010

A. Begen
Cisco
February 11, 2010

Forward Error Correction Grouping Semantics in Session Description
Protocol
draft-ietf-mmusic-rfc4756bis-06

Abstract

The Session Description Protocol (SDP) supports grouping media lines. SDP also has semantics defined for grouping the associated source and Forward Error Correction (FEC)-based repair flows. However, the semantics that was defined in [RFC 4756](#) generally fail to provide the specific grouping relationships between the source and repair flows when there are more than one source and/or repair flows in the same group. Furthermore, the existing semantics does not support describing additive repair flows. This document addresses these issues by introducing new FEC grouping semantics. SSRC-level grouping semantics is also introduced in this document for Real-time Transport Protocol (RTP) streams using SSRC multiplexing.

Status of this Memo

This Internet-Draft is submitted to IETF in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/lid-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on August 15, 2010.

Internet-Draft

FEC Grouping Semantics in SDP

February 2010

Copyright Notice

Copyright (c) 2010 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the BSD License.

Table of Contents

1.	Introduction	3
2.	Requirements Notation	5
3.	Requirements and Changes from RFC 4756	5
3.1.	Source and Repair Flow Association	5
3.2.	Support for Additivity	6
4.	FEC Grouping	6
4.1.	New Grouping Semantics	6
4.2.	SDP Example	7
4.3.	Grouping for SSRC-Multiplexed RTP Streams	8
4.4.	SDP Offer-Answer Model and Backward Compatibility Considerations	10
4.5.	ABNF Syntax	11
5.	Security Considerations	12
6.	IANA Considerations	12
7.	Acknowledgments	12
8.	References	13
8.1.	Normative References	13
8.2.	Informative References	13
	Author's Address	14

1. Introduction

Any application that needs a reliable transmission over an unreliable packet network has to cope with packet losses. Forward Error Correction (FEC) is an effective approach that provides reliable transmission particularly in multicast and broadcast applications where the feedback from the receiver(s) is potentially limited.

In a nutshell, FEC groups source packets into blocks and applies protection to generate a desired number of repair packets. These repair packets may be sent on demand or independently of any receiver feedback. The choice depends on the FEC scheme, the packet loss characteristics of the underlying network, the transport scheme (e.g., unicast, multicast and broadcast) and the application. At the receiver side, lost packets can be recovered by erasure decoding provided that a sufficient number of source and repair packets have been received.

For example, one of the most basic FEC schemes is the parity codes, where an exclusive OR (XOR) operation is applied to a group of packets (i.e., source block) to generate a single repair packet. At the receiver side, this scheme provides a full recovery if only one packet is lost within the source block and the repair packet is received. There are various other ways of generating repair packets, possibly with different loss-recovery capabilities.

The FEC Framework [[I-D.ietf-fecframe-framework](#)] outlines a general framework for using FEC codes in multimedia applications that stream audio, video or other types of multimedia content. The FEC Framework specification states that source and repair packets must be carried in different streams, which are referred to as the source and repair flows, respectively. At the receiver side, the receivers should know which flows are the source flows and which flows are the repair flows. The receivers should also know the exact association of the source and repair flows so that they can use the correct data to repair the original content in case there is a packet loss.

Currently, SDP [[RFC4566](#)] uses [[RFC3388](#)] and [[RFC4756](#)] for this purpose.

In order to provide applications more flexibility, the FEC Framework [[I-D.ietf-fecframe-framework](#)] allows a source flow to be protected by multiple FEC schemes, each of which requires an instance of the FEC Framework. Thus, multiple instances of the FEC Framework may exist at the sender and the receiver(s). Furthermore, within a single FEC Framework instance, multiple source flows may be grouped and protected by one or more repair flows.

It should be noted that the FEC Framework requires the source and

repair packets to be carried in different streams. When Real-time Transport Protocol (RTP) [[RFC3550](#)] is used to carry the source and repair streams, the FEC Framework recommends that each stream is carried in its own RTP session. This provides flexibility in using FEC in a backward-compatible manner. However, in some scenarios, a single RTP session may be desired to carry multiple RTP streams via SSRC multiplexing in order to reduce the port usage. For such scenarios, an appropriate grouping semantics is also required.

A basic example scenario is shown in Figure 1. Here, source flow S1 is protected by repair flow R1. Also, source flows S1 and S2 are grouped and protected together by repair flow R2.

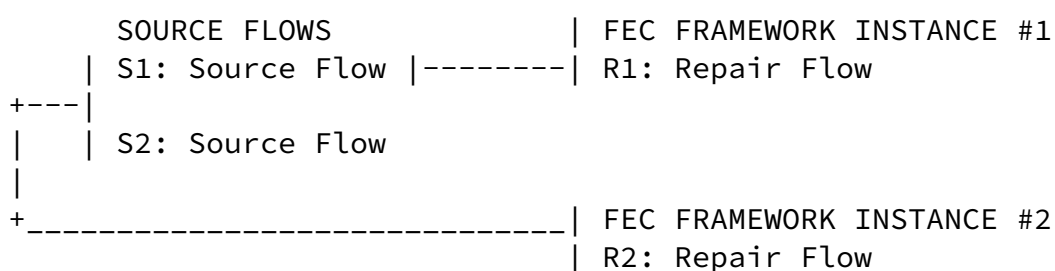


Figure 1: Example scenario with two FEC Framework instances where R1 protects S1, and R2 protects the group of S1 and S2

Grouping source flows before applying FEC protection may allow us to achieve a better coding performance. As a typical scenario, suppose that source flows S1 and S2 in Figure 1 correspond to the base and enhancement layers in a layered video content, respectively. Repair flow R2 protects the combination of the base and enhancement layers

for the receivers who receive both layers, and repair flow R1 protects the base layer only, for the receivers who want the base layer only, or who receive both layers but prefer FEC protection for the base layer only due to a bandwidth and/or any other limitation.

It should be noted that the grouping semantics defined in this document offers the flexibility to determine how source streams are grouped together prior to applying FEC protection. However, not all FEC schemes support the full range of the possible scenarios (e.g., when the source streams carry different top-level media types such as audio and video).

Using multiple FEC Framework instances for a single source flow provides flexibility to the receivers. An example scenario is sketched in Figure 2. Different instances may offer repair flows that are generated by different FEC schemes, and receivers choose receiving the appropriate repair flow(s) that they can support and decode. Alternatively, different instances (whether they use the same FEC scheme or not) may use larger and smaller source block

sizes, which accommodate the receivers that have looser and tighter latency requirements, respectively. In addition, different instances may also provide FEC protection at different redundancy levels. This is particularly useful in multicast scenarios where different receivers may experience different packet loss rates and each receiver can choose the repair flow that is tailored to its needs.

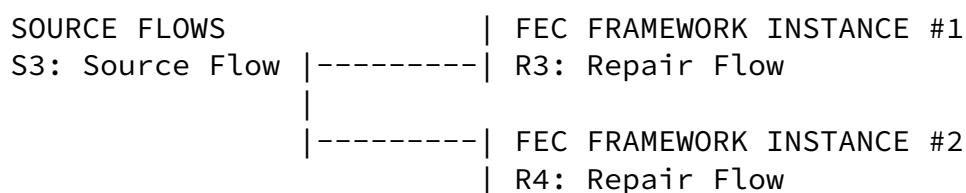


Figure 2: Example scenario with two FEC Framework instances, each with a single repair flow protecting the same source flow S3

In summary, based on the FEC Framework [[I-D.ietf-fecframe-framework](#)], the SDP grouping semantics for FEC must support the ability to indicate that:

1. A given source flow is protected by multiple different FEC schemes.

2. Multiple repair flows are associated with a given FEC scheme.
3. Multiple source flows are grouped prior to applying FEC protection.
4. One or more repair flows protect a group of source flows.

2. Requirements Notation

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

3. Requirements and Changes from [RFC 4756](#)

3.1. Source and Repair Flow Association

The FEC grouping semantics and 'group' attribute defined in this document and [[I-D.ietf-mmusic-rfc3388bis](#)], respectively, are used to associate source and repair flows together. This document also specifies how the 'group' attribute in SDP is used to group multiple repair flows with one or more source flows.

[[I-D.ietf-mmusic-rfc3388bis](#)] updates [[RFC3388](#)] to allow an "m" line identified by its 'mid' attribute to appear in more than one "a=group" line using the same semantics. With this change and other required changes in the grouping semantics for FEC, a sender is allowed to indicate the specific associations between the source and repair flows, and a receiver can determine which repair flow(s) protect which source flow(s).

This document introduces the changes required in the FEC grouping semantics and updates [[RFC4756](#)]. New implementations SHOULD use the new semantics introduced in this document whenever possible, but they may need to use [[RFC4756](#)] semantics when backward compatibility is desired, as described in [Section 4.4](#).

3.2. Support for Additivity

The FEC Framework also supports additive repair flows. Additivity among the repair flows means that multiple repair flows may be decoded jointly to improve the recovery chances of the missing packets in a single or the same set of source flows. Additive repair flows can be generated by the same FEC scheme or different FEC schemes.

For example, in Figure 3, repair flows R5 and R6 may be additive within the FEC Framework instance #1. Alternatively, all three repair flows R5, R6 and R7 could be additive, too.

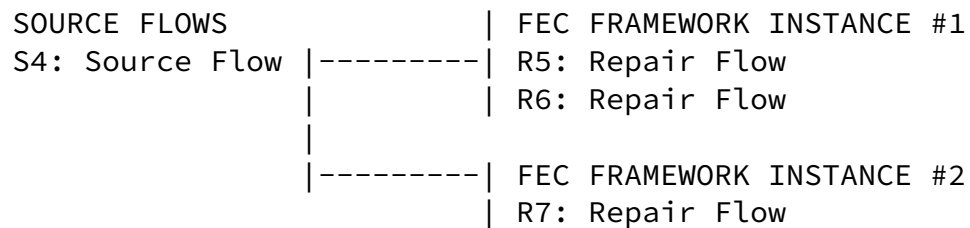


Figure 3: Example scenario with two FEC Framework instances, where two repair flows in the first instance and a single repair flow in the second instance protect the same source flow S4

4. FEC Grouping

4.1. New Grouping Semantics

Each "a=group" line is used to indicate an association relationship between the source and repair flows. The flows included in one "a=group" line are called an FEC Group. If there are more than one repair flows included in an FEC group, they MUST be considered to be additive. Repair flows that are not additive MUST be indicated in

separate FEC groups. However, if two (or more) repair flows are additive in an FEC group, it does not necessarily mean that these repair flows will also be additive in any other FEC group. Generally, in order to express multiple relations between the source and repair flows, each source and repair flow MAY appear in more than one FEC group.

By extending [[I-D.ietf-mmusic-rfc3388bis](#)] we define "FEC-FR" as the

new grouping semantics that can support the features of the FEC Framework.

The "a=group:FEC-FR" semantics MUST always be used to associate the source and repair flows except when the source and repair flows are specified in the same media description, i.e., in the same "m" line. Note that additivity is not necessarily a transitive relation. Thus, each set of additive repair flows MUST be stated explicitly.

[4.2.](#) SDP Example

For the scenario sketched in Figure 1, we need to write the following SDP:


```

o=ali 1122334455 1122334466 IN IP4 fec.example.com
s=New FEC Grouping Semantics
t=0 0
a=group:FEC-FR S1 R1
a=group:FEC-FR S1 S2 R2
m=video 30000 RTP/AVP 100
c=IN IP4 233.252.0.1/127
a=rtpmap:100 MP2T/90000
a=mid:S1
m=video 30000 RTP/AVP 101
c=IN IP4 233.252.0.2/127
a=rtpmap:101 MP2T/90000
a=mid:S2
m=application 30000 RTP/AVP 110
c=IN IP4 233.252.0.3/127
a=rtpmap:110 1d-interleaved-parityfec/90000
a=fmtp:110 L=5; D=10; repair-window=200000
a=mid:R1
m=application 30000 RTP/AVP 111
c=IN IP4 233.252.0.4/127
a=rtpmap:111 1d-interleaved-parityfec/90000
a=fmtp:111 L=10; D=10; repair-window=400000
a=mid:R2

```

In this example, the source and repair flows are carried in their own RTP sessions and the grouping is achieved through the "a=group:FEC-FR" lines.

For the additivity issues, let us consider the scenario sketched in Figure 3. Suppose that repair flows R5 and R6 are additive but repair flow R7 is not additive with any of the other repair flows. In this case, we must write

```

a=group:FEC-FR S4 R5 R6
a=group:FEC-FR S4 R7

```

If none of the repair flows are additive, we must write

```

a=group:FEC-FR S4 R5
a=group:FEC-FR S4 R6
a=group:FEC-FR S4 R7

```

[4.3.](#) Grouping for SSRC-Multiplexed RTP Streams

[RFC5576] defines a grouping attribute, called 'ssrc-group', for the RTP streams that are SSRC multiplexed and carried in the same RTP session. The grouping is based on the Synchronization Source (SSRC)

identifiers. Since SSRC-multiplexed RTP streams are defined in the same "m" line, the 'group' attribute cannot be used.

This document extends [[RFC5576](#)] in two ways. First, we define how FEC is applied to source and repair flows for SSRC-multiplexed streams using the 'ssrc-group' attribute. We then specify how the additivity of the repair flows is expressed for the SSRC-multiplexed streams.

Per [[RFC3550](#)], the SSRC identifiers for the RTP streams that are carried in the same RTP session MUST be unique. However, the SSRC identifiers are not guaranteed to be unique among different RTP sessions. Thus, the 'ssrc-group' attribute MUST only be used at the media level [[RFC5576](#)]. The semantics of "FEC-FR" for the 'ssrc-group' attribute is exactly the same as the one defined for the 'group' attribute.

Let us consider the following scenario where there are two source flows (e.g., one video and one audio) and a single repair flow that protects only one of the source flows (e.g., video). Suppose that all these flows are separate RTP streams that are SSRC multiplexed in the same RTP session.

SOURCE FLOWS		FEC FRAMEWORK INSTANCE #1
S5: Source Flow	-----	R8: Repair Flow
S6: Source Flow		

Figure 4: Example scenario with one FEC Framework instance, where a single repair flow protects only one of the source flows

The following SDP describes the scenario sketched in Figure 4.

```
v=0
o=ali 1122334455 1122334466 IN IP4 fec.example.com
s=New FEC Grouping Semantics for SSRC Multiplexing
t=0 0
m=video 30000 RTP/AVP 100 101 110
c=IN IP4 233.252.0.1/127
a=rtpmap:100 JPEG/90000
a=rtpmap:101 L16/32000/2
a=rtpmap:110 1d-interleaved-parityfec/90000
a=fmtp:110 L=5; D=10; repair-window=200000
a=ssrc:1000 cname:fec@example.com
a=ssrc:1010 cname:fec@example.com
a=ssrc:2110 cname:fec@example.com
a=ssrc-group:FEC-FR 1000 2110
a=mid:Group1
```

Note that in actual use, SSRC values, which are random 32-bit numbers, may be much larger than the ones shown in this example. Also note that before receiving an RTP packet for each stream, the receiver cannot know which SSRC identifier is associated with which payload type.

The additivity of the repair flows is handled in the same way as described in [Section 4.2](#). In other words, the repair flows that are included in an "a=ssrc-group" line MUST be additive. Repair flows that are not additive MUST be indicated in separate "a=ssrc-group" lines.

[4.4](#). SDP Offer-Answer Model and Backward Compatibility Considerations

When offering FEC grouping using SDP in an Offer/Answer model [[RFC3264](#)], the following considerations apply.

A node that is receiving an offer from a sender may or may not understand line grouping. It is also possible that the node understands line grouping but it does not understand the "FEC-FR" semantics. From the viewpoint of the sender of the offer, these cases are indistinguishable.

When a node is offered a session with the "FEC-FR" grouping semantics but it does not support line grouping or the FEC grouping semantics, the node SHOULD respond to the offer either:

- o With an answer that ignores the grouping attribute.

In this case, the original sender of the offer MUST first check whether using the "FEC" grouping semantics will create any ambiguity or not, while keeping its limitations in mind. If using

the "FEC" semantics rather than the "FEC-FR" semantics still provides an exact association among the source and repair flows, the sender of the offer MUST send a new offer using the "FEC" semantics. However, if an exact association cannot be described, the sender MUST send a new offer without FEC.

- o With a refusal to the request (e.g., 488 Not Acceptable Here or 606 Not Acceptable in SIP).

In this case, if the sender of the offer still wishes to establish the session, it MUST first check whether using the "FEC" grouping semantics will create any ambiguity or not, while keeping its limitations in mind. If using the "FEC" semantics rather than the "FEC-FR" semantics still provides an exact association among the source and repair flows, the sender of the offer SHOULD send a new offer using the "FEC" semantics. However, if an exact association cannot be described, the sender SHOULD send a new offer without FEC.

Note that in both cases described above, when the sender of the offer sends a new offer with the "FEC" semantics, and the node understands it, the session will be established and the rules pertaining to [\[RFC4756\]](#) will apply.

However, if the node does not understand the "FEC" semantics, it SHOULD respond to the offer either (1) with an answer that ignores the grouping attribute, or (2) with a refusal to the request. In the first case, the sender MUST send a new offer without FEC. In the second case, if the sender of the offer still wishes to establish the session, it SHOULD retry the request with an offer without FEC.

Note to the RFC Editor: In the following, please replace "XXXX" with the number of this document prior to publication as an RFC.

A new semantics ("FEC-FR") is defined for the 'group' attribute [[I-D.ietf-mmusic-rfc3388bis](#)]. Its formatting in SDP is described by the following ABNF [[RFC5234](#)]:

Begen

Expires August 15, 2010

[Page 11]

Internet-Draft

FEC Grouping Semantics in SDP

February 2010

```
group-attribute = "a=group:" semantics
                  *(space identification-tag)
  semantics = "LS" / "FID" /
              "FEC" /           ; from [RFC4756] for backward
                              ; compatibility
              "FEC-FR"         ; from [RFCXXXX]
```

```
identification-tag = token
```

The identification tags MUST be unique within an SDP session description.

5. Security Considerations

There is a weak threat for the receiver that the FEC grouping can be modified to indicate FEC relationships that do not exist. Such attacks may result in failure of FEC to protect, and/or mishandling of other media payload streams. It is RECOMMENDED that the receiver SHOULD do integrity check on SDP and follow the security considerations of SDP [[RFC4566](#)] to only trust SDP from trusted sources.

6. IANA Considerations

This document registers the following semantics with IANA in Semantics for the 'group' SDP Attribute under SDP Parameters:

Note to the RFC Editor: In the following, please replace "XXXX" with the number of this document prior to publication as an RFC.

Semantics	Token	Reference
Forward Error Correction	FR	[RFCXXXX]

This document also registers the following semantics with IANA in Semantics for the 'ssrc-group' SDP Attribute under SDP Parameters:

Semantics	Token	Reference
Forward Error Correction	FR	[RFCXXXX]

7. Acknowledgments

Some parts of this document are based on [[RFC4756](#)]. Thus, the author

Begen

Expires August 15, 2010

[Page 12]

Internet-Draft

FEC Grouping Semantics in SDP

February 2010

would like to thank those who contributed to [[RFC4756](#)]. Also, thanks to Jonathan Lennox who has contributed to [Section 4.3](#).

8. References

8.1. Normative References

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.

[RFC4566] Handley, M., Jacobson, V., and C. Perkins, "SDP: Session Description Protocol", [RFC 4566](#), July 2006.

[I-D.ietf-mmusic-rfc3388bis]
Camarillo, G. and H. Schulzrinne, "The SDP (Session Description Protocol) Grouping Framework", [draft-ietf-mmusic-rfc3388bis-04](#) (work in progress),

November 2009.

- [RFC3264] Rosenberg, J. and H. Schulzrinne, "An Offer/Answer Model with Session Description Protocol (SDP)", [RFC 3264](#), June 2002.
- [RFC3550] Schulzrinne, H., Casner, S., Frederick, R., and V. Jacobson, "RTP: A Transport Protocol for Real-Time Applications", STD 64, [RFC 3550](#), July 2003.
- [RFC5576] Lennox, J., Ott, J., and T. Schierl, "Source-Specific Media Attributes in the Session Description Protocol (SDP)", [RFC 5576](#), June 2009.
- [RFC5234] Crocker, D. and P. Overell, "Augmented BNF for Syntax Specifications: ABNF", STD 68, [RFC 5234](#), January 2008.

[8.2.](#) Informative References

- [I-D.ietf-fecframe-framework] Watson, M., "Forward Error Correction (FEC) Framework", [draft-ietf-fecframe-framework-05](#) (work in progress), July 2009.
- [RFC4756] Li, A., "Forward Error Correction Grouping Semantics in Session Description Protocol", [RFC 4756](#), November 2006.
- [RFC3388] Camarillo, G., Eriksson, G., Holler, J., and H. Schulzrinne, "Grouping of Media Lines in the Session Description Protocol (SDP)", [RFC 3388](#), December 2002.

Begen

Expires August 15, 2010

[Page 13]

Internet-Draft

FEC Grouping Semantics in SDP

February 2010

Author's Address

Ali Begen
Cisco
170 West Tasman Drive
San Jose, CA 95134
USA

Email: abegen@cisco.com

