

MPLS Working Group  
Internet Draft  
Expiration Date: January 2001

Bilel Jamoussi, Editor  
Nortel Networks Corp.

**O. Aboul-Magd, L. Andersson, P. Ashwood-Smith,  
F. Hellstrand, K. Sundell, Nortel Networks Corp.  
R. Callon, Juniper Networks.  
R. Dantu, IPmobile  
P. Doolan, T. Worster, Ennovate Networks Corp.  
N. Feldman, IBM Corp.  
A. Fredette, PhotonEx Corp.  
M. Girish, Atoga Systems  
E. Gray, Zaffire, Inc.  
J. Halpern, Longitude Systems, Inc.  
J. Heinanen, Telia Finland  
T. Kilty, Newbridge Networks, Inc.  
A. Malis, Vivace Networks  
P. Vaananen, Nokia Telecommunications  
L. Wu, Cisco Systems**

July 2000

## Constraint-Based LSP Setup using LDP

[draft-ietf-mpls-cr-ldp-04.txt](#)

### Status of this Memo

This document is an Internet-Draft and is in full conformance with all provisions of [Section 10 of RFC2026](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as \_work in progress.\_

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

### Abstract

Label Distribution Protocol (LDP) is defined in [1] for distribution of labels inside one MPLS domain. One of the most important

services that may be offered using MPLS in general and LDP in

Jamoussi, et. al. [draft-ietf-mpls-crldp-04.txt](#)

1Internet

Draft Constraint-Based LSP Setup using LDP

July, 2000

particular is support for constraint-based routing of traffic across the routed network. Constraint-based routing offers the opportunity to extend the information used to setup paths beyond what is available for the routing protocol. For instance, an LSP can be setup based on explicit route constraints, QoS constraints, and other constraints. Constraint-based routing (CR) is a mechanism used to meet Traffic Engineering requirements that have been proposed by [2], [3] and [4]. These requirements may be met by extending LDP for support of constraint-based routed label switched paths (CR-LSPs). Other uses for CR-LSPs include MPLS-based VPNs [5]. More information about the applicability of CR-LDP can be found in [6].

This draft specifies mechanisms and TLVs for support of CR-LSPs using LDP.

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [7].

## Table of Contents

<a href="#">1. Introduction.....</a>	<a href="#">4</a>
<a href="#">2. Constraint-based Routing Overview.....</a>	<a href="#">4</a>
<a href="#">2.1 Strict and Loose Explicit Routes.....</a>	<a href="#">5</a>
<a href="#">2.2 Traffic Characteristics.....</a>	<a href="#">5</a>
<a href="#">2.3 Pre-emption.....</a>	<a href="#">6</a>
<a href="#">2.4 Route Pinning.....</a>	<a href="#">6</a>
<a href="#">2.5 Resource Class.....</a>	<a href="#">6</a>
<a href="#">3. Solution Overview.....</a>	<a href="#">7</a>
<a href="#">3.1 Required Messages and TLVs.....</a>	<a href="#">8</a>
<a href="#">3.2 Label Request Message.....</a>	<a href="#">8</a>
<a href="#">3.3 Label Mapping Message.....</a>	<a href="#">9</a>
<a href="#">3.4 Notification Message.....</a>	<a href="#">10</a>
<a href="#">3.5 Release , Withdraw, and Abort Messages.....</a>	<a href="#">10</a>
<a href="#">4. Protocol Specification.....</a>	<a href="#">10</a>
<a href="#">4.1 Explicit Route TLV (ER-TLV).....</a>	<a href="#">11</a>
<a href="#">4.2 Explicit Route Hop TLV (ER-Hop TLV).....</a>	<a href="#">11</a>
<a href="#">4.3 Traffic Parameters TLV.....</a>	<a href="#">12</a>
<a href="#">4.3.1 Semantics.....</a>	<a href="#">14</a>
<a href="#">4.3.1.1 Frequency.....</a>	<a href="#">14</a>
<a href="#">4.3.1.2 Peak Rate.....</a>	<a href="#">14</a>
<a href="#">4.3.1.3 Committed Rate.....</a>	<a href="#">15</a>
<a href="#">4.3.1.4 Excess Burst Size.....</a>	<a href="#">15</a>
<a href="#">4.3.1.5 Peak Rate Token Bucket.....</a>	<a href="#">15</a>
<a href="#">4.3.1.6 Committed Data Rate Token Bucket.....</a>	<a href="#">15</a>
<a href="#">4.3.1.7 Weight.....</a>	<a href="#">16</a>
<a href="#">4.3.2 Procedures.....</a>	<a href="#">16</a>
<a href="#">4.3.2.1 Label Request Message.....</a>	<a href="#">16</a>
<a href="#">4.3.2.2 Label Mapping Message.....</a>	<a href="#">17</a>
<a href="#">4.3.2.3 Notification Message.....</a>	<a href="#">17</a>
<a href="#">4.4 Preemption TLV.....</a>	<a href="#">17</a>
<a href="#">4.5 LSPID TLV.....</a>	<a href="#">18</a>
<a href="#">4.6 Resource Class (Color) TLV.....</a>	<a href="#">20</a>
<a href="#">4.7 ER-Hop semantics.....</a>	<a href="#">20</a>
<a href="#">4.7.1. ER-Hop 1: The IPv4 prefix.....</a>	<a href="#">20</a>
<a href="#">4.7.2. ER-Hop 2: The IPv6 address.....</a>	<a href="#">21</a>
<a href="#">4.7.3. ER-Hop 3: The autonomous system number.....</a>	<a href="#">22</a>
<a href="#">4.7.4. ER-Hop 4: LSPID.....</a>	<a href="#">22</a>
<a href="#">4.8. Processing of the Explicit Route TLV.....</a>	<a href="#">23</a>
<a href="#">4.8.1. Selection of the next hop.....</a>	<a href="#">23</a>

<a href="#">4.8.2. Adding ER-Hops to the explicit route TLV.....</a>	<a href="#">25</a>
<a href="#">4.9 Route Pinning TLV.....</a>	<a href="#">25</a>
<a href="#">4.10 CR-LSP FEC Element.....</a>	<a href="#">26</a>
<a href="#">4.11 TLV Type Summary.....</a>	<a href="#">26</a>
<a href="#">4.12 FEC Type Summary.....</a>	<a href="#">27</a>
<a href="#">4.13 Status Code Summary.....</a>	<a href="#">27</a>
<a href="#">5. IANA Considerations.....</a>	<a href="#">27</a>
<a href="#">5.1 TLV Type Name Space.....</a>	<a href="#">27</a>
<a href="#">5.2 FEC Type Name Space.....</a>	<a href="#">27</a>
<a href="#">5.3 Status Code Space.....</a>	<a href="#">27</a>

Jamoussi, et. al. [draft-ietf-mpls-crldp-04.txt](#)

3Internet

Draft Constraint-Based LSP Setup using LDP

July, 2000

<a href="#">6. Security.....</a>	<a href="#">28</a>
<a href="#">7. Acknowledgments.....</a>	<a href="#">28</a>
<a href="#">8. Intellectual Property Consideration.....</a>	<a href="#">28</a>
<a href="#">9. References.....</a>	<a href="#">28</a>
<a href="#">10. Author's Addresses.....</a>	<a href="#">29</a>
<a href="#">Appendix A: CR-LSP Establishment Examples.....</a>	<a href="#">31</a>
<a href="#">A.1 Strict Explicit Route Example.....</a>	<a href="#">31</a>
<a href="#">A.2 Node Groups and Specific Nodes Example.....</a>	<a href="#">32</a>
<a href="#">Appendix B. QoS Service Examples.....</a>	<a href="#">35</a>
<a href="#">B.1 Service Examples.....</a>	<a href="#">35</a>
<a href="#">B.2 Establishing CR-LSP Supporting Real-Time Applications.....</a>	<a href="#">36</a>
<a href="#">B.3 Establishing CR-LSP Supporting Delay Insensitive Applications.....</a>	<a href="#">37</a>

## **[1. Introduction](#)**

The need for constraint-based routing (CR) in MPLS has been explored elsewhere [3], [2], and [4]. Explicit routing is a subset of the more general constraint-based routing function. At the MPLS WG meeting held during the Washington IETF (December 1997) there was consensus that LDP should support explicit routing of LSPs with provision for indication of associated (forwarding) priority. In the Chicago meeting (August 1998), a decision was made that support for explicit path setup in LDP will be moved to a separate document. This document provides that support and it has been accepted as a working document in the Orlando meeting (December 1998).

This specification proposes an end-to-end setup mechanism of a constraint-based routed LSP (CR-LSP) initiated by the ingress LSR. We also specify mechanisms to provide means for reservation of resources using LDP.

This document introduce TLVs and procedures that provide support for:

- Strict and Loose Explicit Routing
- Specification of Traffic Parameters
- Route Pinning

- CR-LSP Pre-emption though setup/holding priorities
- Handling Failures
- LSPID
- Resource Class

[Section 2](#) introduces the various constraints defined in this specification. [Section 3](#) outlines the CR-LDP solution. [Section 4](#) defines the TLVs and procedures used to setup constraint-based routed label switched paths. [Appendix A](#) provides several examples of CR-LSP path setup. [Appendix B](#) provides Service Definition Examples.

## **[2. Constraint-based Routing Overview](#)**

Constraint-based routing is a mechanism that supports the Traffic

Jamoussi, et. al.      [draft-ietf-mpls-crldp-04.txt](#)      4Internet  
 Draft    Constraint-Based LSP Setup using LDP      July, 2000

Engineering requirements defined in [4]. Explicit Routing is a subset of the more general constraint-based routing where the constraint is the explicit route (ER). Other constraints are defined to provide a network operator with control over the path taken by an LSP. This section is an overview of the various constraints supported by this specification.

Like any other LSP a CR-LSP is a path through an MPLS network. The difference is that while other paths are setup solely based on information in routing tables or from a management system, the constraint-based route is calculated at one point at the edge of network based on criteria, including but not limited to routing information. The intention is that this functionality shall give desired special characteristics to the LSP in order to better support the traffic sent over the LSP. The reason for setting up CR-LSPs might be that one wants to assign certain bandwidth or other Service Class characteristics to the LSP, or that one wants to make sure that alternative routes use physically separate paths through the network.

### **[2.1 Strict and Loose Explicit Routes](#)**

An explicit route is represented in a Label Request Message as a list of nodes or groups of nodes along the constraint-based route. When the CR-LSP is established, all or a subset of the nodes in a group may be traversed by the LSP. Certain operations to be performed along the path can also be encoded in the constraint-based route.

The capability to specify, in addition to specified nodes, groups of nodes, of which a subset will be traversed by the CR-LSP, allows the

system a significant amount of local flexibility in fulfilling a request for a constraint-based route. This allows the generator of the constraint-based route to have some degree of imperfect information about the details of the path.

The constraint-based route is encoded as a series of ER-Hops contained in a constraint-based route TLV. Each ER-Hop may identify a group of nodes in the constraint-based route. A constraint-based route is then a path including all of the identified groups of nodes in the order in which they appear in the TLV.

To simplify the discussion, we call each group of nodes an abstract node. Thus, we can also say that a constraint-based route is a path including all of the abstract nodes, with the specified operations occurring along that path.

## **2.2 Traffic Characteristics**

The traffic characteristics of a path are described in the Traffic Parameters TLV in terms of a peak rate, committed rate, and service granularity. The peak and committed rates describe the bandwidth

Jamoussi, et. al.      [draft-ietf-mpls-crldp-04.txt](#)      5Internet  
Draft    Constraint-Based LSP Setup using LDP      July, 2000

constraints of a path while the service granularity can be used to specify a constraint on the delay variation that the CR-LDP MPLS domain may introduce to a path's traffic.

## **2.3 Pre-emption**

CR-LDP signals the resources required by a path on each hop of the route. If a route with sufficient resources can not be found, existing paths may be rerouted to reallocate resources to the new path. This is the process of path pre-emption. Setup and holding priorities are used to rank existing paths (holding priority) and the new path (setup priority) to determine if the new path can pre-empt an existing path.

The setupPriority of a new CR-LSP and the holdingPriority attributes of the existing CR-LSP are used to specify priorities. Signaling a higher holding priority express that the path, once it has been established, should have a lower chance of being pre-empted. Signaling a higher setup priority expresses the expectation that, in the case that resource are unavailable, the path is more likely to pre-empt other paths. The exact rules determining bumping are an aspect of network policy.

The allocation of setup and holding priority values to paths is an aspect of network policy.

The setup and holding priority values range from zero (0) to seven (7). The value zero (0) is the priority assigned to the most important path. It is referred to as the highest priority. Seven (7) is the priority for the least important path. The use of default priority values is an aspect of network policy. The recommended default value is (4).

The setupPriority of a CR-LSP should not be higher (numerically less) than its holdingPriority since it might bump an LSP and be bumped by the next `_equivalent_` request.

## **2.4 Route Pinning**

Route pinning is applicable to segments of an LSP that are loosely routed - i.e. those segments which are specified with a next hop with the `_L_` bit set or where the next hop is an `_abstract node_`. A CR-LSP may be setup using route pinning if it is undesirable to change the path used by an LSP even when a better next hop becomes available at some LSR along the loosely routed portion of the LSP.

## **2.5 Resource Class**

The network operator may classify network resources in various ways. These classes are also known as `_colors_` or `_administrative groups_`. When a CR-LSP is being established, it's necessary to indicate which resource classes the CR-LSP can draw from.

Jamoussi, et. al. [draft-ietf-mpls-crldp-04.txt](#)

6Internet

Draft Constraint-Based LSP Setup using LDP

July, 2000

## **3. Solution Overview**

CR-LSP over LDP Specification is designed with the following goals:

1. Meet the requirements outlined in [4] for performing traffic engineering and provide a solid foundation for performing more general constraint-based routing.
2. Build on already specified functionality that meets the requirements whenever possible. Hence, this specification is based on [1].
3. Keep the solution simple.

In this document, support for unidirectional point-to-point CR-LSPs is specified. Support for point-to-multipoint, multipoint-to-point, is for further study (FFS).

Support for constraint-based routed LSPs in this specification depends on the following minimal LDP behaviors as specified in [1]:

- Use of Basic and/or Extended Discovery Mechanisms.
- Use of the Label Request Message defined in [1] in downstream on demand label advertisement mode with ordered control.
- Use of the Label Mapping Message defined in [1] in downstream on demand mode with ordered control.
- Use of the Notification Message defined in [1].
- Use of the Withdraw and Release Messages defined in [1].
- Use of the Loop Detection (in the case of loosely routed segments of a CR-LSP) mechanisms defined in [1].

In addition, the following functionality is added to what's defined in [1]:

- The Label Request Message used to setup a CR-LSP includes one or more CR-TLVs defined in [Section 4](#). For instance, the Label Request Message may include the ER-TLV.
- An LSR implicitly infers ordered control from the existence of one or more CR-TLVs in the Label Request Message. This means that the LSR can still be configured for independent control for LSPs established as a result of dynamic routing. However, when a Label Request Message includes one or more of the CR-TLVs, then ordered control is used to setup the CR-LSP. Note that this is also true for the loosely routed parts of a CR-LSP.
- New status codes are defined to handle error notification for failure of established paths specified in the CR-TLVs.

Optional TLVs MUST be implemented to be compliant with the protocol. However, they are optionally carried in the CR-LDP messages to

signal certain characteristics of the CR-LSP being established or modified.

Examples of CR-LSP establishment are given in [Appendix A](#) to illustrate how the mechanisms described in this draft work.

### **[3.1](#) Required Messages and TLVs**

Any Messages, TLVs, and procedures not defined explicitly in this document are defined in the LDP Specification [1]. The reader can use [8] as an informational document about the state transitions, which relate to CR-LDP messages.

The following subsections are meant as a cross-reference to the [1] document and indication of additional functionality beyond what's defined in [1] where necessary.



Note that use of the Status TLV is not limited to Notification messages as specified in [Section 3.4.6](#) of [1]. A message other than a Notification message may carry a Status TLV as an Optional Parameter. When a message other than a Notification carries a Status TLV the U-bit of the Status TLV should be set to 1 to indicate that the receiver should silently discard the TLV if unprepared to handle it.

### 3.2 Label Request Message

The Label Request Message is as defined in 3.5.8 of [1] with the following modifications (required only if any of the CR-TLVs is included in the Label Request Message):

- The Label Request Message MUST include a single FEC-TLV element. The CR-LSP FEC TLV element SHOULD be used. However, the other FEC-TLVs defined in [1] MAY be used instead for certain applications.
- The Optional Parameters TLV includes the definition of any of the Constraint-based TLVs specified in [Section 4](#).
- The Procedures to handle the Label Request Message are augmented by the procedures for processing of the CR-TLVs as defined in [Section 4](#).

The encoding for the CR-LDP Label Request Message is as follows:

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|0|   Label Request (0x0401)   |   Message Length   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Message ID            |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

```

|                               FEC TLV                               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               LSPID TLV           (CR-LDP, mandatory) |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               ER-TLV             (CR-LDP, optional)   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Traffic TLV         (CR-LDP, optional)   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Pinning TLV          (CR-LDP, optional)   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Resource Class TLV (CR-LDP, optional)    |

```

```

+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Pre-emption TLV          (CR-LDP, optional)   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

### 3.3 Label Mapping Message

The Label Mapping Message is as defined in 3.5.7 of [1] with the following modifications:

- The Label Mapping Message MUST include a single Label-TLV.
- The Label Mapping Message Procedures are limited to downstream on demand ordered control mode.

A Mapping message is transmitted by a downstream LSR to an upstream LSR under one of the following conditions:

1. The LSR is the egress end of the CR-LSP and an upstream mapping has been requested.
2. The LSR received a mapping from its downstream next hop LSR for an CR-LSP for which an upstream request is still pending.

The encoding for the CR-LDP Label Mapping Message is as follows:

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|0|  Label Mapping (0x0400)  |      Message Length      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Message ID                |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               FEC TLV                    |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Label TLV                  |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      Label Request Message ID TLV                       |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               LSPID TLV                  (CR-LDP, optional) |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Jamoussi, et. al.      [draft-ietf-mpls-crldp-04.txt](#)      9Internet  
Draft    Constraint-Based LSP Setup using LDP      July, 2000

```

|                               Traffic TLV                (CR-LDP, optional)   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

### 3.4 Notification Message

The Notification Message is as defined in [Section 3.5.1](#) of [1] and

the Status TLV encoding is as defined in [Section 3.4.6](#) of [1]. Establishment of an CR-LSP may fail for a variety of reasons. All such failures are considered advisory conditions and they are signaled by the Notification Message.

Notification Messages carry Status TLVs to specify events being signaled. New status codes are defined in [Section 4.11](#) to signal error notifications associated with the establishment of a CR-LSP and the processing of the CR-TLV.

The Notification Message MAY carry the LSPID TLV of the corresponding CR-LSP.

Notification Messages MUST be forwarded toward the LSR originating the Label Request at each hop and at any time that procedures in this specification - or in [1] - specify sending of a Notification Message in response to a Label Request Message.

The encoding of the notification message is as follows:



### 3.5 Release , Withdraw, and Abort Messages

The Label Release , Label Withdraw, and Label Abort Request Messages are used as specified in [1]. These messages may also carry the LSPID TLV.


## 4. Protocol Specification

The Label Request Message defined in [1] MUST carry the LSPID TLV and MAY carry one or more of the optional Constraint-based Routing TLVs (CR-TLVs) defined in this section. If needed, other constraints can be supported later through the definition of new TLVs. In this specification, the following TLVs are defined:

- Explicit Route Hop TLV
- Traffic Parameters TLV
- Preemption TLV
- LSPID TLV
- Route Pinning TLV
- Resource Class TLV
- CR-LSP FEC TLV

#### 4.1 Explicit Route TLV (ER-TLV)

The ER-TLV is an object that specifies the path to be taken by the LSP being established. It is composed of one or more Explicit Route Hop TLVs (ER-Hop TLVs) defined in [Section 4.2](#).

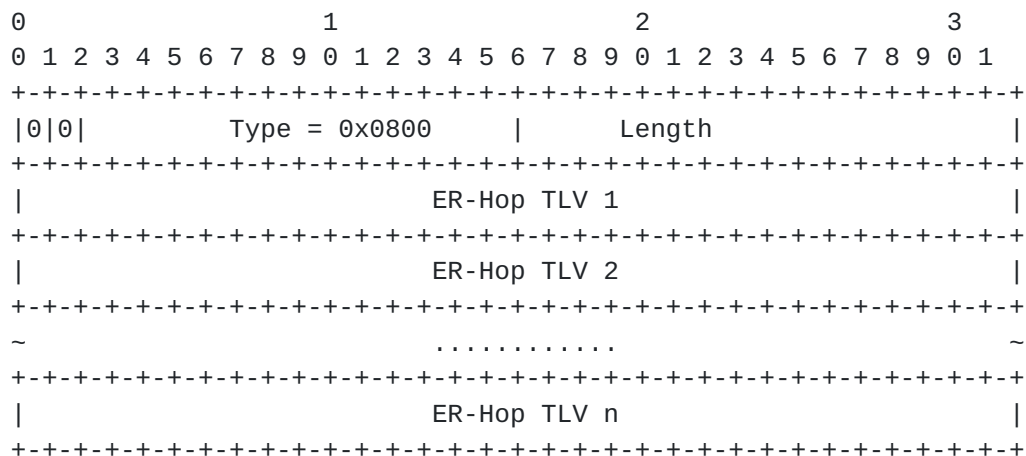

Type

A fourteen-bit field carrying the value of the ER-TLV Type = 0x0800.

Length

Specifies the length of the value field in bytes.

ER-Hop TLVs

One or more ER-Hop TLVs defined in [Section 4.2](#).

#### 4.2 Explicit Route Hop TLV (ER-Hop TLV)

The contents of an ER-TLV are a series of variable length ER-Hop TLVs.

A node receiving a label request message including an ER-Hop type that is not supported MUST not progress the label request message to the downstream LSR and MUST send back a \_No Route\_ Notification Message.

Each ER-Hop TLV has the form:



```

0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|0|0|                                Type          | Length          |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|L|                                Content //        |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+

```

#### ER-Hop Type

A fourteen-bit field carrying the type of the ER-Hop contents.  
Currently defined values are:

Value	Type
0x0801	IPv4 prefix
0x0802	IPv6 prefix
0x0803	Autonomous system number
0x0804	LSPID

#### Length

Specifies the length of the value field in bytes.

#### L bit

The L bit in the ER-Hop is a one-bit attribute. If the L bit is set, then the value of the attribute is `_loose_`. Otherwise, the value of the attribute is `_strict_`. For brevity, we say that if the value of the ER-Hop attribute is loose then it is a `_loose ER-Hop_`. Otherwise, it's a `_strict ER-Hop_`. Further, we say that the abstract node of a strict or loose ER-Hop is a strict or a loose node, respectively. Loose and strict nodes are always interpreted relative to their prior abstract nodes. The path between a strict node and its prior node **MUST** include only network nodes from the strict node and its prior abstract node.

The path between a loose node and its prior node **MAY** include other network nodes, which are not part of the strict node or its prior abstract node.

#### Contents

A variable length field containing a node or abstract node which is one of the consecutive nodes that make up the explicitly routed LSP.

### **4.3 Traffic Parameters TLV**

The following sections describe the CR-LSP Traffic Parameters. The required characteristics of a CR-LSP are expressed by the Traffic Parameter values.

A Traffic Parameters TLV, is used to signal the Traffic Parameter values. The Traffic Parameters are defined in the subsequent sections.

The Traffic Parameters TLV contains a Flags field, a Frequency, a Weight, and the five Traffic Parameters PDR, PBS, CDR, CBS, EBS. The Traffic Parameters TLV is shown below:

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|0|0|           Type = 0x0810           |      Length = 24      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      Flags      |      Frequency      |      Reserved      |      Weight      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                                     Peak Data Rate (PDR)         |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                                     Peak Burst Size (PBS)        |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                                     Committed Data Rate (CDR)     |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                                     Committed Burst Size (CBS)    |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                                     Excess Burst Size (EBS)       |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

#### Type

A fourteen-bit field carrying the value of the Traffic Parameters TLV Type = 0x0810.

#### Length

Specifies the length of the value field in bytes = 24.

#### Flags

The Flags field is shown below:

```

+---+---+---+---+---+---+---+---+
| Res |F6|F5|F4|F3|F2|F1|
+---+---+---+---+---+---+---+---+

```

Res - These bits are reserved.

Zero on transmission.

Ignored on receipt.

F1 - Corresponds to the PDR.

F2 - Corresponds to the PBS.

F3 - Corresponds to the CDR.

F4 - Corresponds to the CBS.  
F5 - Corresponds to the EBS.  
F6 - Corresponds to the Weight.

Each flag  $F_i$  is a Negotiable Flag corresponding to a Traffic Parameter. The Negotiable Flag value zero denotes NotNegotiable and value one denotes Negotiable.

## Frequency

Jamoussi, et. al. [draft-ietf-mpls-crldp-04.txt](#)

13Internet

Draft Constraint-Based LSP Setup using LDP

July, 2000

The Frequency field is coded as an 8 bit unsigned integer with the following code points defined:

0- Unspecified  
1- Frequent  
2- VeryFrequent  
3-255 - Reserved  
Reserved - Zero on transmission. Ignored on receipt.

## Weight

An 8 bit unsigned integer indicating the weight of the CR-LSP. Valid weight values are from 1 to 255. The value 0 means that weight is not applicable for the CR-LSP.

## Traffic Parameters

Each Traffic Parameter is encoded as a 32-bit IEEE single-precision floating-point number. A value of positive infinity is represented as an IEEE single-precision floating-point number with an exponent of all ones (255) and a sign and mantissa of all zeros. The values PDR and CDR are in units of bytes per second. The values PBS, CBS and EBS are in units of bytes.

The value of PDR MUST be greater than or equal to the value of CDR in a correctly encoded Traffic Parameters TLV.

### [4.3.1](#) Semantics

#### [4.3.1.1](#) Frequency

The Frequency specifies at what granularity the CDR allocated to the CR-LSP is made available. The value VeryFrequent means that the available rate should average at least the CDR when measured over any time interval equal to or longer than the shortest packet time at the CDR. The value Frequent means that the available rate should average at least the CDR when measured over any time interval equal to or longer than a small number of shortest packet times at the CDR.

The value Unspecified means that the CDR MAY be provided at any granularity.

#### **4.3.1.2 Peak Rate**

The Peak Rate defines the maximum rate at which traffic SHOULD be sent to the CR-LSP. The Peak Rate is useful for the purpose of resource allocation. If resource allocation within the MPLS domain depends on the Peak Rate value then it should be enforced at the ingress to the MPLS domain.

The Peak Rate is defined in terms of the two Traffic Parameters PDR and PBS, see [section 4.3.1.5](#) below.

Jamoussi, et. al.      [draft-ietf-mpls-crldp-04.txt](#)      14Internet  
Draft    Constraint-Based LSP Setup using LDP      July, 2000

#### **4.3.1.3 Committed Rate**

The Committed Rate defines the rate that the MPLS domain commits to be available to the CR-LSP.

The Committed Rate is defined in terms of the two Traffic Parameters CDR and CBS, see [section 4.3.1.6](#) below.

#### **4.3.1.4 Excess Burst Size**

The Excess Burst Size may be used at the edge of an MPLS domain for the purpose of traffic conditioning. The EBS MAY be used to measure the extent by which the traffic sent on a CR-LSP exceeds the committed rate.

The possible traffic conditioning actions, such as passing, marking or dropping, are specific to the MPLS domain.

The Excess Burst Size is defined together with the Committed Rate, see [section 4.3.1.6](#) below.

#### **4.3.1.5 Peak Rate Token Bucket**

The Peak Rate of a CR-LSP is specified in terms of a token bucket P with token rate PDR and maximum token bucket size PBS.

The token bucket P is initially (at time 0) full, i.e., the token count  $T_p(0) = PBS$ . Thereafter, the token count  $T_p$ , if less than PBS, is incremented by one PDR times per second. When a packet of size B bytes arrives at time t, the following happens:

- If  $T_p(t) - B \geq 0$ , the packet is not in excess of the peak rate



and  $T_p$  is decremented by  $B$  down to the minimum value of 0, else

- the packet is in excess of the peak rate and  $T_p$  is not decremented.

Note that according to the above definition, a positive infinite value of either PDR or PBS implies that arriving packets are never in excess of the peak rate.

The actual implementation of an LSR doesn't need to be modeled according to the above formal token bucket specification.

#### **4.3.1.6 Committed Data Rate Token Bucket**

The committed rate of a CR-LSP is specified in terms of a token bucket  $C$  with rate CDR. The extent by which the offered rate exceeds the committed rate MAY be measured in terms of another token bucket  $E$ , which also operates at rate CDR. The maximum size of the

Jamoussi, et. al.      [draft-ietf-mpls-crldp-04.txt](#)      15Internet  
Draft    Constraint-Based LSP Setup using LDP      July, 2000

token bucket  $C$  is CBS and the maximum size of the token bucket  $E$  is EBS.

The token buckets  $C$  and  $E$  are initially (at time 0) full, i.e., the token count  $T_c(0) = CBS$  and the token count  $T_e(0) = EBS$ . Thereafter, the token counts  $T_c$  and  $T_e$  are updated CDR times per second as follows:

- If  $T_c$  is less than CBS,  $T_c$  is incremented by one, else
- if  $T_e$  is less than EBS,  $T_e$  is incremented by one, else
- neither  $T_c$  nor  $T_e$  is incremented.

When a packet of size  $B$  bytes arrives at time  $t$ , the following happens:

- If  $T_c(t) - B \geq 0$ , the packet is not in excess of the Committed Rate and  $T_c$  is decremented by  $B$  down to the minimum value of 0, else
- if  $T_e(t) - B \geq 0$ , the packet is in excess of the Committed rate but is not in excess of the EBS and  $T_e$  is decremented by  $B$  down to the minimum value of 0, else
- the packet is in excess of both the Committed Rate and the EBS and neither  $T_c$  nor  $T_e$  is decremented.

Note that according to the above specification, a CDR value of positive infinity implies that arriving packets are never in excess of either the Committed Rate or EBS. A positive infinite value of either CBS or EBS implies that the respective limit cannot be

exceeded.

The actual implementation of an LSR doesn't need to be modeled according to the above formal specification.

#### **4.3.1.7 Weight**

The weight determines the CR-LSP's relative share of the possible excess bandwidth above its committed rate. The definition of `_relative share_` is MPLS domain specific.

#### **4.3.2 Procedures**

##### **4.3.2.1 Label Request Message**

If an LSR receives an incorrectly encoded Traffic Parameters TLV in which the value of PDR is less than the value of CDR then it MUST send a Notification Message including the Status code `_Traffic Parameters Unavailable_` to the upstream LSR from which it received the erroneous message.

If a Traffic Parameter is indicated as Negotiable in the Label Request Message by the corresponding Negotiable Flag then an LSR MAY replace the Traffic Parameter value with a smaller value.

Jamoussi, et. al.      [draft-ietf-mpls-crldp-04.txt](#)      16Internet  
Draft    Constraint-Based LSP Setup using LDP      July, 2000

If the Weight is indicated as Negotiable in the Label Request Message by the corresponding Negotiable Flag then an LSR may replace the Weight value with a lower value (down to 0).

If, after possible Traffic Parameter negotiation, an LSR can support the CR-LSP Traffic Parameters then the LSR MUST reserve the corresponding resources for the CR-LSP.

If, after possible Traffic Parameter negotiation, an LSR cannot support the CR-LSP Traffic Parameters then the LSR MUST send a Notification Message that contains the `_Resource Unavailable_` status code.

##### **4.3.2.2 Label Mapping Message**

If an LSR receives an incorrectly encoded Traffic Parameters TLV in which the value of PDR is less than the value of CDR then it MUST send a Label Release message containing the Status code `_Traffic Parameters Unavailable_` to the LSR from which it received the erroneous message. In addition, the LSP should send a Notification Message upstream with the status code `_Label Request Aborted_`.

If the negotiation flag was set in the label request message, the egress LSR MUST include the (possibly negotiated) Traffic Parameters and Weight in the Label Mapping message.

The Traffic Parameters and the Weight in a Label Mapping message MUST be forwarded unchanged.

An LSR SHOULD adjust the resources that it reserved for a CR-LSP when it receives a Label Mapping Message if the Traffic Parameters differ from those in the corresponding Label Request Message.

#### 4.3.2.3 Notification Message

If an LSR receives a Notification Message for a CR-LSP, it SHOULD release any resources that it possibly had reserved for the CR-LSP. In addition, on receiving a Notification Message from a Downstream LSR that is associated with a Label Request from an upstream LSR, the local LSR MUST propagate the Notification message using the procedures in [1].

#### 4.4 Preemption TLV

The default value of the setup and holding priorities should be in the middle of the range (e.g., 4) so that this feature can be turned on gradually in an operational network by increasing or decreasing the priority starting at the middle of the range.

Since the Preemption TLV is an optional TLV, LSPs that are setup without an explicitly signaled preemption TLV SHOULD be treated as LSPs with the default setup and holding priorities (e.g., 4).

When an established LSP is preempted, the LSR that initiates the preemption sends a Withdraw Message upstream and a Release Message downstream.

When an LSP in the process of being established (outstanding Label Request without getting a Label Mapping back) is preempted, the LSR that initiates the preemption, sends a Notification Message upstream and an Abort Message downstream.

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|0|0|      Type = 0x0820      |      Length = 4      |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+

```



The procedure for the code point `_modify_` is defined in [9]. The procedures for other flags are FFS.

Type  
A fourteen-bit field carrying the value of the LSPID-TLV  
Type = 0x0821.

ActFlg

Action Indicator Flag: A 4-bit field that indicates explicitly the action that should be taken if the LSP already exists on the LSR receiving the message. A set of indicator code points is proposed as follows:

```
Reserved
    Zero on transmission.  Ignored on receipt.
```

Jamoussi, et. al. [draft-ietf-mpls-crldp-04.txt](#) 19Internet  
Draft Constraint-Based LSP Setup using LDP July, 2000

#### 4.6 Resource Class (Color) TLV

The Resource Class as defined in [4] is used to specify which links are acceptable by this CR-LSP. This information allows for the network's topology to be pruned.

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|0|0|           Type = 0x0822           |           Length = 4           |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                                           RsCls                                           |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Type

A fourteen-bit field carrying the value of the ResCls-TLV Type = 0x0822.

Length

Specifies the length of the value field in bytes = 4.

RsCls

The Resource Class bit mask indicating which of the 32 \_administrative groups\_ or \_colors\_ of links the CR-LSP can traverse.

## 4.7 ER-Hop semantics

### 4.7.1. ER-Hop 1: The IPv4 prefix

The abstract node represented by this ER-Hop is the set of nodes, which have an IP address, which lies within this prefix. Note that a prefix length of 32 indicates a single IPv4 node.

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|0|0|           Type = 0x0801           |           Length = 8           |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|L|      Reserved                        |      PreLen                        |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                                           IPv4 Address (4 bytes)                                           |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Type

A fourteen-bit field carrying the value of the ER-Hop 1, IPv4 Address, Type = 0x0801

Length

Specifies the length of the value field in bytes = 8.

L Bit


Set to indicate Loose hop.  
 Cleared to indicate a strict hop.

Reserved  
 Zero on transmission. Ignored on receipt.

PreLen  
 Prefix Length 1-32

IP Address  
 A four-byte field indicating the IP Address.

**4.7.2. ER-Hop 2: The IPv6 address**

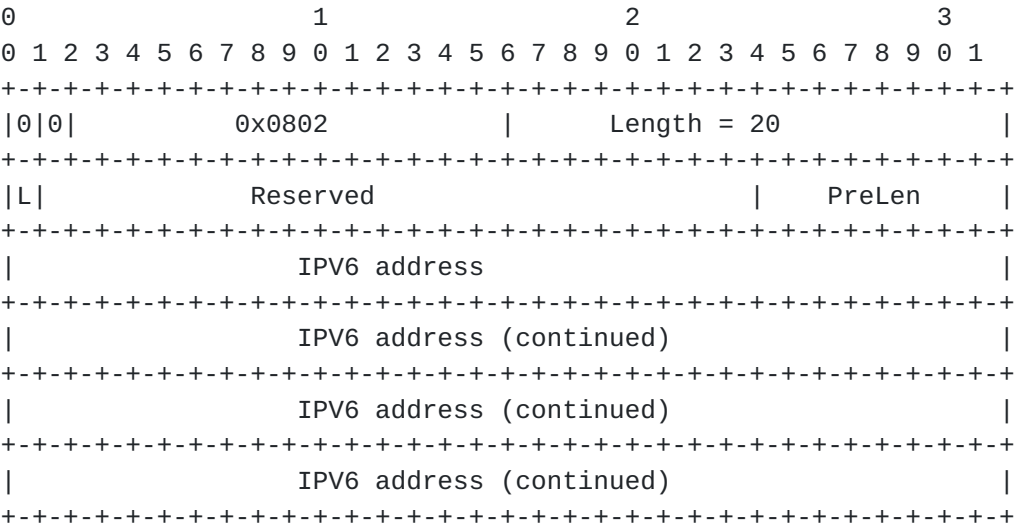

Type  
 A fourteen-bit field carrying the value of the ER-Hop 2, IPv6 Address, Type = 0x0802

Length  
 Specifies the length of the value field in bytes = 20.

L Bit  
 Set to indicate Loose hop.  
 Cleared to indicate a strict hop.

Reserved  
 Zero on transmission. Ignored on receipt.

PreLen  
 Prefix Length 1-128

IPv6 address  
 A 128-bit unicast host address.





If the LSPID Hop is not the last hop in an ER-TLV, the LSR must

remove the LSP-ID Hop and forward the remaining ER-TLV in a Label Request message using an LDP session established with the LSR that is the specified CR-LSP's egress. That LSR will continue processing of the CR-LSP Label Request Message. The result is a tunneled, or stacked, CR-LSP.

[illegible]

A fourteen-bit field carrying the value of the ER-Hop 4, LSPID,  
Type = 0x0804

Length

L Bit

Reserved

Local LSPID

Ingress LSR Router ID

#### 4.8. Processing of the Explicit Route TLV

#### [4.8.1. Selection of the next hop](#)

A Label Request Message containing an explicit route TLV must determine the next hop for this path. Selection of this next hop may involve a selection from a set of possible alternatives. The mechanism for making a selection from this set is implementation dependent and is outside of the scope of this specification.

Jamoussi, et. al. [draft-ietf-mpls-crldp-04.txt](#)

23Internet

Draft Constraint-Based LSP Setup using LDP

July, 2000

Selection of particular paths is also outside of the scope of this specification, but it is assumed that each node will make a best effort attempt to determine a loop-free path. Note that such best efforts may be overridden by local policy.

To determine the next hop for the path, a node performs the following steps:

1. The node receiving the Label Request Message must first evaluate the first ER-Hop. If the L bit is not set in the first ER-Hop and if the node is not part of the abstract node described by the first ER-Hop, it has received the message in error, and should return a `_Bad Initial ER-Hop_` error. If the L bit is set and the local node is not part of the abstract node described by the first ER-Hop, the node selects a next hop that is along the path to the abstract node described by the first ER-Hop. If there is no first ER-Hop, the message is also in error and the system should return a `_Bad Explicit Routing TLV_` error using a Notification Message sent upstream.
2. If there is no second ER-Hop, this indicates the end of the explicit route. The explicit route TLV should be removed from the Label Request Message. This node may or may not be the end of the LSP. Processing continues with [section 4.8.2](#), where a new explicit route TLV may be added to the Label Request Message.
3. If the node is also a part of the abstract node described by the second ER-Hop, then the node deletes the first ER-Hop and continues processing with step 2, above. Note that this makes the second ER-Hop into the first ER-Hop of the next iteration.
4. The node determines if it is topologically adjacent to the abstract node described by the second ER-Hop. If so, the node selects a particular next hop which is a member of the abstract node. The node then deletes the first ER-Hop and continues processing with [section 4.8.2](#).
5. Next, the node selects a next hop within the abstract node of the first ER-Hop that is along the path to the abstract node

of the second ER-Hop. If no such path exists then there are two cases:

5.a If the second ER-Hop is a strict ER-Hop, then there is an error and the node should return a `_Bad Strict Node_` error.

5.b Otherwise, if the second ER-Hop is a loose ER-Hop, then the node selects any next hop that is along the path to the next abstract node. If no path exists within the MPLS domain, then there is an error, and the node should return a `_Bad loose node_` error.

6. Finally, the node replaces the first ER-Hop with any ER-Hop that denotes an abstract node containing the next hop. This is necessary so that when the explicit route is received by the next hop, it will be accepted.

7. Progress the Label Request Message to the next hop.

#### [4.8.2. Adding ER-Hops to the explicit route TLV](#)

After selecting a next hop, the node may alter the explicit route in the following ways.

If, as part of executing the algorithm in [section 4.8.1](#), the explicit route TLV is removed, the node may add a new explicit route TLV.

Otherwise, if the node is a member of the abstract node for the first ER-Hop, then a series of ER-Hops may be inserted before the first ER-Hop or may replace the first ER-Hop. Each ER-Hop in this series must denote an abstract node that is a subset of the current abstract node.

Alternately, if the first ER-Hop is a loose ER-Hop, an arbitrary series of ER-Hops may be inserted prior to the first ER-Hop.

#### [4.9 Route Pinning TLV](#)

[Section 2.4](#) describes the use of route pinning. The encoding of the Route Pinning TLV is as follows:

```
0          1          2          3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|0|0|          Type = 0x0823          |          Length = 4          |
```

```

+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|P|                                     Reserved                             |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

#### Type

A fourteen-bit field carrying the value of the Pinning-TLV  
 Type = 0x0823

#### Length

Specifies the length of the value field in bytes = 4.

#### P Bit

The P bit is set to 1 to indicate that route pinning is requested.  
 The P bit is set to 0 to indicate that route pinning is not requested

Reserved  
 Zero on transmission. Ignored on receipt.

### 4.10 CR-LSP FEC Element

A new FEC element is introduced in this specification to support CR-LSPs. A FEC TLV containing a FEC of Element type CR-LSP (0x04) is a CR-LSP FEC TLV. The CR-LSP FEC Element is an opaque FEC to be used only in Messages of CR-LSPs.

A single FEC element MUST be included in the Label Request Message. The FEC Element SHOULD be the CR-LSP FEC Element. However, one of the other FEC elements (Type=0x01, 0x02, 0x03) defined in [1] MAY be in CR-LDP messages instead of the CR-LSP FEC Element for certain applications. A FEC TLV containing a FEC of Element type CR-LSP (0x04) is a CR-LSP FEC TLV.

FEC Element	Type	Value
Type name		
CR-LSP	0x04	No value; i.e., 0 value octets;

The CR-LSP FEC TLV encoding is as follows:

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|0|0|                               Type = 0x0100                       | Length = 1 |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| CR-LSP (4)                       |

```

+--+--+--+--+--+--+

#### Type

A fourteen-bit field carrying the value of the FEC TLV  
Type = 0x0100

#### Length

Specifies the length of the value field in bytes = 1.

CR-LSP FEC Element Type  
0x04

### 4.11 TLV Type Summary

TLV	Type
-----	-----
Explicit Route TLV	0x0800
Ipv4 Prefix ER-Hop TLV	0x0801
Ipv6 Prefix ER-Hop TLV	0x0802
Autonomous System Number ER-Hop TLV	0x0803
LSP-ID ER-Hop TLV	0x0804
Traffic Parameters TLV	0x0810

Jamoussi, et. al.     [draft-ietf-mpls-crldp-04.txt](#)     26Internet  
Draft     Constraint-Based LSP Setup using LDP     July, 2000

Preemption TLV	0x0820
LSPID TLV	0x0821
Resource Class TLV	0x0822
Route Pinning TLV	0x0823

### 4.12 FEC Type Summary

FEC Element TLV	Type
-----	-----
CR-LSP FEC Element TLV	0x0100

### 4.13 Status Code Summary

Status Code	Type
-----	-----
Bad Explicit Routing TLV Error	0x44000001
Bad Strict Node Error	0x44000002
Bad Loose Node Error	0x44000003
Bad Initial ER-Hop Error	0x44000004
Resource Unavailable	0x44000005
Traffic Parameters Unavailable	0x44000006
LSP Preempted	0x44000007
Modify Request Not Supported	0x44000008
Setup Abort (Label Request Aborted in [1])	0x04000015

## 5. IANA Considerations

CR-LDP defines the following name spaces, which require management:

- TLV types.
- FEC types.
- Status codes.

The following sections provide guidelines for managing these name spaces.

### 5.1 TLV Type Name Space

TLV types in the range 0x0800 - 0x08FF are allocated to CR-LDP base protocol. Following the policies outlined in [IANA], TLV types in this range are allocated through an IETF Consensus action.

### 5.2 FEC Type Name Space

FEC Type 100 is allocated to CR-LDP.

### 5.3 Status Code Space

The range for Status Codes is 0x44000000 - 0x440000FF.

Following the policies outlined in [IANA], Status Codes in the range 0x44000000 - 0x440000FF are allocated through an IETF Consensus

Jamoussi, et. al.      [draft-ietf-mpls-crldp-04.txt](#)      27Internet  
Draft    Constraint-Based LSP Setup using LDP      July, 2000

action.

## 6. Security

CR-LDP inherits the same security mechanism described in [Section 4.0](#) of [1] to protect against the introduction of spoofed TCP segments into LDP session connection streams.

## 7. Acknowledgments

The messages used to signal the CR-LSP setup are based on the work done by the [1] team.

The authors would also like to acknowledge the careful review and comments of Ken Hayward, Greg Wright, Geetha Brown, Brian Williams, Paul Beaubien, Matthew Yuen, Liam Casey, Ankur Anand, Adrian Farrel.

## 8. Intellectual Property Consideration

The IETF has been notified of intellectual property rights claimed in regard to some or all of the specification contained in this

document. For more information consult the online list of claimed rights.

## 9. References

- 1 Andersson et al, "Label Distribution Protocol Specification" work in progress ([draft-ietf-mpls-ldp-08](#)), June 2000.
- 2 Callon et al, "Framework for Multiprotocol Label Switching", work in progress ([draft-ietf-mpls-framework-05](#)), September 1999.
- 3 Rosen et al, "Multiprotocol Label Switching Architecture", work in progress ([draft-ietf-mpls-arch-06](#)), August 1999.
- 4 Awduche et al, "Requirements for Traffic Engineering Over MPLS", [RFC 2702](#), September 1999.
- 5 B. Gleeson, et. al., "A Framework for IP Based Virtual Private Networks", [RFC 2764](#), February 2000.
- 6 B. Jamoussi, et. al., "Applicability Statement for CR-LDP", work in progress, ([draft-ietf-mpls-crldp-applic-01](#)), June 2000.
- 7 S. Bradner, "Key words for use in RFCs to Indicate Requirement Levels", [RFC 2119](#), March 1997.
- 8 L. Wu, et. al., "LDP State Machine", work in progress, ([draft-ietf-mpls-ldp-state-03](#)), January 2000.

Jamoussi, et. al.      [draft-ietf-mpls-crldp-04.txt](#)      28Internet  
Draft    Constraint-Based LSP Setup using LDP      July, 2000

- 9 J. Ash, et. al., "LSP Modification Using CR-LDP", work in progress, ([draft-ietf-mpls-crlsp-modify-01](#)), February 2000.

## 10. Author's Addresses

Osama S. Aboul-Magd  
Nortel Networks  
P O Box 3511 Station C  
Ottawa, ON K1Y 4H7  
Canada  
Phone: +1 613 763-5827  
Osama@nortelnetworks.com

Loa Andersson  
Nortel Networks  
S:t Eriksgatan 115  
PO Box 6701  
113 85 Stockholm  
Tel: +46 8 508 835 00  
Fax: +46 8 508 835 01  
Loa\_andersson@nortelnetworks.com

Peter Ashwood-Smith

Ross Callon

Nortel Networks  
P O Box 3511 Station C  
Ottawa, ON K1Y 4H7  
Canada  
Phone: +1 613 763-4534  
Petera@nortelnetworks.com

Juniper Networks  
1194 North Mathilda Avenue,  
Sunnyvale, CA 94089  
978-692-6724  
rcallon@juniper.net

Ram Dantu  
IPmobile  
1651 North Glenville, Suite 216  
Richardson, TX 75081  
+1-972-234-6070 extension 211  
rdantu@ipmobile.com

Paul Doolan  
Ennovate Networks  
330 Codman Hill Rd  
Marlborough MA 01719  
Phone: 978-263-2002  
Pdoolan@ennovatenetworks.com

Nancy Feldman  
IBM Corp.  
17 Skyline Drive  
Hawthorne NY 10532  
Phone: 914-784-3254  
Nkf@us.ibm.com

Andre Fredette  
PhotonEx Corporation  
135 South Road  
Bedford, MA 01730  
email: fredette@photonex.com  
phone: 781-275-8500

Eric Gray  
Zaffire, Inc  
2630 Orchard Parkway,  
San Jose, CA 95134-2020  
Phone: 408-894-7362  
egray@zaffire.com

Joel M. Halpern  
Longitude Systems, Inc.  
1319 Shepard Road  
Sterling, VA 20164  
703-433-0808 x207  
joel@longsys.com

Juha Heinanen  
Telia Finland, Inc.  
Myrmaentie 2  
01600 VANTAA  
Finland  
Tel: +358 41 500 4808  
Jh@telia.fi

Fiffi Hellstrand  
Nortel Networks  
S:t Eriksgatan 115  
PO Box 6701, 113 85 Stockholm  
Sweden  
+46705593687  
fiffi@nortelnetworks.com

Jamoussi, et. al. [draft-ietf-mpls-crldp-04.txt](#)

29Internet

Draft Constraint-Based LSP Setup using LDP

July 2000

Bilel Jamoussi  
Nortel Networks Corp.  
600 Technology Park Drive  
Billerica, MA 01821  
USA  
Phone: +1 978 288-4506  
Jamoussi@nortelnetworks.com

Timothy E. Kilty  
Newbridge Networks, Inc.  
5 Corporate Drive  
Andover, MA 01810  
USA  
phone: 978 691-4656  
tkilty@northchurch.net

Andrew G. Malis  
Vivace Networks

Muckai K Girish  
Atoga Systems



2730 Orchard Parkway  
San Jose, CA 95134  
Andy.Malis@vivacenetWORKS.com  
Tel: +1 408 383 7223  
Fax: +1 408 904 4748

49026 Milmont Drive  
Fremont, CA 94538  
E-mail: muckai@atoga.com

Kenneth Sundell  
Nortel Networks  
S:t Eriksgatan 115  
PO Box 6701  
113 85 Stockholm  
Tel: +46 8 508 835 00  
Fax: +46 8 508 835 01  
Ksundell@nortelnetworks.com

Pasi Vaananen  
Nokia Telecommunications  
3 Burlington Woods Drive,  
Burlington, MA 01803  
Phone: +1-781-238-4981  
pasi.vaananen@nokia.com

Tom Worster  
Ennovate Networks  
60 Codman Hill Rd  
Boxborough  
MA 01719  
tworster@ennovatenetworks.com

Liwen Wu  
Cisco Systems  
250 Apollo Drive  
Chelmsford, MA. 01824  
Tel: 978-244-3087.  
liwwu@cisco.com

Jamoussi, et. al. [draft-ietf-mpls-cr-ldp-04.txt](#)

30Internet

Draft Constraint-Based LSP Setup using LDP

July 2000

## Appendix A: CR-LSP Establishment Examples

### [A.1](#) Strict Explicit Route Example

This appendix provides an example for the setup of a strictly routed CR-LSP. In this example, a specific node represents each abstract

node.

The sample network used here is a four node network with two edge LSRs and two core LSRs as follows:

abc

LSR1-----LSR2-----LSR3-----LSR4

LSR1 generates a Label Request Message as described in [Section 3.1](#) of this draft and sends it to LSR2. This message includes the CR-TLV.

A vector of three ER-Hop TLVs <a, b, c> composes the ER-TLV. The ER-Hop TLVs used in this example are of type 0x0801 (IPv4 prefix) with a prefix length of 32. Hence, each ER-Hop TLV identifies a specific node as opposed to a group of nodes. At LSR2, the following processing of the ER-TLV per [Section 4.8.1](#) of this draft takes place:

- 1) The node LSR2 is part of the abstract node described by the first hop <a>. Therefore, the first step passes the test. Go to step 2.
- 2) There is a second ER-Hop, <b>. Go to step 3.
- 3) LSR2 is not part of the abstract node described by the second ER-Hop <b>. Go to Step 4.
- 4) LSR2 determines that it is topologically adjacent to the abstract node described by the second ER-Hop <b>. LSR2 selects a next hop (LSR3) which is the abstract node. LSR2 deletes the first ER-Hop <a> from the ER-TLV, which now becomes <b, c>. Processing continues with [Section 4.8.2](#).

At LSR2, the following processing of [Section 4.8.2](#) takes place: Executing algorithm 4.8.1 did not result in the removal of the ER-TLV.

Also, LSR2 is not a member of the abstract node described by the first ER-Hop <b>.

Finally, the first ER-Hop <b> is a strict hop.

Therefore, processing [section 4.8.2](#) does not result in the insertion of new ER-Hops. The selection of the next hop has been already done in step 4 of [Section 4.8.1](#) and the processing of the ER-TLV is

completed at LSR2. In this case, the Label Request Message including

the ER-TLV <b, c> is progressed by LSR2 to LSR3.

At LSR3, a similar processing to the ER-TLV takes place except that the incoming ER-TLV = <b, c> and the outgoing ER-TLV is <c>.

At LSR4, the following processing of [section 4.8.1](#) takes place:

- 1) The node LSR4 is part of the abstract node described by the first hop <c>. Therefore, the first step passes the test. Go to step 2.
- 2) There is no second ER-Hop, this indicates the end of the CR-LSP. The ER-TLV is removed from the Label Request Message. Processing continues with [Section 4.8.2](#).

At LSR4, the following processing of [Section 4.8.2](#) takes place: Executing algorithm 4.8.1 resulted in the removal of the ER-TLV. LSR4 does not add a new ER-TLV.

Therefore, processing [section 4.8.2](#) does not result in the insertion of new ER-Hops. This indicates the end of the CR-LSP and the processing of the ER-TLV is completed at LSR4.

At LSR4, processing of [Section 3.2](#) is invoked. The first condition is satisfied (LSR4 is the egress end of the CR-LSP and upstream mapping has been requested). Therefore, a Label Mapping Message is generated by LSR4 and sent to LSR3.

At LSR3, the processing of [Section 3.2](#) is invoked. The second condition is satisfied (LSR3 received a mapping from its downstream next hop LSR4 for a CR-LSP for which an upstream request is still pending). Therefore, a Label Mapping Message is generated by LSR3 and sent to LSR2.

At LSR2, a similar processing to LSR 3 takes place and a Label Mapping Message is sent back to LSR1, which completes the end-to-end CR-LSP setup.

## **[A.2 Node Groups and Specific Nodes Example](#)**

A request at ingress LSR to setup a CR-LSP might originate from a management system or an application, the details are implementation specific.

The ingress LSR uses information provided by the management system or the application and possibly also information from the routing database to calculate the explicit route and to create the Label Request Message.

The Label request message carries together with other necessary information an ER-TLV defining the explicitly routed path. In our example the list of hops in the ER-Hop TLV is supposed to contain an

abstract node representing a group of nodes, an abstract node representing a specific node, another abstract node representing a group of nodes, and an abstract node representing a specific egress point.

In--{Group 1}--{Specific A}--{Group 2}--{Specific Out: B}

The ER-TLV contains four ER-Hop TLVs:

1. An ER-Hop TLV that specifies a group of LSR valid for the first abstract node representing a group of nodes (Group 1).
2. An ER-Hop TLV that indicates the specific node (Node A).
3. An ER-Hop TLV that specifies a group of LSRs valid for the second abstract node representing a group of nodes (Group 2).
4. An ER-Hop TLV that indicates the specific egress point for the CR-LSP (Node B).

All the ER-Hop TLVs are strictly routed nodes.

The setup procedure for this CR-LSP works as follows:

1. The ingress node sends the Label Request Message to a node that is a member the group of nodes indicated in the first ER-Hop TLV, following normal routing for the specific node (A).
2. The node that receives the message identifies itself as part of the group indicated in the first ER-Hop TLV, and that it is not the specific node (A) in the second. Further it realizes that the specific node (A) is not one of its next hops.
3. It keeps the ER-Hop TLVs intact and sends a Label Request Message to another node that is part of the group indicated in the first ER-Hop TLV (Group 1), following normal routing for the specific node (A).
4. The node that receives the message identifies itself as part of the group indicated in the first ER-Hop TLV, and that it is not the specific node (A) in the second ER-Hop TLV. Further it realizes that the specific node (A) is one of its next hops.
5. It removes the first ER-Hop TLVs and sends a Label Request Message to the specific node (A).

6. The specific node (A) recognizes itself in the first ER-Hop TLV. Removes the specific ER-Hop TLV.

7. It sends a Label Request Message to a node that is a member of the group (Group 2) indicated in the ER-Hop TLV.
8. The node that receives the message identifies itself as part of the group indicated in the first ER-Hop TLV, further it realizes that the specific egress node (B) is one of its next hops.
9. It sends a Label Request Message to the specific egress node (B).
10. The specific egress node (B) recognizes itself as the egress for the CR-LSP, it returns a Label Mapping Message, that will traverse the same path as the Label Request Message in the opposite direction.

## [Appendix B](#). QoS Service Examples

### [B.1](#) Service Examples

Construction of an end-to-end service is the result of the rules enforced at the edge and the treatment that packets receive at the network nodes. The rules define the traffic conditioning actions that are implemented at the edge and they include policing with pass, mark, and drop capabilities. The edge rules are expected to be defined by the mutual agreements between the service providers and their customers and they will constitute an essential part of the SLA. Therefore edge rules are not included in the signaling protocol.

Packet treatment at a network node is usually referred to as the local behavior. Local behavior could be specified in many ways. One example for local behavior specification is the service frequency introduced in [section 4.3.2.1](#), together with the resource reservation rules implemented at the nodes.

Edge rules and local behaviors can be viewed as the main building blocks for the end-to-end service construction. The following table illustrates the applicability of the building block approach for constructing different services including those defined for ATM.

Service Examples	PDR	PBS	CDR	CBS	EBS	Service Frequency	Conditioning Action
DS	S	S	=PDR	=PBS	0	Frequent	drop>PDR
TS	S	S	S	S	0	Unspecified	drop>PDR,PBS mark>CDR,CBS
BE	inf	inf	inf	inf	0	Unspecified	-
FRS	S	S	CIR	~B_C	~B_E	Unspecified	drop>PDR,PBS mark>CDR,CBS,EBS
ATM-CBR	PCR	CDVT	=PCR	=CDVT	0	VeryFrequent	drop>PCR
ATM-VBR.3(rt)	PCR	CDVT	SCR	MBS	0	Frequent	drop>PCR

mark>SCR, MBS

ATM-VBR.3(nrt)	PCR	CDVT	SCR	MBS	0	Unspecified	drop>PCR
							mark>SCR, MBS

ATM-UBR	PCR	CDVT	-	-	0	Unspecified	drop>PCR
---------	-----	------	---	---	---	-------------	----------

ATM-GFR.1	PCR	CDVT	MCR	MBS	0	Unspecified	drop>PCR
-----------	-----	------	-----	-----	---	-------------	----------

ATM-GFR.2	PCR	CDVT	MCR	MBS	0	Unspecified	drop>PCR
							mark>MCR, MFS

Jamoussi, et. al. [draft-ietf-mpls-cr-ldp-04.txt](#) 35Internet  
Draft Constraint-Based LSP Setup using LDP July 2000

int-serv-CL	p	m	r	b	0	Frequent	drop>p
							drop>r, b

S= User specified

In the above table, the DS refers to a delay sensitive service where the network commits to deliver with high probability user datagrams at a rate of PDR with minimum delay and delay requirements. Datagrams in excess of PDR will be discarded.

The TS refers to a generic throughput sensitive service where the network commits to deliver with high probability user datagrams at a rate of at least CDR. The user may transmit at a rate higher than CDR but datagrams in excess of CDR would have a lower probability of being delivered.

The BE is the best effort service and it implies that there are no expected service guarantees from the network.

## **B.2 Establishing CR-LSP Supporting Real-Time Applications**

In this scenario the customer needs to establish an LSP for supporting real-time applications such as voice and video. The Delay-sensitive (DS) service is requested in this case.

The first step is the specification of the traffic parameters in the signaling message. The two parameters of interest to the DS service are the PDR and the PBS and the user based on his requirements specifies their values. Since all the traffic parameters are included in the signaling message, appropriate values must be assigned to all of them. For DS service, the CDR and the CBS values are set equal to the PDR and the PBS respectively. An indication of whether the parameter values are subject to negotiation is flagged.

The transport characteristics of the DS service require Frequent

frequency to be requested to reflect the real-time delay requirements of the service.

In addition to the transport characteristics, both the network provider and the customer need to agree on the actions enforced at the edge. The specification of those actions is expected to be a part of the service level agreement (SLA) negotiation and is not included in the signaling protocol. For DS service, the edge action is to drop packets that exceed the PDR and the PBS specifications. The signaling message will be sent in the direction of the ER path and the LSP is established following the normal LDP procedures. Each LSR applies its admission control rules. If sufficient resources are not available and the parameter values are subject to negotiation, then the LSR could negotiate down the PDR, the PBS, or both.

The new parameter values are echoed back in the Label Mapping Message. LSRs might need to re-adjust their resource reservations based on the new traffic parameter values.

### **B.3 Establishing CR-LSP Supporting Delay Insensitive Applications**

In this example we assume that a throughput sensitive (TS) service is requested. For resource allocation the user assigns values for PDR, PBS, CDR, and CBS. The negotiation flag is set if the traffic parameters are subject to negotiation.

Since the service is delay insensitive by definition, the Unspecified frequency is signaled to indicate that the service frequency is not an issue.

Similar to the previous example, the edge actions are not subject for signaling and are specified in the service level agreement between the user and the network provider.

For TS service, the edge rules might include marking to indicate high discard precedence values for all packets that exceed CDR and the CBS. The edge rules will also include dropping of packets that conform to neither PDR nor PBS.

Each LSR of the LSP is expected to run its admission control rules and negotiate traffic parameters down if sufficient resources do not exist. The new parameter values are echoed back in the Label Mapping Message. LSRs might need to re-adjust their resources based on the new traffic parameter values.



#### Full Copyright Statement

Copyright © The Internet Society (date). All Rights Reserved. This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this paragraph are included on all such copies and derivative works. However, this document itself may not be modified in any way, such as by removing the copyright notice or references to the Internet Society or other Internet organizations, except as needed for the purpose of developing Internet standards in which case the procedures for copyrights defined in the Internet Standards process must be followed, or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by the Internet Society or its successors or assigns.

