

Network Working Group  
Internet-Draft  
Updates: [4379](#) (if approved)  
Intended status: Standards Track  
Expires: November 26, 2015

J. Luo, Ed.  
ZTE  
L. Jin, Ed.  
Individual  
T. Nadeau, Ed.  
Lucidvision  
G. Swallow, Ed.  
Cisco  
May 25, 2015

**Relayed Echo Reply mechanism for LSP Ping  
draft-ietf-mppls-lsp-ping-relay-reply-09**

**Abstract**

In some inter autonomous system (AS) and inter-area deployment scenarios for [RFC 4379](#) "Label Switched Path (LSP) Ping and Traceroute", a replying LSR may not have the available route to the initiator, and the Echo Reply message sent to the initiator would be discarded resulting in false negatives or complete failure of operation of LSP Ping and Traceroute. This document describes extensions to LSP Ping mechanism to enable the replying Label Switching Router (LSR) to have the capability to relay the Echo Response by a set of routable intermediate nodes to the initiator. This document updates [RFC 4379](#).

**Status of This Memo**

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on November 26, 2015.

## Copyright Notice

Copyright (c) 2015 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](http://trustee.ietf.org/license-info) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

This document may contain material from IETF Documents or IETF Contributions published or made publicly available before November 10, 2008. The person(s) controlling the copyright in some of this material may not have granted the IETF Trust the right to allow modifications of such material outside the IETF Standards Process. Without obtaining an adequate license from the person(s) controlling the copyright in such materials, this document may not be modified outside the IETF Standards Process, and derivative works of it may not be created outside the IETF Standards Process, except to format it for publication as an RFC or to translate it into languages other than English.

## Table of Contents

<a href="#">1.</a>	<a href="#">Introduction</a>	<a href="#">3</a>
<a href="#">1.1.</a>	<a href="#">Conventions Used in This Document</a>	<a href="#">3</a>
<a href="#">2.</a>	<a href="#">Motivation</a>	<a href="#">3</a>
<a href="#">3.</a>	<a href="#">Extensions</a>	<a href="#">5</a>
<a href="#">3.1.</a>	<a href="#">Relayed Echo Reply message</a>	<a href="#">6</a>
<a href="#">3.2.</a>	<a href="#">Relay Node Address Stack</a>	<a href="#">6</a>
<a href="#">3.3.</a>	<a href="#">MTU Exceeded Return Code</a>	<a href="#">8</a>
<a href="#">4.</a>	<a href="#">Procedures</a>	<a href="#">8</a>
<a href="#">4.1.</a>	<a href="#">Sending an Echo Request</a>	<a href="#">8</a>
<a href="#">4.2.</a>	<a href="#">Receiving an Echo Request</a>	<a href="#">9</a>
<a href="#">4.3.</a>	<a href="#">Originating an Relayed Echo Reply</a>	<a href="#">10</a>
<a href="#">4.4.</a>	<a href="#">Relaying an Relayed Echo Reply</a>	<a href="#">10</a>
<a href="#">4.5.</a>	<a href="#">Sending an Echo Reply</a>	<a href="#">10</a>
<a href="#">4.6.</a>	<a href="#">Sending Subsequent Echo Requests</a>	<a href="#">11</a>
<a href="#">4.7.</a>	<a href="#">Impact to Traceroute</a>	<a href="#">11</a>
<a href="#">5.</a>	<a href="#">LSP Ping Relayed Echo Reply Example</a>	<a href="#">12</a>
<a href="#">6.</a>	<a href="#">Security Considerations</a>	<a href="#">13</a>
<a href="#">7.</a>	<a href="#">Backward Compatibility</a>	<a href="#">14</a>
<a href="#">8.</a>	<a href="#">IANA Considerations</a>	<a href="#">14</a>



<a href="#">8.1.</a>	New Message Type . . . . .	<a href="#">14</a>
<a href="#">8.2.</a>	New TLV . . . . .	<a href="#">14</a>
<a href="#">8.3.</a>	MTU Exceeded Return Code . . . . .	<a href="#">15</a>
<a href="#">9.</a>	Acknowledgement . . . . .	<a href="#">15</a>
<a href="#">10.</a>	Contributors . . . . .	<a href="#">15</a>
<a href="#">11.</a>	References . . . . .	<a href="#">15</a>
<a href="#">11.1.</a>	Normative References . . . . .	<a href="#">15</a>
<a href="#">11.2.</a>	Informative References . . . . .	<a href="#">15</a>
	Authors' Addresses . . . . .	<a href="#">16</a>

## [1.](#) Introduction

This document describes the extensions to the Label Switched Path (LSP) Ping as specified in [\[RFC4379\]](#), by adding a relayed echo reply mechanism which could be used to detect data plane failures for the inter autonomous system (AS) and inter-area LSPs. The extensions are to update the [\[RFC4379\]](#). Without these extensions, the ping functionality provided by [\[RFC4379\]](#) would fail in many deployed inter-AS scenarios, since the replying LSR in one AS may not have the available route to the initiator in the other AS. The mechanism in this document defines a new message type referred as "Relayed Echo Reply message", and a new TLV referred as "Relay Node Address Stack TLV".

This document is also to update [\[RFC4379\]](#), include updating of Echo Request sending procedure in [section 4.3 of \[RFC4379\]](#), Echo Request receiving procedure in [section 4.4 of \[RFC4379\]](#), Echo Reply sending procedure in [Section 4.5 of \[RFC4379\]](#), Echo Reply receiving procedure in [section 4.6 of \[RFC4379\]](#).

### [1.1.](#) Conventions Used in This Document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [\[RFC2119\]](#).

## [2.](#) Motivation

LSP Ping [\[RFC4379\]](#) defines a mechanism to detect the data plane failures and localize faults. The mechanism specifies that the Echo Reply should be sent back to the initiator using an UDP packet with the IPv4/IPv6 address of the originating LSR. This works in administrative domains where IP addresses reachability are allowed among LSRs, and every LSR is able to route back to the originating LSR. However, in practice, this is often not the case due to intra-provider routing policy, route hiding, and network address translation at autonomous system border routers (ASBR). In fact, it is almost uniformly the case that in inter-AS scenarios, it is not



allowed the distribution or direct routing to the IP addresses of any of the nodes other than the ASBR in another AS.

Figure 1 demonstrates a case where one LSP is set up between PE1 and PE2. If PE1's IP address is not distributed to AS2, a traceroute from PE1 directed towards PE2 can result in a failure because an LSR in AS2 may not be able to send the Echo Reply message. E.g., P2 cannot forward packets back to PE1 given that it is an routable IP address in AS1 but not routable in AS2. In this case, PE1 would detect a path break, as the Echo Reply messages would not be received. Then localization of the actual fault would not be possible.

Note that throughout the document, routable address means that it is possible to route an IP packet to this address using the normal information exchanged by the IGP operating in the AS.



Figure 1: Simple Inter-AS LSP Configuration

A second example that illustrates how [\[RFC4379\]](#) would be insufficient would be the inter-area situation in a seamless MPLS architecture [\[I-D.ietf-mpls-seamless-mpls\]](#) as shown below in Figure 2. In this example LSRs in the core network would not have IP reachable route to any of the ANs. When tracing an LSP from one AN to the remote AN, the LSR1/LSR2 node cannot send the Echo Reply either, like the P2 node in the inter-AS scenario in Figure 1.



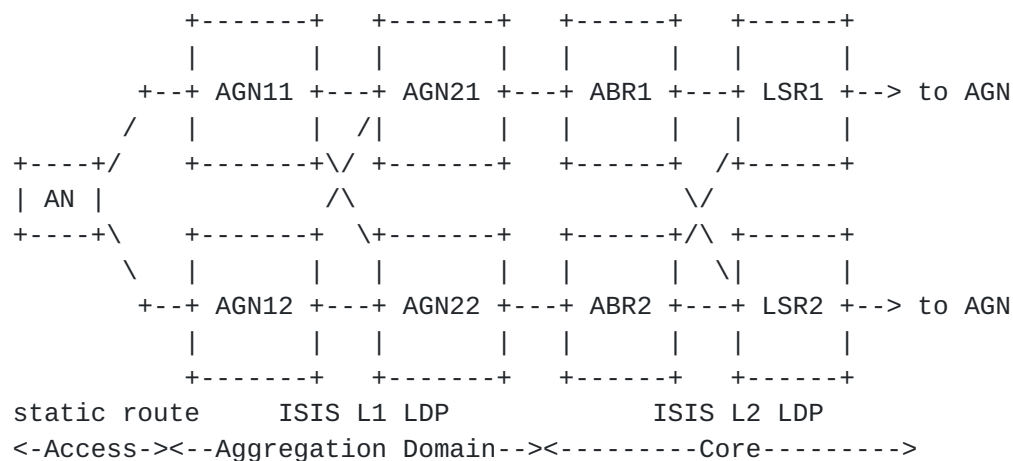


Figure 2: Seamless MPLS Architecture

This document describes extensions to the LSP Ping mechanism to facilitate a response from the replying LSR, by defining a mechanism that uses a relay node (e.g, ASBR) to relay the message back to the initiator. Every designated or learned relay node must be reachable to the next relay node or to the initiator. Using a recursive approach, relay node could relay the message to the next relay node until the initiator is reached.

The LSP Ping relay mechanism in this document is defined for unicast case. How to apply the LSP Ping relay mechanism in multicast case is out of the scope.

### 3. Extensions

[RFC4379] describes the basic MPLS LSP Ping mechanism, which defines two message types, Echo Request and Echo Reply message. This document defines a new message, Relayed Echo Reply message. This new message is used to replace Echo Reply message which is sent from the replying LSR to a relay node or from a relay node to another relay node.

A new TLV named Relay Node Address Stack TLV is defined in this document, to carry the IP addresses of the possible relay nodes for the replying LSR.

In addition, MTU (Maximum Transmission Unit) Exceeded Return Code is defined to indicate to the initiator that one or more TLVs will not be returned due to MTU size.

It should be noted that this document focuses only on detecting the LSP which is set up using a uniform IP address family type. That is,





all hops between the source and destination node use the same address family type for their LSP ping control planes. This does not preclude nodes that support both IPv6 and IPv4 addresses simultaneously, but the entire path must be addressable using only one address family type. Supporting for mixed IPv4-only and IPv6-only is beyond the scope of this document.

### 3.1. Relayed Echo Reply message

The Relayed Echo Reply message is a UDP packet, and the UDP payload has the same format with Echo Request/Reply message. A new message type is requested from IANA.

New Message Type:

Value	Meaning
-----	-----
TBD	MPLS Relayed Echo Reply

The use of TCP and UDP port number 3503 is described in [\[RFC4379\]](#) and has been allocated by IANA for LSP Ping messages. The Relayed Echo Reply message will use the same port number.

### 3.2. Relay Node Address Stack

The Relay Node Address Stack TLV is an optional TLV. It MUST be carried in the Echo Request, Echo Reply and Relayed Echo Reply messages if the echo reply relayed mechanism described in this document is required. Figure 3 illustrates the TLV format.

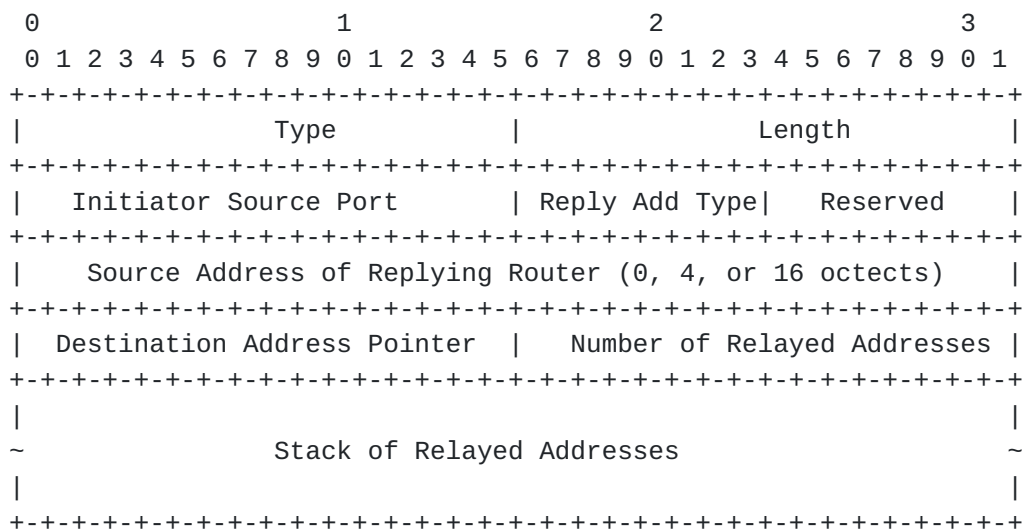


Figure 3: Relay Node Address Stack TLV




- Type: to be assigned by IANA. A value should be assigned from 32768-49161 as suggested by [\[RFC4379\] Section 3](#).
- Length: the length of the value field in octets.
- Initiator Source Port: the source UDP port that the initiator uses in the Echo Request message, and also the port that is expected to receive the Echo Reply message.
- Reply Address Type: address type of replying router. This value also implies the length of the address field as shown below.

Type#	Address Type	Address Length
----	-----	-----
0	Null	0
1	IPv4	4
2	IPv6	16

- Reserved: This field is reserved and MUST be set to zero.
- Source Address of Replying Router: source IP address of the originator of Echo Reply or Replay Echo Reply message.
- Destination Address Pointer: an integer entry number used as the destination address of the Reply or Relayed Reply message. The entry on the top of the Stack of Relayed Addresses will have value 1.
- Number of Relayed Addresses: an integer indicating the number of relayed addresses in the stack.
- Stack of Relayed Addresses: a list of relay node addresses.

The format of each relay node address is as below:

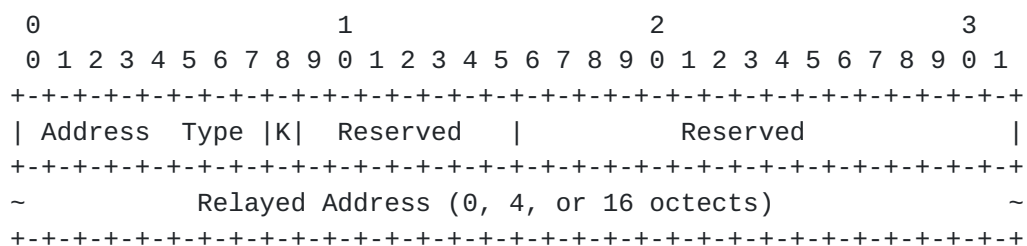

Type#	Address Type	Address Length
----	-----	-----
0	Null	0
1	IPv4	4
2	IPv6	16



Reserved: The two fields are reserved and MUST be set to zero.

K bit: if the K bit is set to 1, then this sub-TLV MUST be kept in Relay Node Address Stack during TLV compress process described in [section 4.2](#).

Having the K bit set in the relay node address entry causes that entry to be preserved in the Relay Node Address Stack TLV for the entire traceroute operation. A responder node MAY set the K bit to ensure its relay node address entry remains as one of the relay nodes in the Relay Node Address Stack TLV. The address with K bit set will always be a relay node address for the Relayed Echo Reply, see [section 4.3](#).

Relayed Address: this field specifies the node address, either IPv4 or IPv6.

### [3.3](#). MTU Exceeded Return Code

Return Code is defined to indicate that one or more TLVs were omitted from the Echo Reply or Relayed Echo Reply message to avoid exceeding the message's effective MTU size. These TLVs MAY be included in an Errored TLV's Object with their lengths set to 0 and no value. The return sub-code MUST be set to the value that otherwise would have been sent.

MTU Exceeded Return Code:

Value	Meaning
-----	-----
TBD	One or more TLVs not returned due to MTU size

## [4](#). Procedures

### [4.1](#). Sending an Echo Request

In addition to the procedures described in [section 4.3 of \[RFC4379\]](#), a Relay Node Address Stack TLV MUST be carried in the Echo Request message to facilitate the relay functionality.

When the initiator sends the first Echo Request with a Relay Node Address Stack TLV, the TLV MUST contain the initiator address as the first entry of the stack of relayed addresses, the destination address pointer set to this entry, and the source address of the replying router set to null. The source UDP port field MUST be set to the source UDP port. Note that the first relay node address in the stack will always be the initiator's address.



## **4.2. Receiving an Echo Request**

An LSR that does not recognize the Relay Node Address Stack TLV, SHOULD ignore it as per [section 3 of \[RFC4379\]](#).

In addition to the processes in [section 4.4 of \[RFC4379\]](#), the procedures of the Relay Node Address Stack TLV are defined here.

Upon receiving a Relay Node Address Stack TLV in an Echo Request message, the receiver updates the "Source Address of Replying Router". The address MUST be same as the source IP address of Relay Echo Reply ([section 4.3](#)) or Echo Reply message ([section 4.5](#)) being sent.

Those address entries with K bit set to 1 MUST be kept in the stack. The receiver MUST check the addresses of the stack in sequence from bottom to top to find the last address in the stack with the K bit set (or the top of the stack if no K bit was found). The receiver then checks the stack beginning with this entry, proceeding towards the bottom to find the first routable address IP address. The Destination Address Pointer MUST be set to this entry which is also the Destination Address. Address entries below the first routable IP address MUST be deleted. At least one address entries of the replying LSR MUST be added at the bottom of the stack. A second or more address entries MAY also be added if necessary, depending on implementation. The final address added MUST be an address that is reachable through the interface that the Echo Request Message would have been forwarded if it had not TTL expired at this node. The updated Relay Node Address Stack TLV MUST be carried in the response message.

If the replying LSR is configured to hide its routable address information, the address entry added in the stack MUST be a NIL entry with Address Type set to NULL.

If a node spans two addressing domains (with respect to this message) where nodes on either side may not be able to reach nodes in the other domain, then the final address added SHOULD set the K bit. K bit applies in the case of a NULL address, to serve as a warning to the initiator that further Echo Request messages may not result in receiving Echo Reply messages.

If the full reply message would exceed the MTU size, the Relay Node Address Stack TLV SHOULD be included in the Echo Reply message (i.e., other optional TLVs are excluded).





### **4.3. Originating an Relayed Echo Reply**

The Destination Address determined in [section 4.2](#) is used as the next relay node address. If the resolved next relay node address is not routable, then sending of Relayed Echo Reply or Echo Reply will fail.

If the first IP address in the Relay Node Address Stack TLV is not the next relay node address, the replying LSR SHOULD send a Relayed Echo Reply message to the next relay node. The processing of Relayed Echo Reply is the same with the procedure of the Echo Reply described in [Section 4.5 of \[RFC4379\]](#), except the destination IP address and the destination UDP port. The destination IP address of the Relayed Echo Reply is set to the next relay node address from the Relay Node Address Stack TLV, and both the source and destination UDP port are set to 3503. The updated Relay Node Address Stack TLV described in [section 4.2](#) MUST be carried in the Relayed Echo Reply message. The Source Address of Replying Router field is kept unmodified, and Source IP address field of the IP header is set to an address of the sending node.

### **4.4. Relaying an Relayed Echo Reply**

Upon receiving an Relayed Echo Reply message with its own address as the destination address in the IP header, the relay node MUST determine the next relay node address as described in [section 4.2](#), with the modification that the location of the received Destination Address is used instead of the bottom of stack in the algorithm. The Destination Address Pointer in Relay Node Address Stack TLV will be set to the next relay node address. Note that unlike [section 4.2](#) no changes are made to the Stack of Relayed Addresses.

If the next relay node address is not the first one in the address list, i.e., another intermediate relay node, the relay node MUST send an Relayed Echo Reply message to the determined upstream node with the payload unchanged other than the Relay Node Address Stack TLV. The TTL SHOULD be copied from the received Relay Echo Reply and decremented by 1. The Source Address of Replying Router field is kept unmodified, and Source IP address field of the IP header is set to an address of the sending node.

### **4.5. Sending an Echo Reply**

The Echo Reply is sent in two cases:

1. When the replying LSR receives an Echo Request, and the first IP address in the Relay Node Address Stack TLV is the next relay node address ([section 4.3](#)), the replying LSR would send an Echo Reply to the initiator. In addition to the procedure of the Echo Reply



described in [Section 4.5 of \[RFC4379\]](#), the updated Relay Node Address Stack TLV described in [section 4.2](#) MUST be carried in the Echo Reply.

2. When the intermediate relay node receives a Relayed Echo Reply, and the first IP address in the Relay Node Address Stack TLV is the next relay node address ([section 4.4](#)), the intermediate relay node would send the Echo Reply to the initiator, and update the Message Type field from type of Relayed Echo Reply to Echo Reply. The updated Relay Node Address Stack TLV described in [section 4.4](#) MUST be carried in the Echo Reply. The destination IP address of the Echo Reply is set to the first IP address in the stack, and the destination UDP port would be copied from the Initiator Source Port field of the Relay Node Address Stack TLV. The source UDP port should be 3503. The TTL of the Echo Reply SHOULD be copied from the received Relay Echo Reply and decremented by 1. The Source Address of Replying Router field is kept unmodified, and Source IP address field of the IP header is set to an address of the sending node.

#### **[4.6.](#) Sending Subsequent Echo Requests**

During a traceroute operation, multiple Echo Request messages are sent. Each time the TTL is increased, the initiator SHOULD copy the Relay Node Address Stack TLV received in the previous Echo Reply to the next Echo Request. The Relay Node Address Stack TLV MUST NOT be modified except as follows. A NIL entry with K bit unset MAY be removed. A NIL entry with K bit serves as a warning that further Echo Request messages are likely to not result in a reply. If, however, the initiator decides to continue a traceroute operation, the NIL entry with the K bit set MUST be removed. The Source Address of Replying Router and Destination Address Pointer fields may be preserved or reset since these fields are ignored in received MPLS Echo Request.

#### **[4.7.](#) Impact to Traceroute**

Source IP address in Echo Reply and Relay Echo Reply is to be of the address of the node sending those packets, not the original responding node. Then the traceroute address output module will print the source IP address as below:

```
if (Relay Node Address Stack TLV exists) {
    Print the Source Address of Replying Router in
    Relay Node Address Stack TLV;
} else {
    Print the source IP address of Echo Reply message;
}
```



## 5. LSP Ping Relayed Echo Reply Example

Considering the inter-AS scenario in Figure 4 below. AS1 and AS2 are two independent address domains. In the example, an LSP has been created between PE1 to PE2, but PE1 in AS1 is not reachable by P2 in AS2.

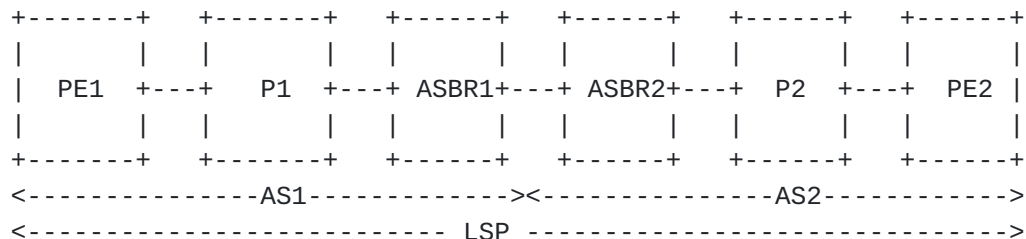


Figure 4: Example Inter-AS LSP

When performing LSP traceroute on the LSP, the first Echo Request sent by PE1 with outer-most label TTL=1, contains the Relay Node Address Stack TLV with PE1's address as the first relayed address.

After processed by P1, P1's interface address facing ASBR1 without the K bit set will be added in the Relay Node Address Stack TLV address list following PE1's address in the Echo Reply.

PE1 copies the Relay Node Address Stack TLV into the next Echo Request when receiving the Echo Reply.

Upon receiving the Echo Request, ASBR1 checks the address list in the Relay Node Address Stack TLV, and determines that PE1's address is the next relay address. Then deletes P1's address, and adds its interface address facing ASBR2 with the K bit set. As a result, there would be PE1's address followed by ASBR1's interface address facing ASBR2 in the Relay Node Address Stack TLV of the Echo Reply sent by ASBR1.

PE1 then sends an Echo Request with outer-most label TTL=3, containing the Relay Node Address Stack TLV copied from the received Echo Reply message. Upon receiving the Echo Request message, ASBR2 checks the address list in the Relay Node Address Stack TLV, and determines ASBR1's interface address is the next relay address in the stack TLV. ASBR2 adds its interface address facing P2 with the K bit set. Then ASBR2 sets the next relay address as the destination address of the Relayed Echo Reply, and sends the Relayed Echo Reply to ASBR1.



Upon receiving the Relayed Echo Reply from ASBR2, ASBR1 checks the address list in the Relay Node Address Stack TLV, and determines that PE1's address is the next relay node. Then ASBR1 sends an Echo Reply to PE1.

For the Echo Request with outer-most label TTL=4, P2 checks the address list in the Relay Node Address Stack TLV, and determines that ASBR2's interface address is the next relay address. Then P2 sends an Relayed Echo Reply to ASBR2 with the Relay Node Address Stack TLV containing four addresses, PE1's, ASBR1's interface address, ASBR2's interface address and P2's interface address facing PE2 in sequence.

Then according to the process described in [section 4.4](#), ASBR2 sends the Relayed Echo Reply to ASBR1. Upon receiving the Relayed Echo Reply, ASBR1 sends an Echo Reply to PE1. And as relayed by ASBR2 and ASBR1, the Echo Reply would finally be sent to the initiator PE1.

For the Echo Request with outer-most label TTL=5, the Echo Reply would relayed to PE1 by ASBR2 and ASBR1, similar to the case of TTL=4.

The Echo Reply from the replying node which has no IP reachable route to the initiator is thus transmitted to the initiator by multiple relay nodes.

## 6. Security Considerations

The Relayed Echo Reply mechanism for LSP Ping creates an increased risk of DoS by putting the IP address of a target router in the Relay Node Address Stack. These messages then could be used to attack the control plane of an LSR by overwhelming it with these packets. A rate limiter SHOULD be applied to the well-known UDP port on the relay node as suggested in [\[RFC4379\]](#). The node which acts as a relay node SHOULD validate the relay reply against a set of valid source addresses and discard packets from untrusted border router addresses. An implementation SHOULD provide such filtering capabilities.

If an operator wants to obscure their nodes, it is RECOMMENDED that they may replace the replying node address that originated the Echo Reply with NIL address entry in Relay Node Address Stack TLV.

A receiver of an MPLS Echo Request could verify that the first address in the Relay Node Address Stack TLV is the same address as the source IP address field of the received IP header.

Other security considerations discussed in [\[RFC4379\]](#), are also applicable to this document.





## **7. Backward Compatibility**

When one of the nodes along the LSP does not support the mechanism specified in this document, the node will ignore the Relay Node Address Stack TLV as described in [section 4.2](#). Then the initiator may not receive the Relay Node Address Stack TLV in Echo Reply message from that node. In this case, an indication should be reported to the operator, and the Relay Node Address Stack TLV in the next Echo Request message should be copied from the previous Echo Request, and continue the ping process. If the node described above is located between the initiator and the first relay node, the ping process could continue without interruption.

## **8. IANA Considerations**

IANA is requested to assign one new Message Type, one new TLV and one Return Code.

### **8.1. New Message Type**

This document requires allocation of one new message type from "Multi-Protocol Label Switching (MPLS) Label Switched Paths (LSPs) Ping Parameters" registry, the "Message Type" registry:

Value	Meaning
-----	-----
TBD	MPLS Relayed Echo Reply

The value should be assigned from the "Standards Action" range (0-191), and using the lowest free value within this range.

### **8.2. New TLV**

This document requires allocation of one new TLV from "Multi-Protocol Label Switching (MPLS) Label Switched Paths (LSPs) Ping Parameters" registry, the "TLVs" registry:

Type	Meaning
----	-----
TBD	Relay Node Address Stack TLV

A suggested value should be assigned from "Standards Action" range (32768-49161) as suggested by [\[RFC4379\] Section 3](#), using the first free value within this range.



### **8.3. MTU Exceeded Return Code**

This document requires allocation of MTU Exceeded return code from "Multi-Protocol Label Switching (MPLS) Label Switched Paths (LSPs) Ping Parameters" registry, the "Return Codes" registry:

Value	Meaning
-----	-----
TBD	One or more TLVs not returned due to MTU size

The value should be assigned from the "Standards Action" range (0-191), and using the lowest free value within this range.

## **9. Acknowledgement**

The authors would like to thank Carlos Pignataro, Xinwen Jiao, Manuel Paul, Loa Andersson, Wim Henderickx, Mach Chen, Thomas Morin, Gregory Mirsky, Nobo Akiya and Joel M. Halpern for their valuable comments and suggestions.

## **10. Contributors**

Ryan Zheng  
JSPTPD  
371, Zhongshan South Road  
Nanjing, 210006, China  
Email: ryan.zhi.zheng@gmail.com

## **11. References**

### **11.1. Normative References**

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC4379] Kompella, K. and G. Swallow, "Detecting Multi-Protocol Label Switched (MPLS) Data Plane Failures", [RFC 4379](#), February 2006.

### **11.2. Informative References**

- [I-D.ietf-mpls-seamless-mpls]  
Leymann, N., Decraene, B., Filsfils, C., Konstantynowicz, M., and D. Steinberg, "Seamless MPLS Architecture", [draft-ietf-mpls-seamless-mpls-07](#) (work in progress), June 2014.



Authors' Addresses

Jian Luo (editor)  
ZTE  
50, Ruanjian Avenue  
Nanjing, 210012, China  
  
Email: [luo.jian@zte.com.cn](mailto:luo.jian@zte.com.cn)

Lizhong Jin (editor)  
Individual  
Shanghai, China  
  
Email: [lizho.jin@gmail.com](mailto:lizho.jin@gmail.com)

Thomas Nadeau (editor)  
Lucidvision  
  
Email: [tnadeau@lucidvision.com](mailto:tnadeau@lucidvision.com)

George Swallow (editor)  
Cisco  
300 Beaver Brook Road  
Boxborough , MASSACHUSETTS 01719, USA  
  
Email: [swallow@cisco.com](mailto:swallow@cisco.com)

