

Network Working Group
Internet Draft
Category: Informational
Expires: January 2007

J.-L. Le Roux (Editor)
France Telecom

T. Morin
France Telecom

Vincent Parfait
Equant

Luyuan Fang
AT&T

Lei Wang
Telenor

Yuji Kamite
NTT Communications

Shane Amante
Level 3 Communications

July 2006

**Requirements for point-to-multipoint extensions to
the Label Distribution Protocol**

[draft-ietf-mpls-mp-ldp-reqs-01.txt](#)

Status of this Memo

By submitting this Internet-Draft, each author represents that any applicable patent or other IPR claims of which he or she is aware have been or will be disclosed, and any of which he or she becomes aware will be disclosed, in accordance with [Section 6 of BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet- Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at
<http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at
<http://www.ietf.org/shadow.html>.

Abstract

This document lists a set of functional requirements for Label Distribution Protocol (LDP) extensions for setting up point-to-multipoint (P2MP) Label Switched Paths (LSP), in order to deliver point-to-multipoint applications over a Multi Protocol Label Switching (MPLS) infrastructure. It is intended that solutions that specify LDP procedures for setting up P2MP LSP satisfy these requirements.

Conventions used in this document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC-2119](#).

Table of Contents

1.	Terminology.....	3
2.	Introduction.....	4
3.	Problem Statement and Requirements Overview.....	5
3.1.	Problem Statement.....	5
3.2.	Requirements overview.....	5
4.	Application scenario.....	6
5.	Detailed Requirements.....	7
5.1.	P2MP LSPs.....	7
5.2.	P2MP LSP FEC.....	7
5.3.	P2MP LDP routing.....	8
5.4.	Setting up, tearing down and modifying P2MP LSPs.....	8
5.5.	Label Advertisement.....	8
5.6.	Data Duplication.....	8
5.7.	Avoiding loops.....	9
5.8.	P2MP LSP Re-routing.....	9
5.8.1.	Rerouting upon Network Failure.....	9
5.8.2.	Rerouting on a Better Path.....	9
5.8.3.	Rerouting upon Planned Maintenance.....	10
5.9.	Support for LAN interfaces.....	10
5.10.	Support for encapsulation in P2P and P2MP TE tunnels.....	10
5.11.	Label spaces.....	10
5.12.	IPv4/IPv6 support.....	11
5.13.	Multi-Area LSPs.....	11
5.14.	OAM.....	11
5.15.	Graceful Restart and Fault Recovery.....	11
5.16.	Robustness.....	11
5.17.	Scalability.....	11
5.17.1.	Orders of magnitude of the expected numbers of P2MP LSPs in operational networks.....	12

5.18.	Backward Compatibility.....	12
6.	Shared Trees.....	12
6.1.	Requirements for MP2MP LSPs.....	13
7.	Evaluation criteria.....	14

7.1.	Performances.....	14
7.2.	Complexity and Risks.....	14
8.	Security Considerations.....	14
9.	Acknowledgments.....	14
10.	References.....	14
10.1.	Normative references.....	14
10.2.	Informative references.....	15
11.	Editor Address.....	15
12.	Contributors Addresses.....	16
13.	Intellectual Property Statement.....	17

[1.](#) Terminology

LSR: Label Switching Router

LSP: MPLS Label Switched Path

Ingress LSR: Router acting as a sender of an LSP

Egress LSR: Router acting as a receiver of an LSP

P2P LSP: A LSP that has one unique Ingress LSR and one unique
Egress LSR

MP2P LSP: A LSP that has one or more Ingress LSRs and one unique
Egress LSR

P2MP LSP: A LSP that has one unique Ingress LSR and one or more
Egress LSRs

MP2MP LSP: A LSP that as one or more Leaf LSRs acting
indifferently as Ingress or Egress LSR

Leaf LSR: Egress LSR of a P2MP LSP or Ingress/Egress LSR of a
MP2MP LSP

Transit LSR: A LSR of a P2MP LSP that has one or more downstream
LSRs

Branch LSR: A LSR of a P2MP LSP that has more than one downstream
LSR

Bud LSR: A LSR of a P2MP LSP that is an egress but also has one or
more directly connected downstream LSRs

2. Introduction

Many operators have deployed LDP [[LDP](#)] for setting up point-to-point (P2P) and multipoint-to-point (MP2P) LSPs, in order to offer point-to-point services in MPLS backbones.

There are emerging requirements for supporting delivery of point-to-multipoint applications in MPLS backbones, such as those defined in [[L3VPN-MCAST-REQ](#)] and [[L2VPN-MCAST-REQ](#)].

This requires mechanisms for setting up point-to-multipoint LSPs (P2MP LSP), i.e. LSPs with one Ingress LSR, a set of Egress LSRs, and with MPLS traffic replication at some Branch LSRs.

RSVP-TE extensions for setting up Point-To-Multipoint Traffic Engineered LSPs (P2MP TE LSPs), have been defined in [[P2MP-TE-RSVP](#)]. They meet requirements expressed in [[P2MP-TE-REQ](#)]. This approach is useful, in network environments where P2MP Traffic Engineering capabilities are needed (Optimization, QoS, Fast recovery).

However for operators who want to support point-to-multipoint traffic delivery on an MPLS backbone, without Traffic Engineering needs, and have already deployed LDP for P2P traffic, an interesting and useful approach would be to rely on LDP extensions in order to setup point-to-multipoint (P2MP) LSPs. This would bring consistency with P2P MPLS applications and would ease the delivery of point-to-multipoint services in an MPLS backbone.

This document focuses on the LDP approach for setting up P2MP LSPs. It lists a detailed set of requirements for P2MP extensions to LDP, so as to deliver P2MP traffic over a LDP-enabled MPLS infrastructure. These requirements should be used as guidelines when specifying LDP extensions. It is intended that solutions that specify LDP procedures for P2MP LSP setup, satisfy these requirements.

Note that generic requirements for P2MP extensions to MPLS are out of the scope of this document. Rather this document describes solution specific requirements related to LDP extensions in order to set up P2MP LSPs.

Note also that other mechanisms could be used for setting up P2MP LSPs, such as for instance PIM extensions, but these are out of the scope of this document. The objective is not to compare these mechanisms but rather to focus on the requirements for an LDP extension approach.

The document is structured as follows:

- [Section 3](#) points out the problem statement;
- [Section 4](#) illustrates an application scenario;

- [Section 5](#) addresses detailed requirements for P2MP LSPs;
- [Section 6](#) finally discusses group communication, and requirements for MP2MP LSPs.

3. Problem Statement and Requirements Overview

3.1. Problem Statement

Many operators have deployed LDP [[LDP](#)] for setting up P2P and MP2P MPLS LSPs as PE-to-PE tunnels so as to carry point-to-point traffic essentially in Layer 3 and Layer 2 VPN networks. There are emerging requirements for supporting multicast traffic delivery within these VPN infrastructures ([[L3VPN-MCAST-REQ](#)] and [[L2VPN-MCAST-REQ](#)]). For various reasons, including consistency with P2P applications, and taking full advantages of MPLS network infrastructure, it would be highly desirable to use MPLS LSPs for the delivery of multicast traffic. This could be implemented by setting up a group of P2P or MP2P LSPs, but such an approach may be sub-optimal since it would result in data replication at the ingress LSR, and bandwidth inefficiency (duplicate data traffic within the network). Hence new mechanisms are required that would allow traffic from an Ingress LSR to be efficiently delivered to a number of Egress LSRs in an MPLS backbone, avoiding duplicate copies of a packet on a given link.

Such efficient traffic delivery requires setting up P2MP LSPs. A P2MP LSP is an LSP starting at an Ingress LSR, and ending on a set of one or more Egress LSRs. Traffic sent by the Ingress LSR is replicated on one or more Branch LSRs down to Egress LSRs.

RSVP-TE extensions for setting up P2MP TE LSPs, which meet requirements expressed in [[P2MP-TE-REQ](#)], have been defined in [P2MP-TE-RSVP]. This approach is useful, in network environments where Traffic Engineering capabilities are required. However, for operators that deployed LDP for setting up PE-to-PE unicast MPLS LSPs, and without the need for traffic engineering, an interesting approach would be using LDP extensions for setting up P2MP LSPs.

The following gives a set of guidelines that a specification of LDP extensions for setting up P2MP LSPs should follow.

3.2. Requirements overview

The P2MP LDP mechanism MUST support setting up P2MP LSPs, i.e. LSPs with one Ingress LSR and one or more Egress LSRs, with traffic replication at some Branch LSRs.

The P2MP LDP mechanism MUST allow the addition or removal of leaves associated with a P2MP LSP.

The P2MP LDP mechanism MUST co-exist with current LDP mechanisms and inherit its capability sets from [[LDP](#)]. It is of paramount importance that the P2MP LDP mechanism MUST NOT impede the operation of existing

P2P/MP2P LSPs.

The P2MP LDP mechanism MAY also allow setting up multipoint-to-multipoint (MP2MP) LSPs connecting a group of Leaf LSRs acting indifferently as Ingress LSR or Egress LSR. This may allow a reduction in the amount of LDP state that needs to be maintained by a LSR.

4. Application scenario

Figure 1 below illustrates an LDP enabled MPLS provider network, used to carry both unicast and multicast traffic of VPN customers following for instance the architecture defined in [\[2547-MCAST\]](#) for BGP/MPLS VPNs, or the one defined in [\[VPLS-MCAST\]](#).

A set of MP2P LDP LSPs are setup between PE routers to carry unicast VPN traffic within the MPLS backbone.

A set of P2MP LDP LSPs are setup between PE routers acting as Ingress LSRs and PE routers acting as Egress LSRs, so as to support multicast VPN traffic delivery within the MPLS backbone.

For instance, a P2MP LDP LSP is setup between Ingress LSR PE1 and Egress LSRs PE2, PE3, and PE4. It is used to transport multicast traffic from PE1 to PE2, PE3 and PE4. P1 is a Branch LSR, it replicates MPLS traffic sent by PE1 to P2, P3 and PE2. P2 and P3 are non-branch transit LSRs, they forward MPLS traffic sent by P1 to PE3 and PE4 respectively.

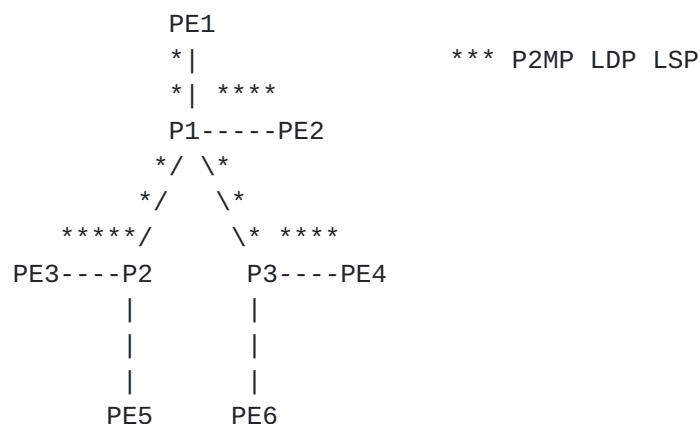


Figure 1: P2MP LSP from PE1 to PE2, PE3, PE4.

If later there are new receivers attached to PE5 and PE6, then PE5 and PE6 join the P2MP LDP LSP. P2 and P3 become Branch LSRs and replicate traffic received from P1, to PE3 and PE5, and to PE4 and PE6 respectively (see figure 2 below).

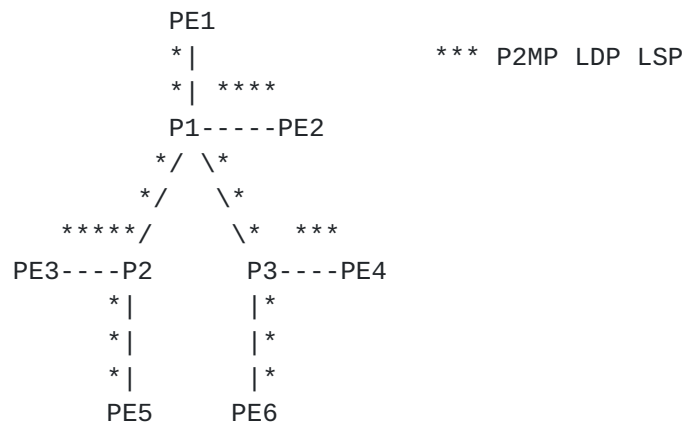


Figure 2: Attachment of PE5 and PE6.

5. Detailed Requirements

5.1. P2MP LSPs

The P2MP LDP mechanism MUST support setting up P2MP LSPs. Data plane aspects related to P2MP LSPs are those already defined in [P2MP-TE-REQ]. That is, a P2MP LSP has one Ingress LSR and one or more Egress LSRs. Traffic sent by the Ingress LSR is received by all Egress LSRs. The specific aspects related to P2MP LSPs is the action required at a Branch LSR, where data replication occurs. Incoming labelled data is appropriately replicated to several outgoing interfaces which may use different labels. Only one copy of a packet MUST be sent on a given link of a P2MP LSP.

A P2MP LSP MUST be identified by a constant and unique identifier within the whole LDP domain, whatever the number of leaves, which may vary dynamically.

This identifier will be used so as to add/remove leaves to/from the P2MP tree.

5.2. P2MP LSP FEC

As with P2P MPLS technology [LDP], traffic MUST be classified into a FEC in this P2MP extension. All packets which belong to a particular P2MP FEC and which travel from a particular node MUST use the same P2MP LSP.

As such, a solution MUST specify a FEC that is suitable for P2MP forwarding. Such P2MP FEC MUST be distinguished clearly from the existing P2P FEC.

5.3. P2MP LDP routing

As with P2P and MP2P LDP LSPs, the P2MP LDP mechanism MUST support hop-by-hop LSP routing. P2MP LDP-based routing SHOULD rely upon the information maintained in LSR Routing Information Bases (RIB).

It is RECOMMENDED that the P2MP LSP routing rely upon a shortest path to the Ingress LSR so as to setup an MPLS shortest path tree.

5.4. Setting up, tearing down and modifying P2MP LSPs

The P2MP LDP mechanism MUST support the establishment, maintenance and teardown of P2MP LSPs in a scalable manner. This MUST include both the existence of a large amount of P2MP LSPs within a single network and a large amount of leaf LSRs for a single P2MP LSP.

In order to scale well with a large number of leaves it is RECOMMENDED to follow a leaf-initiated P2MP LSP setup approach. For that purpose, leaves will have to be aware of the P2MP LSP identifier. The ways a Leaf LSR discovers P2MP LSPs identifiers rely on the applications that will use P2MP LSPs, and are out of the scope of this document.

The P2MP LDP mechanism MUST allow the dynamic addition and removal of leaves to and from a P2MP LSP, without any restriction (provided there is network connectivity). It is RECOMMENDED that these operations be leaf-initiated.

These operations MUST not impact the data transfer (packet loss, duplication, delay) towards other leaves. It is RECOMMENDED that these operations do not cause any additional processing except on the path from the added/removed Leaf LSR to the Branch LSR.

5.5. Label Advertisement

The P2MP LDP mechanism SHOULD support downstream unsolicited label advertisement mode. This is well suited to a leaf-initiated approach and is consistent with P2P/MP2P LDP operations.

5.6. Data Duplication

Data duplication refers to the receipt of multiple copies of a packet by any leaf. Although this may be a marginal situation, it may also be detrimental for certain applications. Hence, data duplication SHOULD be avoided as much as possible, and limited to (hopefully rare) transitory conditions.

Note, in particular, that data duplication might occur if P2MP LSP rerouting is being performed (See also [section 5.8](#)).

5.7. Avoiding loops

The P2MP LDP mechanism SHOULD have a mechanism to avoid routing loops even during transient events.

Furthermore, the P2MP LDP mechanism MUST avoid routing loops that may trigger unexpected non-localized exponential growth of traffic. Note that any loop-avoidance mechanism MUST respect scalability requirements.

5.8. P2MP LSP Re-routing

The P2MP LDP mechanism MUST support the rerouting of a P2MP LSP in the following cases:

- Network failure (link or node);
- A better path exists (e.g. new link, metric change);
- Planned maintenance.

Given that P2MP LDP routing should rely on the RIB, the achievement of the following requirements also implies the underlying routing protocols (IGP, etc.).

5.8.1. Rerouting upon Network Failure

The P2MP LDP mechanism MUST allow for rerouting of a P2MP LSP in case of link or node failure(s). The rerouting time SHOULD be minimized as much as possible so as to reduce traffic disruption.

A mechanism MUST be defined to prevent constant P2MP LSP teardown and rebuild which may be caused by the instability of a specific link/node in the network.

5.8.2. Rerouting on a Better Path

The P2MP LDP mechanism MUST allow for rerouting of a P2MP LSP in case a better path is created in the network, for instance as a result of a metric change, a link repair, or the addition of links or nodes. Traffic disruption and data duplication SHOULD be minimized as much as possible during such rerouting.

There is actually a tension between packet loss minimization and packet duplication minimization objectives.

It SHOULD be feasible to avoid either data duplication or packet loss during such rerouting.

A solution MAY provide the operator with means to choose between favoring avoiding packet loss at the expense of potential packet duplication, and favoring avoiding duplication against packet loss.

5.8.3. Rerouting upon Planned Maintenance

The P2MP LDP mechanism MUST support planned maintenance operations.

It MUST be possible to reroute a P2MP LSP before a link/node is deactivated for maintenance purposes.

Traffic disruption and data duplication SHOULD be minimized as much as possible during such planned maintenance.

There is actually a tension between packet loss minimization and packet duplication minimization objectives.

It SHOULD be feasible to avoid either data duplication or packet loss during such rerouting.

A solution MAY provide the operator with means to choose between favoring avoiding packet loss at the expense of packet duplication, and favoring avoiding duplication against packet loss.

5.9. Support for LAN interfaces

The P2MP LDP mechanism MUST provide a way for a Branch LSR to send a single copy of the data onto an Ethernet LAN interface and reach multiple adjacent downstream nodes. This requires that the same label be negotiated with all downstream LSRs for the LSP.

When there are several candidate upstream LSRs on a LAN interface, the P2MP LDP mechanism MUST provide a way for all downstream LSRs of a given P2MP LSP to select the same upstream LSR, so as to avoid traffic replication.

In addition, the P2MP LDP mechanism SHOULD allow for an efficient balancing of a set of P2MP LSPs among a set of candidate upstream LSRs on a LAN interface.

5.10. Support for encapsulation in P2P and P2MP TE tunnels

The P2MP LDP mechanism MUST support nesting P2MP LSPs into P2P and P2MP TE tunnels.

The P2MP LDP mechanism MUST provide a way for a Branch LSR of a P2MP LSP, which is also a Head End LSR of a P2MP TE tunnel, to send a single copy of the data onto the tunnel and reach all downstream LSRs on the P2MP LSP, which are also Egress LSRs of the tunnel. As with LAN interfaces, this requires that the same LDP label be negotiated with all downstream LSRs for the P2MP LDP LSP.

5.11. Label spaces

Labels for P2MP LSPs and P2P/MP2P LSPs MAY be assigned from shared or dedicated label spaces.

Note that dedicated label spaces will require the establishment of

separate P2P and P2MP LDP sessions.

[5.12.](#) IPv4/IPv6 support

The P2MP LDP mechanism MUST be equally applicable to IPv4 and IPv6 traffic. Likewise, it SHOULD be possible to convey both kinds of traffic in a given P2MP LSP facility.

Also the P2MP LDP mechanism MUST support the establishment of LDP sessions over both IPv4 and IPv6 control planes.

[5.13.](#) Multi-Area LSPs

The P2MP LDP mechanism MUST support the establishment of multi-area P2MP LSPs, i.e. LSPs whose leaves do not all reside in the same IGP area as the Ingress LSR. This SHOULD be possible without requiring the advertisement of Ingress LSRs' addresses across IGP areas.

[5.14.](#) OAM

LDP management tools ([[LDP-MIB](#)], etc.) MUST be enhanced to support P2MP LDP extensions. This may yield a new MIB module, which may possibly be inherited from the LDP MIB.

In order to facilitate correct management, P2MP LDP LSPs MUST have unique identifiers, otherwise it is impossible to determine which LSP is being managed.

Built-in diagnostic tools MUST be defined to check the connectivity, trace the path and ensure fast detection of data plane failures on P2MP LDP LSPs.

Further and precise requirements and mechanisms for P2MP MPLS OAM purpose are out of the scope of this document and are addressed in [[P2MP-OAM-REQ](#)].

[5.15.](#) Graceful Restart and Fault Recovery

LDP Graceful Restart mechanisms [[LDP-GR](#)] and Fault Recovery [[LDP-FT](#)] mechanisms SHOULD be enhanced to support P2MP LDP LSPs.

[5.16.](#) Robustness

A solution MUST avoid single points of failures provided there is enough network connectivity.

[5.17.](#) Scalability

Scalability is a key requirement for the P2MP LDP mechanism. It MUST be designed to scale well with an increase in the number of any of the following:

- number of Leaf LSRs per P2MP LSP;
- number of Downstream LSRs per Branch LSR;
- number of P2MP LSPs per LSR.

In order to scale well with an increase in the number of leaves, it is RECOMMENDED that the size of a P2MP LSP state on a LSR, for one particular LSP, depend only on the number of adjacent LSRs on the LSP.

5.17.1. Orders of magnitude of the expected numbers of P2MP LSPs in operational networks

Typical orders of magnitude that we expect should be supported are:

- tens of thousands of P2MP trees spread out across core network routers;
- hundreds, or a few thousands, of leaves per tree;

See also section 4.2 of [[L3VPN-MCAST-REQ](#)].

5.18. Backward Compatibility

In order to allow for a smooth migration, the P2MP LDP mechanism SHOULD offer as much backward compatibility as possible. In particular, the solution SHOULD allow the setup of a P2MP LSP along non-Branch Transit LSRs that do not support P2MP LDP extensions.

Also, the P2MP LDP solution MUST co-exist with current LDP mechanisms and inherit its capability sets from [[LDP](#)]. The P2MP LDP solution MUST not impede the operation of P2P/MP2P LSPs. A P2MP LDP solution MUST be designed in such a way that it allows P2P/MP2P and P2MP LSPs to be signalled on the same interface.

6. Shared Trees

For traffic delivery between a group of N Leaf LSRs which are acting indifferently as Ingress or Egress LSRs, it may be useful to setup a shared tree connecting all these LSRs, instead of having N P2MP LSPs. This would reduce the amount of control and forwarding state that has to be maintained on a given LSR.

There are actually two main options for supporting such shared trees:

- This could rely on the applications protocols that use LDP LSPs. A shared tree could consist of the combination of a MP2P LDP LSP from Leafs LSRs to a given root node, with a P2MP LSP from this root to all Leaf LSRs. For instance with Multicast L3 VPN applications, it would be possible to build a shared tree by combining:
 - a MP2P unicast LDP LSP, from each PE of the group to a particular root PE acting as tree root,
 - with a P2MP LDP LSP from this root PE to each PEs of the Group.

- Or this could rely on a specific LDP mechanism allowing to setup multipoint-to-multipoint MPLS LSPs (MP2MP LSPs).

The former approach (Combination of MP2P and P2MP LSPs at the application level) is out of the scope of this document while the latter (MP2MP LSPs) belong to the scope of this document. Requirements for the set up of MP2MP LSPs are listed below.

6.1. Requirements for MP2MP LSPs

A MP2MP LSP is a LSP connecting a group of Leaf LSRs acting indifferently as Ingress or Egress LSRs. Traffic sent by any Leaf LSRs is received by all other Leaf LSRs of the group.

Procedures for setting up MP2MP LSPs SHOULD be specified. An implementation that support P2MP LDP LSPs MAY also support MP2MP LDP LSP.

The MP2MP LDP procedures MUST not impede the operations of P2MP LSP.

Requirements for P2MP LSPs set forth in [section 5](#) apply equally to MP2MP LSPs. Particular attention should be given on the below requirements:

- The solution MUST support recovery upon link and transit node failure and there MUST be no single point of failure (provided network connectivity is redundant). Note that transit node failure recovery is likely to be more complex to handle with MP2MP LSPs than with P2MP LSPs;
- The size of MP2MP state on a LSR, for one particular MP2MP LSP, SHOULD only depend on the number of adjacent LSRs on the LSP;
- Furthermore, the MP2MP LDP mechanism MUST avoid routing loops that may trigger exponential growth of traffic. Note that this requirement is more challenging with MP2MP LSPs as a LSR can receive traffic for a given LSP on multiple interfaces.

There are additional requirements specific to MP2MP LSPs:

- It is RECOMMENDED that a MP2MP MPLS LSP follow shortest paths to a specific LSR called root LSR;
- It is RECOMMENDED to define several root LSRs (e.g. a primary and a backup) to ensure redundancy upon root LSR failure;
- The receiver SHOULD not receive back a packet it has sent on the MP2MP LSP;
- The solution SHOULD avoid that all traffic between any pair of leaves is traversing a root LSR, and SHOULD as much as possible minimize the distance between two leaves (similarly to PIM-Bidir trees);
- It MUST be possible to check connectivity of a MP2MP LSP in both directions.

7. Evaluation criteria

7.1. Performances

The solution will be evaluated with respect to the following criteria:

- (1) Time to add or remove a Leaf LSR;
- (2) Time to repair a P2MP LSP in case of link or node failure;
- (3) Scalability (state size, number of messages, message size).

Particularly the P2MP LDP mechanism SHOULD be designed with as key objective to minimize the additional amount of state and additional processing required in the network when deploying P2MP LDP.

Also, the P2MP LDP mechanism SHOULD be designed so that convergence times in case of link or node failure are minimized, in order to limit traffic disruption.

7.2. Complexity and Risks

The proposed solution SHOULD not introduce complexity to the current LDP operations to such a degree that it would affect the stability and diminish the benefits of deploying such P2MP LDP solution.

8. Security Considerations

This document does not introduce any new security issue beyond those inherent to LDP, and a P2MP LDP solution may rely on the security mechanisms defined in [[LDP](#)] (e.g. TCP MD5 Signature).

9. Acknowledgments

We would like to thank Christian Jacquenet (France Telecom), Hitoshi Fukuda (NTT Communications), Ina Minei (Juniper), Dean Cheng (Cisco Systems), and Benjamin Niven-Jenkins (British Telecom), for their highly useful comments and suggestions.

We would also like to thank authors of [[P2MP-TE-REQ](#)] from which some text of this document has been inspired.

10. References

10.1. Normative references

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.

[LDP] L. Andersson, P. Doolan, N. Feldman, A. Fredette, B. Thomas,
"LDP Specification", [RFC 3036](#), January 2001

[LDP-MIB] J. Cuchiarra et al. "Definitions of Managed Objects for the Multiprotocol Label Switching (MPLS), Label Distribution Protocol (LDP)", [RFC3815](#), June 2004.

[LDP-GR] M. Leelanivas, Y. Rekhter, R. Aggarwal, " Graceful Restart Mechanism for Label Distribution Protocol" [RFC3478](#), February 2003.

[LDP-FT] A. Farrel, " Fault Tolerance for the Label Distribution Protocol (LDP)", [RFC3479](#), February 2003.

10.2. Informative references

[L3VPN-MCAST-REQ] T. Morin, Ed., "Requirements for Multicast in L3 Provider-Provisioned VPNs", [draft-ietf-l3vpn-ppvnp-mcast-reqts](#), work in progress.

[L2VPN-MCAST-REQ] Y. Kamite et al. "Requirements for Multicast Support in Virtual Private LAN Services", [draft-ietf-l2vpn-vpls-mcast-reqts](#), work in progress.

[2547-MCAST] E. Rosen, R. Aggarwal, et. al., "Multicast in MPLS/BGP IP VPNs", [draft-ietf-l3vpn-2547bis-mcast](#), work in progress.

[VPLS-MCAST] R. Aggarwal, Y. Kamite, L. Fang, VPLS Multicast [draft-ietf-l2vpn-vpls-mcast](#), work in progress.

[P2MP-OAM-REQ] S. Yasukawa, A. Farrel, D. King, T. Nadeau, "OAM Requirements for Point-To-Multipoint MPLS Networks", [draft-ietf-mpls-p2mp-oam-reqs](#), work in progress.

[P2MP-TE-REQ] S. Yasukawa, et. al., "Requirements for Point-to-Multipoint capability extension to MPLS", [RFC4461](#), April 2006.

[P2MP-TE-RSVP] R. Aggarwal, D. Papadimitriou, S. Yasukawa, et. al., "Extensions to RSVP-TE for Point to Multipoint TE LSPs", [draft-ietf-mpls-rsvp-te-p2mp](#), work in progress.

11. Editor Address

Jean-Louis Le Roux
France Telecom
2, avenue Pierre-Marzin
22307 Lannion Cedex
FRANCE
Email: jeanlouis.leroux@orange-ft.com

12. Contributors Addresses

Thomas Morin
France Telecom
2, avenue Pierre-Marzin
22307 Lannion Cedex
FRANCE
Email: thomas.morin@orange-ft.com

Vincent Parfait
EQUANT
1041 Route des Dolines
Sophia Antipolis
06560 Valbonne
FRANCE
Email: vincent.parfait@orange-ft.com

Luyuan Fang
AT&T
200 Laurel Avenue
Middletown, NJ 07748
USA
Email: luyuanfang@att.com

Lei Wang
Telenor
Snaroyveien 30
Fornebu 1331
NORWAY
Email: lei.wang@telenor.com

Yuji Kamite
NTT Communications Corporation
Tokyo Opera City Tower
3-20-2 Nishi Shinjuku, Shinjuku-ku,
Tokyo 163-1421,
JAPAN
Email: y.kamite@ntt.com

Shane Amante
Level 3 Communications, LLC
1025 Eldorado Blvd
Broomfield, CO 80021
USA
Email: shane@level3.net

13. Intellectual Property Statement

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at ietf-ipr@ietf.org.

Disclaimer of Validity

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Copyright Statement

Copyright (C) The Internet Society (2006). This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

