

Network Working Group  
Internet-Draft  
Intended Status: Standards Track  
Updates: [4379](#) (if approved)  
Created: October 08, 2010  
Expires: April 08, 2010

S. Saxena, Ed.  
Cisco Systems, Inc.  
A. Farrel  
Old Dog Consulting  
S. Yasukawa  
NTT Corporation

Detecting Data Plane Failures in Point-to-Multipoint Multiprotocol  
Label Switching (MPLS) - Extensions to LSP Ping

[draft-ietf-mpls-p2mp-lsp-ping-11.txt](#)

Status of this Memo

This Internet-Draft is submitted to IETF in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/lid-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

Abstract

Recent proposals have extended the scope of Multiprotocol Label Switching (MPLS) Label Switched Paths (LSPs) to encompass point-to-multipoint (P2MP) LSPs.

The requirement for a simple and efficient mechanism that can be used to detect data plane failures in point-to-point (P2P) MPLS LSPs has been recognized and has led to the development of techniques for fault detection and isolation commonly referred to as "LSP Ping".

The scope of this document is fault detection and isolation for P2MP MPLS LSPs. This document does not replace any of the mechanisms of LSP Ping, but clarifies their applicability to MPLS P2MP LSPs, and extends the techniques and mechanisms of LSP Ping to the MPLS P2MP environment.



## Copyright Notice

Copyright (c) 2010 IETF Trust and the persons identified as the document authors. All rights reserved.

## Conventions used in this document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

## Contents

<a href="#">1. Introduction.....</a>	<a href="#">5</a>
<a href="#">1.1. Design Considerations.....</a>	<a href="#">6</a>
<a href="#">2. Notes on Motivation.....</a>	<a href="#">6</a>
<a href="#">2.1. Basic Motivations for LSP Ping.....</a>	<a href="#">7</a>
<a href="#">2.2. Motivations for LSP Ping for P2MP LSPs.....</a>	<a href="#">7</a>
<a href="#">3. Packet Format.....</a>	<a href="#">9</a>
<a href="#">3.1. Identifying the LSP Under Test.....</a>	<a href="#">9</a>
<a href="#">3.1.1. Identifying a P2MP MPLS TE LSP.....</a>	<a href="#">9</a>
<a href="#">3.1.1.1. RSVP P2MP IPv4 Session Sub-TLV.....</a>	<a href="#">10</a>
<a href="#">3.1.1.2. RSVP P2MP IPv6 Session Sub-TLV.....</a>	<a href="#">10</a>
<a href="#">3.1.2. Identifying a Multicast LDP LSP.....</a>	<a href="#">11</a>
<a href="#">3.1.2.1. Multicast LDP FEC Stack Sub-TLVs.....</a>	<a href="#">11</a>
<a href="#">3.1.2.2. Applicability to Multipoint-to-Multipoint LSPs.....</a>	<a href="#">13</a>
<a href="#">3.2. Limiting the Scope of Responses.....</a>	<a href="#">13</a>
<a href="#">3.2.1. Egress Address P2MP Responder Identifier Sub-TLVs.....</a>	<a href="#">14</a>
<a href="#">3.2.2. Node Address P2MP Responder Identifier Sub-TLVs.....</a>	<a href="#">14</a>
<a href="#">3.3. Preventing Congestion of Echo Responses.....</a>	<a href="#">14</a>
<a href="#">3.4. Respond Only If TTL Expired Flag.....</a>	<a href="#">15</a>
<a href="#">3.5. Downstream Detailed Mapping TLV.....</a>	<a href="#">16</a>
<a href="#">4. Operation of LSP Ping for a P2MP LSP.....</a>	<a href="#">16</a>
<a href="#">4.1. Initiating Router Operations.....</a>	<a href="#">16</a>
<a href="#">4.1.1. Limiting Responses to Echo Requests.....</a>	<a href="#">17</a>
<a href="#">4.1.2. Jittered Responses to Echo Requests.....</a>	<a href="#">17</a>
<a href="#">4.2. Responding Router Operations.....</a>	<a href="#">18</a>
<a href="#">4.2.1. Echo Response Reporting.....</a>	<a href="#">19</a>
<a href="#">4.2.1.1. Responses from Transit and Branch nodes.....</a>	<a href="#">19</a>
<a href="#">4.2.1.2. Responses from Egress Nodes.....</a>	<a href="#">20</a>
<a href="#">4.2.1.3. Responses from Bud Nodes.....</a>	<a href="#">20</a>
<a href="#">4.3. Special Considerations for Traceroute.....</a>	<a href="#">22</a>
<a href="#">4.3.1. End of Processing for Traceroutes.....</a>	<a href="#">22</a>
<a href="#">4.3.2. Multiple responses from Bud and Egress Nodes.....</a>	<a href="#">23</a>
<a href="#">4.3.3. Non-Response to Traceroute Echo Requests.....</a>	<a href="#">23</a>
<a href="#">4.3.4. Use of Downstream Detailed Mapping TLV in Echo Request.....</a>	<a href="#">23</a>
<a href="#">4.3.5. Cross Over Node Processing.....</a>	<a href="#">24</a>
<a href="#">5. Non-compliant Routers.....</a>	<a href="#">24</a>
<a href="#">6. OAM Considerations.....</a>	<a href="#">25</a>



<a href="#">7.</a>	<a href="#">IANA Considerations.....</a>	<a href="#">25</a>
<a href="#">7.1.</a>	<a href="#">New Sub-TLV Types.....</a>	<a href="#">25</a>
<a href="#">7.2.</a>	<a href="#">New TLVs.....</a>	<a href="#">26</a>
<a href="#">8.</a>	<a href="#">Security Considerations.....</a>	<a href="#">26</a>
<a href="#">9.</a>	<a href="#">Acknowledgements.....</a>	<a href="#">26</a>
<a href="#">10.</a>	<a href="#">References.....</a>	<a href="#">26</a>
<a href="#">10.1.</a>	<a href="#">Normative References.....</a>	<a href="#">27</a>
<a href="#">10.2.</a>	<a href="#">Informative References.....</a>	<a href="#">27</a>
<a href="#">11.</a>	<a href="#">Authors' Addresses.....</a>	<a href="#">28</a>
<a href="#">12.</a>	<a href="#">Full Copyright Statement.....</a>	<a href="#">28</a>

## **[0.](#) Change Log**

This section to be removed before publication as an RFC.

### **[0.1](#) Changes from 00 to 01**

- Update references.
- Fix boilerplate.

### **[0.2](#) Changes from 01 to 02**

- Update entire document so that it is not specific to MPLS-TE, but also includes multicast LDP LSPs.
- Move the egress identifier sub-TLVs from the FEC Stack TLV to a new egress identifier TLV.
- Include Multicast LDP FEC Stack sub-TLV definition from [MCAST-CV].
- Add brief section on use of LSP Ping for bootstrapping.
- Add new references to References section.
- Add details of two new authors.

### **[0.3](#) Changes from 02 to 03**

- Update references.
- Update boilerplate.
- Fix typos.
- Clarify in 3.2.2 that a recipient of an echo request must reply only once it has applied incoming rate limiting.
- Tidy references to bootstrapping for [MCAST-CV] in 1.1.
- Allow multiple sub-TLVs in the P2MP Egress Identifier TLV in sections [3.2.1](#), [3.2.2](#), [3.2.4](#), [3.3.1](#), and [3.3.4](#).
- Clarify how to handle a P2MP Egress Identifier TLV with no sub-TLVs in sections [3.2.1](#) and [3.2.2](#).

### **[0.4](#) Changes from 03 to 04**

- Revert to previous text in sections [3.2.1](#), [3.2.2](#), [3.2.4](#), [3.3.1](#), and 3.3.4 with respect to multiple sub-TLVs in the P2MP Egress



Identifier TLV.

## **[0.5](#) Changes from 04 to 05**

- Change coordinates for Tom Nadeau. [Section 13](#).
- Fix typos.
- Update references.
- Resolve all acronym expansions.

## **[0.6](#) Changes from 05 to 06**

- New section, 3.2.6, to explain echo response reporting in the Ping case.
- New section, 3.3.7, to explain echo response reporting in the Traceroute case.
- Sections [3.3.2](#), [3.3.5](#), and [5](#). Retire the E-flag for identification of bud nodes. Use the B-flag in a Downstream Mapping TLV with a zero address to provide the necessary indication.
- [Section 3.3.4](#). Note the use of ALLROUTERS address as per [RFC 4379](#)
- [Section 7](#). Suggest values for IANA assignment.
- Rename "P2MP Responder Identifier TLV" to "P2MP Responder Identifier TLV", "Egress Identifier sub-TLV" to "Responder Identifier sub-TLV", and "P2MP egresses" multipath type to "P2MP responder". This allows any LSR on the P2MP LSP to be the target of, or responder to, an echo request.

## **[0.7](#) Changes from 06 to 07**

- Sections [3.3.2](#) and [3.3.3](#). Delete [section 3.3.5](#). New sections 3.3.2.1 through 3.3.2.3: Retire B-flag from Downstream Mapping TLV. Introduce new Node Properties TLV with Branching Properties and Egress Address sub-TLVs.
- [Section 3.3.2.4](#): Clarify rules on presence of Multipath Information in Downstream Mapping TLVs.
- [Section 3.3.5](#): Clarify padding rules.
- [Section 3.3.6](#): Updated to use Downstream Detailed Mapping TLVs for multiple return conditions reported by a single echo response.
- [Section 7](#): Update IANA values and add new sub-sections.
- [Section 11](#): Add reference [draft-ietf-mpls-lsp-ping-enhanced-dsmap](#).
- [Section 13](#): Update Bill Fenner's coordinates.

## **[0.8](#) Changes from 07 to 08**

- Removed the Node Properties TLV ([Section 3.3.2.1](#) of version 07).
- Removed the New Multipath Type from Multipath Sub-TLV ([Section 3.3.5](#) of version 07).
- Removed the Return Code Sub-TLV from Downstream Detailed TLV ([Section 3.3.6.1](#) of version 07), as it is already included in [draft-ietf-mpls-lsp-ping-enhanced-dsmap-02](#).





- Clarified the behavior of Responder Identifier TLV ([Section 3.2.4](#) of version 07). Two new Sub-TLVs are introduced.
- Downstream Detailed Mapping TLV is now mandatory for implementing P2MP OAM functionality.
- Split Multicast LDP TLV into two TLVs, one for P2MP and other for MP2MP. Also added description to allow MP2MP ping by using this draft.
- Removed [Section 4](#). as it was a duplicate of [Section 2.3](#).

#### **[0.9](#) Changes from 08 to 09**

- Reformatted the document to follow the [RFC4379](#) style. After the Motivations section is the Packet Format section, followed by the Operations section. The sections on Ping and Traceroute have been merged.
- Added a Respond if TTL Expired Flag.
- Removed reference to [MCAST-CV].

#### **[0.10](#) Changes from 09 to 10**

- Removed references to bootstrapping other OAM protocols. This draft does not provide any details of such methods. Hence it is cleaner to remove such references.
- Minor edits based on comments.

#### **[0.11](#) Changes from 10 to 11**

- Updated behavior of T bit when no label is present.
- Clarified that Egress Address TLV is not applicable to tracing in Multicast LDP trees.
- Changed expected processing at bud nodes upon receipt of Node Address Responder Identifier TLV from egress node only to combination of egress and branch node.
- Added details on how Downstream Detailed Mapping TLV should be filled for cross-over node scenario.
- Various edits based on comments.

## **[1](#). Introduction**

Simple and efficient mechanisms that can be used to detect data plane failures in point-to-point (P2P) Multiprotocol Label Switching (MPLS) Label Switched Paths (LSP) are described in [[RFC4379](#)]. The techniques involve information carried in MPLS "Echo Request" and "Echo Reply" messages, and mechanisms for transporting them. The echo request and reply messages provide sufficient information to check correct operation of the data plane, as well as a mechanism to verify the data plane against the control plane, and thereby localize faults. The use of reliable channels for echo reply messages as described in [[RFC4379](#)] enables more robust fault isolation. This collection of mechanisms is commonly referred to as "LSP Ping".



The requirements for point-to-multipoint (P2MP) MPLS traffic engineered (TE) LSPs are stated in [[RFC4461](#)]. [[RFC4875](#)] specifies a signaling solution for establishing P2MP MPLS TE LSPs.

The requirements for point-to-multipoint extensions to the Label Distribution Protocol (LDP) are stated in [[P2MP-LDP-REQ](#)]. [[P2MP-LDP](#)] specifies extensions to LDP for P2MP MPLS.

P2MP MPLS LSPs are at least as vulnerable to data plane faults or to discrepancies between the control and data planes as their P2P counterparts. Therefore, mechanisms are needed to detect such data plane faults in P2MP MPLS LSPs as described in [[RFC4687](#)].

This document extends the techniques described in [[RFC4379](#)] such that they may be applied to P2MP MPLS LSPs. This document stresses the reuse of existing LSP Ping mechanisms used for P2P LSPs, and applies them to P2MP MPLS LSPs in order to simplify implementation and network operation.

### **1.1. Design Considerations**

An important consideration for designing LSP Ping for P2MP MPLS LSPs is that every attempt is made to use or extend existing mechanisms rather than invent new mechanisms.

As for P2P LSPs, a critical requirement is that the echo request messages follow the same data path that normal MPLS packets traverse. However, it can be seen this notion needs to be extended for P2MP MPLS LSPs, as in this case an MPLS packet is replicated so that it arrives at each egress (or leaf) of the P2MP tree.

MPLS echo requests are meant primarily to validate the data plane, and they can then be used to validate data plane state against the control plane. They may also be used to bootstrap other OAM procedures such as [[MPLS-BFD](#)]. As pointed out in [[RFC4379](#)], mechanisms to check the liveness, function, and consistency of the control plane are valuable, but such mechanisms are not a feature of LSP Ping and are not covered in this document.

As is described in [[RFC4379](#)], to avoid potential Denial of Service attacks, it is RECOMMENDED to regulate the LSP Ping traffic passed to the control plane. A rate limiter should be applied to the well-known UDP port defined for use by LSP Ping traffic.

## **2. Notes on Motivation**



## **2.1. Basic Motivations for LSP Ping**

The motivations listed in [[RFC4379](#)] are reproduced here for completeness.

When an LSP fails to deliver user traffic, the failure cannot always be detected by the MPLS control plane. There is a need to provide a tool that enables users to detect such traffic "black holes" or misrouting within a reasonable period of time. A mechanism to isolate faults is also required.

[[RFC4379](#)] describes a mechanism that accomplishes these goals. This mechanism is modeled after the ping/traceroute paradigm: ping (ICMP echo request [[RFC792](#)]) is used for connectivity checks, and traceroute is used for hop-by-hop fault localization as well as path tracing. [[RFC4379](#)] specifies a "ping mode" and a "traceroute" mode for testing MPLS LSPs.

The basic idea as expressed in [[RFC4379](#)] is to test that the packets that belong to a particular Forwarding Equivalence Class (FEC) actually end their MPLS path on an LSR that is an egress for that FEC. [[RFC4379](#)] achieves this test by sending a packet (called an "MPLS echo request") along the same data path as other packets belonging to this FEC. An MPLS echo request also carries information about the FEC whose MPLS path is being verified. This echo request is forwarded just like any other packet belonging to that FEC. In "ping" mode (basic connectivity check), the packet should reach the end of the path, at which point it is sent to the control plane of the egress LSR, which then verifies that it is indeed an egress for the FEC. In "traceroute" mode (fault isolation), the packet is sent to the control plane of each transit LSR, which performs various checks that it is indeed a transit LSR for this path; this LSR also returns further information that helps to check the control plane against the data plane, i.e., that forwarding matches what the routing protocols determined as the path.

One way these tools can be used is to periodically ping a FEC to ensure connectivity. If the ping fails, one can then initiate a traceroute to determine where the fault lies. One can also periodically traceroute FECs to verify that forwarding matches the control plane; however, this places a greater burden on transit LSRs and should be used with caution.

## **2.2. Motivations for LSP Ping for P2MP LSPs**

As stated in [[RFC4687](#)], MPLS has been extended to encompass P2MP LSPs. As with P2P MPLS LSPs, the requirement to detect, handle, and diagnose control and data plane defects is critical. For operators



deploying services based on P2MP MPLS LSPs, the detection and specification of how to handle those defects is important because such defects may affect the fundamentals of an MPLS network, but also because they may impact service level specification commitments for customers of their network.

P2MP LDP [[P2MP-LDP](#)] uses the Label Distribution Protocol to establish multicast LSPs. These LSPs distribute data from a single source to one or more destinations across the network according to the next hops indicated by the routing protocols. Each LSP is identified by an MPLS multicast FEC.

P2MP MPLS TE LSPs [[RFC4875](#)] may be viewed as MPLS tunnels with a single ingress and multiple egresses. The tunnels, built on P2MP LSPs, are explicitly routed through the network. There is no concept or applicability of a FEC in the context of a P2MP MPLS TE LSP.

MPLS packets inserted at the ingress of a P2MP LSP are delivered equally (barring faults) to all egresses. In consequence, the basic idea of LSP Ping for P2MP MPLS TE LSPs may be expressed as an intention to test that packets that enter (at the ingress) a particular P2MP LSP actually end their MPLS path on the LSRs that are the (intended) egresses for that LSP. The idea may be extended to check selectively that such packets reach specific egresses.

The technique in this document makes this test by sending an LSP Ping echo request message along the same data path as the MPLS packets. An echo request also carries the identification of the P2MP MPLS LSP (multicast LSP or P2MP TE LSP) that it is testing. The echo request is forwarded just as any other packet using that LSP, and so is replicated at branch points of the LSP and should be delivered to all egresses.

In "ping" mode (basic connectivity check), the echo request should reach the end of the path, at which point it is sent to the control plane of the egress LSRs, which verify that they are indeed an egress (leaf) of the P2MP LSP. An echo response message is sent by an egress to the ingress to confirm the successful receipt (or announce the erroneous arrival) of the echo request.

In "traceroute" mode (fault isolation), the echo request is sent to the control plane at each transit LSR, and the control plane checks that it is indeed a transit LSR for this P2MP MPLS LSP. The transit LSR returns information about the outgoing paths. This information can be used by ingress LSR to build topology or by downstream LSRs to do extra label verification.

P2MP MPLS LSPs may have many egresses, and it is not necessarily the intention of the initiator of the ping or traceroute operation to





collect information about the connectivity or path to all egresses. Indeed, in the event of pinging all egresses of a large P2MP MPLS LSP, it might be expected that a large number of echo responses would arrive at the ingress independently but at approximately the same time. Under some circumstances this might cause congestion at or around the ingress LSR. The procedures described in this document provide two mechanisms to control echo responses.

The first procedure allows the responders to randomly delay (or jitter) their responses so that the chances of swamping the ingress are reduced. The second procedure allows the initiator to limit the scope of an LSP Ping echo request (ping or traceroute mode) to one specific intended egress.

LSP Ping can be used to periodically ping a P2MP MPLS LSP to ensure connectivity to any or all of the egresses. If the ping fails, the operator or an automated process can then initiate a traceroute to determine where the fault is located within the network. A traceroute may also be used periodically to verify that data plane forwarding matches the control plane state; however, this places an increased burden on transit LSRs and should be used infrequently and with caution.

### **3. Packet Format**

The basic structure of the LSP Ping packet remains the same as described in [\[RFC4379\]](#). Some new TLVs and sub-TLVs are required to support the new functionality. They are described in the following sections.

#### **[3.1. Identifying the LSP Under Test](#)**

##### **[3.1.1. Identifying a P2MP MPLS TE LSP](#)**

[\[RFC4379\]](#) defines how an MPLS TE LSP under test may be identified in an echo request. A Target FEC Stack TLV is used to carry either an RSVP IPv4 Session or an RSVP IPv6 Session sub-TLV.

In order to identify the P2MP MPLS TE LSP under test, the echo request message MUST carry a Target FEC Stack TLV, and this MUST carry exactly one of two new sub-TLVs: either an RSVP P2MP IPv4 Session sub-TLV or an RSVP P2MP IPv6 Session sub-TLV. These sub-TLVs carry fields from the RSVP-TE P2MP Session and Sender-Template objects [\[RFC4875\]](#) and so provide sufficient information to uniquely identify the LSP.




The new sub-TLVs are assigned sub-type identifiers as follows, and are described in the following sections.

Sub-Type #	Length	Value Field
-----	-----	-----
TBD	20	RSVP P2MP IPv4 Session
TBD	56	RSVP P2MP IPv6 Session

#### **3.1.1.1. RSVP P2MP IPv4 Session Sub-TLV**


The format of the RSVP P2MP IPv4 Session sub-TLV value field is specified in the following figure. The value fields are taken from the definitions of the P2MP IPv4 LSP Session Object and the P2MP IPv4 Sender-Template Object in [[RFC4875](https://datatracker.ietf.org/doc/rfc4875)]. Note that the Sub-Group ID of the Sender-Template is not required.

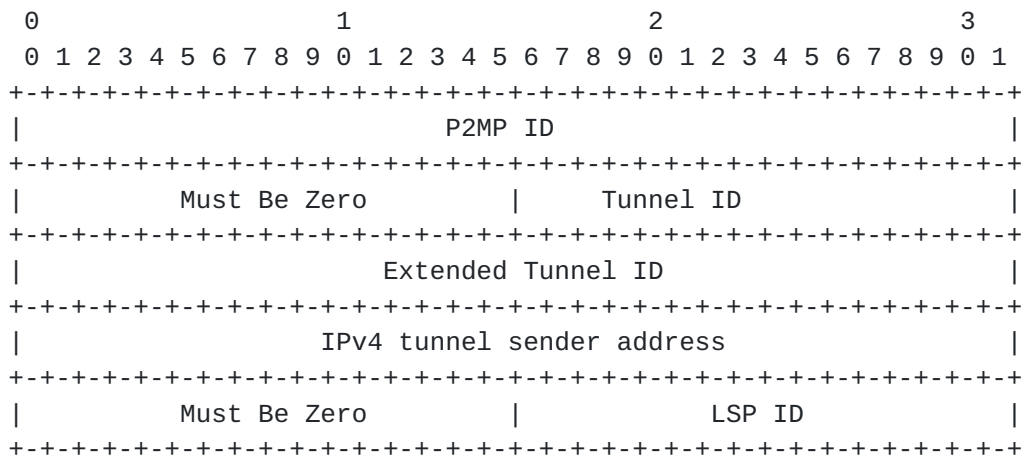

#### **3.1.1.2. RSVP P2MP IPv6 Session Sub-TLV**

The format of the RSVP P2MP IPv6 Session sub-TLV value field is specified in the following figure. The value fields are taken from the definitions of the P2MP IPv6 LSP Session Object, and the P2MP IPv6 Sender-Template Object in [[RFC4875](https://datatracker.ietf.org/doc/rfc4875)]. Note that the Sub-Group ID of the Sender-Template is not required.



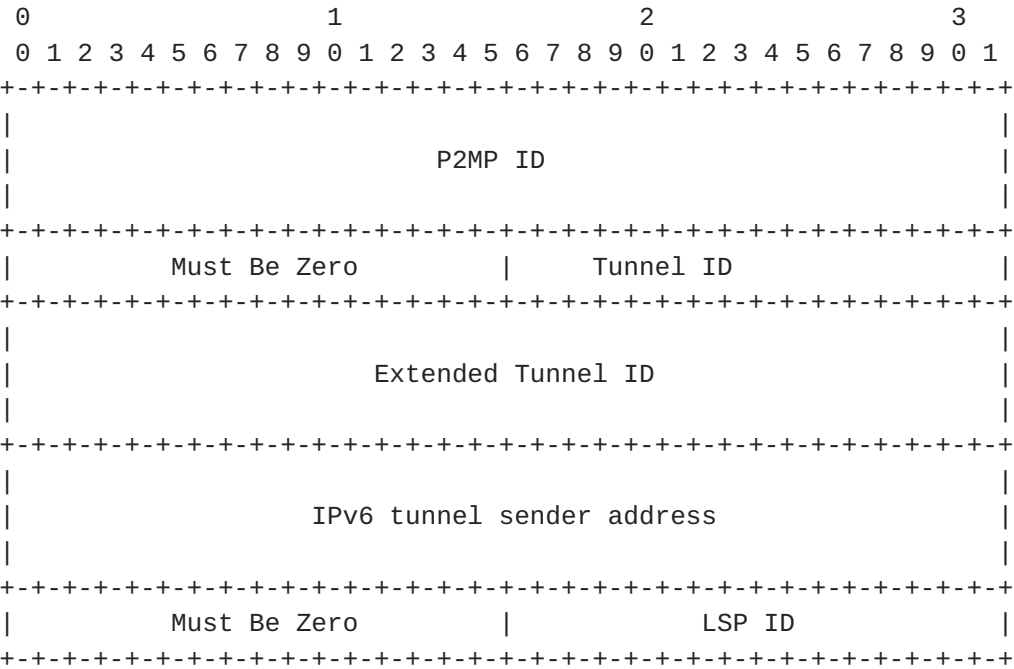

**3.1.2. Identifying a Multicast LDP LSP**

[RFC4379] defines how a P2P LDP LSP under test may be identified in an echo request. A Target FEC Stack TLV is used to carry one or more sub-TLVs (for example, an IPv4 Prefix FEC sub-TLV) that identify the LSP.

In order to identify a multicast LDP LSP under test, the echo request message MUST carry a Target FEC Stack TLV, and this MUST carry exactly one of two new sub-TLVs: either a Multicast P2MP LDP FEC Stack sub-TLV or a Multicast MP2MP LDP FEC Stack sub-TLV. These sub-TLVs use fields from the multicast LDP messages [[P2MP-LDP](#)] and so provides sufficient information to uniquely identify the LSP.


The new sub-TLVs are assigned a sub-type identifiers as follows, and are described in the following section.

Sub-Type #	Length	Value Field
-----	-----	-----
TBD	Variable	Multicast P2MP LDP FEC Stack
TBD	Variable	Multicast MP2MP LDP FEC Stack

**3.1.2.1. Multicast LDP FEC Stack Sub-TLVs**

Both Multicast P2MP and MP2MP LDP FEC Stack have the same format, as specified in the following figure.



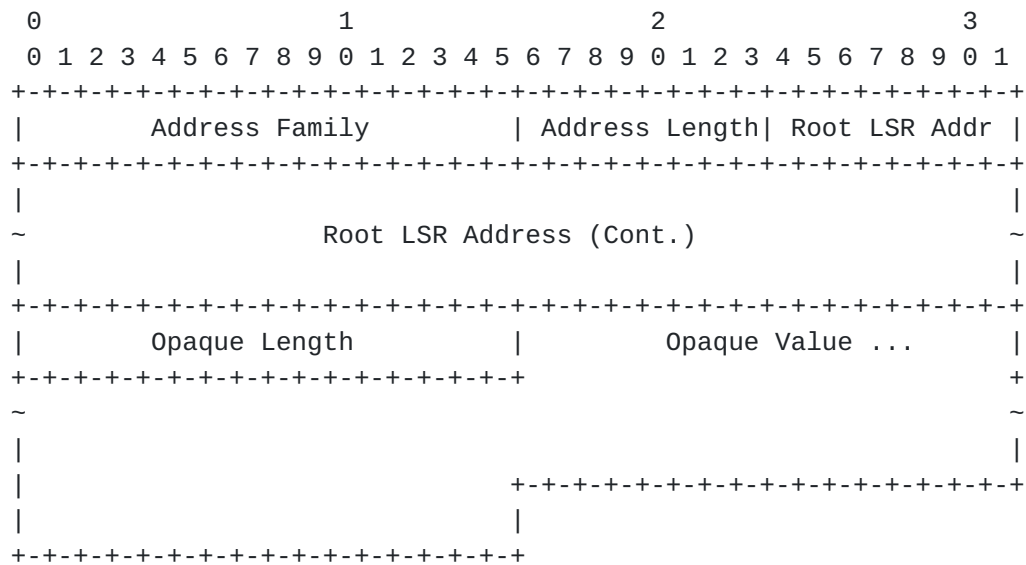

#### Address Family

Two octet quantity containing a value from ADDRESS FAMILY NUMBERS in [[IANA-PORT](https://datatracker.ietf.org/doc/rfc2139)] that encodes the address family for the Root LSR Address.

#### Address Length

Length of the Root LSR Address in octets.

#### Root LSR Address

Address of the LSR at the root of the P2MP LSP encoded according to the Address Family field.

#### Opaque Length

The length of the Opaque Value, in octets. Depending on length of the Root LSR Address, this field may not be aligned to a word boundary.

#### Opaque Value

An opaque value element which uniquely identifies the P2MP LSP in the context of the Root LSR.

If the Address Family is IPv4, the Address Length MUST be 4. If the Address Family is IPv6, the Address Length MUST be 16. No other Address Family values are defined at present.





### 3.1.2.2. Applicability to Multipoint-to-Multipoint LSPs

The mechanisms defined in this document can be extended to include Multipoint-to-Multipoint (MP2MP) Multicast LSPs. In an MP2MP LSP tree, any leaf node can be treated like a head node of a P2MP tree. In other words, for MPLS OAM purposes, the MP2MP tree can be treated like a collection of P2MP trees, with each MP2MP leaf node acting like a P2MP head-end node. When a leaf node is acting like a P2MP head-end node, the remaining leaf nodes act like egress or bud nodes.

### 3.2. Limiting the Scope of Responses

A new TLV is defined for inclusion in the Echo request message.

The P2MP Responder Identifier TLV is assigned the TLV type value TBD and is encoded as follows.

```

      0               1               2               3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|Type=TBD(P2MP Responder ID TLV)|      Length = Variable      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
~                               Sub-TLVs                               ~
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Sub-TLVs:

Zero, one or more sub-TLVs as defined below.

If no sub-TLVs are present, the TLV MUST be processed as if it were absent. If more than one sub-TLV is present the first MUST be processed as described in this document, and subsequent sub-TLVs SHOULD be ignored.

The P2MP Responder Identifier TLV only has meaning on an echo request message. If present on an echo response message, it SHOULD be ignored.

Four sub-TLVs are defined for inclusion in the P2MP Responder Identifier TLV carried on the echo request message. These are:

Sub-Type #	Length	Value Field
-----	-----	-----
1	4	IPv4 Egress Address P2MP Responder Identifier
2	16	IPv6 Egress Address P2MP Responder Identifier
3	4	IPv4 Node Address P2MP Responder Identifier
4	16	IPv6 Node Address P2MP Responder Identifier



The content of these Sub-TLVs are defined in the following sections. Also defined is the intended behavior of the responding node upon receiving any of these Sub-TLVs.

#### **3.2.1. Egress Address P2MP Responder Identifier Sub-TLVs**

The IPv4 or IPv6 Egress Address P2MP Responder Identifier Sub-TLVs MAY be used in an echo request carrying RSVP P2MP Session Sub-TLV. They SHOULD NOT be used with an echo request carrying Multicast LDP FEC Stack Sub-TLV. If a node receives these TLVs in an echo request carrying Multicast LDP then it SHOULD ignore these sub-TLVs and respond as if they are not present. Hence these TLVs cannot be used to traceroute to a single node when Multicast LDP FEC is used.

A node that receives an echo request with this Sub-TLV present MUST respond only if the node lies on the path to the address in the Sub-TLV.

The address in this Sub-TLV SHOULD be of an egress or bud node and SHOULD NOT be of a transit or branch node. A transit or branch node, should be able to determine if the address in this Sub-TLV is for an egress or bud node which is reachable through it. Hence, this address SHOULD be known to the nodes upstream of the target node, for instance via control plane signaling. As a case in point, if RSVP-TE is used to signal the P2MP LSP, this address SHOULD be the address used in destination address field of the S2L\_SUB\_LSP object, when corresponding egress or bud node is signaled.

#### **3.2.2. Node Address P2MP Responder Identifier Sub-TLVs**

The IPv4 or IPv6 Node Address P2MP Responder Identifier Sub-TLVs MAY be used in an echo request carrying either RSVP P2MP Session or Multicast LDP FEC Stack Sub-TLV.

A node that receives an echo request with this Sub-TLV present MUST respond only if the address in the Sub-TLV corresponds to any address that is local to the node. This address in the Sub-TLV may be of any physical interface or may be the router id of the node itself.

The address in this Sub-TLV SHOULD be of any transit, branch, bud or egress node for that P2MP LSP.

### **3.3. Preventing Congestion of Echo Responses**

A new TLV is defined for inclusion in the Echo request message.



The Echo Jitter TLV is assigned the TLV type value TBD and is encoded as follows.

```

      0                   1                   2                   3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|           Type = TBD (Jitter TLV)           | Length = 4          |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                                           Jitter time                |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Jitter time:

This field specifies the upper bound of the jitter period that should be applied by a responding node to determine how long to wait before sending an echo response. A responding node SHOULD wait a random amount of time between zero milliseconds and the value specified in this field.

Jitter time is specified in milliseconds.

The Echo Jitter TLV only has meaning on an echo request message. If present on an echo response message, it SHOULD be ignored.

### 3.4. Respond Only If TTL Expired Flag

A new flag is being introduced in the Global Flags field. The new format of the Global Flags field is:

```

      0                   1
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|           MBZ                | T | V |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

The V flag is described in [\[RFC4379\]](#).

The T (Respond Only If TTL Expired) flag SHOULD be set only in the echo request packet by the sender. This flag SHOULD NOT be set in the echo reply packet. If this flag is set in an echo reply packet, then it MUST be ignored.

If the T flag is set to 1, then the reciever SHOULD reply only if the TTL of the incoming MPLS label is equal to 1; if the TTL is more than 1, then no response should be sent back. If there is no incoming MPLS label on the echo request packet, then this bit SHOULD be ignored.



If the T flag is set to 0, then the receiver SHOULD reply as per regular processing.

### **3.5. Downstream Detailed Mapping TLV**

Downstream Detailed Mapping TLV is described in [[DDMT](#)]. A transit, branch or bud node can use the Downstream Detailed Mapping TLV to return multiple Return Codes for different downstream paths. This functionality can not be achieved via the Downstream Mapping TLV. As per Section 4.3 of [[DDMT](#)], the Downstream Mapping TLV as described in [[RFC4379](#)] is being deprecated.

Therefore for P2MP, a node MUST support Downstream Detailed Mapping TLV. The Downstream Mapping TLV [[RFC4379](#)] is not appropriate for P2MP traceroute functionality and SHOULD NOT be included in an Echo Request message. When responding to an RSVP IPv4/IPv6 P2MP Session FEC Type or a Multicast P2MP/MP2MP LDP FEC Type, a node MUST ignore any Downstream Mapping TLV it receives in the echo request and MUST continue processing as if the Downstream Mapping TLV is not present.

The details of the Return Codes to be used in the Downstream Detailed Mapping TLV are provided in [section 4](#).

## **4. Operation of LSP Ping for a P2MP LSP**

This section describes how LSP Ping is applied to P2MP MPLS LSPs. As mentioned previously, an important design consideration has been to extend existing LSP Ping mechanism in [[RFC4379](#)] rather than invent new mechanisms.

As specified in [[RFC4379](#)], MPLS LSPs can be tested via a "ping" mode or a "traceroute" mode. The ping mode is also known as "connectivity verification" and traceroute mode is also known as "fault isolation". Further details can be obtained from [[RFC4379](#)].

This section specifies processing of echo requests for both ping and traceroute mode at various nodes (ingress, transit, etc.) of the P2MP LSP.

### **4.1. Initiating Router Operations**

The router initiating the echo request will follow the procedures in [[RFC4379](#)]. The echo request will contain a Target FEC Stack TLV. To identify the P2MP LSP under test, this TLV will contain one of the new sub-TLVs defined in [section 3.1](#). Additionally there may be other





optional TLVs present.

#### **4.1.1. Limiting Responses to Echo Requests**

As described in [Section 2.2](#), it may be desirable to restrict the operation of P2MP ping or traceroute to a single egress. Since echo requests are forwarded through the data plane without interception by the control plane, there is no facility to limit the propagation of echo requests, and they will automatically be forwarded to all reachable egresses.

However, a single egress may be identified by the inclusion of a P2MP Responder Identifier TLV. The details of this TLV and its Sub-TLVs are in [section 3.2](#). There are two main types of sub-TLV in the P2MP Responder Identifier TLV: Egress Address sub-TLV and Node Address sub-TLV.

These sub-TLVs limit the responses either to the specified router only or to any router on the path to the specified router. The former capability is generally useful for ping mode, while the latter is more suited to traceroute mode. An initiating router may indicate that it wishes all egresses to respond to an echo request by omitting the P2MP Responder Identifier TLV.

#### **4.1.2. Jittered Responses to Echo Requests**

The initiating router MAY request the responding routers to introduce a random delay (or jitter) before sending the response. The randomness of the delay allows the responses from multiple egresses to be spread over a time period. Thus this technique is particularly relevant when the entire P2MP LSP is being pinged or traced since it helps prevent the initiating (or nearby) routers from being swamped by responses, or from discarding responses due to rate limits that have been applied.

It is desirable for the initiating router to be able to control the bounds of the jitter. If the tree size is small, only a small amount of jitter is required, but if the tree is large, greater jitter is needed.

The initiating router can supply the desired value of the jitter in the Echo Jitter TLV as defined [section 3.3](#). If this TLV is present, the responding router MUST delay sending a response for a random amount of time between zero milliseconds and the value indicated in the TLV. If the TLV is absent, the responding egress SHOULD NOT introduce any additional delay in responding to the echo request.



LSP ping SHOULD NOT be used to attempt to measure the round-trip time for data delivery. This is because the P2MP LSPs are unidirectional, and the echo response is often sent back through the control plane. The timestamp fields in the echo request and echo response packets MAY be used to deduce some information about delivery times and particularly the variance in delivery times.

The use of echo jittering does not change the processes for gaining information, but note that the responding node MUST set the value in the Timestamp Received fields before applying any delay.

Echo response jittering SHOULD be used for P2MP LSPs. If the Echo Jitter TLV is present in an echo request for any other type of LSPs, the responding egress MAY apply the jitter behavior as described here.

#### **4.2. Responding Router Operations**

Usually the echo request packet will reach the egress and bud nodes. In case of TTL Expiry, i.e. traceroute mode, the echo request packet may stop at branch or transit nodes. In both scenarios, the echo request will be passed on to control plane for reply processing.

The operations at the receiving node are an extension to the existing processing as specified in [[RFC4379](#)]. A responding router is RECOMMENDED to rate limit its receipt of echo request messages. After rate limiting, the responding router must verify general sanity of the packet. If the packet is malformed, or certain TLVs are not understood, the [[RFC4379](#)] procedures must be followed for echo reply. Similarly the Reply Mode field determines if the response is required or not (and the mechanism to send it back).

For P2MP LSP ping and traceroute, i.e. if the echo request is carrying an RSVP P2MP FEC or a Multicast LDP FEC, the responding router MUST determine whether it is part of the P2MP LSP in question by checking with the control plane.

- If the node is not part of the P2MP LSP, it MUST respond according to [[RFC4379](#)] processing rules.
- If the node is part of the P2MP LSP, the node must check whether the echo request is directed to it or not.
  - If a P2MP Responder Identifier TLV is present, then the node must follow the procedures defined in [section 3.2](#) to determine whether it should respond to the request or not. The presence of a P2MP Responder Identifier TLV or a Downstream Detailed Mapping TLV might affect the Return Code.



This is discussed in more detail later.

- If the P2MP Responder Identifier TLV is not present (or, in the error case, is present, but does not contain any sub-TLVs), then the node MUST respond according to [[RFC4379](#)] processing rules.

#### **4.2.1. Echo Response Reporting**

Echo response messages carry return codes and subcodes to indicate the result of the LSP Ping (when the ping mode is being used) as described in [[RFC4379](#)].

When the responding node reports that it is an egress, it is clear that the echo response applies only to the reporting node. Similarly, when a node reports that it does not form part of the LSP described by the FEC (i.e. there is a misconnection) then the echo response applies to the reporting node.

However, it should be noted that an echo response message that reports an error from a transit node may apply to multiple egress nodes (i.e. leaves) downstream of the reporting node. In the case of the ping mode of operation, it is not possible to correlate the reporting node to the affected egresses unless the topology of the P2MP tree is already known, and it may be necessary to use the traceroute mode of operation to further diagnose the LSP.

Note also that a transit node may discover an error but also determine that while it does lie on the path of the LSP under test, it does not lie on the path to the specific egress being tested. In this case, the node SHOULD NOT generate an echo response.

The following sections describe the expected values of Return Codes for various nodes in a P2MP LSP. It is assumed that the sanity and other checks have been performed and an echo response is being sent back. As mentioned previously, the Return Code might change based on the presence of Responder Identifier TLV or Downstream Detailed Mapping TLV.

##### **4.2.1.1. Responses from Transit and Branch nodes**

The presence of a Responder Identifier TLV does not influence the choice of the Return Code, which MAY be set to value 8 ('Label switched at stack-depth <RSC>') or any other error value as needed.

The presence of a Downstream Detailed Mapping TLV will influence the choice of Return Code. As per [[DDMT](#)], the Return Code in the echo



response header MAY be set to value TBD ('See DDM TLV for Return Code and Return SubCode') as defined in [DDMT]. The Return Code for each Downstream Detailed Mapping TLV will depend on the downstream path as described in [DDMT].

There will be a Downstream Detailed Mapping TLV for each downstream path being reported in the echo response. Hence for transit nodes, there will be only one such TLV and for branch nodes, there will be more than one. If there is an Egress Address Responder Identifier Sub-TLV, then the branch node will include only one Downstream Detailed Mapping TLV corresponding to the downstream path required to reach the address specified in the Egress Address Sub-TLV.

#### **4.2.1.2. Responses from Egress Nodes**

The presence of a Responder Identifier TLV does not influence the choice of the Return Code, which MAY be set to value 3 ('Replying router is an egress for the FEC at stack-depth <RSC>') or any other error value as needed.

The presence of the Downstream Detailed Mapping TLV does not influence the choice of Return Code. Egress nodes do not put in any Downstream Detailed Mapping TLV in the echo response.

#### **4.2.1.3. Responses from Bud Nodes**

The case of bud nodes is more complex than other types of nodes. The node might behave as either an egress node or a transit node or a combination of an egress and branch node. This behavior is determined by the presence of any Responder Identifier TLV and the type of sub-TLV in it. Similarly Downstream Detailed Mapping TLV can influence the Return Code values.

To determine the behavior of the bud node, use the following guidelines. The intent of these guidelines is to figure out if the echo request is meant for all nodes, or just this node, or for another node reachable through this node or for a different section of the tree. In the first case, the node will behave like a combination of egress and branch node; in the second case, the node will behave like pure egress node; in the third case, the node will behave like a transit node; and in the last case, no response will be sent back.

Node behavior guidelines:

- If the Responder Identifier TLV is not present, then the node will behave as a combination egress and branch node.





- If the Responder Identifier TLV containing a Node Address sub-TLV is present, and:
  - If the address specified in the sub-TLV matches to an address in the node, then the node will behave like a combination egress and branch node.
  - If the address specified in the sub-TLV does not match any address in the node, then no response will be sent.
- If the Responder Identifier TLV containing an Egress Address sub-TLV is present, and:
  - If the address specified in the sub-TLV matches to an address in the node, then the node will behave like an egress node only.
  - If the node lies on the path to the address specified in the sub-TLV, then the node will behave like a transit node.
  - If the node does not lie on the path to the address specified in the sub-TLV, then no response will be sent.

Once the node behavior has been determined, the possible values for Return Codes are as follows:

- If the node is behaving as an egress node only, then the Return Code MAY be set to value 3 ('Replying router is an egress for the FEC at stack-depth <RSC>') or any other error value as needed. The echo response MUST NOT contain any Downstream Detailed Mapping TLV, even if one is present in the echo request.
- If the node is behaving as a transit node, and:
  - If a Downstream Detailed Mapping TLV is not present, then the Return Code MAY be set to value 8 ('Label switched at stack-depth <RSC>') or any other error value as needed.
  - If a Downstream Detailed Mapping TLV is present, then the Return Code MAY be set to value TBD ('See DDM TLV for Return Code and Return SubCode') as defined in [[DDMT](#)]. The Return Code for the Downstream Detailed Mapping TLV will depend on the downstream path as described in [[DDMT](#)]. There will be only one Downstream Detailed Mapping corresponding to the downstream path to the address specified in the Egress Address Sub-TLV.



- If the node is behaving as a combination egress and branch node, and:
  - If a Downstream Detailed Mapping TLV is not present, then the Return Code MAY be set to value 3 ('Replying router is an egress for the FEC at stack-depth <RSC>') or any other error value as needed.
  - If a Downstream Detailed Mapping TLV is present, then the Return Code MAY be set to value 3 ('Replying router is an egress for the FEC at stack-depth <RSC>') or any other error value as needed. Return Code for the each Downstream Detailed Mapping TLV will depend on the downstream path as described in [\[DDMT\]](#). There will be a Downstream Detailed Mapping for each downstream path from the node.

### **[4.3.](#) Special Considerations for Traceroute**

#### **[4.3.1.](#) End of Processing for Traceroutes**

As specified in [\[RFC4379\]](#), the traceroute mode operates by sending a series of echo requests with sequentially increasing TTL values. For regular P2P targets, this processing stops when a valid response is received from the intended egress or when some errored return code is received.

For P2MP targets, there may not be an easy way to figure out the end of the traceroute processing, as there are multiple egress nodes. Receiving a valid response from an egress will not signal the end of processing.

In P2MP TE LSP, the initiating router has a priori knowledge about number of egress nodes and their addresses. Hence it possible to continue processing till a valid response has been received from each end-point, provided the responses can be matched correctly to the egress nodes.

However in Multicast LDP LSPs, the initiating router has no knowledge about the egress nodes. Hence it is not possible to estimate the end of processing for traceroute in such scenarios.

Therefore it is RECOMMENDED that traceroute operations provide for a configurable upper limit on TTL values. Hence the user can choose the depth to which the tree will be probed.



#### **4.3.2. Multiple responses from Bud and Egress Nodes**

The P2MP traceroute may continue even after it has received a valid response from a bud or egress node, as there may be more nodes at deeper levels. Hence for subsequent TTL values, a bud or egress node that has previously replied would continue to get new echo requests. Since each echo request is handled independently from previous requests, these bud and egress nodes will keep on responding to the traceroute echo requests. This can cause extra processing burden for the initiating router and these bud or egress routers.

To prevent a bud or egress node from sending multiple responses in the same traceroute operation, a new "Respond Only If TTL Expired" flag is being introduced. This flag is described in [Section 3.4](#).

It is RECOMMENDED that this flag be used for P2MP traceroute mode only. By using this flag, extraneous responses from bud and egress nodes can be reduced. If PHP is being used in the P2MP tree, then bud and egress nodes will not get any labels with the echo request packet. Hence this mechanism will not be effective for PHP scenario.

#### **4.3.3. Non-Response to Traceroute Echo Requests**

There are multiple reasons for which an ingress node may not receive a response to its echo request. For example, the transit node has failed, or the transit node does not support LSP Ping.

When no response to an echo request is received by the ingress, then as per [\[RFC4379\]](#) the subsequent echo request with a larger TTL SHOULD be sent.

#### **4.3.4. Use of Downstream Detailed Mapping TLV in Echo Request**

As described in [section 4.6 of \[RFC4379\]](#), an initiating router, during traceroute, SHOULD copy the Downstream Mapping(s) into its next echo request(s). However for P2MP LSPs, the initiating router will receive multiple sets of Downstream Detailed Mapping TLV from different nodes. It is not practical to copy all of them into the next echo request. Hence this behavior is being modified for P2MP LSPs. In the echo request packet, the "Downstream IP Address" field, of the Downstream Detailed Mapping TLV, SHOULD be set to the ALLROUTERS multicast address.

If an Egress Address Responder Identifier sub-TLV is being used, then the traceroute is limited to only one path to one egress. Therefore this traceroute is effectively behaving like a P2P traceroute. In this scenario, as per [section 4.2](#), the echo responses from



intermediate nodes will contain only one Downstream Detailed Mapping TLV corresponding to the downstream path required to reach the address specified in the Egress Address sub-TLV. For this case, the echo request packet MAY reuse a received Downstream Detailed Mapping TLV.

#### **4.3.5 Cross Over Node Processing**

A cross-over nodes will require slightly different processing for traceroute mode. The following definition of cross-over is taken from [[RFC4875](#)].

The term "cross-over" refers to the case of an ingress or transit node that creates a branch of a P2MP LSP, a cross-over branch, that intersects the P2MP LSP at another node farther down the tree. It is unlike re-merge in that, at the intersecting node, the cross-over branch has a different outgoing interface as well as a different incoming interface.

During traceroute, a cross-over node will receive the echo requests via each of its input interfaces. Therefore the Downstream Detailed Mapping TLV in the echo response SHOULD carry information only about the outgoing interface corresponding to the input interface.

Due to this restriction, the cross-over node will not duplicate the outgoing interface information in each of the echo request it receives via the different input interfaces. This will reflect the actual packet replication in the data plane.

### **5. Non-compliant Routers**

If a node for a P2MP LSP does not support MPLS LSP ping, then no reply will be sent, resulting in a "false negative" result. There is no protection for this situation, and operators may wish to ensure that all nodes for P2MP LSPs are all equally capable of supporting this function.

If the non-compliant node is an egress, then the traceroute mode can be used to verify the LSP nearly all the way to the egress, leaving the final hop to be verified manually.

If the non-compliant node is a branch or transit node, then it should not impact ping mode. However the node will not respond during traceroute mode.





## **6. OAM Considerations**

The procedures in this document provide OAM functions for P2MP MPLS LSPs and may be used to enable bootstrapping of other OAM procedures.

In order to be fully operational several considerations must be made.

- Scaling concerns dictate that only cautious use of LSP Ping should be made. In particular, sending an LSP Ping to all egresses of a P2MP MPLS LSP could result in congestion at or near the ingress when the responses arrive.

Further, incautious use of timers to generate LSP Ping echo requests either in ping mode or especially in traceroute may lead to significant degradation of network performance.

- Management interfaces should allow an operator full control over the operation of LSP Ping. In particular, it SHOULD provide the ability to limit the scope of an LSP Ping echo request for a P2MP MPLS LSP to a single egress.

Such an interface SHOULD also provide the ability to disable all active LSP Ping operations to provide a quick escape if the network becomes congested.

- A MIB module is required for the control and management of LSP Ping operations, and to enable the reported information to be inspected.

There is no reason to believe this should not be a simple extension of the LSP Ping MIB module used for P2P LSPs.

## **7. IANA Considerations**

### **7.1. New Sub-TLV Types**

Four new sub-TLV types are defined for inclusion within the LSP Ping [[RFC4379](#)] Target FEC Stack TLV (TLV type 1).

IANA is requested to assign sub-type values to the following sub-TLVs from the "Multiprotocol Label Switching Architecture (MPLS) Label Switched Paths (LSPs) Parameters - TLVs" registry, "TLVs and sub-TLVs" sub-registry.

- RSVP P2MP IPv4 Session ([Section 3.1.1](#)). Suggested value 17.
- RSVP P2MP IPv6 Session ([Section 3.1.1](#)). Suggested value 18.
- Multicast P2MP LDP FEC Stack ([Section 3.1.2](#)). Suggested value 19.
- Multicast MP2MP LDP FEC Stack ([Section 3.1.2](#)). Suggested value 20.



## **7.2. New TLVs**

Two new LSP Ping TLV types are defined for inclusion in LSP Ping messages.

IANA is requested to assign a new value from the "Multi-Protocol Label Switching Architecture (MPLS) Label Switched Paths (LSPs) Parameters - TLVs" registry, "TLVs and sub-TLVs" sub-registry as follows using a Standards Action value.

P2MP Responder Identifier TLV (see [Section 3.2](#)) is a mandatory TLV. Suggested value 11. Four sub-TLVs are defined.

- Type 1: IPv4 Egress Address P2MP Responder Identifier
- Type 2: IPv6 Egress Address P2MP Responder Identifier
- Type 3: IPv4 Node Address P2MP Responder Identifier
- Type 4: IPv6 Node Address P2MP Responder Identifier

Echo Jitter TLV (see [Section 3.3](#)) is a mandatory TLV. Suggested value 12.

## **8. Security Considerations**

This document does not introduce security concerns over and above those described in [[RFC4379](#)]. Note that because of the scalability implications of many egresses to P2MP MPLS LSPs, there is a stronger concern to regulate the LSP Ping traffic passed to the control plane by the use of a rate limiter applied to the LSP Ping well-known UDP port. Note that this rate limiting might lead to false positives.

## **9. Acknowledgements**

The authors would like to acknowledge the authors of [[RFC4379](#)] for their work which is substantially re-used in this document. Also thanks to the members of the MBONED working group for their review of this material, to Daniel King and Mustapha Aissaoui for their review, and to Yakov Rekhter for useful discussions.

The authors would like to thank Bill Fenner, Vanson Lim, Danny Prairie, Reshad Rahman, Ben Niven-Jenkins, Hannes Gredler, Nitin Bahadur, Tetsuya Murakami, Michael Hua, Michael Wildt, Dipa Thakkar and IJsbrand Wijnands for their comments and suggestions.

## **10. References**



### **10.1. Normative References**

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC4379] Kompella, K., and Swallow, G., "Detecting Multi-Protocol Label Switched (MPLS) Data Plane Failures", [RFC 4379](#), February 2006.
- [DDMT] Bahadur, N., Kompella, K., and Swallow, G., "Mechanism for Performing LSP-Ping over MPLS Tunnels", [draft-ietf-mpls-lsp-ping-enhanced-dsmap](#), work in progress.

### **10.2. Informative References**

- [RFC792] Postel, J., "Internet Control Message Protocol", [RFC 792](#).
- [RFC4461] Yasukawa, S., "Signaling Requirements for Point to Multipoint Traffic Engineered Multiprotocol Label Switching (MPLS) Label Switched Paths (LSPs)", [RFC 4461](#), April 2006.
- [RFC4687] Yasukawa, S., Farrel, A., King, D., and Nadeau, T., "Operations and Management (OAM) Requirements for Point-to-Multipoint MPLS Networks", [RFC 4687](#), September 2006.
- [RFC4875] Aggarwal, R., Papadimitriou, D., and Yasukawa, S., "Extensions to Resource Reservation Protocol - Traffic Engineering (RSVP-TE) for Point-to-Multipoint TE Label Switched Paths (LSPs)", [RFC 4875](#), May 2007.
- [P2MP-LDP-REQ] J.-L. Le Roux, et al., "Requirements for point-to-multipoint extensions to the Label Distribution Protocol", [draft-ietf-mpls-mp-ldp-reqs](#), work in progress.
- [P2MP-LDP] Minei, I., and Wijnands, I., "Label Distribution Protocol Extensions for Point-to-Multipoint and Multipoint-to-Multipoint Label Switched Paths", [draft-ietf-mpls-ldp-p2mp](#), work in progress.
- [MPLS-BFD] Aggarwal, R., Kompella, K., Nadeau, T., and Swallow, G., "BFD For MPLS LSPs", [draft-ietf-bfd-mpls](#), work in progress.
- [IANA-PORT] IANA Assigned Port Numbers, <http://www.iana.org>



## **11. Authors' Addresses**

Seisho Yasukawa  
NTT Corporation  
(R&D Strategy Department)  
3-1, Otemachi 2-Chome Chiyodaku, Tokyo 100-8116 Japan  
Phone: +81 3 5205 5341  
Email: [yasukawa.seisho@lab.ntt.co.jp](mailto:yasukawa.seisho@lab.ntt.co.jp)

Adrian Farrel  
Old Dog Consulting  
EMail: [adrian@olddog.co.uk](mailto:adrian@olddog.co.uk)

Zafar Ali  
Cisco Systems Inc.  
2000 Innovation Drive  
Kanata, ON, K2K 3E8, Canada.  
Phone: 613-889-6158  
Email: [zali@cisco.com](mailto:zali@cisco.com)

George Swallow  
Cisco Systems, Inc.  
1414 Massachusetts Ave  
Boxborough, MA 01719  
Email: [swallow@cisco.com](mailto:swallow@cisco.com)

Thomas D. Nadeau  
British Telecom  
BT Centre  
81 Newgate Street  
EC1A 7AJ  
London  
Email: [tom.nadeau@bt.com](mailto:tom.nadeau@bt.com)

Shaleen Saxena  
Cisco Systems, Inc.  
1414 Massachusetts Ave  
Boxborough, MA 01719  
Email: [ssaxena@cisco.com](mailto:ssaxena@cisco.com)

## **12. Full Copyright Statement**

Copyright (c) 2010 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of





publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

This document may contain material from IETF Documents or IETF Contributions published or made publicly available before November 10, 2008. The person(s) controlling the copyright in some of this material may not have granted the IETF Trust the right to allow modifications of such material outside the IETF Standards Process. Without obtaining an adequate license from the person(s) controlling the copyright in such materials, this document may not be modified outside the IETF Standards Process, and derivative works of it may not be created outside the IETF Standards Process, except to format it for publication as an RFC or to translate it into languages other than English.