

Internet Engineering Task Force
Internet-Draft
Intended status: Standards Track
Expires: January 4, 2015

H. Chen
Z. Li
Huawei Technologies
N. So
Tata Communications
A. Liu
Ericsson
F. Xu
Verizon
M. Toy
Comcast
L. Huang
China Mobile
L. Liu
UC Davis
July 3, 2014

Extensions to RSVP-TE for LSP Egress Local Protection
draft-ietf-mpls-rsvp-egress-protection-01.txt

Abstract

This document describes extensions to Resource Reservation Protocol - Traffic Engineering (RSVP-TE) for locally protecting egress nodes of a Traffic Engineered (TE) Label Switched Path (LSP) in a Multi-Protocol Label Switching (MPLS) and Generalized MPLS (GMPLS) network.

Status of this Memo

This Internet-Draft is submitted to IETF in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on January 4, 2015.

Copyright Notice

Copyright (c) 2014 IETF Trust and the persons identified as the

Internet-Draft

RSVP LSP Egress Protection

July 2014

document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	3
1.1.	An Example of Egress Local Protection	3
1.2.	Egress Local Protection with FRR	4
2.	Conventions Used in This Document	4
3.	Terminology	4
4.	Protocol Extensions	4
4.1.	EGRESS_BACKUP Object	4
4.2.	Flags in FAST_REROUTE	6
4.3.	Path Message	6
5.	Egress Protection Behaviors	6
5.1.	Ingress Behavior	6
5.2.	Intermediate Node and PLR Behavior	7
5.2.1.	Signaling for One-to-One Protection	8
5.2.2.	Signaling for Facility Protection	8
5.2.3.	Signaling for S2L Sub LSP Protection	9
5.2.4.	PLR Procedures during Local Repair	10
6.	Considering Application Traffic	10
6.1.	A Typical Application	10
6.2.	PLR Procedure for Applications	11
6.3.	Egress Procedures for Applications	11
7.	Security Considerations	12
8.	IANA Considerations	12
9.	Contributors	12
10.	Acknowledgement	13
11.	References	13
11.1.	Normative References	13
11.2.	Informative References	14
	Authors' Addresses	14

1. Introduction

[RFC 4090](#) describes two methods for protecting the transit nodes of a P2P LSP: one-to-one and facility protection. [RFC 4875](#) specifies how to use them to protect the transit nodes of a P2MP LSP. However, they do not mention any local protection for an egress of an LSP.

To protect the egresses of an LSP (P2P or P2MP), an existing approach sets up a backup LSP from a backup ingress (or the ingress of the LSP) to the backup egresses, where each egress is paired with a backup egress and protected by the backup egress.


This approach may use more resources and provide slow fault recovery. This document specifies extensions to RSVP-TE for local protection of an egress of an LSP, which overcomes these disadvantages.

1.1. An Example of Egress Local Protection

Figure 1 shows an example of using backup LSPs to locally protect egresses of a primary P2MP LSP from ingress R1 to two egresses: L1 and L2. The primary LSP is represented by star(*) lines and backup LSPs by hyphen(-) lines.

La and Lb are the designated backup egresses for egresses L1 and L2 respectively. To distinguish an egress (e.g., L1) from a backup egress (e.g., La), an egress is called a primary egress if needed.

The backup LSP for protecting L1 is from its upstream node R3 to backup egress La. The one for protecting L2 is from R5 to Lb.

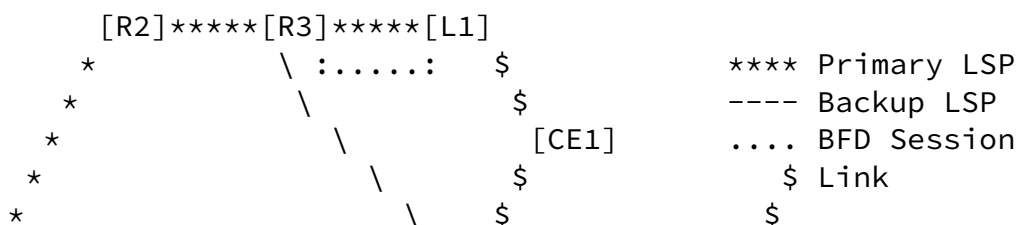

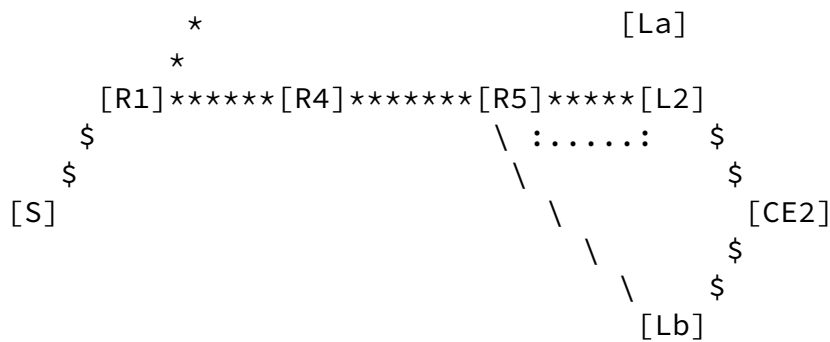


Figure 1: Backup LSP for Locally Protecting Egress

During normal operations, the traffic carried by the P2MP LSP is sent through R3 to L1, which delivers the traffic to its destination CE1. When R3 detects the failure of L1, R3 switches the traffic to the backup LSP to backup egress La, which delivers the traffic to CE1. The time for switching the traffic is within tens of milliseconds.

The failure of a primary egress (e.g., L1 in the figure) MAY be detected by its upstream node (e.g., R3 in the figure) through a BFD between the upstream node and the egress in MPLS networks. Exactly how the failure is detected is out of scope for this document.

[1.2.](#) Egress Local Protection with FRR

Using the egress local protection and the FRR, we can locally protect the egresses, the links and the intermediate nodes of an LSP. The traffic switchover time is within tens of milliseconds whenever an egress, any of the links and the intermediate nodes of the LSP fails.

The egress nodes of the LSP can be locally protected via the egress local protection. All the links and the intermediate nodes of the LSP can be locally protected through using the FRR.

[2.](#) Conventions Used in This Document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#).

3. Terminology

This document uses terminologies defined in [RFC 2205](#), [RFC 3031](#), [RFC 3209](#), [RFC 3473](#), [RFC 4090](#), [RFC 4461](#), and [RFC 4875](#).

4. Protocol Extensions

A new object EGRESS_BACKUP is defined for egress local protection. It contains a backup egress for a primary egress.

4.1. EGRESS_BACKUP Object

The class of the EGRESS_BACKUP object is TBD-1 to be assigned by IANA. The C-Type of the EGRESS_BACKUP IPv4/IPv6 object is TBD-2/TBD-3 to be assigned by IANA.

EGRESS_BACKUP Class Num = TBD-1, IPv4/IPv6 C-Type = TBD-2/TBD-3


```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
~                               Backup Egress IPv4/IPv6 address                               ~
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
~                               Primary Egress IPv4/IPv6 address                               ~
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
~                               (Subobjects)                                               ~
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```


- o Backup Egress IPv4/IPv6 address:
 - IPv4/IPv6 address of the backup egress node
- o Primary Egress IPv4/IPv6 address:
 - IPv4/IPv6 address of the primary egress node

The Subobjects are optional. One of them is P2P LSP ID IPv4/IPv6 subobject, whose body has the following format and Type is TBD-4/TBD-5. It may be used to identify a backup LSP.

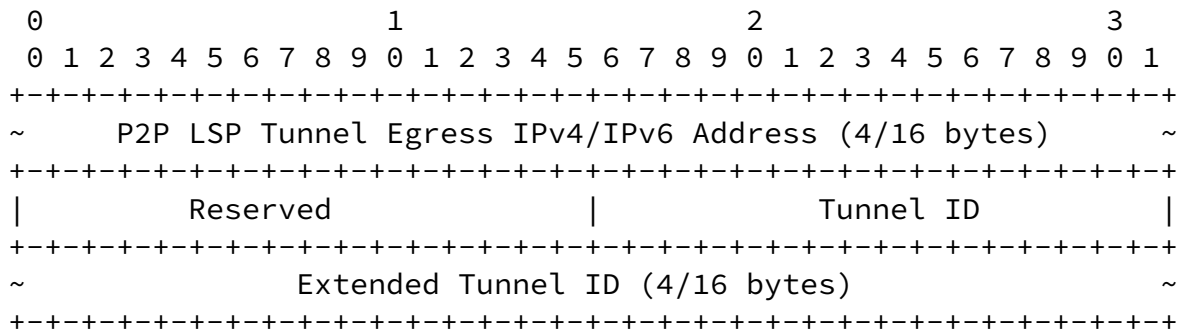

- o P2P LSP Tunnel Egress IPv4/IPv6 Address:
IPv4/IPv6 address of the egress of the tunnel
- o Tunnel ID:
A 16-bit identifier that is constant over the life of the tunnel
- o Extended Tunnel ID:
A 4/16-byte identifier being constant over the life of the tunnel

Another one is Label subobject, whose body has the format below and Type is TBD-6 to be assigned by IANA.

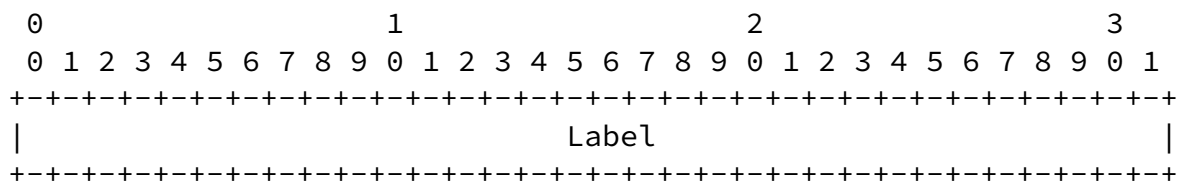

[4.2.](#) Flags in FAST_REROUTE

A bit of the flags in the FAST_REROUTE object may be used to indicate whether S2L Sub LSP is desired for protecting an egress of a P2MP LSP or One-to-One Backup is preferred for protecting an egress of a P2P LSP when the "Facility Backup Desired" flag is set. This bit is called "S2L Sub LSP Backup Desired" or "One-to-One Backup Preferred".

[4.3.](#) Path Message

A Path message is enhanced to carry the information about a backup egress for a primary egress of an LSP through including an egress backup descriptor list. The format of the enhanced Path message is illustrated below.

```

<Path Message> ::= <Common Header> [ <INTEGRITY> ]
                  [ [ <MESSAGE_ID_ACK> | <MESSAGE_ID_NACK> ] ... ]
                  [ <MESSAGE_ID> ] <SESSION> <RSVP_HOP> <TIME_VALUES>
                  [ <EXPLICIT_ROUTE> ]
                  <LABEL_REQUEST> [ <PROTECTION> ] [ <LABEL_SET> ... ]
                  [ <SESSION_ATTRIBUTE> ] [ <NOTIFY_REQUEST> ]
                  [ <ADMIN_STATUS> ] [ <POLICY_DATA> ... ]
                  <sender descriptor> [ <S2L sub-LSP descriptor list> ]
                  [ <egress backup descriptor list> ]

```

The egress backup descriptor list in the message is defined below. It is a sequence of EGRESS_BACKUP objects, each of which describes a pair of a primary egress and a backup egress.

```

<egress backup descriptor list> ::=
    <egress backup descriptor>
    [ <egress backup descriptor list> ]

```

```

<egress backup descriptor> ::= <EGRESS_BACKUP>

```

[5. Egress Protection Behaviors](#)

[5.1. Ingress Behavior](#)

To protect a primary egress of an LSP, the ingress MUST set the "label recording desired" flag and the "node protection desired" flag in the SESSION_ATTRIBUTE object.

If one-to-one backup or facility backup method is desired to protect a primary egress of an LSP, the ingress SHOULD include a FAST_REROUTE

object and set the "One-to-One Backup Desired" or "Facility Backup Desired" flag.

If S2L Sub LSP backup method is desired to protect a primary egress of a P2MP LSP, the ingress SHOULD include a FAST_REROUTE object and set the "S2L Sub LSP Backup Desired" flag.

Note that if "Facility Backup Desired" flag is set for protecting the

intermediate nodes of a primary P2P LSP, but we want to use "One-to-One Backup" for protecting the egress of the LSP, then the ingress SHOULD set "One-to-One Backup Preferred" flag.

Optionally, a backup egress may be configured on the ingress of an LSP to protect a primary egress of the LSP.

The ingress sends a Path message for the LSP with the objects above and an optional egress backup descriptor list. For each primary egress of the LSP to be protected, the ingress adds an EGRESS_BACKUP object into the list if the backup egress is given. The object contains the primary egress and the backup egress for protecting the primary egress.

[5.2.](#) Intermediate Node and PLR Behavior

If an intermediate node of an LSP receives the Path message with an egress backup descriptor list and it is not an upstream node of any primary egress of the LSP, it forwards the list unchanged.

If the intermediate node is the upstream node of a primary egress to be protected, it determines the backup egress, obtains a path for the backup LSP and sets up the backup LSP along the path.

The PLR (upstream node of the primary egress) tries to get the backup egress from EGRESS_BACKUP in the egress backup descriptor list if the Path message contains the list. If the PLR can not get it, the PLR tries to find the backup egress, which is not the primary egress but has the same IP address as the destination IP address of the LSP.

Note that the primary egress and the backup egress SHOULD have a same local address configured, and the cost to the local address on the backup egress SHOULD be much bigger than the cost to the local address on the primary egress. Thus another name such as virtual node based egress protection may be used for egress local protection.

After obtaining the backup egress, the PLR tries to compute a backup path from itself to the backup egress. It excludes the primary egress to be protected when computing the path. Thus the PLR will not select any path via the primary egress.

The PLR then sets up the backup LSP along the path obtained. It

provides one-to-one backup protection for the primary egress if the "One-to-One Backup Desired" or "One-to-One Backup Preferred" flag is set in the message; otherwise, it provides facility backup protection if the "Facility Backup Desired flag" is set.

The PLR sets the protection flags in the RRO Sub-object for the primary egress in the Resv message according to the status of the primary egress and the backup LSP protecting the primary egress. For example, it will set the "local protection available" and the "node protection" flag indicating that the primary egress is protected when the backup LSP is up and ready for protecting the primary egress.

5.2.1. Signaling for One-to-One Protection

The behavior of the upstream node of a primary egress of an LSP as a PLR is the same as that of a PLR for one-to-one backup method described in [RFC 4090](#) except for that the upstream node creates a backup LSP from itself to a backup egress.

If the LSP is a P2MP LSP and a primary egress of the LSP is also a transit node (i.e., bud node), the upstream node of the primary egress as a PLR also creates a backup LSP from itself to each of the next hops of the primary egress.

When the PLR detects the failure of the primary egress, it MUST switch the packets from the primary LSP to the backup LSP to the backup egress. For the failure of the bud node of a P2MP LSP, the PLR MUST also switch the packets to the backup LSPs to the bud node's next hops, where the packets are merged into the primary LSP.

5.2.2. Signaling for Facility Protection

Except for backup LSP and downstream label, the behavior of the upstream node of the primary egress of a primary LSP as a PLR follows the PLR behavior for facility backup method described in [RFC 4090](#).

For a number of primary P2P LSPs going through the same PLR to the same primary egress, the primary egress of these LSPs may be protected by one backup LSP from the PLR to the backup egress designated for protecting the primary egress.

The PLR selects or creates a backup LSP from itself to the backup egress. If there is a backup LSP that satisfies the constraints given in the Path message, then this one is selected; otherwise, a new backup LSP to the backup egress will be created.

After getting the backup LSP, the PLR associates the backup LSP with

a primary LSP for protecting its primary egress. The PLR records that the backup LSP is used to protect the primary LSP against its primary egress failure and includes an EGRESS_BACKUP object in the Path message to the primary egress. The object contains the backup egress and the backup LSP ID. It indicates that the primary egress SHOULD send the backup egress the primary LSP label as UA label.

After receiving the Path message with the EGRESS_BACKUP, the primary egress includes the information about the primary LSP label in the Resv message with an EGRESS_BACKUP object as UA label. When the PLR receives the Resv message with the information about the UA label, it includes the information in the Path message for the backup LSP to the backup egress. Thus the primary LSP label as UA label is sent to the backup egress from the primary egress.

When the PLR detects the failure of the primary egress, it redirects the packets from the primary LSP into the backup LSP to backup egress using the primary LSP label from the primary egress as an inner label. The backup egress delivers the packets to the same destinations as the primary egress using the backup LSP label as context label and the inner label as UA label.

5.2.3. Signaling for S2L Sub LSP Protection

The S2L Sub LSP Protection is used to protect a primary egress of a P2MP LSP. Its major advantage is that the application traffic carried by the LSP is easily protected against the egress failure.

The PLR determines to protect a primary egress of a P2MP LSP via S2L sub LSP protection when it receives a Path message with flag "S2L Sub LSP Backup Desired" set.

The PLR sets up the backup S2L sub LSP to the backup egress, creates and maintains its state in the same way as of setting up a source to leaf (S2L) sub LSP defined in [RFC 4875](#) from the signaling's point of view. It computes a path for the backup LSP from itself to the backup egress, constructs and sends a Path message along the path, receives and processes a Resv message responding to the Path message.

After receiving the Resv message for the backup LSP, the PLR creates a forwarding entry with an inactive state or flag called inactive forwarding entry. This inactive forwarding entry is not used to forward any data traffic during normal operations.

When the PLR detects the failure of the primary egress, it changes the forwarding entry for the backup LSP to active. Thus, the PLR

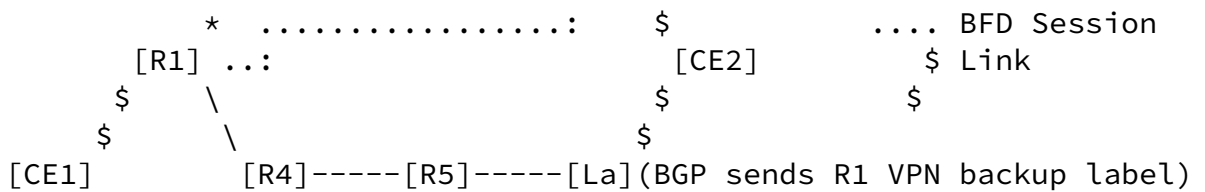


Figure 2: Protect Egress for L3VPN Traffic

In normal operations, R1 sends the traffic from CE1 through primary LSP with VPN label received from L1 as inner label to L1, which delivers the traffic to CE2 using VPN label.

When R1 detects the failure of L1, R1 sends the traffic from CE1 via backup LSP with VPN backup label received from La as inner label to La, which delivers the traffic to CE2 using VPN backup label.

A new solution (refer to Figure 3) with egress local protection for protecting L3VPN traffic includes: 1) A BFD session between R3 and egress L1 of primary LSP; 2) A backup LSP from R3 to backup egress La; 3) L1 sends La VPN label as UA label and related information; 4) L1 and La is virtualized as one. This can be achieved by configuring a same local address on L1 and La, using the address as a destination of the LSP and BGP next hop for VPN traffic.

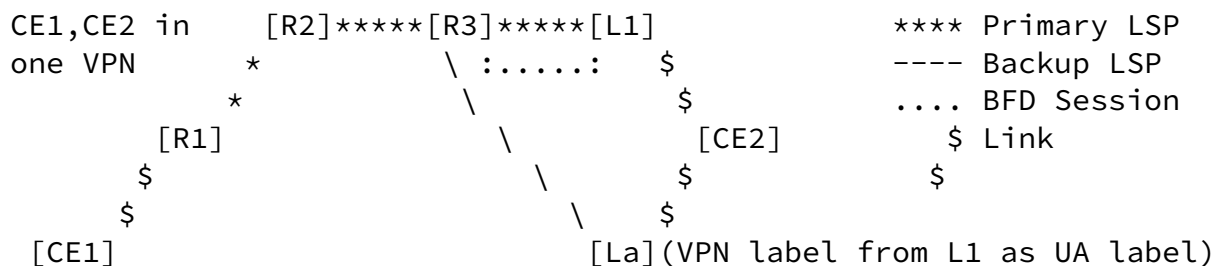


Figure 3: Locally Protect Egress for L3VPN Traffic

When R3 detects L1's failure, R3 sends the traffic from primary LSP via backup LSP to La, which delivers the traffic to CE2 using VPN label as UA label under the backup LSP label as a context label.

[6.2.](#) PLR Procedure for Applications

When the PLR gets a backup LSP from itself to a backup egress for protecting a primary egress of a primary LSP, it includes an EGRESS_BACKUP object in the Path message for the primary LSP. The object contains the ID information of the backup LSP and indicates that the primary egress SHOULD send the backup egress the application traffic label (e.g., VPN label) as UA label when needed.

[6.3.](#) Egress Procedures for Applications

When a primary egress of an LSP sends the ingress of the LSP a label for an application such as a VPN, it SHOULD send the backup egress for protecting the primary egress the label as a UA label via BGP or another protocol. Exactly how the label is sent is out of scope for this document.

Chen, et al.

Expires January 4, 2015

[Page 11]

Internet-Draft

RSVP LSP Egress Protection

July 2014

When the backup egress receives a UA label from the primary egress, it adds a forwarding entry with the label into the LFIB for the primary egress. When the backup egress receives a packet from the backup LSP, it uses the top label as a context label to find the LFIB for the primary egress and the inner label to deliver the packet to the same destination as the primary egress according to the LFIB.

[7.](#) Security Considerations

In principle this document does not introduce new security issues. The security considerations pertaining to [RFC 4090](#), [RFC 4875](#) and other RSVP protocols remain relevant.

[8.](#) IANA Considerations

IANA considerations for new objects will be specified after the objects used are decided upon.

[9.](#) Contributors

Boris Zhang
Telus Communications

200 Consilium Pl Floor 15
Toronto, ON M1H 3J3
Canada
Email: Boris.Zhang@telus.com

Nan Meng
Huawei Technologies
Huawei Bld., No.156 Beiqing Rd.
Beijing 100095
China
Email: mengnan@huawei.com

Vic Liu
China Mobile
No.32 Xuanwumen West Street, Xicheng District
Beijing, 100053
China
Email: liuzhiheng@chinamobile.com

Chen, et al.

Expires January 4, 2015

[Page 12]

Internet-Draft

RSVP LSP Egress Protection

July 2014

10. Acknowledgement

The authors would like to thank Richard Li, Nobo Akiya, Tarek Saad, Lizhong Jin, Ravi Torvi, Eric Gray, Olufemi Komolafe, Michael Yue, Rob Rennison, Neil Harrison, Kannan Sampath, Yimin Shen, Ronhazli Adam and Quintin Zhao for their valuable comments and suggestions on this draft.

11. References

11.1. Normative References

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.

[RFC3692] Narten, T., "Assigning Experimental and Testing Numbers Considered Useful", [BCP 82](#), [RFC 3692](#), January 2004.

- [RFC2205] Braden, B., Zhang, L., Berson, S., Herzog, S., and S. Jamin, "Resource ReSerVation Protocol (RSVP) -- Version 1 Functional Specification", [RFC 2205](#), September 1997.
- [RFC3031] Rosen, E., Viswanathan, A., and R. Callon, "Multiprotocol Label Switching Architecture", [RFC 3031](#), January 2001.
- [RFC3209] Awduche, D., Berger, L., Gan, D., Li, T., Srinivasan, V., and G. Swallow, "RSVP-TE: Extensions to RSVP for LSP Tunnels", [RFC 3209](#), December 2001.
- [RFC3473] Berger, L., "Generalized Multi-Protocol Label Switching (GMPLS) Signaling Resource ReserVation Protocol-Traffic Engineering (RSVP-TE) Extensions", [RFC 3473](#), January 2003.
- [RFC4090] Pan, P., Swallow, G., and A. Atlas, "Fast Reroute Extensions to RSVP-TE for LSP Tunnels", [RFC 4090](#), May 2005.
- [RFC4875] Aggarwal, R., Papadimitriou, D., and S. Yasukawa, "Extensions to Resource Reservation Protocol - Traffic Engineering (RSVP-TE) for Point-to-Multipoint TE Label Switched Paths (LSPs)", [RFC 4875](#), May 2007.
- [RFC5331] Aggarwal, R., Rekhter, Y., and E. Rosen, "MPLS Upstream Label Assignment and Context-Specific Label Space", [RFC 5331](#), August 2008.
- [RFC5786] Aggarwal, R. and K. Kompella, "Advertising a Router's

Chen, et al.

Expires January 4, 2015

[Page 13]

Internet-Draft

RSVP LSP Egress Protection

July 2014

Local Addresses in OSPF Traffic Engineering (TE) Extensions", [RFC 5786](#), March 2010.

[P2MP FRR]

Le Roux, J., Aggarwal, R., Vasseur, J., and M. Vigoureux, "P2MP MPLS-TE Fast Reroute with P2MP Bypass Tunnels", [draft-leroux-mpls-p2mp-te-bypass](#), March 1997.

11.2. Informative References

- [RFC4461] Yasukawa, S., "Signaling Requirements for Point-to-

Multipoint Traffic-Engineered MPLS Label Switched Paths (LSPs)", [RFC 4461](#), April 2006.

Authors' Addresses

Huaimo Chen
Huawei Technologies
Boston, MA
USA

Email: huaimo.chen@huawei.com

Zhenbin Li
Huawei Technologies
Huawei Bld., No.156 Beiqing Rd.
Beijing 100095,
China

Email: lizhenbin@huawei.com

Ning So
Tata Communications
2613 Fairbourne Cir.
Plano, TX 75082
USA

Email: ningso01@gmail.com

Chen, et al.

Expires January 4, 2015

[Page 14]

Internet-Draft

RSVP LSP Egress Protection

July 2014

Autumn Liu
Ericsson
CA
USA

Email: autumn.liu@ericsson.com

Fengman Xu
Verizon
2400 N. Glenville Dr
Richardson, TX 75082
USA

Email: fengman.xu@verizon.com

Mehmet Toy
Comcast
1800 Bishops Gate Blvd.
Mount Laurel, NJ 08054
USA

Email: mehmet_toy@cable.comcast.com

Lu Huang
China Mobile
No.32 Xuanwumen West Street, Xicheng District
Beijing, 100053
China

Email: huanglu@chinamobile.com

Lei Liu
UC Davis
USA

Email: liulei.kddi@gmail.com