

MPLS Working Group  
Internet-Draft  
Intended status: Standards Track  
Expires: May 25, 2019

H. Sitaraman  
V. Beeram  
Juniper Networks  
T. Parikh  
Verizon  
T. Saad  
Cisco Systems  
November 21, 2018

**Signaling RSVP-TE tunnels on a shared MPLS forwarding plane  
draft-ietf-mpls-rsvp-shared-labels-06.txt**

Abstract

As the scale of MPLS RSVP-TE networks has grown, so the number of Label Switched Paths (LSPs) supported by individual network elements has increased. Various implementation recommendations have been proposed to manage the resulting increase in control plane state.

However, those changes have had no effect on the number of labels that a transit Label Switching Router (LSR) has to support in the forwarding plane. That number is governed by the number of LSPs transiting or terminated at the LSR and is directly related to the total LSP state in the control plane.

This document defines a mechanism to prevent the maximum size of the label space limit on an LSR from being a constraint to control plane scaling on that node. It introduces the notion of pre-installed 'per Traffic Engineering (TE) link labels' that can be shared by MPLS RSVP-TE LSPs that traverse these TE links. This approach significantly reduces the forwarding plane state required to support a large number of LSPs. This couples the feature benefits of the RSVP-TE control plane with the simplicity of the Segment Routing MPLS forwarding plane.

Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#) [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on May 25, 2019.

Copyright Notice

Copyright (c) 2018 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

- [1.](#) Introduction . . . . . [3](#)
- [2.](#) Terminology . . . . . [5](#)
- [3.](#) Allocation of TE Link Labels . . . . . [5](#)
- [4.](#) Segment Routed RSVP-TE Tunnel Setup . . . . . [5](#)
- [5.](#) Delegating Label Stack Imposition . . . . . [7](#)
  - [5.1.](#) Stacking at the Ingress . . . . . [8](#)
    - [5.1.1.](#) Stack to Reach Delegation Hop . . . . . [8](#)
    - [5.1.2.](#) Stack to Reach Egress . . . . . [9](#)
  - [5.2.](#) Explicit Delegation . . . . . [10](#)
  - [5.3.](#) Automatic Delegation . . . . . [10](#)
    - [5.3.1.](#) Effective Transport Label-Stack Depth (ETLD) . . . . . [10](#)
- [6.](#) Mixing TE Link Labels and Regular Labels in an RSVP-TE Tunnel [12](#)
- [7.](#) Construction of Label Stacks . . . . . [12](#)
- [8.](#) Facility Backup Protection . . . . . [13](#)



8.1.	Link Protection . . . . .	13
9.	Protocol Extensions . . . . .	14
9.1.	Requirements . . . . .	14
9.2.	Attribute Flags TLV: TE Link Label . . . . .	15
9.3.	RRO Label Subobject Flag: TE Link Label . . . . .	15
9.4.	Attribute Flags TLV: LSI-D . . . . .	15
9.5.	RRO Label Subobject Flag: Delegation Label . . . . .	16
9.6.	Attributes Flags TLV: LSI-D-S2E . . . . .	16
9.7.	Attributes TLV: ETLD . . . . .	16
10.	OAM Considerations . . . . .	17
11.	Acknowledgements . . . . .	17
12.	Contributors . . . . .	17
13.	IANA Considerations . . . . .	18
13.1.	Attribute Flags: TE Link Label, LSI-D, LSI-D-S2E . . . . .	18
13.2.	Attribute TLV: ETLD . . . . .	18
13.3.	Record Route Label Sub-object Flags: TE Link Label, Delegation Label . . . . .	18
13.4.	Error Codes and Error Values . . . . .	19
14.	Security Considerations . . . . .	19
15.	References . . . . .	19
15.1.	Normative References . . . . .	19
15.2.	Informative References . . . . .	20
	Authors' Addresses . . . . .	21

## 1. Introduction

The scaling of RSVP-TE [[RFC3209](#)] control plane implementations can be improved by adopting the guidelines and mechanisms described in [[RFC2961](#)] and [[RFC8370](#)]. These documents do not make any difference to the forwarding plane state required to handle the control plane state. The forwarding plane state remains unchanged and is directly proportional to the total number of Label Switching Paths (LSPs) supported by the control plane.

This document describes a mechanism that prevents the size of the platform specific label space on a Label Switching Router (LSR) from being a constraint to pushing the limits of control plane scaling on that node.

This work introduces the notion of pre-installed 'per Traffic Engineering (TE) link labels' that are allocated by an LSR. Each such label is installed in the MPLS forwarding plane with a 'pop' operation and the instruction to forward the received packet over the TE link. An LSR advertises this label in the Label object of a Resv message as LSPs are set up and they are recorded hop by hop in the Record Route object (RRO) of the Resv message as it traverses the network. To make use of this feature, the ingress Label Edge Router (LER) pushes a stack of labels [[RFC3031](#)] as received in the RRO.



These 'TE link labels' can be shared by MPLS RSVP-TE LSPs that traverse the same TE link.

This forwarding plane behavior fits in the MPLS architecture [[RFC3031](#)] and is same as that exhibited by Segment Routing (SR) [[RFC8402](#)] when using an MPLS forwarding plane and a series of adjacency segments [[I-D.ietf-spring-segment-routing-mpls](#)]. This work couples the feature benefits of the RSVP-TE control plane with the simplicity of the Segment Routing MPLS forwarding plane.

RSVP-TE using a shared MPLS forwarding plane offers the following benefits:

1. Shared Labels: The transit label on a TE link is shared among RSVP-TE tunnels traversing the link and is used independent of the ingress and egress of the LSPs.
2. Faster LSP setup time: No forwarding plane state needs to be programmed during LSP setup and teardown resulting in faster time for provisioning and deprovisioning LSPs.
3. Hitless re-routing: New transit labels are not required during make-before-break (MBB) in scenarios where the new LSP instance traverses the exact same path as the old LSP instance. This saves the ingress LER and the services that use the tunnel from needing to update the forwarding plane with new tunnel labels and so makes MBB events faster. Periodic MBB events are relatively common in networks that deploy the 'auto-bandwidth' feature on RSVP-TE LSPs to monitor bandwidth utilization and periodically adjust LSP bandwidth.
4. Mix and match labels: Both 'TE link labels' and regular labels can be used on transit hops for a single RSVP-TE tunnel (see [Section 6](#)). This allows backward compatibility with transit LSRs that provide regular labels in Resv messages.

No additional extensions to routing protocols are required in order to support key functionalities such as bandwidth admission control, LSP priorities, preemption and auto-bandwidth on this shared MPLS forwarding plane. This document also discusses how Fast Reroute [[RFC4090](#)] via facility backup link protection using regular bypass tunnels can be supported on this forwarding plane.

The signaling procedures and extensions discussed in this document do not apply to Point to Multipoint (P2MP) RSVP-TE Tunnels.



## **2. Terminology**

The following terms are used in this document:

**TE link label:** An incoming label at an LSR that will be popped by the LSR with the packet being forwarded over a specific outgoing TE link to a neighbor.

**Shared MPLS forwarding plane:** An MPLS forwarding plane where every participating LSR uses TE link labels on every LSP.

**Segment Routed RSVP-TE tunnel:** An MPLS RSVP-TE tunnel that requests the use of a shared MPLS forwarding plane at every hop of the LSP. The corresponding LSPs are referred to as Segment Routed RSVP-TE LSPs.

**Delegation hop:** A transit hop of a Segment Routed RSVP-TE LSP that is selected to assist in the imposition of the label stack in scenarios where the ingress LER cannot impose the full label stack. There could be multiple delegation hops along the path of a Segment Routed RSVP-TE LSP.

**Delegation label:** A label assigned at the delegation hop to represent a set of labels that will be pushed at this hop.

## **3. Allocation of TE Link Labels**

An LSR that participates in a shared MPLS forwarding plane **MUST** allocate a unique TE link label for each TE link. When an LSR encounters a TE link label at the top of the label stack it **MUST** pop the label and forward the packet over the TE link to the downstream neighbor on the RSVP-TE tunnel.

Multiple TE link labels **MAY** be allocated for the TE link to accommodate tunnels requesting protection.

Implementations that maintain per label bandwidth accounting at each hop must aggregate the reservations made for all the LSPs using the shared TE link label.

## **4. Segment Routed RSVP-TE Tunnel Setup**

This section provides an example of how the RSVP-TE signaling procedure works to set up a tunnel utilizing a shared MPLS forwarding plane. The sample topology below is used to explain the example. Labels shown at each node are TE link labels that, when present at the top of the label stack, indicate that they should be popped and that the packet should be forwarded on the TE link to the neighbor.





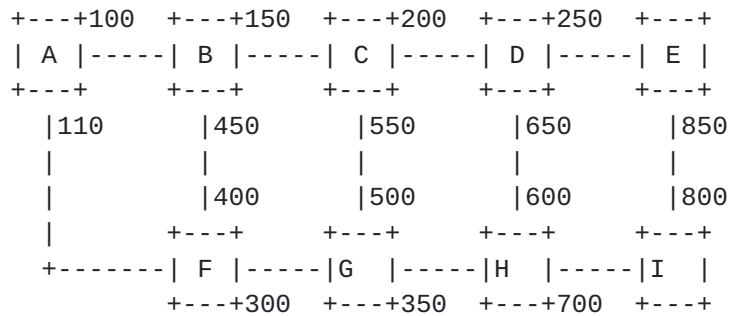


Figure 1: Sample Topology - TE Link Labels

Consider two tunnels:

RSVP-TE tunnel T1: From A to E on path A-B-C-D-E

RSVP-TE tunnel T2: From F to E on path F-B-C-D-E

Both tunnels share the TE links B-C, C-D, and D-E.

RSVP-TE is used to signal the setup of tunnel T1 (using the TE link label attributes flag defined in [Section 9.2](#)). When LSR D receives the Resv message from the egress LER E, it checks the next-hop TE link (D-E) and provides the TE link label (250) in the Resv message for the tunnel placing the label value in the Label object and also in the Label subobject carried in the RRO and setting the TE link label flag as defined in [Section 9.3](#).

Similarly, LSR C provides the TE link label (200) for the TE link C-D, and LSR B provides the TE link label (150) for the TE link B-C.

For tunnel T2, the transit LSRs provide the same TE link labels as described for tunnel T1 as the links B-C, C-D, and D-E are common between the two LSPs.

The ingress LERs (A and F) will push the same stack of labels (from top of stack to bottom of stack) {150, 200, 250} for tunnels T1 and T2 respectively.

It should be noted that a transit LSR does not swap the top TE link label on an incoming packet (the label that it advertised in the Resv message it sent). All it has to do is pop the top label and forward the packet.

The values in the Label subobjects in the RRO are of interest to the ingress LERs in order to construct the stack of labels to impose on the packets.




If, in this example, there was another RSVP-TE tunnel T3 from F to I on path F-B-C-D-E-I, then this would also share the TE links B-C, C-D, and D-E and additionally traverse link E-I. The label stack used by F would be {150, 200, 250, 850}. Hence, regardless of the ingress and egress LERs from where the LSPs start and end, they will share LSR labels at shared hops in the shared MPLS forwarding plane.

There MAY be local operator policy at the ingress LER that influences the maximum depth of the label stack that can be pushed for a Segment Routed RSVP-TE tunnel. Prior to signaling the LSP, the ingress LER may determine that it would be unable to push a label stack containing one label for each hop along the path. In some scenarios, the ingress LER may not have sufficient information to make that determination. In these cases the LER SHOULD adopt the techniques described in [Section 5](#).

**5. Delegating Label Stack Imposition**

One or more transit LSRs can assist the ingress LER by imposing part of the label stack required for the path. Consider the example in Figure 2 with an RSVP-TE tunnel from A to L on path A-B-C-D-E-F-G-H-I-J-K-L. In this case, the LSP is too long for LER A to impose the full label stack, so it uses the assistance of delegation hops LSR D and LSR I to impose parts of the label stack.

Each delegation hop allocates a delegation label to represent a set of labels that will be pushed at this hop. When a packet arrives at a delegation hop LSR with a delegation label, the LSR pops the label and pushes a set of labels before forwarding the packet.

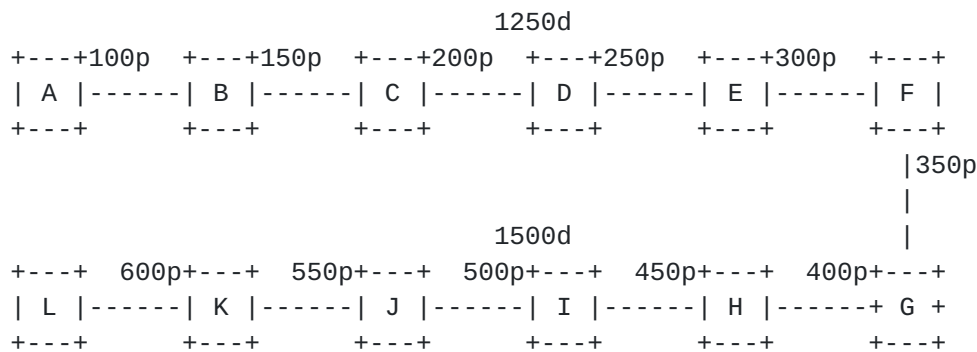

Notation : <Label>p - TE link label  
 <Label>d - delegation label

Figure 2: Delegating Label Stack Imposition



**5.1. Stacking at the Ingress**

When delegation labels come into play, there are two stacking approaches that the ingress can choose from. [Section 7](#) explains how the label stack can be constructed.

**5.1.1. Stack to Reach Delegation Hop**

In this approach, the stack pushed by the ingress carries a set of labels that will take the packet to the first delegation hop. When this approach is employed, the set of labels represented by a delegation label at a given delegation hop will include the corresponding delegation label from the next delegation hop. As a result, this delegation label can only be shared among LSPs that are destined to the same egress and traverse the same downstream path.

This approach is shown in Figure 3. The delegation label 1250 represents the stack {300, 350, 400, 450, 1500} and the delegation label 1500 represents the label stack {550, 600}.

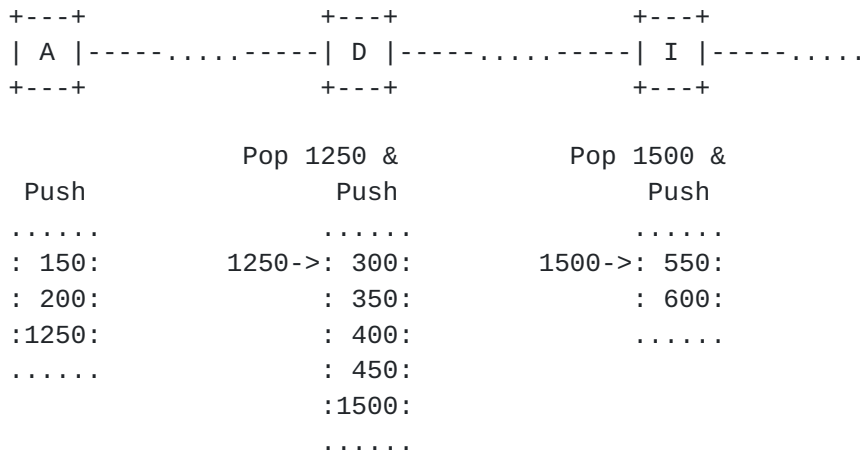


Figure 3: Stack to Reach Delegation Hop

With this approach, the ingress LER A will push {150, 200, 1250} for the tunnel in Figure 2. At LSR D, the delegation label 1250 will get popped and {300, 350, 400, 450, 1500} will get pushed. And at LSR I, the delegation label 1500 will get popped and the remaining set of labels {550, 600} will get pushed.



5.1.2. Stack to Reach Egress

In this approach, the stack pushed by the ingress carries a set of labels that will take the packet all the way to the egress so that all the delegation labels are part of the stack. When this approach is employed, the set of labels represented by a delegation label at a given delegation hop will not include the corresponding delegation label from the next delegation hop. As a result, this delegation label can be shared among all LSPs traversing the segment between the two delegation hops.

The downside of this approach is that the number of hops that the LSP can traverse is dictated by the label stack push limit of the ingress.

This approach is shown in Figure 4. The delegation label 1250 represents the stack {300, 350, 400, 450} and the delegation label 1500 represents the label stack {550, 600}.

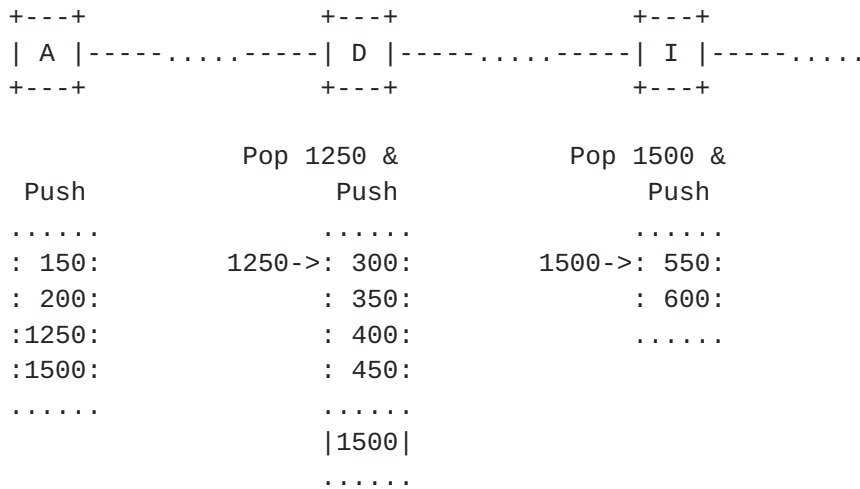


Figure 4: Stack to reach egress

With this approach, the ingress LER A will push {150, 200, 1250, 1500} for the tunnel in Figure 2. At LSR D, the delegation label 1250 will get popped and {300, 350, 400, 450} will get pushed. And at LSR I, the delegation label 1500 will get popped and the remaining set of labels {550, 600} will get pushed. The signaling extension required for the ingress to indicate the chosen stacking approach is defined in [Section 9.6](#).





## **5.2. Explicit Delegation**

In this delegation option, the ingress LER can explicitly delegate one or more specific transit LSRs to handle pushing labels for a certain number of their downstream hops. In order to accurately pick the delegation hops, the ingress needs to be aware of the label stack depth push limit of each of the transit LSRs prior to initiating the signaling sequence. The mechanism by which the ingress or controller (hosting the path computation element) learns this information is outside the scope of this document.

The signaling extension required for the ingress LER to explicitly delegate one or more specific transit hops is defined in [Section 9.4](#). The extension required for the delegation hop to indicate that the recorded label is a delegation label is defined in [Section 9.5](#).

## **5.3. Automatic Delegation**

In this approach, the ingress LER lets the downstream LSRs automatically pick suitable delegation hops during the initial signaling sequence. The ingress does not need to be aware up front of the label stack depth push limit of each of the transit LSRs. This approach SHOULD be used if there are loose hops in the explicit route. The delegation hops are picked based on a per-hop signaled attribute called the Effective Transport Label-Stack Depth (ETLD) as described in the next section.

### **5.3.1. Effective Transport Label-Stack Depth (ETLD)**

The ETLD is signaled as a per-hop recorded attribute in the Path message [[RFC7570](#)]. When automatic delegation is requested, the ingress MUST populate the ETLD with the maximum number of transport labels that it can potentially send to its downstream hop. This value is then decremented at each successive hop. If a node is reached and it is determined that this hop cannot support automatic delegation, then it MUST act as if it does not support TE link labels. If a node is reached where the ETLD set from the previous hop is 1, then that node MUST select itself as the delegation hop. If a node is reached and it is determined that this hop cannot receive more than one transport label, then that node MUST select itself as the delegation hop. If there is a node or a sequence of nodes along the path of the LSP that do not support ETLD, then the immediate hop that supports ETLD MUST select itself as the delegation hop. The ETLD MUST be decremented at each non-delegation transit hop by either 1 or some appropriate number based on the limitations at that hop. At each delegation hop, the ETLD MUST be reset to the maximum number of transport labels that the hop can send and the ETLD decrements start again at each successive hop until either a new



delegation hop is selected or the egress is reached. The net result is that by the time the Path message reaches the egress, all delegation hops are selected. During the Resv processing, at each delegation hop, a suitable delegation label is selected (either an existing label is reused or a new label is allocated) and recorded in the Resv message.

Consider the example shown in Figure 5. Let's assume ingress LER A can push up to 3 transport labels while the remaining nodes can push up to 5 transport labels. The ingress LER A signals the initial Path message with ETLD set to 3. The ETLD value is adjusted at each successive hop and signaled downstream as shown. By the time the Path message reaches the egress LER L, LSRs D and I are automatically selected as delegation hops.

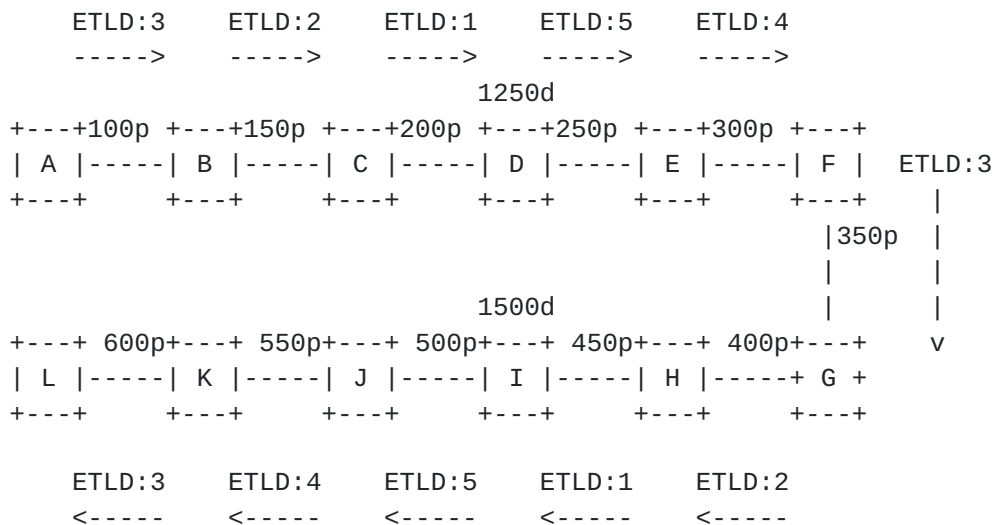


Figure 5: ETLD


When an LSP that requests automatic delegation also requests facility backup protection [RFC4090], the ingress or the delegation hop MUST account for the bypass tunnel's label(s) when populating the ETLD. Hence, when a regular bypass tunnel is used to protect the facility, the ETLD that gets populated on these nodes is one less than what gets populated for a corresponding unprotected LSP.

Signaling extension for the ingress LER to request automatic delegation is defined in Section 9.4. The extension for signaling the ETLD is defined in Section 9.7. The extension required for the delegation hop to indicate that the recorded label is a delegation label is defined in Section 9.5.



**6. Mixing TE Link Labels and Regular Labels in an RSVP-TE Tunnel**

Labels can be mixed across transit hops in a single MPLS RSVP-TE LSP. Certain LSRs can use TE link labels and others can use regular labels. The ingress can construct a label stack appropriately based on what type of label is recorded from every transit LSR.

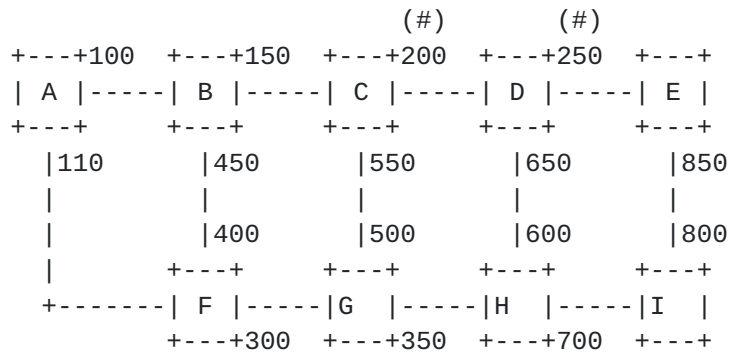

Notation : (#) denotes regular labels  
 Other labels are TE link labels

Figure 6: Sample Topology - TE Link Labels and Regular Labels

If the transit LSR allocates a regular label to be sent upstream in the Resv, then the label operation at the LSR is a swap to the label received from the downstream LSR. If the transit LSR is using a TE link label to be sent upstream in the Resv, then the label operation at the LSR is a pop and forward regardless of any label received from the downstream LSR. There is no change in the behavior of a penultimate hop popping (PHP) LSR [[RFC3031](#)].

[Section 7](#) explains how the label stack can be constructed. For example, the LSP from A to I using path A-B-C-D-E-I will use a label stack of {150, 200}.

**7. Construction of Label Stacks**

The ingress LER or delegation hop MUST check the type of label received from each transit hop as recorded in the RRO in the Resv message and generate the appropriate label stack to reach the next delegation hop or the egress.

The following logic could be used by the node constructing the label stack:



Each RRO label sub-object SHOULD be processed starting with the label sub-object from the first downstream hop. Any label provided by the first downstream hop MUST always be pushed on the label stack regardless of the label type. If the label type is a TE link label, then any label from the next downstream hop MUST also be pushed on the constructed label stack. If the label type is a regular label, then any label from the next downstream hop MUST NOT be pushed on the constructed label stack. If the label type is a delegation label, then the type of stacking approach chosen by the ingress for this LSP ([Section 5.1](#)) MUST be used to determine how the delegation labels are pushed in the label stack.

## **8. Facility Backup Protection**

The following section describes how link protection works with facility backup protection [[RFC4090](#)] using regular bypass tunnels for the Segment Routed RSVP-TE tunnels. The procedures for supporting node protection are not discussed in this document. The use of Segment Routed bypass tunnels for providing facility protection is left for further study.

### **8.1. Link Protection**


To provide link protection at a Point of Local Repair (PLR) with a shared MPLS forwarding plane, the LSR SHOULD allocate a separate TE link label for the TE link that will be used for RSVP-TE tunnels that request link protection from the ingress. No signaling extensions are required to support link protection for RSVP-TE tunnels over the shared MPLS forwarding plane.

At each LSR, link protected TE link labels can be allocated for each TE link and a link protecting facility backup LSP can be created to protect the TE link. The link protected TE link label can be sent by the LSR for LSPs requesting link protection over the specific TE link. Since the facility backup terminates at the next-hop (merge point), the incoming label on the packet will be what the merge point expects.

Consider the network shown in Figure 7. LSR B can install a facility backup LSP for the link protected TE link label 151. When the TE link B-C is up, LSR B will pop 151 and send the packet to C. If the TE link B-C is down, the LSR can pop 151 and send the packet via the facility backup to C.





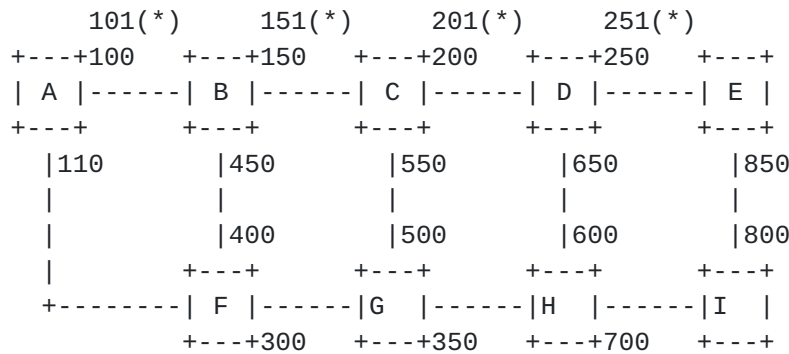

Notation : (\*) denotes link protection TE link labels

Figure 7: Link Protection Topology

## 9. Protocol Extensions

### 9.1. Requirements

The functionality discussed in this document imposes the following requirements on the signaling protocol.

- o The Ingress of the LSP SHOULD have the ability to mandate/request the use and recording of TE link labels at all hops along the path of the LSP.
- o When the use of TE link labels is mandated/requested for the path:
  - \* the node recording the TE link label SHOULD have the ability to indicate if the recorded label is a TE link label.
  - \* the ingress SHOULD have the ability to delegate label stack imposition by:
    - + explicitly mandating specific hops to be delegation hops (or)
    - + requesting automatic delegation.
  - \* When explicit delegation is mandated or automatic delegation is requested:
    - + the ingress SHOULD have the ability to indicate the chosen stacking approach (and)
    - + the delegation hop SHOULD have the ability to indicate that the recorded label is a delegation label.



## **9.2. Attribute Flags TLV: TE Link Label**

Bit Number 16 (Early allocation by IANA): TE Link Label

The presence of this in the LSP\_ATTRIBUTES/LSP\_REQUIRED\_ATTRIBUTES object of a Path message indicates that the ingress has requested/mandated the use and recording of TE link labels at all hops along the path of this LSP. When a node that does not cater to the mandate receives a Path message carrying the LSP\_REQUIRED\_ATTRIBUTES object with this flag set, it MUST send a PathErr message with an error code of 'Routing Problem (24)' and an error value of 'TE link label usage failure (TBD3)'. A transit hop that caters to this request/mandate MUST also check for the presence of other Attribute Flags introduced in this document ([Section 9.4](#) and [Section 9.6](#)) and process them as specified. An ingress LER that sets this bit MUST also set the "label recording desired" flag [[RFC3209](#)] in the SESSION\_ATTRIBUTE object.

## **9.3. RRO Label Subobject Flag: TE Link Label**

Bit Number (TBD1): TE Link Label

The presence of this flag indicates that the recorded label is a TE link label. This flag MUST be used by a node only if the use and recording of TE link labels is requested/mandated for the LSP.

## **9.4. Attribute Flags TLV: LSI-D**

Bit Number 17 (Early allocation by IANA): Label Stack Imposition - Delegation (LSI-D)

Automatic Delegation: The presence of this flag in the LSP\_ATTRIBUTES object of a Path message indicates that the ingress has requested automatic delegation of label stack imposition. This flag MUST be set in the LSP\_ATTRIBUTES object of a Path message only if the use and recording of TE link labels is requested/mandated for this LSP. If the transit hop does not support this flag, it MUST act as if it does not support TE link labels. If the use of TE link labels was mandated in the LSP\_REQUIRED\_ATTRIBUTES object, it MUST send a PathErr message with an error code of 'Routing Problem (24)' and an error value of 'TE link label usage failure (TBD3)'.

Explicit Delegation: The presence of this flag in the HOP\_ATTRIBUTES subobject [[RFC7570](#)] of an Explicit Route Object (ERO) in the Path message indicates that the hop identified by the preceding IPv4 or IPv6 or Unnumbered Interface ID subobject has been picked as an explicit delegation hop. The HOP\_ATTRIBUTES subobject carrying this







The presence of this TLV in the HOP\_ATTRIBUTES subobject of an RRO object in the Path message indicates that the hop identified by the preceding IPv4 or IPv6 or Unnumbered Interface ID subobject supports automatic delegation. This attribute MUST be used only if the use and recording of TE link labels is requested/mandated and automatic delegation is requested for the LSP.

The ETLD field specifies the effective number of transport labels that this hop (in relation to its position in the path) can potentially send to its downstream hop. It MUST be set to a non-zero value.

The Reserved field is for future specification. It SHOULD be set to zero on transmission and MUST be ignored on receipt to ensure future compatibility.

## **10. OAM Considerations**

MPLS LSP ping and traceroute [[RFC8029](#)] are applicable for Segment Routed RSVP-TE tunnels. The existing procedures allow for the label stack imposed at a delegation hop to be reported back in the Label Stack Sub-TLV in the MPLS echo reply for traceroute.

## **11. Acknowledgements**

The authors would like to thank Adrian Farrel, Kireeti Kompella, Markus Jork and Ross Callon for their input from discussions.

Adrian Farrel provided a review and text suggestion for clarity and readability.

## **12. Contributors**

The following individuals contributed to this document:

Raveendra Torvi  
Juniper Networks  
Email: rtorvi@juniper.net

Chandra Ramachandran  
Juniper Networks  
Email: csekar@juniper.net

George Swallow  
Email: swallow.ietf@gmail.com





**13. IANA Considerations**

**13.1. Attribute Flags: TE Link Label, LSI-D, LSI-D-S2E**

IANA manages the 'Attribute Flags' registry as part of the 'Resource Reservation Protocol-Traffic Engineering (RSVP-TE) Parameters' registry located at <http://www.iana.org/assignments/rsvp-te-parameters>. This document introduces three new Attribute Flags.

Bit No.	Name	Attribute Flags	Attribute Path	RRO	ERO	Reference
16	TE Link Label	Yes	No	No	No	[This.ID] ( <a href="#">Section 9.2</a> )
17	LSI-D	Yes	No	No	Yes	[This.ID] ( <a href="#">Section 9.4</a> )
18	LSI-D-S2E	Yes	No	No	No	[This.ID] ( <a href="#">Section 9.6</a> )

Note: The code points specified for TE Link Label, LSI-D and LSI-D-S2E are early allocations by IANA.

**13.2. Attribute TLV: ETLD**

IANA manages the "Attribute TLV Space" registry as part of the 'Resource Reservation Protocol-Traffic Engineering (RSVP-TE) Parameters' registry located at <http://www.iana.org/assignments/rsvp-te-parameters>. This document introduces a new Attribute TLV.

Type	Name	Allowed on LSP ATTRIBUTES	Allowed on LSP REQUIRED ATTRIBUTES	Allowed on LSP Hop Attributes	Reference
6	ETLD	No	No	Yes	[This.ID] ( <a href="#">Section 9.7</a> )

Note: The code point specified for ETLD is an early allocation by IANA.

**13.3. Record Route Label Sub-object Flags: TE Link Label, Delegation Label**

IANA manages the 'Record Route Object Sub-object Flags' registry as part of the 'Resource Reservation Protocol-Traffic Engineering (RSVP-TE) Parameters' registry located at <http://www.iana.org/assignments/rsvp-te-parameters>. This registry currently does not include Label Sub-object Flags. This document requests the addition of a new sub-registry for Label Sub-object Flags as shown below.



Flag	Name	Reference
0x1	Global Label	<a href="#">RFC 3209</a>
TBD1	TE Link Label	[This.ID] ( <a href="#">Section 9.3</a> )
TBD2	Delegation Label	[This.ID] ( <a href="#">Section 9.5</a> )

All assignments in this sub-registry are to be performed via Standards Action.

#### **[13.4.](#) Error Codes and Error Values**

IANA maintains a registry called "Resource Reservation Protocol (RSVP) Parameters" with a subregistry called "Error Codes and Globally-Defined Error Value Sub-Codes". Within this subregistry there is a definition of the "Routing Problem" error code with error code value 24. The definition lists a number of error values that may be used with this error code. IANA is requested to allocate further error values for use with this error code as described in this document. The resulting entry in the registry should look as follows.

24 Routing Problem [\[RFC3209\]](#)

This Error Code has the following globally-defined Error Value sub-codes:

TBD3 = TE link label usage failure [This.ID]  
TBD4 = Label stack imposition failure [This.ID]

#### **[14.](#) Security Considerations**

This document does not introduce new security issues. The security considerations pertaining to the original RSVP protocol [\[RFC2205\]](#) and RSVP-TE [\[RFC3209\]](#) and those that are described in [\[RFC5920\]](#) remain relevant.

#### **[15.](#) References**

##### **[15.1.](#) Normative References**

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.



- [RFC2205] Braden, R., Ed., Zhang, L., Berson, S., Herzog, S., and S. Jamin, "Resource ReSerVation Protocol (RSVP) -- Version 1 Functional Specification", [RFC 2205](#), DOI 10.17487/RFC2205, September 1997, <<https://www.rfc-editor.org/info/rfc2205>>.
- [RFC3031] Rosen, E., Viswanathan, A., and R. Callon, "Multiprotocol Label Switching Architecture", [RFC 3031](#), DOI 10.17487/RFC3031, January 2001, <<https://www.rfc-editor.org/info/rfc3031>>.
- [RFC3209] Awduche, D., Berger, L., Gan, D., Li, T., Srinivasan, V., and G. Swallow, "RSVP-TE: Extensions to RSVP for LSP Tunnels", [RFC 3209](#), DOI 10.17487/RFC3209, December 2001, <<https://www.rfc-editor.org/info/rfc3209>>.
- [RFC4090] Pan, P., Ed., Swallow, G., Ed., and A. Atlas, Ed., "Fast Reroute Extensions to RSVP-TE for LSP Tunnels", [RFC 4090](#), DOI 10.17487/RFC4090, May 2005, <<https://www.rfc-editor.org/info/rfc4090>>.
- [RFC7570] Margaria, C., Ed., Martinelli, G., Balls, S., and B. Wright, "Label Switched Path (LSP) Attribute in the Explicit Route Object (ERO)", [RFC 7570](#), DOI 10.17487/RFC7570, July 2015, <<https://www.rfc-editor.org/info/rfc7570>>.
- [RFC8029] Kompella, K., Swallow, G., Pignataro, C., Ed., Kumar, N., Aldrin, S., and M. Chen, "Detecting Multiprotocol Label Switched (MPLS) Data-Plane Failures", [RFC 8029](#), DOI 10.17487/RFC8029, March 2017, <<https://www.rfc-editor.org/info/rfc8029>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.

## **15.2. Informative References**

- [I-D.ietf-spring-segment-routing-mpls]  
Bashandy, A., Filsfils, C., Previdi, S., Decraene, B., Litkowski, S., and R. Shakir, "Segment Routing with MPLS data plane", [draft-ietf-spring-segment-routing-mpls-15](#) (work in progress), October 2018.
- [RFC2961] Berger, L., Gan, D., Swallow, G., Pan, P., Tommasi, F., and S. Molendini, "RSVP Refresh Overhead Reduction Extensions", [RFC 2961](#), DOI 10.17487/RFC2961, April 2001, <<https://www.rfc-editor.org/info/rfc2961>>.



- [RFC5920] Fang, L., Ed., "Security Framework for MPLS and GMPLS Networks", [RFC 5920](#), DOI 10.17487/RFC5920, July 2010, <<https://www.rfc-editor.org/info/rfc5920>>.
- [RFC8370] Beeram, V., Ed., Minei, I., Shakir, R., Pacella, D., and T. Saad, "Techniques to Improve the Scalability of RSVP-TE Deployments", [RFC 8370](#), DOI 10.17487/RFC8370, May 2018, <<https://www.rfc-editor.org/info/rfc8370>>.
- [RFC8402] Filsfils, C., Ed., Previdi, S., Ed., Ginsberg, L., Decraene, B., Litkowski, S., and R. Shakir, "Segment Routing Architecture", [RFC 8402](#), DOI 10.17487/RFC8402, July 2018, <<https://www.rfc-editor.org/info/rfc8402>>.

## Authors' Addresses

Harish Sitaraman  
Juniper Networks  
1133 Innovation Way  
Sunnyvale, CA 94089  
US

Email: [hsitaraman@juniper.net](mailto:hsitaraman@juniper.net)

Vishnu Pavan Beeram  
Juniper Networks  
10 Technology Park Drive  
Westford, MA 01886  
US

Email: [vbeeram@juniper.net](mailto:vbeeram@juniper.net)

Tejal Parikh  
Verizon  
400 International Parkway  
Richardson, TX 75081  
US

Email: [tejal.parikh@verizon.com](mailto:tejal.parikh@verizon.com)





Tarek Saad  
Cisco Systems  
2000 Innovation Drive  
Kanata, Ontario K2K 3E8  
Canada

Email: [tsaad@cisco.com](mailto:tsaad@cisco.com)