

Network Working Group  
Internet Draft  
Expires: March 2004

Cheenu Srinivasan  
Bloomberg L.P.

Arun Viswanathan  
Force10 Networks, Inc.

Thomas D. Nadeau  
Cisco Systems, Inc.

August 2003

**Multiprotocol Label Switching (MPLS) Traffic Engineering  
Management Information Base**

[draft-ietf-mpls-te-mib-12.txt](#)

Status of this Memo

This document is an Internet-Draft and is in full conformance with all provisions of [Section 10 of RFC 2026](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

Abstract

This memo defines a portion of the Management Information Base (MIB) for use with network management protocols in the Internet community. In particular, it describes managed objects for Multiprotocol Label Switching (MPLS) based traffic engineering.

Table of Contents

[1. Introduction](#) ..... [2](#)

[2.](#) Terminology ..... [3](#)  
[3.](#) The Internet-Standard Management Framework ..... [3](#)

[4. Feature List](#) ..... [3](#)  
[5. Outline](#) ..... [4](#)  
[5.1. Summary of Traffic Engineering MIB module](#) ..... [4](#)  
[6. Brief Description of MIB Objects](#) ..... [5](#)  
[6.1. mplsTunnelTable](#) ..... [5](#)  
[6.2. mplsTunnelResourceTable](#) ..... [5](#)  
[6.3. mplsTunnelHopTable](#) ..... [5](#)  
[6.4. mplsTunnelARHopTable](#) ..... [6](#)  
[6.5. mplsTunnelCHoptable](#) ..... [6](#)  
[6.6. mplsTunnelPerfTable](#) ..... [6](#)  
[6.7. mplsTunnelCRLDPResTable](#) ..... [6](#)  
[7. Use of 32-bit and 64-bit Counters](#) ..... [7](#)  
[8. Application of the Interface Group to MPLS Tunnels](#) ..... [7](#)  
[8.1. Support of the MPLS Tunnel Interface by ifTable](#) ..... [8](#)  
[9. Example of Tunnel Setup](#) ..... [9](#)  
[10. The Use of RowPointer](#) ..... [11](#)  
[11. MPLS Traffic Engineering MIB Definitions](#) ..... [12](#)  
[12. Security Considerations](#) ..... [63](#)  
[13. Acknowledgments](#) ..... [64](#)  
[14. References](#) ..... [64](#)  
[14.1. Normative References](#) ..... [64](#)  
[14.2. Informative References](#) ..... [66](#)  
[15. Authors' Addresses](#) ..... [66](#)  
[16. Full Copyright Statement](#) ..... [67](#)  
[17. Intellectual Property Notice](#) ..... [67](#)  
[18. IANA Considerations](#) ..... [68](#)  
[18.1. IANA Considerations for MPLS-TE-STD-MIB](#) ..... [68](#)

**1. Introduction**

This memo defines a portion of the Management Information Base (MIB) for use with network management protocols in the Internet community. In particular, it describes managed objects for modeling a Multi-Protocol Label Switching (MPLS) [[RFC3031](#)] based traffic engineering. This MIB module should be used in conjunction with the companion document [[LSRMIB](#)] for MPLS based traffic engineering configuration and management.

Comments should be made directly to the MPLS mailing list at [mpls@uu.net](mailto:mpls@uu.net).

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#), reference [[RFC2119](#)].

## **2. Terminology**

MPLS Working Group

Expires March 2004

[Page 2]

This document uses terminology from the MPLS architecture document [[RFC3031](#)] and MPLS Label Switch Router MIB [[LSRMIB](#)]. Some frequently used terms are described next.

An explicitly routed LSP (ERLSP) is referred to as an MPLS tunnel. It consists of in-segment(s) and/or out-segment(s) at the egress/ingress LSRs, each segment being associated with one MPLS interface. These are also referred to as tunnel segments. Additionally, at an intermediate LSR, we model a connection as consisting of one or more in-segments and/or one or more out-segments. The binding or interconnection between in-segments and out-segments is performed using a cross-connect. These objects are defined in the MPLS Label Switch Router MIB [[LSRMIB](#)].

### **3. The Internet-Standard Management Framework**

For a detailed overview of the documents that describe the current Internet-Standard Management Framework, please refer to [section 7 of RFC 3410](#) [[RFC3410](#)].

Managed objects are accessed via a virtual information store, termed the Management Information Base or MIB. MIB objects are generally accessed through the Simple Network Management Protocol (SNMP). Objects in the MIB are defined using the mechanisms defined in the Structure of Management Information (SMI). This memo specifies a MIB module that is compliant to the SMIV2, which is described in STD 58, [RFC 2578](#) [[RFC2578](#)], STD 58, [RFC 2579](#) [[RFC2579](#)] and STD 58, [RFC 2580](#) [[RFC2580](#)].

### **4. Feature List**

The MPLS traffic engineering MIB module is designed to satisfy the following requirements and constraints.

- The MIB module supports configuration of point-to-point unidirectional tunnels.
- MPLS tunnels need not be interfaces, but it is possible to configure a tunnel as an interface.
- The MIB module supports tunnel establishment via an MPLS signalling protocol wherein the tunnel parameters are specified using this MIB module at the head end of the

LSP and end-to-end tunnel LSP establishment is accomplished via signalling. The MIB module also

supports manually configured tunnels, i.e. those for which label associations at each hop of the tunnel LSP are provisioned by the administrator via the LSR MIB [[LSRMIB](#)].

- The MIB module supports persistent as well as non-persistent tunnels.

## 5. Outline

Traffic engineering support for MPLS tunnels requires the following configuration.

- Setting up MPLS tunnels along with appropriate configuration parameters.
- Configuring tunnel loose and strict source routed hops.

These actions may need to be accompanied by corresponding actions using [[LSRMIB](#)] to establish and configure tunnel segments, if this is done manually. Also, the in-segment and out-segment performance tables, `mplsInSegmentPerfTable` and `mplsOutSegmentPerfTable` [[LSRMIB](#)], should be used to determine performance of the tunnels and tunnel segments in addition to `mplsTunnelPerfTable` in this MIB module.

### 5.1. Summary of Traffic Engineering MIB module

The MIB module objects for performing these actions consist of the following tables.

- Tunnel table (`mplsTunnelTable`) for setting up MPLS tunnels.
- Resource table (`mplsTunnelResourceTable`) for setting up the tunnel resources.
- Tunnel specified, actual, and computed hop tables (`mplsTunnelHopTable`, `mplsTunnelARHopTable`, and `mplsTunnelCHopTable`) for strict and loose source routed MPLS tunnel hops.
- Tunnel performance table (`mplsTunnelPerfTable`) for measuring tunnel performance.
- CRLDP resource table (`mplsTunnelCRLDPResTable`) for

specifying resource objects applicable to tunnels  
signaled using CRLDP.

These tables are described in the subsequent sections.

## **6. Brief Description of MIB Objects**

The objects described in this section support the functionality described in documents [RSVPTE] and [CRLDP]. The tables support both manually configured and signaled tunnels.

### **6.1. mplsTunnelTable**

The mplsTunnelTable allows new MPLS tunnels to be created between an MPLS LSR and a remote endpoint, and existing tunnels to be reconfigured or removed. Note that we only support point-to-point tunnels, although multi-point-to-point and point-to-multi-point connections are supported by an LSR acting as a cross-connect. Each MPLS tunnel can thus have one out-segment originating at an LSR and/or one in-segment terminating at that LSR.

mplsTunnelTable does not define the in and out segments forming the tunnel. Instead, these are defined by creating rows in the in-segment and out-segment tables, defining relationships in the cross-connect table and referring to these rows in the mplsTunnelTable using a cross-connect index, mplsTunnelXCIndex. These segment and cross-connect related objects are defined in [LSRMIB].

### **6.2. mplsTunnelResourceTable**

mplsTunnelResourceTable is used to indicate the resources required for a tunnel. Multiple tunnels may share the same resources by pointing to the same entry in this table. Tunnels that do not share resources must point to separate entries in this table.

### **6.3. mplsTunnelHopTable**

mplsTunnelHopTable is used to indicate the hops, strict or loose, for an MPLS tunnel defined in mplsTunnelTable, when it is established via signalling. Multiple tunnels may share the same hops by pointing to the same entry in this table. Each row also has a secondary index,

mplsTunnelHopIndex, corresponding to the next hop of this tunnel. The scalar mplsTunnelMaxHops indicates the maximum

number of hops that can be specified on each tunnel supported by this LSR.

At transit LSRs this table contains the hops, strict or loose, that apply to the downstream part of this tunnel only. This corresponds to the requested path received through the signaling protocol.

#### **6.4. mplsTunnelARHopTable**

mplsTunnelARHopTable is used to indicate the actual hops traversed by a tunnel as reported by the MPLS signalling protocol after the tunnel is setup. The support of this table is optional since not all MPLS signalling protocol may support this feature.

At transit LSRs this table contains the actual hops traversed by the tunnel along its entire length if that information is available. This corresponds to the recorded path reported by the MPLS signalling protocol, possibly derived from multiple signaling messages.

#### **6.5. mplsTunnelCHopTable**

mplsTunnelCHopTable lists the actual hops computed by a constraint-based routing algorithm based on the mplsTunnelHopTable for the MPLS signalling protocol in use. The support of this table is optional since not all implementations may support computation of hop list using a constraint-based routing protocol.

At transit LSRs this table contains the hops computed to apply to the downstream part of this tunnel. This corresponds to the requested path signaled from this LSR through the signaling protocol.

#### **6.6. mplsTunnelPerfTable**

mplsTunnelPerfTable provides several counters to measure the performance of the MPLS tunnels. This table augments mplsTunnelTable.

#### **6.7. mplsTunnelCRLDResTable**

mplsTunnelCRLDPResTable contains resource information for those tunnels that are signaled using CRLDP [[CRLDP](#)]. This

is a sparse extension to `mplsTunnelResourceTable` and is also indexed by `mplsTunnelResourceIndex`. As with `mplsTunnelResourceTable`, multiple tunnels may share the same resources by pointing to the same entry in this table. Tunnels that do not share resources must point to separate entries in this table. The `mplsTunnelCRLDPResTable` may be supported only by implementations that support the CR-LDP signaling protocol.

## **7. Use of 32-bit and 64-bit Counters**

64-bit counters are provided in this MIB module for high-speed interfaces where the use of 32-bit counters might be impractical. The requirements on the use of 32-bit and 64-bit counters (copied verbatim from [[RFC2863](#)]) are as follows.

For interfaces that operate at 20,000,000 (20 million) bits per second or less, 32-bit byte and packet counters MUST be supported. For interfaces that operate faster than 20,000,000 bits/second, and slower than 650,000,000 bits/second, 32-bit packet counters MUST be supported and 64-bit octet counters MUST be supported. For interfaces that operate at 650,000,000 bits/second or faster, 64-bit packet counters AND 64-bit octet counters MUST be supported.

## **8. Application of the Interface Group to MPLS Tunnels**

The Interfaces Group of MIB II defines generic managed objects for managing interfaces. This memo contains the media-specific extensions to the Interfaces Group for managing MPLS Tunnels as logical interfaces.

This memo assumes the interpretation of the Interfaces Group to be in accordance with [[RFC2863](#)] which states that the interfaces table (`ifTable`) contains information on the managed resource's interfaces and that each sub-layer below the internetwork layer of a network interface is considered an interface. Thus, the MPLS interface is represented as an entry in the `ifTable`. The interrelation of entries in the `ifTable` is defined by the Interfaces Stack Group defined in [[RFC2863](#)].


When using MPLS Tunnels as interfaces, the interface stack table might appear as follows:

+-----+

MPLS Working Group

Expires March 2004

[Page 7]

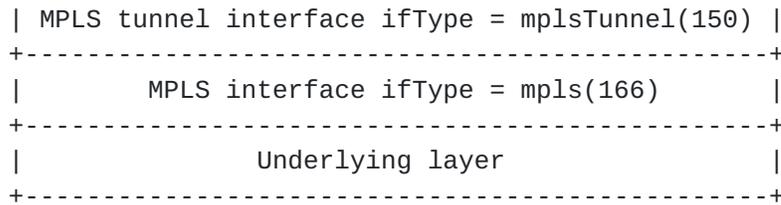

In the above diagram, "Underlying Layer" refers to the ifIndex of any interface type for which MPLS internetworking has been defined. Examples include ATM, Frame Relay, and Ethernet.

**8.1. Support of the MPLS Tunnel Interface by ifTable**

Some specific interpretations of ifTable for those MPLS tunnels represented as interfaces follow:

Object	Use for the MPLS tunnel.
ifIndex	Each MPLS tunnel is represented by an ifEntry.
ifDescr	Description of the MPLS tunnel.
ifType	The value that is allocated for MPLS tunnel is 150.
ifSpeed	The total bandwidth in bits per second for use by the MPLS tunnel.
ifPhysAddress	Unused.
ifAdminStatus	See [ <a href="#">RFC2863</a> ].
ifOperStatus	This value reflects the actual operational status of MPLS tunnel. Assumes the value down(2) if the MPLS tunnel is down.
ifLastChange	See [ <a href="#">RFC2863</a> ].
ifInOctets	The number of octets received over the MPLS tunnel.
ifOutOctets	The number of octets transmitted over the MPLS tunnel.

ifInErrors            The number of labeled packets dropped

due to uncorrectable errors.

ifInUnknownProtos	The number of received packets discarded during packet header validation, including packets with unrecognized label values.
ifOutErrors	See [ <a href="#">RFC2863</a> ].
ifName	Textual name (unique on this system) of the MPLS tunnel or an octet string of zero length.
ifLinkUpDownTrapEnable	Default is disabled (2).
ifConnectorPresent	Set to false (2).
ifHighSpeed	See [ <a href="#">RFC2863</a> ].
ifHCInOctets	The 64-bit version of ifInOctets; supported if required by the compliance statements in [ <a href="#">RFC2863</a> ].
ifHCOctets	The 64-bit version of ifOutOctets; supported if required by the compliance statements in [ <a href="#">RFC2863</a> ].
ifAlias	The non-volatile 'alias' name for the MPLS tunnel as specified by a network manager.

## 9. Example of Tunnel Setup

This section contains an example of which MIB objects should be modified if one would like to create a best effort, loosely routed, unidirectional traffic engineered tunnel, which spans two hops of a simple network. Note that these objects should be created on the "head-end" LSR. Those objects relevant to illustrating the relationships amongst different tables are shown here. Other objects may be needed before conceptual row activation can happen.

The RowStatus values shown in this section are those to be used in the set request, typically createAndGo(4) which is used to create the conceptual row and have its status

immediately set to active. A subsequent retrieval operation on the conceptual row will return a different

value, such as active(1). Please see [[RFC2579](#)] for a detailed discussion on the use of RowStatus.

In mplsTunnelResourceTable:

```
{
  mplsTunnelResourceIndex          = 5,
  mplsTunnelResourceMaxRate        = 0,
  mplsTunnelResourceMeanRate       = 0,
  mplsTunnelResourceMaxBurstSize   = 0,
  mplsTunnelResourceMeanBurstSize  = 0,
  mplsTunnelResourceExBurstSize    = 0,
  mplsTunnelResourceExBurstSize    = unspecified (1),
  mplsTunnelResourceWeight         = 0,
  -- Mandatory parameters needed to activate the row go here
  mplsTunnelResourceRowStatus      = createAndGo (4)
}
```

The next two instances of mplsTunnelHopEntry are used to denote the hops this tunnel will take across the network.

The following denotes the beginning of the tunnel, or the first hop. We have used the fictitious LSR identified by "192.168.100.1" as our example head-end router.

In mplsTunnelHopTable:

```
{
  mplsTunnelHopListIndex           = 1,
  mplsTunnelPathOptionIndex        = 1,
  mplsTunnelHopIndex               = 1,
  mplsTunnelHopAddrType            = ipv4 (1),
  mplsTunnelHopIpAddr              = "192.168.100.1",
  mplsTunnelHopIpPrefixLen         = 32,
  mplsTunnelHopType                 = strict (2),
  mplsTunnelHopInclude             = true (1),
  mplsTunnelHopPathOptionName      = "Here to there",
  mplsTunnelHopEntryPathComp       = explicit (2),
  -- Mandatory parameters needed to activate the row go here
  mplsTunnelHopRowStatus           = createAndGo (4)
}
```

The following denotes the end of the tunnel, or the last hop in our example. We have used the fictitious LSR identified by "192.168.101.1" as our end router.

In mplsTunnelHopTable:

```
{
  mplsTunnelHopListIndex           = 1,
```

```
mplsTunnelPathOptionIndex    = 1,  
mplsTunnelHopIndex           = 2,  
mplsTunnelHopAddrType        = ipv4 (1),
```

```

mplsTunnelHopIpAddr      = "192.168.101.1",
mplsTunnelHopIpPrefixLen = 32,
mplsTunnelHopType        = loose (2),
mplsTunnelHopInclude     = true (1),
mplsTunnelHopPathOptionName = "Here to there",
mplsTunnelHopEntryPathComp = explicit (2),
-- Mandatory parameters needed to activate the row go here
mplsTunnelHopRowStatus   = createAndGo (4)
}

```

The following denotes the configured tunnel "head" entry:

In mplsTunnelTable:

```

{
  mplsTunnelIndex          = 1,
  mplsTunnelInstance       = 0,
  mplsTunnelIngressLSRId   = 192.168.100.1,
  mplsTunnelEgressLSRId    = 192.168.101.1,
  mplsTunnelName           = "My first tunnel",
  mplsTunnelDescr          = "Here to there",
  mplsTunnelIsIf           = true (1),
-- RowPointer MUST point to the first accessible column
  mplsTunnelXCPointer      = 0.0,
  mplsTunnelSignallingProto = none (1),
  mplsTunnelSetupPrio      = 0,
  mplsTunnelHoldingPrio    = 0,
  mplsTunnelSessionAttributes = 0,
  mplsTunnelLocalProtectInUse = false (0),
-- RowPointer MUST point to the first accessible column
  mplsTunnelResourcePointer = mplsTunnelResourceMaxRate.5,
  mplsTunnelInstancePriority = 1,
  mplsTunnelHopTableIndex  = 1,
  mplsTunnelIncludeAnyAffinity = 0,
  mplsTunnelIncludeAllAffinity = 0,
  mplsTunnelExcludeAnyAffinity = 0,
  mplsTunnelPathInUse      = 1,
  mplsTunnelRole           = head (1),
-- Mandatory parameters needed to activate the row go here
  mplsTunnelRowStatus      = createAndGo (4)
}

```

Note that any active or signaled instances of the above tunnel would appear with the same primary mplsTunnelIndex, but would have values greater than 0 for mplsTunnelInstance. They would also have other objects such as the mplsTunnelXCPointer set accordingly.

**10. The Use of RowPointer**

MPLS Working Group

Expires March 2004

[Page 11]

RowPointer is a textual convention used to identify a conceptual row in a conceptual table in a MIB by pointing to the first accessible object. In this MIB module, in `mplsTunnelTable`, the objects `mplsTunnelXCPointer` and `mplsTunnelResourcePointer` are of type RowPointer. The object `mplsTunnelXCPointer` points to a specific entry in the `mplsXCTable` [[LSRMIB](#)]. This entry in the `mplsXCTable` is the associated LSP for the given MPLS tunnel entry. The object `mplsTunnelResourcePointer` points to a specific entry in a traffic parameter table. An example of such a traffic parameter table is `mplsTunnelResourceTable`. It indicates a specific instance of a traffic parameter entry that is associated with a given MPLS tunnel entry. These RowPointer objects MUST point to the first instance of the first accessible columnar object in the appropriate conceptual row in order to allow the manager to find the appropriate corresponding entry in either MPLS-LSR-STD-MIB [[LSRMIB](#)] or MPLS-TE-STD-MIB [[TEMIB](#)]. If object `mplsTunnelXCPointer` returns `zeroDotZero` it implies that there is no LSP associated with that particular instance of tunnel entry. If object `mplsTunnelResourcePointer` returns `zeroDotZero` it implies that there is no QoS resource associated with that particular instance of tunnel entry.

## **11. MPLS Traffic Engineering MIB Definitions**

```
MPLS-TE-STD-MIB DEFINITIONS ::= BEGIN
```

```
IMPORTS
```

```
MODULE-IDENTITY, OBJECT-TYPE, NOTIFICATION-TYPE,  
Integer32, Unsigned32, Counter32, Counter64, TimeTicks,  
zeroDotZero  
    FROM SNMPv2-SMI  
MODULE-COMPLIANCE, OBJECT-GROUP, NOTIFICATION-GROUP  
    FROM SNMPv2-CONF  
TruthValue, RowStatus, RowPointer, StorageType,  
TimeStamp  
    FROM SNMPv2-TC  
InterfaceIndexOrZero, ifGeneralInformationGroup,  
ifCounterDiscontinuityGroup  
    FROM IF-MIB  
mplsStdMIB, MplsBitRate, MplsBurstSize, MplsLSPID,  
MplsTunnelIndex, MplsTunnelInstanceIndex,  
MplsTunnelAffinity, MplsExtendedTunnelId, MplsPathIndex,  
MplsPathIndexOrZero, MplsOwner, TeHopAddressType,
```

TeHopAddress, TeHopAddressAS, TeHopAddressUnnum  
FROM MPLS-TC-STD-MIB  
SnmpAdminString

```
FROM SNMP-FRAMEWORK-MIB
IndexIntegerNextFree
FROM DIFFSERV-MIB
InetAddressPrefixLength
FROM INET-ADDRESS-MIB
;
```

mplsTeStdMIB MODULE-IDENTITY

LAST-UPDATED

"200308061200Z" -- 06 August 2003 12:00:00 GMT

ORGANIZATION

"Multiprotocol Label Switching (MPLS) Working Group"

CONTACT-INFO

" Cheenu Srinivasan  
Bloomberg L.P.  
Email: cheenu@bloomberg.net

Arun Viswanathan  
Force10 Networks, Inc.  
Email: arunv@force10networks.com

Thomas D. Nadeau  
Cisco Systems, Inc.  
Email: tnadeau@cisco.com

Comments about this document should be emailed  
directly to the MPLS working group mailing list at  
mpls@uu.net."

DESCRIPTION

"Copyright (C) The Internet Society (2003). This  
version of this MIB module is part of RFC xxxx; see  
the RFC itself for full legal notices.

This MIB module contains managed object definitions  
for MPLS Traffic Engineering (TE) as defined in:

1. Extensions to RSVP for LSP Tunnels, Awduche et al, [RFC 3209](#), December 2001
2. Constraint-Based LSP Setup using LDP, Jamoussi (Editor), [RFC 3212](#), January 2002
3. Requirements for Traffic Engineering Over MPLS, Awduche, D., Malcolm, J., Agogbua, J., O'Dell, M., and J. McManus, [RFC 2702](#), September 1999"

-- Revision history.

REVISION

"200308061200Z" -- 06 August 2003 12:00:00 GMT

DESCRIPTION

"Initial draft version issued as part of RFC XXXX."

MPLS Working Group

Expires March 2004

[Page 13]

```
 ::= { mplsStdMIB 3 }

-- Top level components of this MIB module.

-- traps
mplsTeNotifications OBJECT IDENTIFIER ::= { mplsTeStdMIB 0 }
-- tables, scalars
mplsTeScalars OBJECT IDENTIFIER ::= { mplsTeStdMIB 1 }
mplsTeObjects OBJECT IDENTIFIER ::= { mplsTeStdMIB 2 }
-- conformance
mplsTeConformance OBJECT IDENTIFIER ::= { mplsTeStdMIB 3 }

-- MPLS Tunnel scalars.

mplsTunnelConfigured OBJECT-TYPE
    SYNTAX      Unsigned32
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The number of tunnels configured on this device. A
        tunnel is considered configured if the
        mplsTunnelRowStatus is active(1)."
```

```
 ::= { mplsTeScalars 1 }

mplsTunnelActive OBJECT-TYPE
    SYNTAX      Unsigned32
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The number of tunnels active on this device. A
        tunnel is considered active if the
        mplsTunnelOperStatus is up(1)."
```

```
 ::= { mplsTeScalars 2 }

mplsTunnelTEDistProto OBJECT-TYPE
    SYNTAX      BITS {
        other (0),
        ospf (1),
        isis (2)
    }
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The traffic engineering distribution protocol(s)
        used by this LSR. Note that an LSR may support more
        than one distribution protocol simultaneously."
```

::= { mplsTeScalars 3 }

## mplsTunnelMaxHops OBJECT-TYPE

SYNTAX Unsigned32

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"The maximum number of hops that can be specified for a tunnel on this device."

::= { mplsTeScalars 4 }

## mplsTunnelNotificationMaxRate OBJECT-TYPE

SYNTAX Unsigned32

MAX-ACCESS read-write

STATUS current

## DESCRIPTION

"This variable indicates the maximum number of notifications issued per second. If events occur more rapidly, the implementation may simply fail to emit these notifications during that period, or may queue them until an appropriate time. A value of 0 means no throttling is applied and events may be notified at the rate at which they occur."

DEFVAL { 0 }

::= { mplsTeScalars 5 }

-- End of MPLS Tunnel scalars.

-- MPLS tunnel table.

## mplsTunnelIndexNext OBJECT-TYPE

SYNTAX IndexIntegerNextFree

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"This object contains an unused value for mplsTunnelIndex, or a zero to indicate that none exist.

Note that this object offers an unused value for an mplsTunnelIndex value at the ingress side of a tunnel. At other LSRs the value of mplsTunnelIndex SHOULD be taken from the value signaled by the MPLS signaling protocol.

"

::= { mplsTeObjects 1 }

## mplsTunnelTable OBJECT-TYPE

SYNTAX SEQUENCE OF MplsTunnelEntry

MAX-ACCESS not-accessible  
STATUS current

MPLS Working Group

Expires March 2004

[Page 15]

## DESCRIPTION

"The `mplsTunnelTable` allows new MPLS tunnels to be created between an LSR and a remote endpoint, and existing tunnels to be reconfigured or removed. Note that only point-to-point tunnel segments are supported, although multi-point-to-point and point-to-multi-point connections are supported by an LSR acting as a cross-connect. Each MPLS tunnel can thus have one out-segment originating at this LSR and/or one in-segment terminating at this LSR."

```
::= { mplsTeObjects 2 }
```

`mplsTunnelEntry` OBJECT-TYPE

```
SYNTAX      MplsTunnelEntry
```

```
MAX-ACCESS  not-accessible
```

```
STATUS      current
```

## DESCRIPTION

"An entry in this table represents an MPLS tunnel. An entry can be created by a network administrator or by an SNMP agent as instructed by an MPLS signalling protocol. Whenever a new entry is created with `mplsTunnelIsIf` set to `true(1)`, then a corresponding entry is created in `ifTable` as well (see [RFC 2863](#)). The `ifType` of this entry is `mplsTunnel(150)`.

A tunnel entry needs to be uniquely identified across a MPLS network. Indices `mplsTunnelIndex` and `mplsTunnelInstance` uniquely identify a tunnel on the LSR originating the tunnel. To uniquely identify a tunnel across an MPLS network requires index `mplsTunnelIngressLSRId`. The last index `mplsTunnelEgressLSRId` is useful in identifying all instances of a tunnel that terminate on the same egress LSR."

## REFERENCE

"1. [RFC 2863](#) - The Interfaces Group MIB, McCloghrie, K., and F. Kastenholtz, June 2000 "

```
INDEX { mplsTunnelIndex,
        mplsTunnelInstance,
        mplsTunnelIngressLSRId,
        mplsTunnelEgressLSRId
      }
```

```
::= { mplsTunnelTable 1 }
```

```
MplsTunnelEntry ::= SEQUENCE {
```

```
    mplsTunnelIndex
```

```
    MplsTunnelIndex,
```

mplsTunnelInstance  
mplsTunnelIngressLSRId  
mplsTunnelEgressLSRId

MplsTunnelInstanceIndex,  
MplsExtendedTunnelId,  
MplsExtendedTunnelId,

```

mplsTunnelName          SnmpAdminString,
mplsTunnelDescr         SnmpAdminString,
mplsTunnelIsIf          TruthValue,
mplsTunnelIfIndex       InterfaceIndexOrZero,
mplsTunnelOwner         MplsOwner,
mplsTunnelRole          INTEGER,
mplsTunnelXCPointer     RowPointer,
mplsTunnelSignallingProto INTEGER,
mplsTunnelSetupPrio     Integer32,
mplsTunnelHoldingPrio   Integer32,
mplsTunnelSessionAttributes BITS,
mplsTunnelLocalProtectInUse TruthValue,
mplsTunnelResourcePointer RowPointer,
mplsTunnelPrimaryInstance MplsTunnelInstanceIndex,
mplsTunnelInstancePriority Unsigned32,
mplsTunnelHopTableIndex MplsPathIndexOrZero,
mplsTunnelPathInUse     MplsPathIndexOrZero,
mplsTunnelARHopTableIndex MplsPathIndexOrZero,
mplsTunnelCHopTableIndex MplsPathIndexOrZero,
mplsTunnelIncludeAnyAffinity MplsTunnelAffinity,
mplsTunnelIncludeAllAffinity MplsTunnelAffinity,
mplsTunnelExcludeAnyAffinity MplsTunnelAffinity,
mplsTunnelTotalUpTime   TimeTicks,
mplsTunnelInstanceUpTime TimeTicks,
mplsTunnelPrimaryUpTime TimeTicks,
mplsTunnelPathChanges   Counter32,
mplsTunnelLastPathChange TimeTicks,
mplsTunnelCreationTime  TimeStamp,
mplsTunnelStateTransitions Counter32,
mplsTunnelAdminStatus   INTEGER,
mplsTunnelOperStatus    INTEGER,
mplsTunnelRowStatus     RowStatus,
mplsTunnelStorageType   StorageType
}

```

mplsTunnelIndex OBJECT-TYPE

```

SYNTAX          MplsTunnelIndex
MAX-ACCESS      not-accessible
STATUS          current

```

DESCRIPTION

"Uniquely identifies a set of tunnel instances between a pair of ingress and egress LSRs. Managers should obtain new values for row creation in this table by reading mplsTunnelIndexNextFree. When the MPLS signalling protocol is rsvp(2) this value SHOULD be equal to the value signaled in the

Tunnel Id of the Session object. When the MPLS signalling protocol is crldp(3) this value SHOULD be equal to the value signaled in the

LSP ID.

"

::= { mplsTunnelEntry 1 }

mplsTunnelInstance OBJECT-TYPE

SYNTAX MplsTunnelInstanceIndex

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Uniquely identifies a particular instance of a tunnel between a pair of ingress and egress LSRs. It is useful to identify multiple instances of tunnels for the purposes of backup and parallel tunnels. When the MPLS signaling protocol is rsvp(2) this value SHOULD be equal to the LSP Id of the Sender Template object. When the signaling protocol is crldp(3) there is no equivalent signaling object."

::= { mplsTunnelEntry 2 }

mplsTunnelIngressLSRId OBJECT-TYPE

SYNTAX MplsExtendedTunnelId

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Identity of the ingress LSR associated with this tunnel instance. When the MPLS signalling protocol is rsvp(2) this value SHOULD be equal to the Tunnel Sender Address in the Sender Template object and MAY be equal to the Extended Tunnel Id field in the SESSION object. When the MPLS signalling protocol is crldp(3) this value SHOULD be equal to the Ingress LSR Router ID field in the LSPID TLV object."

REFERENCE

- "1. RSVP-TE: Extensions to RSVP for LSP Tunnels, Awduche et al, [RFC 3209](#), December 2001
2. Constraint-Based LSP Setup using LDP, Jamoussi (Editor), [RFC 3212](#), January 2002"

::= { mplsTunnelEntry 3 }

mplsTunnelEgressLSRId OBJECT-TYPE

SYNTAX MplsExtendedTunnelId

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Identity of the egress LSR associated with this tunnel instance."

```
::= { mplsTunnelEntry 4 }
```

```
mplsTunnelName OBJECT-TYPE
```

SYNTAX SnmpAdminString

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"The canonical name assigned to the tunnel. This name can be used to refer to the tunnel on the LSR's console port. If mplsTunnelIsIf is set to true then the ifName of the interface corresponding to this tunnel should have a value equal to mplsTunnelName. Also see the description of ifName in [RFC 2863](#)."

REFERENCE

"[RFC 2863](#) - The Interfaces Group MIB, McCloghrie, K., and F. Kastenholz, June 2000"

DEFVAL {""}

::= { mplsTunnelEntry 5 }

mplsTunnelDescr OBJECT-TYPE

SYNTAX SnmpAdminString

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"A textual string containing information about the tunnel. If there is no description this object contains a zero length string. This object is may not be signaled by MPLS signaling protocols, consequentially the value of this object at transit and egress LSRs MAY be automatically generated or absent."

DEFVAL {""}

::= { mplsTunnelEntry 6 }

mplsTunnelIsIf OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"Denotes whether or not this tunnel corresponds to an interface represented in the interfaces group table. Note that if this variable is set to true then the ifName of the interface corresponding to this tunnel should have a value equal to mplsTunnelName. Also see the description of ifName in [RFC 2863](#). This object is meaningful only at the ingress and egress LSRs."

REFERENCE

"[RFC 2863](#) - The Interfaces Group MIB, McCloghrie, K.,

and F. Kastenholz, June 2000"  
DEFVAL { false }  
::= { mplsTunnelEntry 7 }

## mplsTunnelIfIndex OBJECT-TYPE

SYNTAX InterfaceIndexOrZero

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"If mplsTunnelIsIf is set to true, then this value contains the LSR-assigned ifIndex which corresponds to an entry in the interfaces table. Otherwise this variable should contain the value of zero indicating that a valid ifIndex was not assigned to this tunnel interface."

## REFERENCE

"[RFC 2863](#) - The Interfaces Group MIB, McCloghrie, K., and F. Kastenholz, June 2000"

DEFVAL { 0 }

::= { mplsTunnelEntry 8 }

## mplsTunnelOwner OBJECT-TYPE

SYNTAX MplsOwner

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"Denotes the entity that created and is responsible for managing this tunnel. This column is automatically filled by the agent on creation of a row."

::= { mplsTunnelEntry 9 }

## mplsTunnelRole OBJECT-TYPE

SYNTAX INTEGER { head(1),  
transit(2),  
tail(3),  
headTail(4) }

MAX-ACCESS read-create

STATUS current

## DESCRIPTION

"This value signifies the role that this tunnel entry/instance represents. This value MUST be set to head(1) at the originating point of the tunnel. This value MUST be set to transit(2) at transit points along the tunnel, if transit points are supported. This value MUST be set to tail(3) at the terminating point of the tunnel if tunnel tails are supported.

The value headTail(4) is provided for tunnels that

```
begin and end on the same LSR."  
DEFVAL { head }  
::= { mplsTunnelEntry 10 }
```

## mplsTunnelXCPointer OBJECT-TYPE

SYNTAX RowPointer  
MAX-ACCESS read-create  
STATUS current

## DESCRIPTION

"This variable points to a row in the mplsXCTable.  
This table identifies the segments that compose  
this tunnel, their characteristics, and  
relationships to each other. A value of zeroDotZero  
indicates that no LSP has been associated with this  
tunnel yet."

## REFERENCE

"Srinivasan, C., Viswanathan, A., and T. Nadeau, MPLS  
Label Switch Router Management Information Base,  
Internet Draft <[draft-ietf-mpls-lsr-mib-10.txt](#)>,  
June 2003."

DEFVAL { zeroDotZero }  
::= { mplsTunnelEntry 11 }

## mplsTunnelSignallingProto OBJECT-TYPE

SYNTAX INTEGER {  
    none(1),  
    rsvp(2),  
    crldp(3),  
    other(4)  
}

MAX-ACCESS read-create  
STATUS current

## DESCRIPTION

"The signalling protocol, if any, used to setup this  
tunnel."

DEFVAL { none }  
::= { mplsTunnelEntry 12 }

## mplsTunnelSetupPrio OBJECT-TYPE

SYNTAX Integer32 (0..7)  
MAX-ACCESS read-create  
STATUS current

## DESCRIPTION

"Indicates the setup priority of this tunnel."

## REFERENCE

1. RSVP-TE: Extensions to RSVP for LSP Tunnels,  
Awduche et al, [RFC 3209](#), December 2001
2. Constraint-Based LSP Setup using LDP, Jamoussi  
(Editor), [RFC 3212](#), January 2002"

DEFVAL { 0 }

```
::= { mplsTunnelEntry 13 }
```

mplsTunnelHoldingPrio OBJECT-TYPE

SYNTAX Integer32 (0..7)  
MAX-ACCESS read-create  
STATUS current  
DESCRIPTION  
"Indicates the holding priority for this tunnel."

## REFERENCE

1. RSVP-TE: Extensions to RSVP for LSP Tunnels, Awduche et al, [RFC3209](#), December 2001
2. Constraint-Based LSP Setup using LDP, Jamoussi (Editor), [RFC 3212](#), January 2002"

DEFVAL { 0 }  
::= { mplsTunnelEntry 14 }

## mplsTunnelSessionAttributes OBJECT-TYPE

SYNTAX BITS {  
fastReroute (0),  
mergingPermitted (1),  
isPersistent (2),  
isPinned (3),  
recordRoute(4)  
}  
MAX-ACCESS read-create  
STATUS current  
DESCRIPTION

"This bit mask indicates optional session values for this tunnel. The following describes these bit fields:

**fastReroute**This flag indicates that the any tunnel hop may choose to reroute this tunnel without tearing it down. This flag permits transit routers to use a local repair mechanism which may result in violation of the explicit routing of this tunnel. When a fault is detected on an adjacent downstream link or node, a transit router can re-route traffic for fast service restoration.

**mergingPermitted** This flag permits transit routers to merge this session with other RSVP sessions for the purpose of reducing resource overhead on downstream transit routers, thereby providing better network scaling.

**isPersistent** Indicates whether this tunnel should be restored automatically after a failure occurs.

isPinned This flag indicates whether the loose-routed hops of this tunnel are to be pinned.

recordRouteThis flag indicates whether or not the signalling protocol should remember the tunnel path after it has been signaled."

## REFERENCE

"1. RSVP-TE: Extensions to RSVP for LSP Tunnels, Awduche et al, [RFC 3209](#), December 2001."

::= { mplsTunnelEntry 15 }

## mplsTunnelLocalProtectInUse OBJECT-TYPE

SYNTAX TruthValue  
MAX-ACCESS read-create  
STATUS current

## DESCRIPTION

"Indicates that the local repair mechanism is in use to maintain this tunnel (usually in the face of an outage of the link it was previously routed over)."

DEFVAL { false }

::= { mplsTunnelEntry 16 }

## mplsTunnelResourcePointer OBJECT-TYPE

SYNTAX RowPointer  
MAX-ACCESS read-create  
STATUS current

## DESCRIPTION

"This variable represents a pointer to the traffic parameter specification for this tunnel. This value may point at an entry in the mplsTunnelResourceEntry to indicate which mplsTunnelResourceEntry is to be assigned to this LSP instance. This value may optionally point at an externally defined traffic parameter specification table. A value of zeroDotZero indicates best-effort treatment. By having the same value of this object, two or more LSPs can indicate resource sharing."

DEFVAL { zeroDotZero }

::= { mplsTunnelEntry 17 }

## mplsTunnelPrimaryInstance OBJECT-TYPE

SYNTAX MplsTunnelInstanceIndex  
MAX-ACCESS read-only  
STATUS current

## DESCRIPTION

"Specifies the instance index of the primary instance of this tunnel. More details of the definition of tunnel instances and the primary tunnel instance can be found in the description of the textual

```
        convention MplsTunnelInstanceIndex."  
DEFVAL { 0 }  
::= { mplsTunnelEntry 18 }
```

## mplsTunnelInstancePriority OBJECT-TYPE

SYNTAX Unsigned32  
MAX-ACCESS read-create  
STATUS current

## DESCRIPTION

"This value indicates which priority, in descending order, with 0 indicating the lowest priority, within a group of tunnel instances. A group of tunnel instances is defined as a set of LSPs with the same mplsTunnelIndex in this table, but with a different mplsTunnelInstance. Tunnel instance priorities are used to denote the priority at which a particular tunnel instance will supercede another. Instances of tunnels containing the same mplsTunnelInstancePriority will be used for load sharing."

DEFVAL { 0 }  
::= { mplsTunnelEntry 19 }

## mplsTunnelHopTableIndex OBJECT-TYPE

SYNTAX MplsPathIndexOrZero  
MAX-ACCESS read-create  
STATUS current

## DESCRIPTION

"Index into the mplsTunnelHopTable entry that specifies the explicit route hops for this tunnel. This object is meaningful only at the head-end of the tunnel."

DEFVAL { 0 }  
::= { mplsTunnelEntry 20 }

## mplsTunnelPathInUse OBJECT-TYPE

SYNTAX MplsPathIndexOrZero  
MAX-ACCESS read-create  
STATUS current

## DESCRIPTION

"This value denotes the configured path that was chosen for this tunnel. This value reflects the secondary index into mplsTunnelHopTable. This path may not exactly match the one in mplsTunnelARHopTable due to the fact that some CSPF modification may have taken place. See mplsTunnelARHopTable for the actual path being taken by the tunnel. A value of zero denotes that no path is currently in use or available."

DEFVAL { 0 }

```
::= { mplsTunnelEntry 21 }
```

mplsTunnelARHopTableIndex OBJECT-TYPE

SYNTAX MplsPathIndexOrZero

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"Index into the mplsTunnelARHopTable entry that specifies the actual hops traversed by the tunnel. This is automatically updated by the agent when the actual hops becomes available."

DEFVAL { 0 }

::= { mplsTunnelEntry 22 }

mplsTunnelCHopTableIndex OBJECT-TYPE

SYNTAX MplsPathIndexOrZero

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"Index into the mplsTunnelCHopTable entry that specifies the computed hops traversed by the tunnel. This is automatically updated by the agent when computed hops become available or when computed hops get modified."

DEFVAL { 0 }

::= { mplsTunnelEntry 23 }

mplsTunnelIncludeAnyAffinity OBJECT-TYPE

SYNTAX MplsTunnelAffinity

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"A link satisfies the include-any constraint if and only if the constraint is zero, or the link and the constraint have a resource class in common."

REFERENCE

"1. RSVP-TE: Extensions to RSVP for LSP Tunnels, Awduche et al, [RFC 3209](#), December 2001."

::= { mplsTunnelEntry 24 }

mplsTunnelIncludeAllAffinity OBJECT-TYPE

SYNTAX MplsTunnelAffinity

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"A link satisfies the include-all constraint if and only if the link contains all of the administrative groups specified in the constraint."

REFERENCE

"1. RSVP-TE: Extensions to RSVP for LSP Tunnels,

Awduche et al, [RFC 3209](#), December 2001."  
 ::= { mplsTunnelEntry 25 }

## mplsTunnelExcludeAnyAffinity OBJECT-TYPE

SYNTAX MplsTunnelAffinity

MAX-ACCESS read-create

STATUS current

## DESCRIPTION

"A link satisfies the exclude-any constraint if and only if the link contains none of the administrative groups specified in the constraint."

## REFERENCE

"1. RSVP-TE: Extensions to RSVP for LSP Tunnels, Awduche et al, [RFC 3209](#), December 2001."

DEFVAL { 0 }

::= { mplsTunnelEntry 26 }

## mplsTunnelTotalUpTime OBJECT-TYPE

SYNTAX TimeTicks

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"This value represents the aggregate up time for all instances of this tunnel, if available. If this value is unavailable, it MUST return a value of 0."  
::= { mplsTunnelEntry 27 }

## mplsTunnelInstanceUpTime OBJECT-TYPE

SYNTAX TimeTicks

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"This value identifies the total time that this tunnel instance's operStatus has been Up(1)."  
::= { mplsTunnelEntry 28 }

## mplsTunnelPrimaryUpTime OBJECT-TYPE

SYNTAX TimeTicks

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"Specifies the total time the primary instance of this tunnel has been active. The primary instance of this tunnel is defined in mplsTunnelPrimaryInstance."  
::= { mplsTunnelEntry 29 }

## mplsTunnelPathChanges OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"Specifies the number of times the actual path for

MPLS Working Group

Expires March 2004

[Page 26]

```
        this tunnel instance has changed."
 ::= { mplsTunnelEntry 30 }
```

mplsTunnelLastPathChange OBJECT-TYPE

```
SYNTAX      TimeTicks
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "Specifies the time since the last change to the
     actual path for this tunnel instance."
 ::= { mplsTunnelEntry 31 }
```

mplsTunnelCreationTime OBJECT-TYPE

```
SYNTAX      TimeStamp
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "Specifies the value of SysUpTime when the first
     instance of this tunnel came into existence.
     That is, when the value of mplsTunnelOperStatus
     was first set to up(1)."
```

```
 ::= { mplsTunnelEntry 32 }
```

mplsTunnelStateTransitions OBJECT-TYPE

```
SYNTAX      Counter32
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "Specifies the number of times the state
     (mplsTunnelOperStatus) of this tunnel instance has
     changed."
```

```
 ::= { mplsTunnelEntry 33 }
```

mplsTunnelAdminStatus OBJECT-TYPE

```
SYNTAX      INTEGER {
                -- ready to pass packets
                up(1),
                down(2),
                -- in some test mode
                testing(3)
            }
MAX-ACCESS  read-create
STATUS      current
DESCRIPTION
    "Indicates the desired operational status of this
     tunnel."
```

```
 ::= { mplsTunnelEntry 34 }
```

mplsTunnelOperStatus OBJECT-TYPE  
SYNTAX INTEGER {

MPLS Working Group

Expires March 2004

[Page 27]

```
    -- ready to pass packets
    up(1),
    down(2),
    -- in some test mode
    testing(3),
    -- status cannot be determined
    unknown(4),
    dormant(5),
    -- some component is missing
    notPresent(6),
    -- down due to the state of
    -- lower layer interfaces
    lowerLayerDown(7)
}
MAX-ACCESS      read-only
STATUS          current
DESCRIPTION
    "Indicates the actual operational status of this
    tunnel, which is typically but not limited to, a
    function of the state of individual segments of
    this tunnel."
 ::= { mplsTunnelEntry 35 }
```

mplsTunnelRowStatus OBJECT-TYPE

```
SYNTAX          RowStatus
MAX-ACCESS      read-create
STATUS          current
DESCRIPTION
    "This variable is used to create, modify, and/or
    delete a row in this table.  When a row in this
    table is in active(1) state, no objects in that row
    can be modified by the agent except
    mplsTunnelAdminStatus, mplsTunnelRowStatus and
    mplsTunnelStorageType."
 ::= { mplsTunnelEntry 36 }
```

mplsTunnelStorageType OBJECT-TYPE

```
SYNTAX          StorageType
MAX-ACCESS      read-create
STATUS          current
DESCRIPTION     "The storage type for this tunnel entry.
                Conceptual rows having the value 'permanent'
                need not allow write-access to any columnar
                objects in the row."
DEFVAL { volatile }
 ::= { mplsTunnelEntry 37 }
```

-- End of mplsTunnelTable

`mplsTunnelHopListIndexNext` OBJECT-TYPE`SYNTAX` MplsPathIndexOrZero`MAX-ACCESS` read-only`STATUS` current`DESCRIPTION`

"This object contains an appropriate value to be used for `mplsTunnelHopListIndex` when creating entries in the `mplsTunnelHopTable`. If the number of unassigned entries is exhausted, a retrieval operation will return a value of 0. This object may also return a value of 0 when the LSR is unable to accept conceptual row creation, for example, if the `mplsTunnelHopTable` is implemented as read-only. To obtain the value of `mplsTunnelHopListIndex` for a new entry in the `mplsTunnelHopTable`, the manager issues a management protocol retrieval operation to obtain the current value of `mplsTunnelHopIndex`.

When the SET is performed to create a row in the `mplsTunnelHopTable`, the Command Responder (agent) must determine whether the value is indeed still unused; Two Network Management Applications may attempt to create a row (configuration entry) simultaneously and use the same value. If it is currently unused, the SET succeeds and the Command Responder (agent) changes the value of this object, according to an implementation-specific algorithm. If the value is in use, however, the SET fails. The Network Management Application must then re-read this variable to obtain a new usable value."

`::= { mplsTeObjects 3 }``mplsTunnelHopTable` OBJECT-TYPE`SYNTAX` SEQUENCE OF MplsTunnelHopEntry`MAX-ACCESS` not-accessible`STATUS` current`DESCRIPTION`

"The `mplsTunnelHopTable` is used to indicate the hops, strict or loose, for an instance of an MPLS tunnel defined in `mplsTunnelTable`, when it is established via signalling, for the outgoing direction of the tunnel. Thus at a transit LSR, this table contains the desired path of the tunnel from this LSR onwards. Each row in this table is indexed by `mplsTunnelHopListIndex` which corresponds to a group of hop lists or path options. Each row also has a secondary index `mplsTunnelHopIndex`, which indicates

a group of hops (also known as a path option).  
Finally, the third index, `mplsTunnelHopIndex`  
indicates the specific hop information for a path

option. In case we want to specify a particular interface on the originating LSR of an outgoing tunnel by which we want packets to exit the LSR, we specify this as the first hop for this tunnel in `mplsTunnelHopTable`."

```
::= { mplsTeObjects 4 }
```

`mplsTunnelHopEntry` OBJECT-TYPE

SYNTAX MplsTunnelHopEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry in this table represents a tunnel hop. An entry is created by a network administrator for signaled ERLSP set up by an MPLS signalling protocol."

INDEX {

mplsTunnelHopListIndex,  
mplsTunnelHopPathOptionIndex,  
mplsTunnelHopIndex

}

```
::= { mplsTunnelHopTable 1 }
```

`MplsTunnelHopEntry` ::= SEQUENCE {

<code>mplsTunnelHopListIndex</code>	<code>MplsPathIndex</code> ,
<code>mplsTunnelHopPathOptionIndex</code>	<code>MplsPathIndex</code> ,
<code>mplsTunnelHopIndex</code>	<code>MplsPathIndex</code> ,
<code>mplsTunnelHopAddrType</code>	<code>TeHopAddressType</code> ,
<code>mplsTunnelHopIpAddress</code>	<code>TeHopAddress</code> ,
<code>mplsTunnelHopIpPrefixLen</code>	<code>InetAddressPrefixLength</code> ,
<code>mplsTunnelHopAsNumber</code>	<code>TeHopAddressAS</code> ,
<code>mplsTunnelHopAddrUnnum</code>	<code>TeHopAddressUnnum</code> ,
<code>mplsTunnelHopLspId</code>	<code>MplsLSPID</code> ,
<code>mplsTunnelHopType</code>	<code>INTEGER</code> ,
<code>mplsTunnelHopInclude</code>	<code>TruthValue</code> ,
<code>mplsTunnelHopPathOptionName</code>	<code>SnmpAdminString</code> ,
<code>mplsTunnelHopEntryPathComp</code>	<code>INTEGER</code> ,
<code>mplsTunnelHopRowStatus</code>	<code>RowStatus</code> ,
<code>mplsTunnelHopStorageType</code>	<code>StorageType</code>

}

`mplsTunnelHopListIndex` OBJECT-TYPE

SYNTAX MplsPathIndex

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Primary index into this table identifying a

```
particular explicit route object."  
 ::= { mplsTunnelHopEntry 1 }
```

## mplsTunnelHopPathOptionIndex OBJECT-TYPE

SYNTAX MplsPathIndex  
MAX-ACCESS not-accessible  
STATUS current  
DESCRIPTION

"Secondary index into this table identifying a particular group of hops representing a particular configured path. This is otherwise known as a path option."

::= { mplsTunnelHopEntry 2 }

## mplsTunnelHopIndex OBJECT-TYPE

SYNTAX MplsPathIndex  
MAX-ACCESS not-accessible  
STATUS current  
DESCRIPTION

"Secondary index into this table identifying a particular hop."

::= { mplsTunnelHopEntry 3 }

## mplsTunnelHopAddrType OBJECT-TYPE

SYNTAX TeHopAddressType  
MAX-ACCESS read-create  
STATUS current  
DESCRIPTION "The Hop Address Type of this tunnel hop.

The value of this object cannot be changed if the value of the corresponding mplsTunnelHopRowStatus object is 'active'.

Note that lspid(5) is a valid option only for tunnels signaled via CRLDP.

"

DEFVAL { ipv4 }  
::= { mplsTunnelHopEntry 4 }

## mplsTunnelHopIpAddr OBJECT-TYPE

SYNTAX TeHopAddress  
MAX-ACCESS read-create  
STATUS current  
DESCRIPTION "The Tunnel Hop Address for this tunnel hop.

The type of this address is determined by the value of the corresponding mplsTunnelHopAddrType.

The value of this object cannot be changed if the value of the corresponding mplsTunnelHopRowStatus object is 'active'.

```
"  
DEFVAL { '00000000'h } -- IPv4 address 0.0.0.0
```

```
::= { mplsTunnelHopEntry 5 }
```

```
mplsTunnelHopIpPrefixLen OBJECT-TYPE
```

```
SYNTAX      InetAddressPrefixLength
```

```
MAX-ACCESS  read-create
```

```
STATUS      current
```

```
DESCRIPTION "If mplsTunnelHopAddrType is set to ipv4(1) or  
            ipv6(2), then this value will contain an  
            appropriate prefix length for the IP address in  
            object mplsTunnelHopIpAddress. Otherwise this value  
            is irrelevant and should be ignored.  
            "
```

```
DEFVAL      { 32 }
```

```
::= { mplsTunnelHopEntry 6 }
```

```
mplsTunnelHopAsNumber OBJECT-TYPE
```

```
SYNTAX      TeHopAddressAS
```

```
MAX-ACCESS  read-create
```

```
STATUS      current
```

```
DESCRIPTION
```

```
            "If mplsTunnelHopAddrType is set to asnumber(3), then  
            this value will contain the AS number of this hop.  
            Otherwise the agent should set this object to zero-  
            length string and the manager should ignore this."
```

```
::= { mplsTunnelHopEntry 7 }
```

```
mplsTunnelHopAddrUnnum OBJECT-TYPE
```

```
SYNTAX      TeHopAddressUnnum
```

```
MAX-ACCESS  read-create
```

```
STATUS      current
```

```
DESCRIPTION
```

```
            "If mplsTunnelHopAddrType is set to unnum(4), then  
            this value will contain the interface identifier of  
            the unnumbered interface for this hop. This object  
            should be used in conjunction with  
            mplsTunnelHopIpAddress which would contain the LSR  
            Router ID in this case. Otherwise the agent should  
            set this object to zero-length string and the  
            manager should ignore this."
```

```
::= { mplsTunnelHopEntry 8 }
```

```
mplsTunnelHopLspId OBJECT-TYPE
```

```
SYNTAX      MplsLSPID
```

```
MAX-ACCESS  read-create
```

```
STATUS      current
```

```
DESCRIPTION
```

```
            "If mplsTunnelHopAddrType is set to lspid(5), then
```

this value will contain the LSPID of a tunnel of this hop. The present tunnel being configured is tunneled through this hop (using label stacking).

This object is otherwise insignificant and should contain a value of 0 to indicate this fact."

::= { mplsTunnelHopEntry 9 }

mplsTunnelHopType OBJECT-TYPE

SYNTAX INTEGER {  
strict(1),  
loose(2)  
}

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"Denotes whether this tunnel hop is routed in a strict or loose fashion. The value of this object has no meaning if the mplsTunnelHopInclude object is set to 'false'."

::= { mplsTunnelHopEntry 10 }

mplsTunnelHopInclude OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"If this value is set to true, then this indicates that this hop must be included in the tunnel's path. If this value is set to 'false', then this hop must be avoided when calculating the path for this tunnel. The default value of this object is 'true', so that by default all indicated hops are included in the CSPF path computation. If this object is set to 'false' the value of mplsTunnelHopType should be ignored."

DEFVAL { true }

::= { mplsTunnelHopEntry 11 }

mplsTunnelHopPathOptionName OBJECT-TYPE

SYNTAX SnmpAdminString

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"The description of this series of hops as they relate to the specified path option. The value of this object SHOULD be the same for each hop in the series that comprises a path option."

::= { mplsTunnelHopEntry 12 }

mplsTunnelHopEntryPathComp OBJECT-TYPE

SYNTAX INTEGER {

dynamic(1), -- CSPF computed

```
        explicit(2)    -- strict hop
    }
MAX-ACCESS    read-create
STATUS        current
DESCRIPTION
    "If this value is set to dynamic, then the user
     should only specify the source and destination of
     the path and expect that the CSPF will calculate
     the remainder of the path.  If this value is set to
     explicit, the user should specify the entire path
     for the tunnel to take.  This path may contain
     strict or loose hops.  Each hop along a specific
     path SHOULD have this object set to the same value"
 ::= { mplsTunnelHopEntry 13 }

mplsTunnelHopRowStatus OBJECT-TYPE
SYNTAX        RowStatus
MAX-ACCESS    read-create
STATUS        current
DESCRIPTION
    "This variable is used to create, modify, and/or
     delete a row in this table.  When a row in this
     table is in active(1) state, no objects in that row
     can be modified by the agent except
     mplsTunnelHopRowStatus and
     mplsTunnelHopStorageType."
 ::= { mplsTunnelHopEntry 14 }

mplsTunnelHopStorageType OBJECT-TYPE
SYNTAX        StorageType
MAX-ACCESS    read-create
STATUS        current
DESCRIPTION
    "The storage type for this Hop entry.  Conceptual
     rows having the value 'permanent' need not
     allow write-access to any columnar objects
     in the row."
DEFVAL { volatile }
 ::= { mplsTunnelHopEntry 15 }

-- End of mplsTunnelHopTable

-- Begin of mplsTunnelResourceTable

mplsTunnelResourceIndexNext OBJECT-TYPE
SYNTAX        Unsigned32 (0.. 2147483647)
MAX-ACCESS    read-only
```

STATUS current

DESCRIPTION

"This object contains the next appropriate value to

be used for `mplsTunnelResourceIndex` when creating entries in the `mplsTunnelResourceTable`. If the number of unassigned entries is exhausted, a retrieval operation will return a value of 0. This object may also return a value of 0 when the LSR is unable to accept conceptual row creation, for example, if the `mplsTunnelTable` is implemented as read-only. To obtain the `mplsTunnelResourceIndex` value for a new entry, the manager must first issue a management protocol retrieval operation to obtain the current value of this object.

When the SET is performed to create a row in the `mplsTunnelResourceTable`, the Command Responder (agent) must determine whether the value is indeed still unused; Two Network Management Applications may attempt to create a row (configuration entry) simultaneously and use the same value. If it is currently unused, the SET succeeds and the Command Responder (agent) changes the value of this object, according to an implementation-specific algorithm. If the value is in use, however, the SET fails. The Network Management Application must then re-read this variable to obtain a new usable value."

```
::= { mplsTeObjects 5 }
```

`mplsTunnelResourceTable` OBJECT-TYPE

```
SYNTAX          SEQUENCE OF MplsTunnelResourceEntry
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
```

"The `mplsTunnelResourceTable` allows a manager to specify which resources are desired for an MPLS tunnel. This table also allows several tunnels to point to a single entry in this table, implying that these tunnels should share resources."

```
::= { mplsTeObjects 6 }
```

`mplsTunnelResourceEntry` OBJECT-TYPE

```
SYNTAX          MplsTunnelResourceEntry
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
```

"An entry in this table represents a set of resources for an MPLS tunnel. An entry can be created by a network administrator or by an SNMP agent as instructed by any MPLS signalling protocol.

An entry in this table referenced by a tunnel instance  
with zero mplsTunnelInstance value indicates a

configured set of resource parameter. An entry referenced by a tunnel instance with a non-zero `mplsTunnelInstance` reflects the in-use resource parameters for the tunnel instance which may have been negotiated or modified by the MPLS signaling protocols."

```
INDEX          { mplsTunnelResourceIndex }
 ::= { mplsTunnelResourceTable 1 }
```

```
MplsTunnelResourceEntry ::= SEQUENCE {
    mplsTunnelResourceIndex      Unsigned32,
    mplsTunnelResourceMaxRate    MplsBitRate,
    mplsTunnelResourceMeanRate   MplsBitRate,
    mplsTunnelResourceMaxBurstSize MplsBurstSize,
    mplsTunnelResourceMeanBurstSize MplsBurstSize,
    mplsTunnelResourceExBurstSize MplsBurstSize,
    mplsTunnelResourceFrequency  INTEGER,
    mplsTunnelResourceWeight     Unsigned32,
    mplsTunnelResourceRowStatus  RowStatus,
    mplsTunnelResourceStorageType StorageType
}
```

```
mplsTunnelResourceIndex OBJECT-TYPE
    SYNTAX      Unsigned32 (1..2147483647)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Uniquely identifies this row."
    ::= { mplsTunnelResourceEntry 1 }
```

```
mplsTunnelResourceMaxRate OBJECT-TYPE
    SYNTAX      MplsBitRate
    UNITS       "bits per second"
    MAX-ACCESS  read-create
    STATUS      current
    DESCRIPTION
        "The maximum rate in bits/second. Note that setting
        mplsTunnelResourceMaxRate,
        mplsTunnelResourceMeanRate, and
        mplsTunnelResourceMaxBurstSize to 0 indicates best-
        effort treatment."
```

This object is copied to an instance of `mplsTrafficParamMaxRate` in `mplsTrafficParamTable` the OID of which is copied into the corresponding `mplsInSegmentTrafficParamPtr`."

REFERENCE

"Srinivasan, C., Viswanathan, A., and T. Nadeau, MPLS  
Label Switch Router Management Information Base,  
Internet Draft <[draft-ietf-mpls-lsr-mib-10.txt](#)>,"

June 2003."  
 ::= { mplsTunnelResourceEntry 2 }

mplsTunnelResourceMeanRate OBJECT-TYPE

SYNTAX            MplsBitRate  
UNITS             "bits per second"  
MAX-ACCESS       read-create  
STATUS            current

DESCRIPTION

"This object is copied into an instance of mplsTrafficParamMeanRate in the mplsTrafficParamTable. The OID of this table entry is then copied into the corresponding mplsInSegmentTrafficParamPtr.

When resource allocation is performed as requested by this TSpec object, it is copied into an entry in mplsTrafficParamTable [[LSRMIB](#)]: mplsTunnelInMeanRate to mplsTrafficParamMeanRate. The OID of this entry is copied to mplsInSegmentTrafficParamPtr of the corresponding in-segment entry."

REFERENCE

"Srinivasan, C., Viswanathan, A., and T. Nadeau, MPLS Label Switch Router Management Information Base, Internet Draft <[draft-ietf-mpls-lsr-mib-10.txt](#)>, June 2003."

::= { mplsTunnelResourceEntry 3 }

mplsTunnelResourceMaxBurstSize OBJECT-TYPE

SYNTAX            MplsBurstSize  
UNITS             "bytes"  
MAX-ACCESS       read-create  
STATUS            current

DESCRIPTION

"The maximum burst size in bytes. This object is copied to mplsInSegmentMaxBurstSize of the corresponding in-segment.

When resource allocation is performed as requested by this TSpec object, it is copied into an entry in mplsTrafficParamTable [[LSRMIB](#)]: mplsTunnelInMaxBurstSize to mplsTrafficParamMaxBurstSize. The OID of this entry is copied to mplsInSegmentTrafficParamPtr of the corresponding in-segment entry."

REFERENCE

"Srinivasan, C., Viswanathan, A., and T. Nadeau, MPLS  
Label Switch Router Management Information Base,  
Internet Draft <[draft-ietf-mpls-lsr-mib-10.txt](#)>,"

June 2003."

::= { mplsTunnelResourceEntry 4 }

mplsTunnelResourceMeanBurstSize OBJECT-TYPE

SYNTAX MplsBurstSize

UNITS "bytes"

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"The mean burst size in bytes. The implementations which do not implement this variable must return a noSuchObject exception for this object and must not allow a user to set this object."

::= { mplsTunnelResourceEntry 5 }

mplsTunnelResourceExBurstSize OBJECT-TYPE

SYNTAX MplsBurstSize

UNITS "bytes"

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"The Excess burst size in bytes. The implementations which do not implement this variable must return noSuchObject exception for this object and must not allow a user to set this value."

REFERENCE

"CR-LDP Specification, [Section 4.3](#)."

::= { mplsTunnelResourceEntry 6 }

mplsTunnelResourceFrequency OBJECT-TYPE

SYNTAX INTEGER { unspecified(1),  
frequent(2),  
veryFrequent(3)  
}

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"The granularity of the availability of committed rate. The implementations which do not implement this variable must return unspecified(1) for this value and must not allow a user to set this value."

REFERENCE

"CR-LDP Specification, [Section 4.3](#)."

::= { mplsTunnelResourceEntry 7 }

mplsTunnelResourceWeight OBJECT-TYPE

SYNTAX Unsigned32(0..255)

MAX-ACCESS read-create  
STATUS current  
DESCRIPTION

"The relative weight for using excess bandwidth above its committed rate. The value of 0 means that weight is not applicable for the CR-LSP."

## REFERENCE

"CR-LDP Specification, [Section 4.3](#)."

::= { mplsTunnelResourceEntry 8 }

## mplsTunnelResourceRowStatus OBJECT-TYPE

SYNTAX RowStatus  
MAX-ACCESS read-create  
STATUS current

## DESCRIPTION

"This variable is used to create, modify, and/or delete a row in this table. When a row in this table is in active(1) state, no objects in that row can be modified by the agent except mplsTunnelResourceRowStatus and mplsTunnelResourceStorageType."

::= { mplsTunnelResourceEntry 9 }

## mplsTunnelResourceStorageType OBJECT-TYPE

SYNTAX StorageType  
MAX-ACCESS read-create  
STATUS current

## DESCRIPTION

"The storage type for this Hop entry. Conceptual rows having the value 'permanent' need not allow write-access to any columnar objects in the row."

DEFVAL { volatile }

::= { mplsTunnelResourceEntry 10 }

-- End mplsTunnelResourceTable

-- Tunnel Actual Route Hop table.

## mplsTunnelARHopTable OBJECT-TYPE

SYNTAX SEQUENCE OF MplsTunnelARHopEntry  
MAX-ACCESS not-accessible  
STATUS current

## DESCRIPTION

"The mplsTunnelARHopTable is used to indicate the hops for an MPLS tunnel defined in mplsTunnelTable, as reported by the MPLS signalling protocol. Thus at a transit LSR, this table (if the table is supported and if the signaling protocol is recording actual

route information) contains the actual route of the whole tunnel. If the signaling protocol is not

recording the actual route, this table MAY report the information from the mplsTunnelHopTable or the mplsTunnelCHopTable.

Each row in this table is indexed by mplsTunnelARHopListIndex. Each row also has a secondary index mplsTunnelARHopIndex, corresponding to the next hop that this row corresponds to.

Please note that since the information necessary to build entries within this table is not provided by some MPLS signalling protocols, implementation of this table is optional. Furthermore, since the information in this table is actually provided by the MPLS signalling protocol after the path has been set-up, the entries in this table are provided only for observation, and hence, all variables in this table are accessible exclusively as read-only.

Note also that the contents of this table may change while it is being read because of re-routing activities. A network administrator may verify that the actual route read is consistent by reference to the mplsTunnelLastPathChange object."

```
::= { mplsTeObjects 7 }
```

```
mplsTunnelARHopEntry OBJECT-TYPE
```

```
SYNTAX MplsTunnelARHopEntry
```

```
MAX-ACCESS not-accessible
```

```
STATUS current
```

```
DESCRIPTION
```

```
"An entry in this table represents a tunnel hop. An entry is created by the agent for signaled ERLSP set up by an MPLS signalling protocol."
```

```
INDEX { mplsTunnelARHopListIndex, mplsTunnelARHopIndex }
```

```
::= { mplsTunnelARHopTable 1 }
```

```
MplsTunnelARHopEntry ::= SEQUENCE {
```

mplsTunnelARHopListIndex	MplsPathIndex,
mplsTunnelARHopIndex	MplsPathIndex,
mplsTunnelARHopAddrType	TeHopAddressType,
mplsTunnelARHopIpAddr	TeHopAddress,
mplsTunnelARHopAddrUnnum	TeHopAddressUnnum,
mplsTunnelARHopLspId	MplsLSPID

```
}
```

mplsTunnelARHopListIndex OBJECT-TYPE

SYNTAX MplsPathIndex

MAX-ACCESS not-accessible

STATUS current  
DESCRIPTION  
"Primary index into this table identifying a  
particular recorded hop list."  
 ::= { mplsTunnelARHopEntry 1 }

mplsTunnelARHopIndex OBJECT-TYPE  
SYNTAX MplsPathIndex  
MAX-ACCESS not-accessible  
STATUS current  
DESCRIPTION  
"Secondary index into this table identifying the  
particular hop."  
 ::= { mplsTunnelARHopEntry 2 }

mplsTunnelARHopAddrType OBJECT-TYPE  
SYNTAX TeHopAddressType  
MAX-ACCESS read-only  
STATUS current  
DESCRIPTION  
"The Hop Address Type of this tunnel hop.  
  
Note that lspid(5) is a valid option only  
for tunnels signaled via CRLDP."  
DEFVAL { ipv4 }  
 ::= { mplsTunnelARHopEntry 3 }

mplsTunnelARHopIpAddr OBJECT-TYPE  
SYNTAX TeHopAddress  
MAX-ACCESS read-only  
STATUS current  
DESCRIPTION  
"The Tunnel Hop Address for this tunnel hop.  
  
The type of this address is determined by the  
value of the corresponding mplsTunnelARHopAddrType.  
  
If mplsTunnelARHopAddrType is set to unnum(4),  
then this value contains the LSR Router ID of the  
unnumbered interface. Otherwise the agent SHOULD  
set this object to the zero-length string and the  
manager should ignore this object."  
DEFVAL { '00000000'h } -- IPv4 address 0.0.0.0  
 ::= { mplsTunnelARHopEntry 4 }

mplsTunnelARHopAddrUnnum OBJECT-TYPE  
SYNTAX TeHopAddressUnnum  
MAX-ACCESS read-only

STATUS           current  
DESCRIPTION

MPLS Working Group

Expires March 2004

[Page 41]

"If mplsTunnelARHopAddrType is set to unnum(4), then this value will contain the interface identifier of the unnumbered interface for this hop. This object should be used in conjunction with mplsTunnelARHopIpAddress which would contain the LSR Router ID in this case. Otherwise the agent should set this object to zero-length string and the manager should ignore this."

::= { mplsTunnelARHopEntry 5 }

mplsTunnelARHopLspId OBJECT-TYPE

SYNTAX MplsLSPID  
MAX-ACCESS read-only  
STATUS current

DESCRIPTION

"If mplsTunnelARHopAddrType is set to lspid(5), then this value will contain the LSP ID of this hop. This object is otherwise insignificant and should contain a value of 0 to indicate this fact."

::= { mplsTunnelARHopEntry 6 }

-- End of mplsTunnelARHopTable

-- Tunnel Computed Hop table.

mplsTunnelCHopTable OBJECT-TYPE

SYNTAX SEQUENCE OF MplsTunnelCHopEntry  
MAX-ACCESS not-accessible  
STATUS current

DESCRIPTION

"The mplsTunnelCHopTable is used to indicate the hops, strict or loose, for an MPLS tunnel defined in mplsTunnelTable, as computed by a constraint-based routing protocol, based on the mplsTunnelHopTable for the outgoing direction of the tunnel. Thus at a transit LSR, this table (if the table is supported) MAY contain the path computed by the CSPF engine on (or on behalf of) this LSR. Each row in this table is indexed by mplsTunnelCHopListIndex. Each row also has a secondary index mplsTunnelCHopIndex, corresponding to the next hop that this row corresponds to. In case we want to specify a particular interface on the originating LSR of an outgoing tunnel by which we want packets to exit the LSR, we specify this as the first hop for this tunnel in

mplsTunnelCHopTable.

Please note that since the information necessary to

build entries within this table may not be supported by some LSRs, implementation of this table is optional. Furthermore, since the information in this table describes the path computed by the CSPF engine the entries in this table are read-only."

::= { mplsTeObjects 8 }

mplsTunnelCHopEntry OBJECT-TYPE

SYNTAX MplsTunnelCHopEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry in this table represents a tunnel hop. An entry in this table is created by a path computation engine using CSPF techniques applied to the information collected by routing protocols and the hops specified in the corresponding mplsTunnelHopTable."

INDEX { mplsTunnelCHopListIndex, mplsTunnelCHopIndex }

::= { mplsTunnelCHopTable 1 }

MplsTunnelCHopEntry ::= SEQUENCE {

mplsTunnelCHopListIndex	MplsPathIndex,
mplsTunnelCHopIndex	MplsPathIndex,
mplsTunnelCHopAddrType	TeHopAddressType,
mplsTunnelCHopIpAddr	TeHopAddress,
mplsTunnelCHopIpPrefixLen	InetAddressPrefixLength,
mplsTunnelCHopAsNumber	TeHopAddressAS,
mplsTunnelCHopAddrUnnum	TeHopAddressUnnum,
mplsTunnelCHopLspId	MplsLSPID,
mplsTunnelCHopType	INTEGER

}

mplsTunnelCHopListIndex OBJECT-TYPE

SYNTAX MplsPathIndex

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Primary index into this table identifying a particular computed hop list."

::= { mplsTunnelCHopEntry 1 }

mplsTunnelCHopIndex OBJECT-TYPE

SYNTAX MplsPathIndex

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Secondary index into this table identifying the particular hop."

MPLS Working Group

Expires March 2004

[Page 43]

```
::= { mplsTunnelCHopEntry 2 }
```

```
mplsTunnelCHopAddrType OBJECT-TYPE
```

```
SYNTAX TeHopAddressType
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

```
"The Hop Address Type of this tunnel hop.
```

```
Note that lspid(5) is a valid option only  
for tunnels signaled via CRLDP."
```

```
DEFVAL { ipv4 }
```

```
::= { mplsTunnelCHopEntry 3 }
```

```
mplsTunnelCHopIpAddr OBJECT-TYPE
```

```
SYNTAX TeHopAddress
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

```
"The Tunnel Hop Address for this tunnel hop.
```

```
The type of this address is determined by the  
value of the corresponding mplsTunnelCHopAddrType.
```

```
If mplsTunnelCHopAddrType is set to unnum(4), then  
this value will contain the LSR Router ID of the  
unnumbered interface. Otherwise the agent should  
set this object to the zero-length string and the  
manager SHOULD ignore this object."
```

```
DEFVAL { '00000000'h } -- IPv4 address 0.0.0.0
```

```
::= { mplsTunnelCHopEntry 4 }
```

```
mplsTunnelCHopIpPrefixLen OBJECT-TYPE
```

```
SYNTAX InetAddressPrefixLength
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

```
"If mplsTunnelCHopAddrType is set to ipv4(1) or  
ipv6(2), then this value will contain an  
appropriate prefix length for the IP address in  
object mplsTunnelCHopIpAddr. Otherwise this value  
is irrelevant and should be ignored.  
"
```

```
DEFVAL { 32 }
```

```
::= { mplsTunnelCHopEntry 5 }
```

```
mplsTunnelCHopAsNumber OBJECT-TYPE
```

```
SYNTAX TeHopAddressAS
```

MAX-ACCESS read-only  
STATUS current

MPLS Working Group

Expires March 2004

[Page 44]

## DESCRIPTION

"If mplsTunnelCHopAddrType is set to asnumber(3), then this value will contain the AS number of this hop. Otherwise the agent should set this object to zero-length string and the manager should ignore this."

::= { mplsTunnelCHopEntry 6 }

## mplsTunnelCHopAddrUnnum OBJECT-TYPE

SYNTAX TeHopAddressUnnum

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"If mplsTunnelCHopAddrType is set to unnum(4), then this value will contain the unnumbered interface identifier of this hop. This object should be used in conjunction with mplsTunnelCHopIpAddr which would contain the LSR Router ID in this case. Otherwise the agent should set this object to zero-length string and the manager should ignore this."

::= { mplsTunnelCHopEntry 7 }

## mplsTunnelCHopLspId OBJECT-TYPE

SYNTAX MplsLSPID

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"If mplsTunnelCHopAddrType is set to lspid(5), then this value will contain the LSP ID of this hop. This object is otherwise insignificant and should contain a value of 0 to indicate this fact."

::= { mplsTunnelCHopEntry 8 }

## mplsTunnelCHopType OBJECT-TYPE

SYNTAX INTEGER { strict(1),  
loose(2)  
}

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"Denotes whether this tunnel hop is routed in a strict or loose fashion."

::= { mplsTunnelCHopEntry 9 }

-- End of mplsTunnelCHopTable

-- MPLS Tunnel Performance Table.

mplsTunnelPerfTable OBJECT-TYPE

MPLS Working Group

Expires March 2004

[Page 45]

SYNTAX SEQUENCE OF MplsTunnelPerfEntry  
MAX-ACCESS not-accessible  
STATUS current  
DESCRIPTION  
"This table provides per-tunnel instance MPLS  
performance information."  
 ::= { mplsTeObjects 9 }

mplsTunnelPerfEntry OBJECT-TYPE  
SYNTAX MplsTunnelPerfEntry  
MAX-ACCESS not-accessible  
STATUS current  
DESCRIPTION  
"An entry in this table is created by the LSR for  
every tunnel. Its is an extension to  
mplsTunnelEntry."  
AUGMENTS { mplsTunnelEntry }  
 ::= { mplsTunnelPerfTable 1 }

MplsTunnelPerfEntry ::= SEQUENCE {  
 mplsTunnelPerfPackets Counter32,  
 mplsTunnelPerfHCPackets Counter64,  
 mplsTunnelPerfErrors Counter32,  
 mplsTunnelPerfBytes Counter32,  
 mplsTunnelPerfHCBytes Counter64  
 }

mplsTunnelPerfPackets OBJECT-TYPE  
SYNTAX Counter32  
MAX-ACCESS read-only  
STATUS current  
DESCRIPTION  
"Number of packets forwarded by the tunnel.  
This object should represents the 32-bit  
value of the least significant part of the  
64-bit value if both mplsTunnelPerfHCPackets  
is returned."  
 ::= { mplsTunnelPerfEntry 1 }

mplsTunnelPerfHCPackets OBJECT-TYPE  
SYNTAX Counter64  
MAX-ACCESS read-only  
STATUS current  
DESCRIPTION  
"High capacity counter for number of packets  
forwarded by the tunnel. "  
 ::= { mplsTunnelPerfEntry 2 }

mplsTunnelPerfErrors OBJECT-TYPE  
SYNTAX Counter32

MPLS Working Group

Expires March 2004

[Page 46]

```
MAX-ACCESS      read-only
STATUS          current
DESCRIPTION
    "Number of packets dropped because of errors or for
    other reasons."
 ::= { mplsTunnelPerfEntry 3 }
```

```
mplsTunnelPerfBytes OBJECT-TYPE
```

```
SYNTAX          Counter32
MAX-ACCESS      read-only
STATUS          current
DESCRIPTION
    "Number of bytes forwarded by the tunnel.
    This object should represents the 32-bit
    value of the least significant part of the
    64-bit value if both mplsTunnelPerfHCBytes
    is returned."
 ::= { mplsTunnelPerfEntry 4 }
```

```
mplsTunnelPerfHCBytes OBJECT-TYPE
```

```
SYNTAX          Counter64
MAX-ACCESS      read-only
STATUS          current
DESCRIPTION
    "High capacity counter for number of bytes forwarded
    by the tunnel."
 ::= { mplsTunnelPerfEntry 5 }
```

```
-- End of mplsTunnelPerfTable
```

```
-- CR-LDP Tunnel Resource Table
```

```
mplsTunnelCRLDResTable OBJECT-TYPE
```

```
SYNTAX          SEQUENCE OF MplsTunnelCRLDResEntry
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
    "The mplsTunnelCRLDResTable allows a manager to
    specify which CR-LDP-specific resources are desired
    for an MPLS tunnel if that tunnel is signaled using
    CR-LDP. Note that these attributes are in addition
    to those specified in mplsTunnelResourceTable. This
    table also allows several tunnels to point to a
    single entry in this table, implying that these
    tunnels should share resources."
 ::= { mplsTeObjects 10 }
```

mplsTunnelCRLDResEntry OBJECT-TYPE  
SYNTAX MplsTunnelCRLDResEntry

MPLS Working Group

Expires March 2004

[Page 47]

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry in this table represents a set of resources for an MPLS tunnel established using CRLDP (mplsTunnelSignallingProto equal to crldp (3)). An entry can be created by a network administrator or by an SNMP agent as instructed by any MPLS signalling protocol."

INDEX { mplsTunnelResourceIndex }

::= { mplsTunnelCRLDPResTable 1 }

```
MplsTunnelCRLDPResEntry ::= SEQUENCE {
    mplsTunnelCRLDPResMeanBurstSize  MplsBurstSize,
    mplsTunnelCRLDPResExBurstSize    MplsBurstSize,
    mplsTunnelCRLDPResFrequency      INTEGER,
    mplsTunnelCRLDPResWeight         Unsigned32,
    mplsTunnelCRLDPResFlags          Unsigned32,
    mplsTunnelCRLDPResRowStatus      RowStatus,
    mplsTunnelCRLDPResStorageType    StorageType
}
```

mplsTunnelCRLDPResMeanBurstSize OBJECT-TYPE

SYNTAX MplsBurstSize

UNITS "bytes"

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"The mean burst size in bytes."

::= { mplsTunnelCRLDPResEntry 1 }

mplsTunnelCRLDPResExBurstSize OBJECT-TYPE

SYNTAX MplsBurstSize

UNITS "bytes"

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"The Excess burst size in bytes."

REFERENCE

"CR-LDP Specification, [Section 4.3](#)."

::= { mplsTunnelCRLDPResEntry 2 }

mplsTunnelCRLDPResFrequency OBJECT-TYPE

SYNTAX INTEGER {

unspecified(1),

frequent(2),

veryFrequent(3)

```
}  
MAX-ACCESS    read-create  
STATUS        current
```

DESCRIPTION

"The granularity of the availability of committed rate."

REFERENCE

"CR-LDP Specification, [Section 4.3.](#)"

::= { mplsTunnelCRLDPResEntry 3 }

mplsTunnelCRLDPResWeight OBJECT-TYPE

SYNTAX Unsigned32(0..255)

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"The relative weight for using excess bandwidth above its committed rate. The value of 0 means that weight is not applicable for the CR-LSP."

REFERENCE

"CR-LDP Specification, [Section 4.3.](#)"

DEFVAL { 0 }

::= { mplsTunnelCRLDPResEntry 4 }

mplsTunnelCRLDPResFlags OBJECT-TYPE

SYNTAX Unsigned32 (0..63)

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"The value of the 1 byte Flags conveyed as part of the traffic parameters during the establishment of the CRLSP. The bits in this object are to be interpreted as follows.



Res - These bits are reserved. Zero on transmission.

Ignored on receipt.

F1 - Corresponds to the PDR.

F2 - Corresponds to the PBS.

F3 - Corresponds to the CDR.

F4 - Corresponds to the CBS.

F5 - Corresponds to the EBS.

F6 - Corresponds to the Weight.

Each flag if is a Negotiable Flag corresponding to a Traffic Parameter. The Negotiable Flag value zero denotes Not Negotiable and value one denotes

Negotiable."

REFERENCE

"1. [Section 4.3](#), Constraint-Based LSP Setup using

LDP, Jamoussi (Editor), [RFC 3212](#), January 2002"  
DEFVAL { 0 }  
::= { mplsTunnelCRLDPResEntry 5 }

mplsTunnelCRLDPResRowStatus OBJECT-TYPE

SYNTAX RowStatus

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"This variable is used to create, modify, and/or delete a row in this table. When a row in this table is in active(1) state, no objects in that row can be modified by the agent except mplsTunnelCRLDPResRowStatus and mplsTunnelCRLDPResStorageType."

::= { mplsTunnelCRLDPResEntry 6 }

mplsTunnelCRLDPResStorageType OBJECT-TYPE

SYNTAX StorageType

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"The storage type for this CR-LDP Resource entry. Conceptual rows having the value 'permanent' need not allow write-access to any columnar objects in the row."

DEFVAL { volatile }

::= { mplsTunnelCRLDPResEntry 7 }

-- Notifications.

mplsTunnelNotificationEnable OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"If this object is true, then it enables the generation of mplsTunnelUp and mplsTunnelDown traps, otherwise these traps are not emitted."

DEFVAL { false }

::= { mplsTeObjects 11 }

mplsTunnelUp NOTIFICATION-TYPE

OBJECTS {  
mplsTunnelAdminStatus,  
mplsTunnelOperStatus

```
}  
STATUS      current  
DESCRIPTION
```

MPLS Working Group

Expires March 2004

[Page 50]

"This notification is generated when a  
mplsTunnelOperStatus object for one of the  
configured tunnels is about to leave the down state  
and transition into some other state (but not into  
the notPresent state). This other state is  
indicated by the included value of  
mplsTunnelOperStatus."

::= { mplsTeNotifications 1 }

mplsTunnelDown NOTIFICATION-TYPE

OBJECTS {  
 mplsTunnelAdminStatus,  
 mplsTunnelOperStatus  
}

STATUS current

DESCRIPTION

"This notification is generated when a  
mplsTunnelOperStatus object for one of the  
configured tunnels is about to enter the down state  
from some other state (but not from the notPresent  
state). This other state is indicated by the  
included value of mplsTunnelOperStatus."

::= { mplsTeNotifications 2 }

mplsTunnelRerouted NOTIFICATION-TYPE

OBJECTS {  
 mplsTunnelAdminStatus,  
 mplsTunnelOperStatus  
}

STATUS current

DESCRIPTION

"This notification is generated when a tunnel is  
rerouted. If the mplsTunnelARHopTable is used, then  
this tunnel instance's entry in the  
mplsTunnelARHopTable MAY contain the new path for  
this tunnel some time after this trap is issued by  
the agent."

::= { mplsTeNotifications 3 }

mplsTunnelReoptimized NOTIFICATION-TYPE

OBJECTS {  
 mplsTunnelAdminStatus,  
 mplsTunnelOperStatus  
}

STATUS current

DESCRIPTION

"This notification is generated when a tunnel is

reoptimized. If the `mplsTunnelARHopTable` is used, then this tunnel instance's entry in the `mplsTunnelARHopTable` MAY contain the new path for

```
        this tunnel some time after this trap is issued by
        the agent."
 ::= { mplsTeNotifications 4 }

-- End of notifications.

-- Module compliance.

mplsTeGroups
  OBJECT IDENTIFIER ::= { mplsTeConformance 1 }

mplsTeCompliances
  OBJECT IDENTIFIER ::= { mplsTeConformance 2 }

-- Compliance requirement for fully compliant implementations.

mplsTeModuleFullCompliance MODULE-COMPLIANCE
  STATUS current
  DESCRIPTION
    "Compliance statement for agents that provide full
    support the MPLS-TE-STD-MIB module."

  MODULE IF-MIB -- The Interfaces Group MIB, RFC 2863.
    MANDATORY-GROUPS {
      ifGeneralInformationGroup,
      ifCounterDiscontinuityGroup
    }

  MODULE -- this module

    -- The mandatory group has to be implemented by all
    -- LSRs that originate/terminate ESLSPs/tunnels.
    -- In addition, depending on the type of tunnels
    -- supported, other groups become mandatory as
    -- explained below.

    MANDATORY-GROUPS {
      mplsTunnelGroup,
      mplsTunnelScalarGroup
    }

  GROUP mplsTunnelManualGroup
  DESCRIPTION
    "This group is mandatory for devices which support
    manual configuration of tunnels."

  GROUP mplsTunnelSignaledGroup
```

DESCRIPTION

"This group is mandatory for devices which support

MPLS Working Group

Expires March 2004

[Page 52]

signaled tunnel set up."

GROUP mplsTunnelIsNotIntfcGroup

DESCRIPTION

"This group is mandatory for devices which support tunnels that are not interfaces."

GROUP mplsTunnelIsIntfcGroup

DESCRIPTION

"This group is mandatory for devices which support tunnels that are interfaces."

GROUP mplsTunnelCRLDPResOptionalGroup

DESCRIPTION

"Objects in this group are required by implementations supporting the CR-LDP protocol for signalling of TE tunnels."

GROUP mplsTeNotificationGroup

DESCRIPTION "This group is mandatory for those implementations which can implement the notifications contained in this group."

OBJECT mplsTunnelRowStatus

SYNTAX RowStatus { active(1), notInService(2) }

WRITE-SYNTAX RowStatus { active(1), notInService(2),  
createAndGo(4), destroy(6)  
}

DESCRIPTION "Support for notInService, createAndWait and notReady is not required."  
"

OBJECT mplsTunnelHopRowStatus

SYNTAX RowStatus { active(1), notInService(2) }

WRITE-SYNTAX RowStatus { active(1), notInService(2),  
createAndGo(4), destroy(6)  
}

DESCRIPTION "Support for notInService, createAndWait and notReady is not required."  
"

OBJECT mplsTunnelHopStorageType

MIN-ACCESS read-only

DESCRIPTION "Write access is not required."

OBJECT mplsTunnelCRLDPResRowStatus

SYNTAX RowStatus { active(1), notInService(2) }

WRITE-SYNTAX RowStatus { active(1), notInService(2),

```
    createAndGo(4), destroy(6)  
}
```

```
DESCRIPTION "Support for notInservice, createAndWait and notReady
            is not required.
            "
```

```
OBJECT      mplsTunnelCRLDPResStorageType
MIN-ACCESS  read-only
DESCRIPTION "Write access is not required."
```

```
::= { mplsTeCompliances 1 }
```

```
-- Compliance requirement for read-only implementations.
```

```
mplsTeModuleReadOnlyCompliance MODULE-COMPLIANCE
```

```
STATUS current
```

```
DESCRIPTION
```

```
    "Compliance requirement for implementations that only
    provide read-only support for MPLS-TE-STD-MIB.
    Such devices can then be monitored but cannot be
    configured using this MIB modules."
```

```
MODULE -- this module
```

```
-- mplsTunnelTable
```

```
MANDATORY-GROUPS {
    mplsTunnelGroup,
    mplsTunnelScalarGroup
}
```

```
GROUP mplsTunnelManualGroup
```

```
DESCRIPTION
```

```
    "This group is mandatory for devices which support
    manual configuration of tunnels."
```

```
GROUP mplsTunnelSignaledGroup
```

```
DESCRIPTION
```

```
    "This group is mandatory for devices which support
    signaled tunnel set up."
```

```
GROUP mplsTunnelIsNotIntfcGroup
```

```
DESCRIPTION
```

```
    "This group is mandatory for devices which support
    tunnels that are not interfaces."
```

```
GROUP mplsTunnelIsIntfcGroup
```

```
DESCRIPTION
```

```
    "This group is mandatory for devices which support
    tunnels that are interfaces."
```

GROUP mplsTunnelCRLDPResOptionalGroup

MPLS Working Group

Expires March 2004

[Page 54]

## DESCRIPTION

"Objects in this group are required by implementations supporting the CR-LDP protocol for signalling of TE tunnels."

## GROUP mplsTeNotificationGroup

DESCRIPTION "This group is mandatory for those implementations which can implement the notifications contained in this group."

## -- mplsTunnelTable

OBJECT mplsTunnelName

MIN-ACCESS read-only

DESCRIPTION

"Write access is not required."

OBJECT mplsTunnelDescr

MIN-ACCESS read-only

DESCRIPTION

"Write access is not required."

OBJECT mplsTunnelIsIf

MIN-ACCESS read-only

DESCRIPTION

"Write access is not required."

OBJECT mplsTunnelIfIndex

DESCRIPTION

"Write access is not required."

OBJECT mplsTunnelXCPointer

MIN-ACCESS read-only

DESCRIPTION

"Write access is not required."

OBJECT mplsTunnelSignallingProto

MIN-ACCESS read-only

DESCRIPTION

"Write access is not required."

OBJECT mplsTunnelSetupPrio

MIN-ACCESS read-only

DESCRIPTION

"Write access is not required."

OBJECT mplsTunnelHoldingPrio

MIN-ACCESS read-only

DESCRIPTION

"Write access is not required."

MPLS Working Group

Expires March 2004

[Page 55]

OBJECT mplsTunnelSessionAttributes  
MIN-ACCESS read-only  
DESCRIPTION  
"Write access is not required."

OBJECT mplsTunnelLocalProtectInUse  
MIN-ACCESS read-only  
DESCRIPTION  
"Write access is not required."

OBJECT mplsTunnelResourcePointer  
MIN-ACCESS read-only  
DESCRIPTION  
"Write access is not required."

OBJECT mplsTunnelInstancePriority  
MIN-ACCESS read-only  
DESCRIPTION  
"Write access is not required."

OBJECT mplsTunnelHopTableIndex  
MIN-ACCESS read-only  
DESCRIPTION  
"Write access is not required."

OBJECT mplsTunnelIncludeAnyAffinity  
MIN-ACCESS read-only  
DESCRIPTION  
"Write access is not required."

OBJECT mplsTunnelIncludeAllAffinity  
MIN-ACCESS read-only  
DESCRIPTION  
"Write access is not required."

OBJECT mplsTunnelExcludeAnyAffinity  
MIN-ACCESS read-only  
DESCRIPTION  
"Write access is not required."

OBJECT mplsTunnelPathInUse  
MIN-ACCESS read-only  
DESCRIPTION  
"Write access is not required."

OBJECT mplsTunnelRole  
MIN-ACCESS read-only

DESCRIPTION

"Write access is not required."

MPLS Working Group

Expires March 2004

[Page 56]

OBJECT mplsTunnelAdminStatus  
SYNTAX INTEGER { up (1), down (2) }  
MIN-ACCESS read-only  
DESCRIPTION  
"Only up and down states must be supported. Write  
access is not required."

OBJECT mplsTunnelRowStatus  
SYNTAX RowStatus { active(1) }  
MIN-ACCESS read-only  
DESCRIPTION "Write access is not required."

-- mplsTunnelHopTable

OBJECT mplsTunnelHopAddrType  
MIN-ACCESS read-only  
DESCRIPTION "Write access is not required."

OBJECT mplsTunnelHopIpAddr  
MIN-ACCESS read-only  
DESCRIPTION "Write access is not required."

OBJECT mplsTunnelHopIpPrefixLen  
MIN-ACCESS read-only  
DESCRIPTION  
"Write access is not required."

OBJECT mplsTunnelHopAddrUnnum  
MIN-ACCESS read-only  
DESCRIPTION  
"Write access is not required."

OBJECT mplsTunnelHopAsNumber  
MIN-ACCESS read-only  
DESCRIPTION  
"Write access is not required."

OBJECT mplsTunnelHopLspId  
MIN-ACCESS read-only  
DESCRIPTION  
"Write access is not required."

OBJECT mplsTunnelHopType  
SYNTAX INTEGER { strict(1) }  
MIN-ACCESS read-only  
DESCRIPTION  
"loose(2) need not be supported. Write access is

not required."

MPLS Working Group

Expires March 2004

[Page 57]

OBJECT mplsTunnelHopInclude  
MIN-ACCESS read-only  
DESCRIPTION "Write access is not required."

OBJECT mplsTunnelHopPathOptionName  
MIN-ACCESS read-only  
DESCRIPTION "Write access is not required."

OBJECT mplsTunnelHopEntryPathComp  
MIN-ACCESS read-only  
DESCRIPTION "Write access is not required."

OBJECT mplsTunnelHopRowStatus  
SYNTAX RowStatus { active(1) }  
MIN-ACCESS read-only  
DESCRIPTION "Write access is not required."

OBJECT mplsTunnelHopStorageType  
MIN-ACCESS read-only  
DESCRIPTION "Write access is not required."

-- mplsTunnelResourceTable

OBJECT mplsTunnelResourceMaxRate  
MIN-ACCESS read-only  
DESCRIPTION "Write access is not required."

OBJECT mplsTunnelResourceMeanRate  
MIN-ACCESS read-only  
DESCRIPTION "Write access is not required."

OBJECT mplsTunnelResourceMaxBurstSize  
MIN-ACCESS read-only  
DESCRIPTION "Write access is not required."

OBJECT mplsTunnelResourceMeanBurstSize  
MIN-ACCESS read-only  
DESCRIPTION "Write access is not required."

OBJECT mplsTunnelResourceExBurstSize  
MIN-ACCESS read-only  
DESCRIPTION  
"Write access is not required."

OBJECT mplsTunnelResourceFrequency  
MIN-ACCESS read-only  
DESCRIPTION "Write access is not required."

OBJECT mplsTunnelResourceWeight  
MIN-ACCESS read-only

MPLS Working Group

Expires March 2004

[Page 58]

DESCRIPTION "Write access is not required."

OBJECT mplsTunnelResourceRowStatus

SYNTAX RowStatus { active(1) }

MIN-ACCESS read-only

DESCRIPTION "Write access is not required."

OBJECT mplsTunnelResourceStorageType

MIN-ACCESS read-only

DESCRIPTION "Write access is not required."

-- mplsTunnelCRLDPResTable

OBJECT mplsTunnelCRLDPResMeanBurstSize

MIN-ACCESS read-only

DESCRIPTION "Write access is not required."

OBJECT mplsTunnelCRLDPResExBurstSize

MIN-ACCESS read-only

DESCRIPTION "Write access is not required."

OBJECT mplsTunnelCRLDPResFrequency

MIN-ACCESS read-only

DESCRIPTION "Write access is not required."

OBJECT mplsTunnelCRLDPResWeight

MIN-ACCESS read-only

DESCRIPTION "Write access is not required."

OBJECT mplsTunnelCRLDPResFlags

MIN-ACCESS read-only

DESCRIPTION "Write access is not required."

OBJECT mplsTunnelCRLDPResRowStatus

SYNTAX RowStatus { active(1) }

MIN-ACCESS read-only

DESCRIPTION "Write access is not required."

OBJECT mplsTunnelCRLDPResStorageType

MIN-ACCESS read-only

DESCRIPTION "Write access is not required."

::= { mplsTeCompliances 2 }

-- Units of conformance.

mplsTunnelGroup OBJECT-GROUP

```
OBJECTS {  
    mplsTunnelIndexNext,
```

mplsTunnelName,  
mplsTunnelDescr,  
mplsTunnelOwner,  
mplsTunnelXCPointer,  
mplsTunnelIfIndex,  
mplsTunnelHopTableIndex,  
mplsTunnelARHopTableIndex,  
mplsTunnelCHopTableIndex,  
mplsTunnelAdminStatus,  
mplsTunnelOperStatus,  
mplsTunnelRowStatus,  
mplsTunnelNotificationEnable,  
mplsTunnelStorageType,  
mplsTunnelConfigured,  
mplsTunnelActive,  
mplsTunnelPrimaryInstance,  
mplsTunnelPrimaryUpTime,  
mplsTunnelPathChanges,  
mplsTunnelLastPathChange,  
mplsTunnelCreationTime,  
mplsTunnelStateTransitions,  
mplsTunnelIncludeAnyAffinity,  
mplsTunnelIncludeAllAffinity,  
mplsTunnelExcludeAnyAffinity,  
mplsTunnelPerfPackets,  
mplsTunnelPerfHCPackets,  
mplsTunnelPerfErrors,  
mplsTunnelPerfBytes,  
mplsTunnelPerfHCBytes,  
mplsTunnelResourcePointer,  
mplsTunnelInstancePriority,  
mplsTunnelPathInUse,  
mplsTunnelRole,  
mplsTunnelTotalUpTime,  
mplsTunnelInstanceUpTime,  
mplsTunnelResourceIndexNext,  
mplsTunnelResourceMaxRate,  
mplsTunnelResourceMeanRate,  
mplsTunnelResourceMaxBurstSize,  
mplsTunnelResourceMeanBurstSize,  
mplsTunnelResourceExBurstSize,  
mplsTunnelResourceFrequency,  
mplsTunnelResourceWeight,  
mplsTunnelResourceRowStatus,  
mplsTunnelResourceStorageType,  
mplsTunnelARHopAddrType,  
mplsTunnelARHopIpAddr,

mplsTunnelARHopAddrUnnum,  
mplsTunnelARHopLspId,  
mplsTunnelCHopAddrType,

```
mplsTunnelCHopIpAddr,  
mplsTunnelCHopIpPrefixLen,  
mplsTunnelCHopAsNumber,  
mplsTunnelCHopAddrUnnum,  
mplsTunnelCHopLspId,  
mplsTunnelCHopType  
}  
STATUS current  
DESCRIPTION  
    "Necessary, but not sufficient, set of objects to  
    implement tunnels.  In addition, depending on the  
    type of the tunnels supported (for example,  
    manually configured or signaled, persistent or non-  
    persistent, etc.), the following other groups  
    defined below are mandatory: mplsTunnelManualGroup  
    and/or mplsTunnelSignaledGroup,  
    mplsTunnelIsNotIntfcGroup and/or  
    mplsTunnelIsIntfcGroup."  
 ::= { mplsTeGroups 1 }
```

```
mplsTunnelManualGroup OBJECT-GROUP  
  OBJECTS { mplsTunnelSignallingProto }  
  STATUS current  
  DESCRIPTION  
    "Object(s) needed to implement manually configured  
    tunnels."  
 ::= { mplsTeGroups 2 }
```

```
mplsTunnelSignaledGroup OBJECT-GROUP  
  OBJECTS {  
    mplsTunnelSetupPrio,  
    mplsTunnelHoldingPrio,  
    mplsTunnelSignallingProto,  
    mplsTunnelLocalProtectInUse,  
    mplsTunnelSessionAttributes,  
    mplsTunnelHopListIndexNext,  
    mplsTunnelHopAddrType,  
    mplsTunnelHopIpAddr,  
    mplsTunnelHopIpPrefixLen,  
    mplsTunnelHopAddrUnnum,  
    mplsTunnelHopAsNumber,  
    mplsTunnelHopLspId,  
    mplsTunnelHopType,  
    mplsTunnelHopInclude,  
    mplsTunnelHopPathOptionName,  
    mplsTunnelHopEntryPathComp,  
    mplsTunnelHopRowStatus,  
  }
```

```
    mplsTunnelHopStorageType
  }
STATUS current
```

## DESCRIPTION

"Objects needed to implement signaled tunnels."

::= { mplsTeGroups 3 }

## mplsTunnelScalarGroup OBJECT-GROUP

## OBJECTS {

mplsTunnelConfigured,  
mplsTunnelActive,  
mplsTunnelTEDistProto,  
mplsTunnelMaxHops,  
mplsTunnelNotificationMaxRate

}

STATUS current

## DESCRIPTION

"Scalar object needed to implement MPLS tunnels."

::= { mplsTeGroups 4 }

## mplsTunnelIsIntfcGroup OBJECT-GROUP

## OBJECTS { mplsTunnelIsIf }

STATUS current

## DESCRIPTION

"Objects needed to implement tunnels that are  
interfaces."

::= { mplsTeGroups 5 }

## mplsTunnelIsNotIntfcGroup OBJECT-GROUP

## OBJECTS { mplsTunnelIsIf }

STATUS current

## DESCRIPTION

"Objects needed to implement tunnels that are not  
interfaces."

::= { mplsTeGroups 6 }

## mplsTunnelCRLDPResOptionalGroup OBJECT-GROUP

## OBJECTS {

mplsTunnelCRLDPResMeanBurstSize,  
mplsTunnelCRLDPResExBurstSize,  
mplsTunnelCRLDPResFrequency,  
mplsTunnelCRLDPResWeight,  
mplsTunnelCRLDPResFlags,  
mplsTunnelCRLDPResRowStatus,  
mplsTunnelCRLDPResStorageType

}

STATUS current

## DESCRIPTION

"Set of objects implemented for resources applicable  
for tunnels signaled using CR-LDP."

::= { mplsTeGroups 7 }

mplsTeNotificationGroup NOTIFICATION-GROUP

MPLS Working Group

Expires March 2004

[Page 62]

```
NOTIFICATIONS {
    mplsTunnelUp,
    mplsTunnelDown,
    mplsTunnelRerouted,
    mplsTunnelReoptimized
}
STATUS current
DESCRIPTION
    "Set of notifications implemented in this module.
    None is mandatory."
 ::= { mplsTeGroups 8 }
```

END

## **12. Security Considerations**

It is clear that this MIB module is potentially useful for monitoring of MPLS TE tunnels. This MIB module can also be used for configuration of certain objects, and anything that can be configured can be incorrectly configured, with potentially disastrous results.

There are a number of management objects defined in this MIB module with a MAX-ACCESS clause of read-write and/or read-create. Such objects may be considered sensitive or vulnerable in some network environments. The support for SET operations in a non-secure environment without proper protection can have a negative effect on network operations. These are the tables and objects and their sensitivity/vulnerability:

- the mplsTunnelTable, mplsTunnelHopTable, mplsTunnelResourceTable, and mplsTunnelCRLDPResTable collectively contain objects to provision MPLS tunnels, tunnel hops, and tunnel resources. Unauthorized access to objects in these tables, could result in disruption of traffic on the network. This is especially true if a tunnel has been established. The use of stronger mechanisms such as SNMPv3 security should be considered where possible. Specifically, SNMPv3 VACM and USM MUST be used with any v3 agent which implements this MIB. Administrators should consider whether read access to these objects should be allowed, since read access may be undesirable under certain circumstances.

Some of the readable objects in this MIB module "i.e., objects with a MAX-ACCESS other than not-accessible" may be considered sensitive or vulnerable in some network

environments. It is thus important to control even GET and/or NOTIFY access to these objects and possibly to even encrypt the values of these objects when sending them over the network via SNMP. These are the tables and objects and their sensitivity/vulnerability:

- the `mplsTunnelTable`, `mplsTunnelHopTable`, `mplsTunnelResourceTable`, `mplsTunnelARHopTable`, `mplsTunnelCHopTable`, `mplsTunnelPerfTable`, and `mplsTunnelCRLDPResTable` collectively show the MPLS-TE tunnel network topology and its performance characteristics. If an Administrator does not want to reveal this information, then these tables should be considered sensitive/vulnerable.

SNMP versions prior to SNMPv3 did not include adequate security. Even if the network itself is secure "for example by using IPSec", even then, there is no control as to who on the secure network is allowed to access and GET/SET "read/change/create/delete" the objects in this MIB module.

It is RECOMMENDED that implementers consider the security features as provided by the SNMPv3 framework "see [\[RFC3410\], section 8](#)", including full support for the SNMPv3 cryptographic mechanisms "for authentication and privacy".

Further, deployment of SNMP versions prior to SNMPv3 is NOT RECOMMENDED. Instead, it is RECOMMENDED to deploy SNMPv3 and to enable cryptographic security. It is then a customer/operator responsibility to ensure that the SNMP entity giving access to an instance of this MIB module, is properly configured to give access to the objects only to those principals "users" that have legitimate.

### **13. Acknowledgments**

We wish to thank Adrian Farrel, Bert Wijnen, Eric Gray, Joan Cucchiara, Patrick Kerharo, Paul Langille, Marcus Brunner, Mike MacFaden and Mike Piecuch for their comments on this document.

### **14. References**

## 14.1. Normative References

MPLS Working Group

Expires March 2004

[Page 64]

- [RFC2119] S. Bradner, "Key Words for use in RFCs to Indicate Requirement Levels", [RFC 2119](#), [BCP 14](#), March 1997.
- [RFC2578] McCloghrie, K., Perkins, D., Schoenwaelder, J., Case, J., Rose, M., and S. Waldbusser, "Structure of Management Information Version 2 (SMIV2)", STD 58, [RFC 2578](#), April 1999.
- [RFC2579] McCloghrie, K., Perkins, D., Schoenwaelder, J., Case, J., Rose, M., and S. Waldbusser, "Textual Conventions for SMIV2", STD 58, [RFC 2579](#), April 1999.
- [RFC2580] McCloghrie, K., Perkins, D., Schoenwaelder, J., Case, J., Rose, M., and S. Waldbusser, "Conformance Statements for SMIV2", STD 58, [RFC 2580](#), April 1999.
- [RFC2702] Awduche, D., Malcolm, J., Agogbua, J., O'Dell, M., and J. McManus, "Requirements for Traffic Engineering Over MPLS", [RFC 2702](#), September 1999.
- [RFC2863] McCloghrie, K. and F. Kastenholz, "The Interfaces Group MIB ", [RFC 2863](#), June 2000.
- [RFC3031] Rosen, E., Viswanathan, A., and R. Callon, "Multiprotocol Label Switching Architecture", [RFC 3031](#), January 2001.
- [RFC3209] Awduche, D., Berger, L., Gan, D., Li, T., Srinivasan, V., and G. Swallow, "RSVP-TE: Extensions to RSVP for LSP Tunnels", [RFC 3209](#), December 2001.
- [RFC3291] Daniele, M., Haberman, B., Routhier, S., and J. Schoenwaelder, "Textual Conventions for Internet Network Addresses", [RFC 3291](#), May 2002.
- [RFC3411] Harrington, D., Presuhn, R., and B. Wijnen, "An Architecture for Describing Simple Network Management Protocol (SNMP) Management Frameworks", [RFC 3411](#), December 2002.
- [TCMIB] Nadeau, T. and J. Cucchiara (Editors),

"Definition of Textual Conventions and  
OBJECT-IDENTITIES for Multi-Protocol Label

MPLS Working Group

Expires March 2004

[Page 65]

Switching (MPLS) Management", Internet Draft  
<[draft-ietf-mpls-tc-mib-08.txt](#)>, June 2003.

[LSRMIB] Srinivasan, C., Viswanathan, A. and T.  
Nadeau, "MPLS Multiprotocol Label Switching  
(MPLS) Label Switch Router Management  
Information Base ", Internet Draft <[draft-  
ietf-mpls-lsr-mib-10.txt](#)>, June 2003.

[CRLDP] B. Jamoussi (Editor), "Constraint-Based LSP  
Setup using LDP", [RFC 3212](#), January 2002.

#### **14.2. Informative References**

- [RFC2026] S. Bradner, "The Internet Standards Process  
-- Revision 3", [RFC 2026](#), October 1996.
- [RFC2401] Kent, S., and R. Atkinson, "Security  
Architecture for the Internet Protocol", [RFC  
2401](#), November 1998.
- [RFC3410] Case, J., Mundy, R., Partain, D., and B.  
Stewart, "Introduction and Applicability  
Statement for Internet Standard Management  
Framework", [RFC 3410](#), December 2002.

#### **15. Authors' Addresses**

Cheenu Srinivasan  
Bloomberg L.P.  
499 Park Ave., New York, NY 10022  
Phone: +1-212-893-3682  
Email: [cheenu@bloomberg.net](mailto:cheenu@bloomberg.net)

Arun Viswanathan  
Force10 Networks, Inc.  
1440 McCarthy Blvd  
Milpitas, CA 95035  
Phone: +1-408-571-3516  
Email: [arunv@force10networks.com](mailto:arunv@force10networks.com)

Thomas D. Nadeau  
Cisco Systems, Inc.  
300 Apollo Drive  
Chelmsford, MA 01824  
Phone: +1-978-244-3051

Email: [tnadeau@cisco.com](mailto:tnadeau@cisco.com)

MPLS Working Group

Expires March 2004

[Page 66]

## **16. Full Copyright Statement**

Copyright (C) The Internet Society (2003). All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this paragraph are included on all such copies and derivative works. However, this document itself may not be modified in any way, such as by removing the copyright notice or references to the Internet Society or other Internet organizations, except as needed for the purpose of developing Internet standards in which case the procedures for copyrights defined in the Internet Standards process must be followed, or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by the Internet Society or its successors or assigns. This document and the information contained herein is provided on an "AS IS" basis and THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

## **17. Intellectual Property Notice**

The IETF takes no position regarding the validity or scope of any intellectual property or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; neither does it represent that it has made any effort to identify any such rights. Information on the IETF's procedures with respect to rights in standards-track and standards-related documentation can be found in [BCP-11 \[RFC2028\]](#). Copies of claims of rights made available for publication and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such

proprietary rights by implementors or users of this specification can be obtained from the IETF Secretariat.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to practice this standard. Please address the information to the IETF Executive Director.

## **18. IANA Considerations**

As described in [MPLSMGMT] and as requested in the MPLS-TC-STD-MIB [MPLSTCMIB], MPLS related standards track MIB modules should be rooted under the mplsStdMIB subtree. There are 4 MPLS MIB Modules contained in this document, each of the following "IANA Considerations" subsections requests IANA for a new assignment under the mplsStdMIB subtree. New assignments can only be made via a Standards Action as specified in [[RFC2434](#)].

### **18.1. IANA Considerations for MPLS-TE-STD-MIB**

The IANA is requested to assign { mplsStdMIB 3 } to the MPLS-TE-STD-MIB module specified in this document.