

MULTIMOB Working Group
Internet-Draft
Intended status: Experimental
Expires: January 17, 2013

LM. Contreras
Telefonica I+D
CJ. Bernardos
UC3M
I. Soto
UPM
July 16, 2012

**PMIPv6 multicast handover optimization by the Subscription Information
Acquisition through the LMA (SIAL)
draft-ietf-multimob-fast-handover-01**

Abstract

This document specifies a multicast handover optimization mechanism for Proxy Mobile IPv6 to accelerate the delivery of multicast traffic to mobile nodes after handovers. The mechanism is based on speeding up the acquisition of mobile nodes' active multicast subscriptions information by the mobile access gateways. To do that, extensions to the current Proxy Mobile IPv6 protocol are proposed. These extensions are not only applicable to the base solution for multicast support in Proxy Mobile IPv6, but also can be applied to other solutions envisioned as possible architectural evolutions of it. Furthermore, they are also independent of the role played by the mobile access gateway within the multicast network (either acting as multicast listener discovery proxy or multicast router).

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on January 17, 2013.

Copyright Notice

Copyright (c) 2012 IETF Trust and the persons identified as the

document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	4
2.	Terminology	5
3.	Overview	6
4.	PMIPv6 extensions	7
4.1.	New mobility option	7
4.1.1.	Active Multicast Subscription mobility option	7
4.1.1.1.	Option application rules	7
4.1.1.2.	Option format	7
4.2.	New flags	8
4.2.1.	Multicast Signaling flag on PBU/PBA message headers	8
4.2.1.1.	Flag application rules	8
4.2.1.1.1.	Registration process	8
4.2.1.1.2.	De-registration process	9
4.2.1.2.	New format of conventional PBU/PBA messages	10
4.2.1.2.1.	Proxy Binding Update message	10
4.2.1.2.2.	Proxy Binding Acknowledgement Message	10
4.2.2.	Multicast Active flag in the LMA Binding Cache and (optionally) on the MN's policy store	11
4.2.2.1.	Flag application rules	11
4.3.	New messages	12
4.3.1.	Messages for active multicast subscription interrogation	12
4.3.1.1.	Subscription Query message	12
4.3.1.1.1.	Message application rules	12
4.3.1.1.2.	Message format	12
4.3.1.2.	Subscription Response message	13
4.3.1.2.1.	Message application rules	13
4.3.1.2.2.	Message format	13
4.3.2.	Messages for active multicast subscription indication	15
4.3.2.1.	Multicast Activity Indication message	15
4.3.2.1.1.	Message application rules	15
4.3.2.1.2.	Message format	15

4.3.2.2. Multicast Activity Indication Acknowledge message	16
4.3.2.2.1. Message application rules	16
4.3.2.2.2. Message format	16
4.4. New PBA timer in the LMA	17
5. Signaling processes description	18
5.1. Multicast Activity signaling	18
5.1.1. Multicast Activity set to ON (A=1)	18
5.1.2. Multicast Activity set to OFF (A=0)	19
5.2. Handover signaling procedures	20
5.2.1. Handover of proactive type	20
5.2.1.1. Rationale	20
5.2.1.2. Message flow description	20
5.2.2. Handover of reactive type	22
5.2.2.1. Rationale	22
5.2.2.2. Message flow description	23
5.2.2.3. Further considerations for the reactive handover signaling	26
5.2.3. LMA decision process	27
5.2.3.1. LMA processing of S flag on reception of PBU messages	27
5.2.3.1.1. Proactive handover	27
5.2.3.1.2. Reactive handover	28
5.2.3.2. LMA set-up of S flag in PBA messages	29
5.2.4. Prevention of large delays of the binding acknowledgement for unicast traffic	30
6. Co-existence with PMIPv6 multicast architectural evolutions	34
7. Benefits of layer-2 triggers for fast handover	34
8. Security Considerations	35
9. IANA Considerations	35
10. Contributors	35
11. Acknowledgments	35
12. References	36
12.1. Normative References	36
12.2. Informative References	36
Appendix A. Change Log	37
Authors' Addresses	37

1. Introduction

The base solution describing how continuous multicast service delivery can be provided in Proxy Mobile IPv6 domains is described in [RFC 6224](#) [[RFC6224](#)]. This solution specifies the basic functionality needed in the Proxy Mobile IPv6 [[RFC5213](#)] entities to provide a multicast service, and supports the continuous delivery of multicast traffic by obtaining, after a handover, the on-going multicast subscription information directly from the mobile node. When a mobile node attaches to a new mobile access gateway, the mobile node is interrogated by the mobile access gateway through a multicast listener discovery General Query, which is sent just after any new link is set up, to get knowledge of any existing subscription, as specified in [[RFC2710](#)].

However, as highlighted by [[I-D.von-hugo-multimob-future-work](#)], the base solution needs to be improved to meet some performance requirements, especially those referred to the user perceived service quality, which is seriously affected by the disruption of multicast content forwarding to the mobile node during handovers.

A mobile node with an active multicast subscription, moving from one point of attachment to another within a Proxy Mobile IPv6 domain, experiences a certain delay until it resumes receiving again the multicast content that it was receiving at the previous location. Such delay causes a gap in the content reception. Two different actions can help to mitigate such reception gap. One of them is to buffer at the previous mobile access gateway the traffic with destination at the mobile node and forward it to the new mobile access gateway, in order to deliver that traffic to the mobile node. The other possible (complementary) action is to reduce the time needed by the new mobile access gateway to get knowledge of the active multicast subscription of the mobile node (i.e., the IP addresses of the multicast groups subscribed and the sources providing them), so the new mobile access gateway can subscribe to the multicast group(s) on behalf of the mobile node as soon as possible.

While the first mechanism can be accomplished by using [[RFC5949](#)] or some evolution of it (despite being only applicable in the case the underlying radio access technology supports layer-2 triggers, thus requiring additional support on the mobile node), there is no a generic standard solution for the accelerated acquisition of the on-going multicast subscription of the mobile node.

The approach followed by the base solution [[RFC6224](#)] to get knowledge of an existing multicast subscription relies on the behavior of the IGMP/MLD protocols. Both protocols send multicast membership

interrogation messages when a new link is up. The response to such a message reports any existing multicast subscription by the mobile node. While this is a straightforward approach, it also causes that the mobile access gateway can incur in a non-negligible delay in receiving the corresponding MLD Report message. This delay is caused by the time needed for the detection of the attachment in the new link, the radio transfer delays associated with the signaling to the mobile node, and the MLD query response interval time required by this procedure (whose default value is 10 seconds as defined in [\[RFC2710\]](#), or between 5 and 10 seconds as considered in the best case wireless link scenario in [\[RFC6636\]](#)).

This document extends the Proxy Mobile IPv6 signaling protocol defined in the base protocol [\[RFC5213\]](#) by including a new multicast information option to update Proxy Mobile IPv6 entities during the registration and de-registration processes, and new messages to trigger the transfer of multicast information. No extension is required in any of the multicast-related protocols in use (IGMP/MLD or PIM protocols). This document provides a signaling method internal to the network to speed up the subscription information acquisition by the mobile access gateway, in order to accelerate the multicast delivery to the mobile node after having completed a handover. By doing so, the knowledge by the mobile access gateway of the currently active multicast subscription becomes independent of the underlying radio technology dynamics and relaxes the requirement of a rapid response from the mobile node in processing MLD control messages. Issues like radio framing, radio access contention, channel reliability, MN's capabilities (i.e., layer-2 triggering support), IGMP/MLD timers optimization for wireless environments, etc, will not impact on the observed multicast performance during handovers.

The solution described in this document is not only applicable to the base solution defined in [\[RFC6224\]](#), but also it can be applied to other solutions envisioned as possible architectural evolutions of it, as those stated in [\[I-D.ietf-multimob-pmipv6-ropt\]](#). Furthermore, it is also independent of the role played by the mobile access gateway within the multicast network (either acting as MLD proxy or multicast router).

2. Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119](#) [\[RFC2119\]](#).

This document uses the terminology referring to PMIPv6 components as

defined in [[RFC5213](#)].

Additionally, the following terms are defined.

pMAG The previous MAG or pMAG is the MAG where the MN is initially registered in a handover event.

nMAG The new MAG or nMAG is the MAG where the MN is registered at the end of the handover event.

Reactive Handover A reactive handover is a handover event in which the LMA receives the MN registration from the nMAG without having previously received the MN de-registration from the pMAG.

Proactive handover A proactive handover is a handover event where the LMA receives the MN de-registration from the pMAG previously to receive the MN registration from the nMAG.

3. Overview

The LMA is a key element within the PMIPv6 infrastructure, which traces the MN reachability along the PMIPv6 domain. Therefore the LMA is the best element to maintain the MNs' multicast subscription information updated and to forward it to the rest of PMIPv6 entities (i.e., to the MAGs) as needed when MNs move within the domain. The LMA has timely knowledge of the MNs' location, especially during handover events, and it is therefore able to quickly provide information to the new one point of attachment (querying the previous one if required).

The LMA only obtains the detailed subscription information (in terms of the IP addresses of both the multicast group subscribed, G, and the source delivering it, S) during a handover event. There is no need of continuously informing the LMA about MNs' multicast state while the mobile nodes remain attached to the same mobile access gateway. Such a continuous updating procedure would significantly increase the signaling load within the PMIPv6 domain without a clear benefit. The subscription information (S,G) is only critical during handovers, neither after nor before. Indicating the active subscription while the handover is ongoing guarantees that such information will be up-to-date, ready to be transferred to the new MAG where the MN has just attached.

To be able to transfer the multicast subscription information between PMIPv6 entities during a handover, this document extends the PMIPv6 protocol in several ways. First of all, a new mobility option is defined to carry the IP addresses of the current multicast

subscription. Furthermore, additional messages are defined to manage the interchange of the multicast information among PMIPv6 entities. Finally, some flags are defined to govern the process.

Next sections provide the details of these Proxy Mobile IPv6 protocol extensions.

4. PMIPv6 extensions

This section outlines the extensions proposed to the PMIPv6 protocol specified in [RFC5213].

4.1. New mobility option

4.1.1. Active Multicast Subscription mobility option


4.1.1.1. Option application rules

A new TLV-encoded mobility option, "Active Multicast Subscription" option is defined for use with the PBU (Proxy Binding Update) and PBA (Proxy Binding Acknowledge) messages exchanged between an LMA and a MAG to transfer the multicast subscription information. This option is used for exchanging the IP addresses of both the group subscribed to by the MN, and the source(s) delivering it, as well as the applicable filter mode. This information is carried by using directly the Multicast Address Record format defined in [RFC3810]. There can be multiple "Active Multicast Subscription" options present in the message, one for each active subscription maintained by the MN when the handover is taking place (i.e., one per Multicast Address Record).

This new option will be also used, with the same aim, by the new message Subscription Response described later in this document.

4.1.1.2. Option format

The format of this new option is as follows:

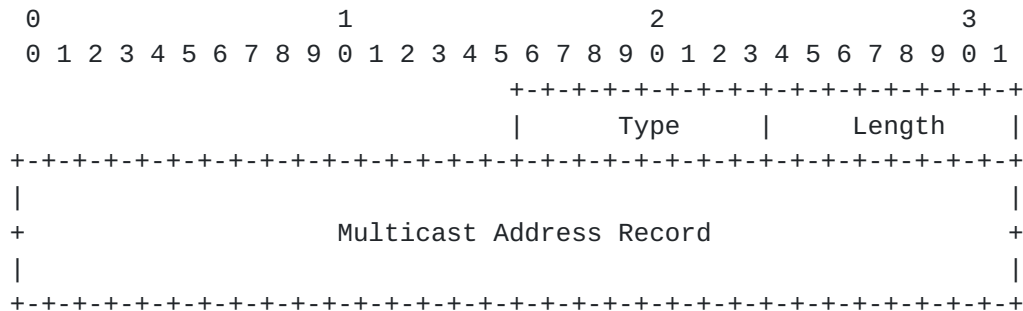

Type:

To be defined by IANA.

Length:

8-bit unsigned integer indicating the length of the option in octets, excluding the type and length fields.

Multicast Address Record:

Multicast subscription information corresponding to a single subscribed multicast address as defined in [[RFC3810](#)].

4.2. New flags

Two new flags are defined and used to handle the forwarding of multicast subscription information.

4.2.1. Multicast Signaling flag on PBU/PBA message headers

4.2.1.1. Flag application rules

A new flag S is added in both PBU and PBA message headers to advise about the MAG and the LMA capabilities of processing multicast-related signaling for the MN that caused the message.

This flag will govern the multicast-related signaling between the LMA and the MAG. As a general rule, the value of the flag in the PBA message SHOULD be a copy of the value received in the PBU message. Specific rules are described in next sub-sections.

4.2.1.1.1. Registration process

During handover, the entities involved in this process are the nMAG and the LMA. These rules also apply for the Initial Binding registration process.

o PBU message

- * S=0, it indicates that the MAG sending the PBU message does not accept multicast-related signaling for the MN being attached. This can be used to discriminate PMIPv6 nodes which are not multicast enabled, for backward compatibility reasons.
- * S=1, it indicates that the MAG sending the PBU message accepts multicast-related signaling for the MN being attached. Depending on the type of handover (reactive or proactive) the

LMA will take some actions, described later in this document.

o PBA message

- * If S=0 in the corresponding PBU message, the value of the flag in the PBA message SHOULD be a copy of the value received in the PBU message (thus S=0), without any further meaning.
- * If S=1 in the corresponding PBU message, two sub-cases can happen
 - + S=1 and "Active Multicast Subscription" mobility option in the PBA message. When the MN maintains an active multicast session, if the LMA is able to provide the multicast subscription information during registration, the PBA message will include the "Active Multicast Subscription" mobility option with the IP addresses of the subscribed group and the source providing it. If the LMA is not able to provide such information during registration, the PBA message will include the "Active Multicast Subscription" mobility option with the IP addresses of the group and the source set to 0. This case is useful to decouple unicast and multicast signaling for an MN being registered at nMAG. A way for obtaining later active multicast-subscription information is described later in this document.
 - + S=0 in the PBA message if the MN does not maintain an active multicast subscription (note that for backward compatibility reasons an LMA not supporting multicast related signaling would always send S=0).

4.2.1.1.2. De-registration process

During handover, the entities involved in this process are the pMAG and the LMA. These rules apply for the Binding De-registration process

o PBU message

- * S=0, it indicates that the MN has no active multicast session (note that for backward compatibility reasons a pMAG not supporting multicast related signaling would always send S=0).
- * S=1, it indicates that the MN has an active multicast session, and the IP addresses of the subscribed group and the source providing it are transported in the "Active Multicast Subscription" mobility option.


o PBA message

- * The value of the flag in the PBA message SHOULD be 0, without any further meaning (note that for backward compatibility reasons an LMA not supporting multicast related signaling would always send S=0).

4.2.1.2. New format of conventional PBU/PBA messages


4.2.1.2.1. Proxy Binding Update message

As result of the new defined flag, the PBU message results as follows:

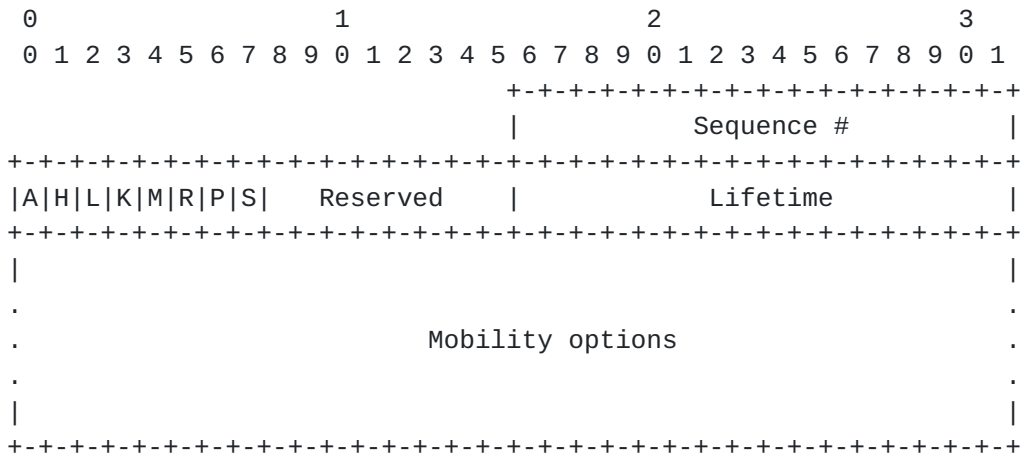

4.2.1.2.2. Proxy Binding Acknowledgement Message

As result of the new defined flag, the PBA message results as follows:

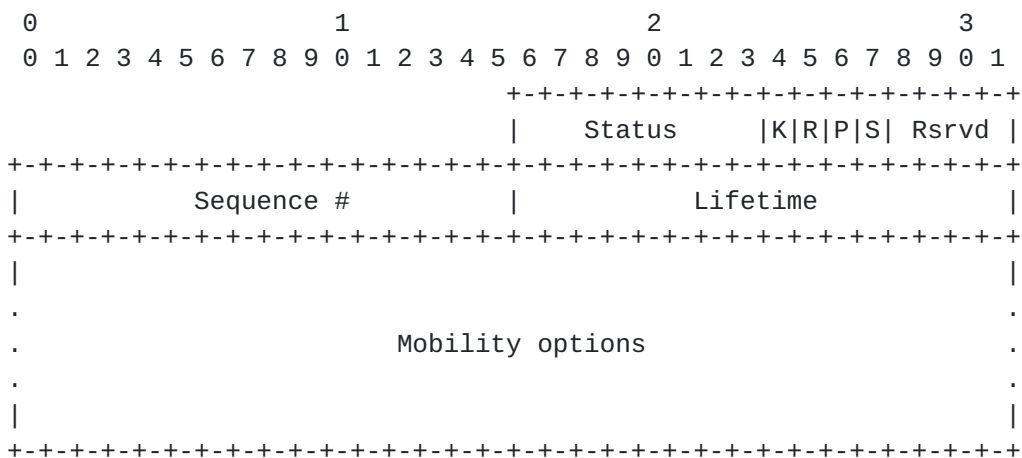

4.2.2. Multicast Active flag in the LMA Binding Cache and (optionally) on the MN's policy store

4.2.2.1. Flag application rules

A new flag A is added in the LMA Binding Cache to retain the knowledge that the registered MN maintains or not an active multicast subscription. The basic use of this flag is to restrict the interrogation of the pMAG only to the cases in which the MN certainly is maintaining an active subscription. The algorithm which is followed by the LMA to interrogate or not the pMAG (after receiving a PBU message from the nMAG) is as follows:

- o Flag S=0 & flag A=0: this situation represents the case where the nMAG does not support multicast-related signaling for the MN being registered, and, additionally, the LMA is not aware of any active multicast subscription on-going. Then, the LMA does not interrogate the pMAG, and registers the MN as attached to the nMAG as usual.
- o Flag S=0 & flag A=1: this situation represents the case where the nMAG does not support multicast-related signaling for the MN being registered, but the LMA is aware of one or more on-going MN's active multicast subscriptions. Due to the fact that multicast signaling is not supported by the nMAG for that MN, the LMA does not interrogate the pMAG, and registers the MN as attached to the nMAG as usual.
- o Flag S=1 & flag A=0: this situation represents the case where the nMAG supports multicast-related signaling for the MN being registered, but the LMA is not aware of any active multicast subscription. Then, the LMA does not interrogate the pMAG, and registers the MN as attached to the nMAG as usual.
- o Flag S=1 & flag A=1: this situation represents the case where the nMAG supports multicast-related signaling for the MN being registered, and, additionally, the LMA is aware of one or more on-going MN's active multicast subscriptions. Then, the LMA interrogates the pMAG to obtain the multicast subscription details in the form of (S,G) previously to complete the registration of the MN attached to the nMAG.

The flag A SHOULD be initialized to the value 0.

Optionally, this flag can be also added to the MN's policy store, and dynamically updated by the LMA to signal that the MN has (or not) an active multicast subscription. By introducing this flag in the MN's policy profile, the nMAG can know in advance the existence of an

active multicast session by the incoming MN.

4.3. New messages

4.3.1. Messages for active multicast subscription interrogation

A new pair of messages is defined for interrogating entities about the active multicast subscription of the MN when the handover is of reactive type.

These messages are sent using the Mobility Header as defined in [RFC6275].

4.3.1.1. Subscription Query message


4.3.1.1.1. Message application rules

The Subscription Query message is sent by the LMA towards the pMAG to interrogate it about any existing multicast subscription of the MN which is being registered by the nMAG. This message is generated in case that the handover is of reactive type.

Additionally, this message is sent by the nMAG towards the LMA to interrogate it about the existing multicast subscription of the MN when the LMA acknowledges the PBU sent by the nMAG but the multicast information is not provided (in detail, when the PBU messages has set the flag S to 1, and the PBA message has set the flag S to 1 but the IP addresses of the group and the source in the "Active Multicast Subscription" mobility option are set to 0).

4.3.1.1.2. Message format

The Subscription Query message has the following format.

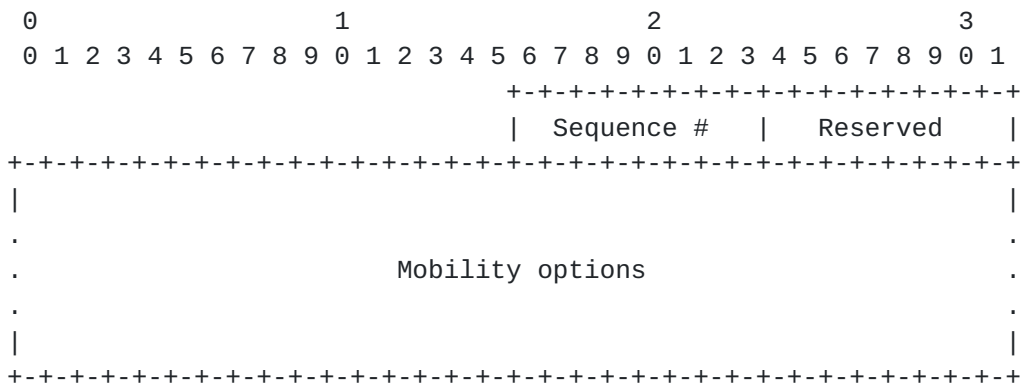

Sequence Number :

The Sequence Number field establishes the order of the messages sent in the Subscription Query / Subscription Response dialogue between the LMA and the MAG for a certain MN. The initial Sequence Number will be determined by the entity which creates the message (either LMA or MAG, depending on the scenario), which will be responsible of managing this counter.

Reserved:

This field is unused for now. The value MUST be initialized to 0.

Mobility options:

This message will carry one or more TLV-encoded mobility options. The valid mobility options for this message are the following:

- * Mobile Node Identifier option (mandatory)
- * Home Network Prefix option (optional)

There can be one or more instances of the Home Network Prefix option, but only one instance of the Mobile Node Identifier option.


4.3.1.2. Subscription Response message

4.3.1.2.1. Message application rules

The Subscription Response message is sent by the pMAG towards the LMA, or by the LMA towards the nMAG, to answer a previously received Subscription Query message, as described above.

4.3.1.2.2. Message format

The Subscription Response message has the following format.

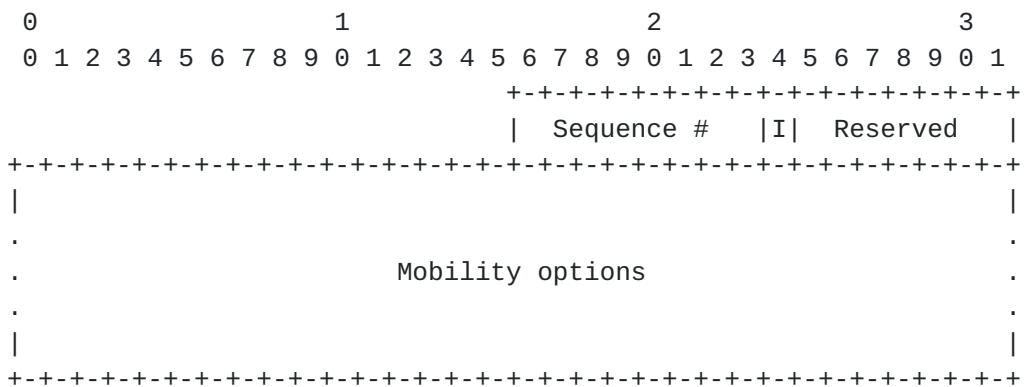

Sequence Number:

The value of the Sequence Number field in the Subscriber Response message MUST be a copy of the Sequence Number received in the Subscription Query message.

Multicast Information (I):

The multicast Information flag I specifies if there is multicast subscription information available for the MN or not. The meaning is the following:

I=0: there is no multicast subscription information available for the MN identified by the Mobile Node Identifier option in this message.

I=1: there is multicast subscription information available for the MN identified by the Mobile Node Identifier option in this message. The multicast subscription information is carried on one or more instances of the Active Multicast Subscription option in this message (one instance for each active subscription).

Reserved:

This field is unused for now. The value MUST be initialized to 0.

Mobility options:

This message will carry one or more TLV-encoded mobility options. The valid mobility options for this message are the following:

- * Mobile Node Identifier option (mandatory)
- * Active Multicast Subscription option (mandatory) only when flag I=1, not present in any other case
- * Home Network Prefix option (optional)

There can be one or more instances of the Home Network Prefix option (in all cases) and the Active Multicast Subscription option (only when I=1), but only one instance of the Mobile Node Identifier option.

4.3.2. Messages for active multicast subscription indication

A new pair of messages is defined for setting up and down the optional A flag defined above.

These messages are sent using the Mobility Header as defined in [RFC6275].


4.3.2.1. Multicast Activity Indication message

4.3.2.1.1. Message application rules

The Multicast Activity Indication message is sent by a MAG towards the LMA to set to 1 or 0 the A flag either to indicate the start or the complete cease of any multicast subscription by the MN. Through the use of this message, the LMA becomes aware that one or more multicast flows are being forwarded to a MN. This information is useful for the LMA during a handover to discriminate if the pMAG needs to be asked or not about multicast information corresponding to the MN being registered at the nMAG, in case that the handover is of reactive type.

4.3.2.1.2. Message format

The Multicast Activity Indication message has the following format.

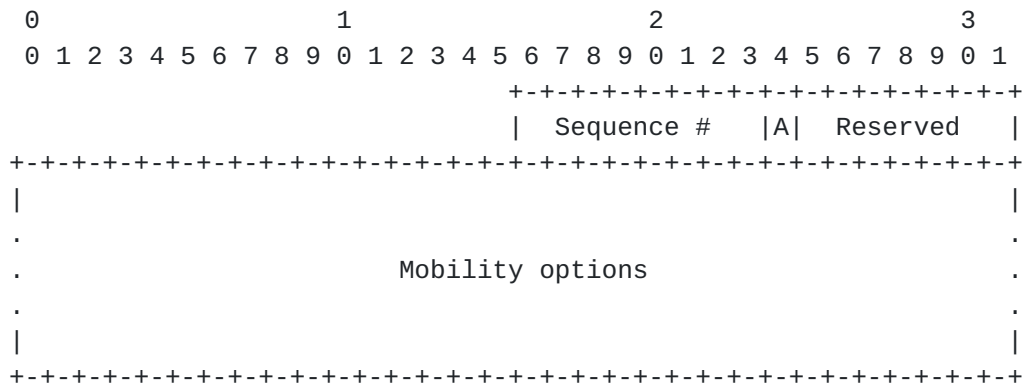

Sequence Number:

The Sequence Number field establishes the order of the messages sent in the Activity Indication / Activity Indication Ack dialogue between the MAG and the LMA for a certain MN. The initial Sequence Number will be determined by the MAG, which will be responsible of managing this counter.

Activity indicator (A):

The Activity indicator flag A specifies if the MN multicast activity is on, that is, if the MN maintains one or more active multicast subscriptions at the MAG. The meaning is the following:

A=0: the multicast activity of the MN (identified by the Mobile Node Identifier option in this message) is OFF.

A=1: the multicast activity of the MN (identified by the Mobile Node Identifier option in this message) is ON.

Reserved:

This field is unused for now. The value MUST be initialized to 0.

Mobility options:

This message will carry one or more TLV-encoded mobility options. The valid mobility options for this message are the following:

- * Mobile Node Identifier option (mandatory)
- * Home Network Prefix option (optional)

There can be one or more instances of the Home Network Prefix option, but only one instance of the Mobile Node Identifier option.


4.3.2.2. Multicast Activity Indication Acknowledge message

4.3.2.2.1. Message application rules

The Multicast Activity Indication Acknowledge message is sent by the LMA towards a MAG to confirm the reception of a previously sent Multicast Activity Indication message.

4.3.2.2.2. Message format

The Multicast Activity Indication message has the following format.

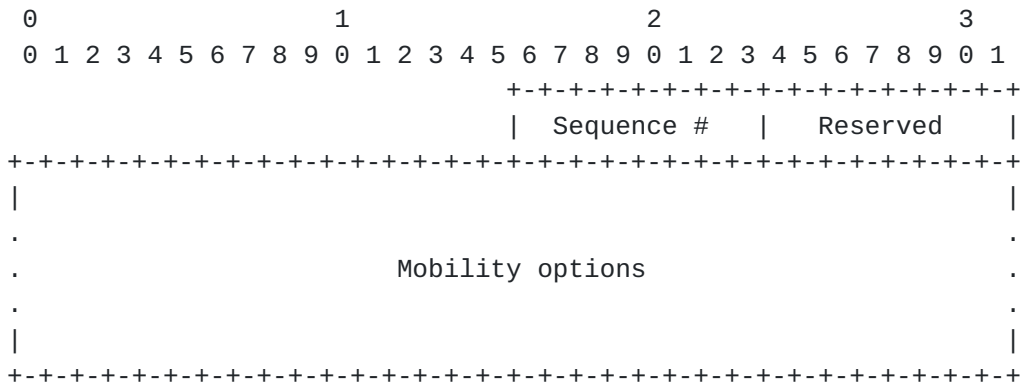

Sequence Number:

The value of the Sequence Number field in the Activity Indication Ack message MUST be a copy of the Sequence Number received in the Activity Indication message.

Reserved:

This field is unused for now. The value MUST be initialized to 0.

Mobility options:

This message will carry one or more TLV-encoded mobility options. The valid mobility options for this message are the following:

- * Mobile Node Identifier option (mandatory)
- * Home Network Prefix option (optional)

There can be one or more instances of the Home Network Prefix option, but only one instance of the Mobile Node Identifier option.

4.4. New PBA timer in the LMA

A new timer named "PBA timer" is used in the LMA to define the maximum waiting time before the PBA message is sent to the nMAG in case the multicast subscription information relative to the MN is not yet available. The aim of this timer is to prevent potential large delays in the forwarding of unicast traffic towards the MN being registered at the nMAG. This timer allows decoupling the unicast signaling from the multicast one.

This timer SHOULD be upper bounded by the constant defined in [RFC6275] INIT_BINDACK_TIMEOUT, whose default value is 1 s. This constant sets the time when the nMAG will retry the MN registration

by sending again the PBU message. The "PBA timer" has to ensure that the nMAG does not enter the retry mode.

5. Signaling processes description

A number of new signaling processes are introduced with this solution. Next sections describe these new processes in detail.

5.1. Multicast Activity signaling

This solution makes use of the flag A to keep track of existing multicast activity in a certain MN. The idea behind this is to define a mechanism which helps the LMA to decide whether to interrogate or not the pMAG about potential subscription information.

5.1.1. Multicast Activity set to ON (A=1)

Figure 1 summarizes this process.

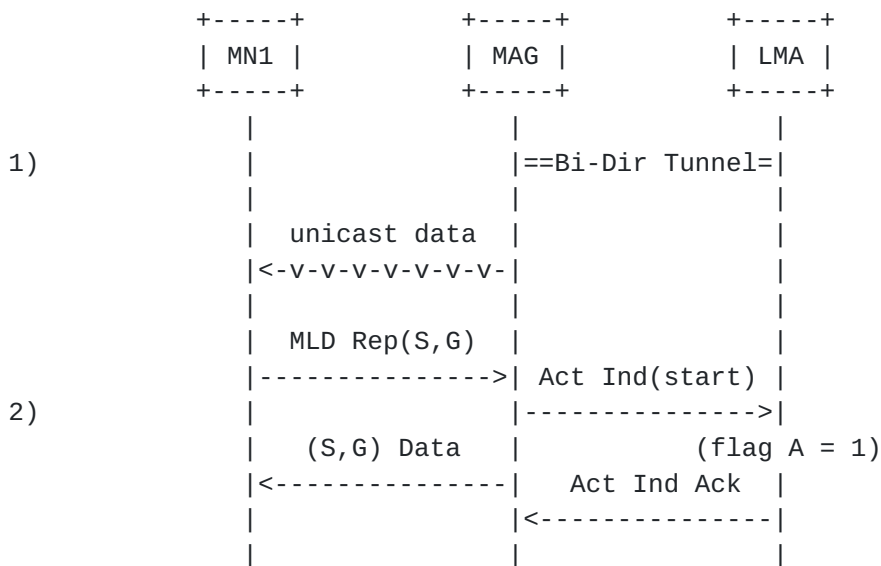


Figure 1: Multicast Activity set to ON

The sequence of messages is the following:

1. An MN, named MN1, is attached to the MAG. The MN is a multicast-enabled node, and it is only receiving unicast traffic as usual in PMIPv6 domains, with no multicast subscription yet. At some point in time, the MN1 requests to the MAG to be subscribed to the content identified by the IP addresses (S,G), by sending a standard MLD report from the MN to the MAG. The MAG will keep the multicast status state of the point-to-point link with the

MN. In case the MAG has not already subscribed to the multicast flow (S,G) it joins the content on behalf of MN. Multicast flow (S,G) is subsequently forwarded by the MAG to the MN1.

- Due to this initial multicast subscription for the MN1, the MAG triggers the multicast Activity Indication message towards the LMA, to indicate that the MN1 multicast activity is ON. The LMA will set the flag A to 1. Afterwards, the LMA sends an Activity Indication Ack message to the MAG to acknowledge the previous indication.

5.1.2. Multicast Activity set to OFF (A=0)

Figure 2 presents the corresponding flow.

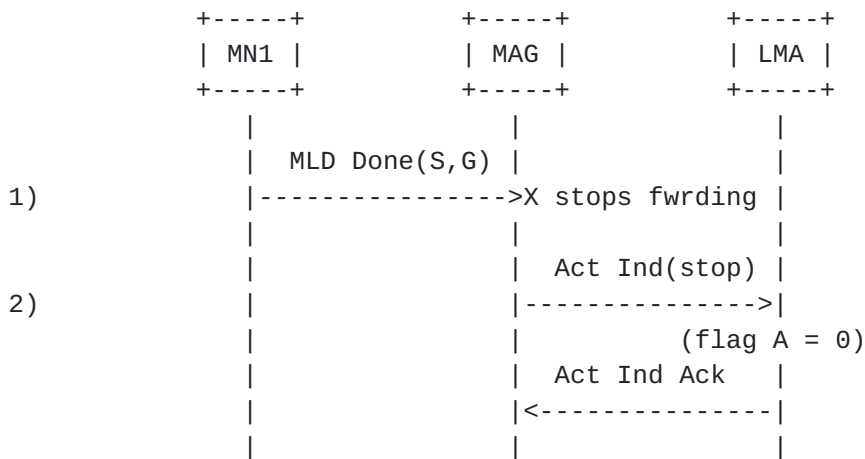


Figure 2: Multicast Activity set to OFF

The message flow is as follows:

- Some time later, the MN1 decides to totally stop all the active multicast subscriptions that it maintains. The MN1 will send an MLD Done message to the MAG to request the cease of the multicast traffic delivery. As a consequence, the MAG will stop all the multicast traffic forwarding to the MN1.
- After removing the active subscriptions for the MN1, the MAG sends a multicast Activity Indication message to the LMA indicating that the MN1 multicast activity is OFF. The LMA will set the flag A to 0, its default value. Afterwards, the LMA sends an Activity Indication Ack message to the MAG to acknowledge the previous indication.

5.2. Handover signaling procedures

As the MN moves from one access gateway (named previous-MAG, pMAG) to another (named new-MAG, nMAG), the mobility-related signaling due to the handover event is carried out independently by the pMAG and the nMAG. That signaling process is not synchronized and, thus, two scenarios need to be considered depending on the order in which the LMA receives notification of the MN registration and de-registration in the nMAG and the pMAG respectively.

5.2.1. Handover of proactive type

5.2.1.1. Rationale

In the proactive case, the LMA receives the MN de-registration from the pMAG previously to receive the MN registration from the nMAG.

Only for those MNs which maintain an active multicast subscription, the pMAG will include, as part of the PBU message (with flag S set to 1), the new TLV-encoded mobility option "Active Multicast Subscription" carrying the IP addresses of the multicast subscription(s) active in the MN at that moment.

The LMA will store that information in the corresponding binding cache. If, later on, the MN attaches to a nMAG, this information will be sent (using the same TLV option) to the nMAG as part of the PBA confirmation of the registration process (the PBU message sent by the nMAG SHOULD set the flag S to 1). On the other hand, if no further registration happens, the multicast information will be removed together with the rest of binding database for that MN.

After receiving the multicast addresses of the group(s) subscribed to by the MN, and of the source(s) delivering the corresponding multicast content, the nMAG can subscribe to the multicast flow(s) on behalf of the MN if there is no other MN receiving it already at the nMAG. The multicast status can be also set in advance for the point-to-point link towards the MN.

5.2.1.2. Message flow description

Figure 3 summarizes this process.



Figure 3: Proactive handover

The message flow is as follows:

1. A registered MN is receiving a multicast content which has been previously subscribed to by sending a standard MLD report from the MN to the currently serving MAG, pMAG. The pMAG keeps the multicast status state of the point-to-point link with the MN.

2. The MN perceives a better radio link and decides to initiate a handover process over a radio access controlled by a new MAG, nMAG. As a consequence, pMAG determines a detach event corresponding to this MN, and updates the attachment status of this MN to the LMA by sending an extended Proxy Binding Update message, including a new TLV-encoded option, named "Active Multicast Subscription", which contains the IP addresses of the (S,G) pairs of the active multicast subscriptions in the moment of handover.
3. The LMA processes the PBU message. Additionally, the LMA stores in the Binding Cache the information regarding the on-going multicast subscription(s) when the detachment is initiated. This information will be kept until a new registration of the MN is completed by another MAG, or till the Binding Cache expiration, according to [[RFC5213](#)].
4. The LMA acknowledges to the pMAG the previous PBU message.
5. As a result of the handover process, the MN attaches to another MAG, called nMAG.
6. The nMAG triggers a registration process by sending a PBU message (with flag S set to 1) to the LMA.
7. After the analysis of the PBU message, the LMA sends an extended PBA including the new "Active Multicast Subscription" option, which contains the IP addresses of the (S,G) pairs of the active multicast subscriptions in the moment of handover.
8. The nMAG processes the PBA message following all the standard procedures described in [[RFC5213](#)]. Additionally, with the new information relative to multicast subscription, the nMAG will set up the multicast status of the point-to-point link between the nMAG and the MN, and will join the content identified by (S,G) on behalf of the MN in case the nMAG is not receiving already such content due to a previous subscription ordered by another MN attached to it. From that instant, the multicast content is served to the MN.

5.2.2. Handover of reactive type

5.2.2.1. Rationale

In the reactive case, the LMA receives the MN registration from the nMAG without having previously received the MN de-registration from the pMAG.

As the nMAG is not aware of any active multicast subscription of the MN, the nMAG will start a conventional registration process, by sending a normal PBU message (with flag S set to 1) towards the LMA.

After receiving the PBU message from the nMAG, the LMA will take the decision of interrogating or not the pMAG regarding any existing multicast subscription for that MN. This decision is taken following a procedure that is described later.

Once the multicast subscription information is retrieved from the pMAG, the LMA encapsulates it in the PBA message by using the TLV option "Active Multicast Subscription", and forwards the PBA message to the nMAG. Then, the nMAG can subscribe the multicast flow on behalf of the MN, if there is no other MN receiving it already at the nMAG. The multicast status can be also set in advance for the point-to-point link towards the MN.

[5.2.2.2.](#) Message flow description

Figure 4 and Figure 5 summarize this process.

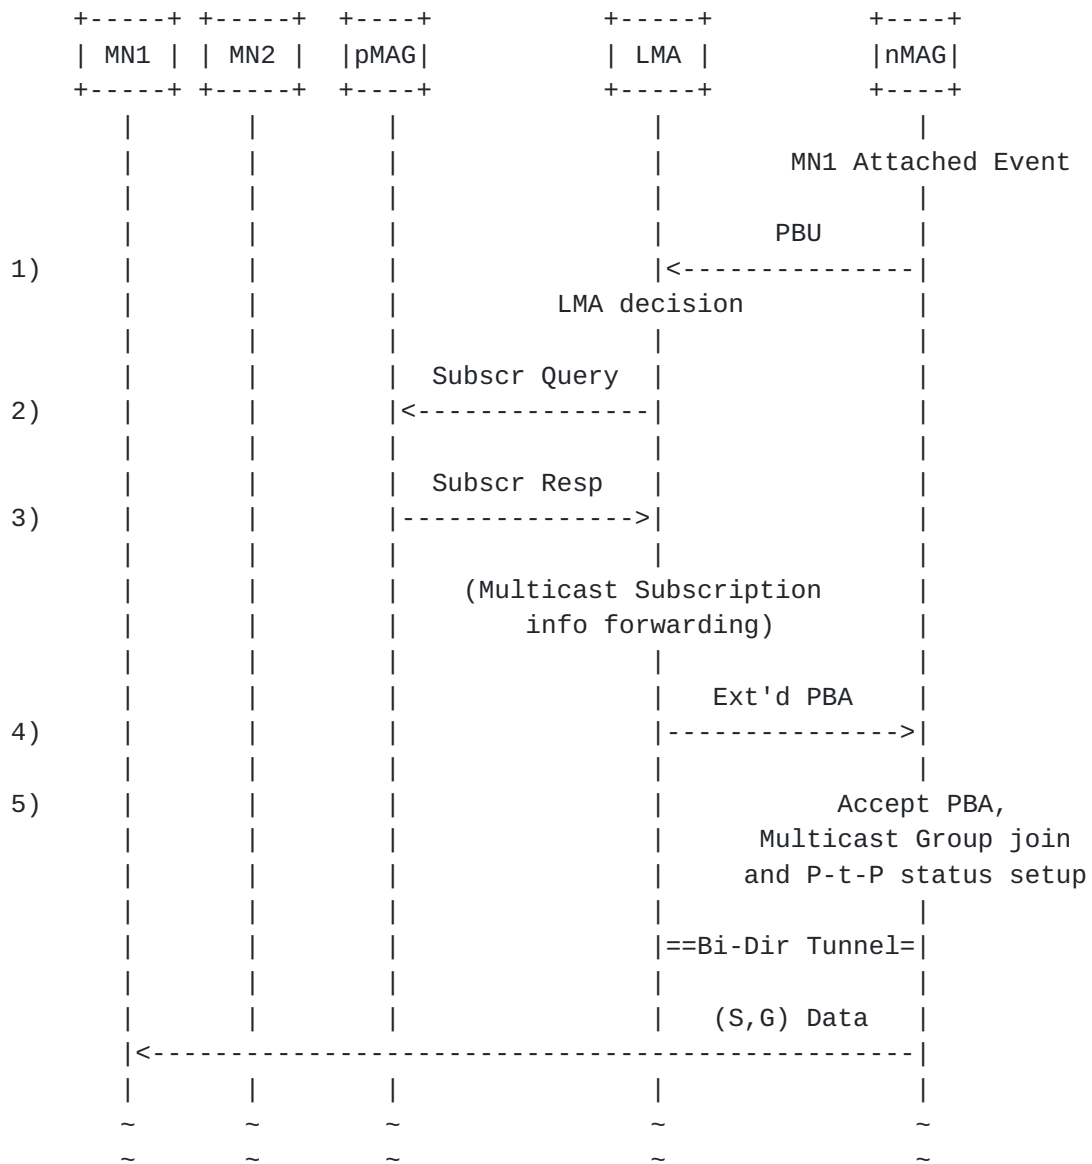


Figure 4: Reactive handover (steps 1 to 5)

Consider as starting point the situation where a couple of MNs, named MN1 and MN2, are attached to the pMAG, both MNs being multicast-enabled nodes, but only MN1 maintains an active multicast subscription at this moment. As consequence, the value of the A flag in the LMA is set to 1 for MN1, and set to 0 for MN2.

The sequence of messages for the handover of MN1 and MN2 is the following (as depicted in Figure 4):

1. At certain time, the MN1 perceives a better radio link and decides to attach at a new MAG, nMAG, in a handover process (as it is a reactive case, the pMAG is not aware of the detachment process). Then, the nMAG triggers a registration process by sending a PBU message (with flag S set to 1) to the LMA.
2. Prior to acknowledge the received PBU message, the LMA checks the status of the A flag for this MN. Due that the flag A=1, the LMA interrogates the pMAG about if there is any active multicast subscription for the MN1, by sending a Subscription Query message.
3. The pMAG answers the LMA with a Subscription Response message including the IP addresses of the existing subscriptions (the pair (S,G) in this case).
4. After processing the pMAG answer, the LMA acknowledges (with flag S set to 1) the PBU message, including the multicast subscription information within the new TLV-encoded option "Active Multicast Subscription". The nMAG then process the extended PBA message.
5. The nMAG processes the PBA message, and it proceeds to set up the multicast status of the point-to-point link between the nMAG and the MN1, and to join the content identified by (S,G) on behalf of the MN1 in case the nMAG is not receiving already such content. (The bidirectional tunnel is also set up between the nMAG and the LMA if it has not been established before by another MN connection). At this moment, the multicast content can be served to the MN1. The unicast traffic for the MN1 can be forwarded as well.

the multicast related information for the MN.

In order to avoid losing the multicast subscription information sent in the de-registration PBU message, the LMA SHOULD store it, and include it in the PBA message towards the nMAG in case the Subscription Response message from the pMAG does not contain multicast subscription information for the MN.

5.2.3. LMA decision process

A key point of the solution proposed in this document resides on the LMA decision of interrogating the pMAG about a potential active subscription of the MN entering the nMAG. Several variables take place, and it is required to define a mechanism for assisting the LMA in its decision process.

Basically two flags will be used. One flag, the named "multicast Signaling" or S flag, is used to signal the multicast capabilities of the MAGs and the transport of the multicast subscription information within the PBU/PBA messages. The other one, the named "multicast Activity" or A flag, is used to register on the LMA whether the MN is maintaining an active multicast subscription or not.

The following sections summarize the use of these flags on the LMA decision process.

5.2.3.1. LMA processing of S flag on reception of PBU messages

5.2.3.1.1. Proactive handover

In the event of proactive handover, the pMAG has previously informed the LMA about any potential subscription information currently active in the MN. The actions to be carried out by the LMA once it receives the PBU message from the nMAG are summarized in the table below.

multicast signaling flag S	multicast activity flag A	Meaning	LMA action
S=0	A=0	- Multicast not supported by nMAG - No active subscription by MN	- MN registration as in RFC 5213 (S=0 in PBA)
	A=1	- Multicast not supported by nMAG - Active subscription by MN	- LMA stores multicast subscription info - MN registration as in RFC 5213 (S=0 in PBA)
S=1	A=0	- Multicast supported by nMAG - No active subscription by MN	- MN registration as in RFC 5213 (S=0 in PBA)
	A=1	- Multicast supported by nMAG - Active subscription by MN	- LMA stores multicast subscription info - MN registration conveys multicast subscription info (S=1 in PBA)

Figure 6: Flag processing on LMA for proactive handover

5.2.3.1.2. Reactive handover

In the event of reactive handover, the LMA is not aware about any potential subscription information currently active in the MN. The actions to be carried out by the LMA once it receives the PBU message from the nMAG are summarized in the table below.

multicast signaling flag S	multicast activity flag A	Meaning	LMA action
S=0	A=0	- Multicast not supported by nMAG - No active subscription by MN	- MN registration as in RFC 5213 (S=0 in PBA)
	A=1	- Multicast not supported by nMAG - Active subscription by MN	- LMA does not interrogate pMAG - MN registration as in RFC 5213 (S=0 in PBA)
S=1	A=0	- Multicast supported by nMAG - No active subscription by MN	- LMA does not interrogate pMAG - MN registration as in RFC 5213 (S=0 in PBA)
	A=1	- Multicast supported by nMAG - Active subscription by MN	- LMA interrogates pMAG to obtain multicast subscription - MN registration conveys multicast subscription info (S=1 in PBA)

Figure 7: Flag processing on LMA for reactive handover

5.2.3.2. LMA set-up of S flag in PBA messages

Once the LMA decision process is finished, the LMA builds the PBA message to complete the registration process triggered by the nMAG. The value of the S flag in the PBA message will be set according to the data specified in the table below.

S flag received in PBU message	S flag sent in PBA message	Meaning
S=0	S=0	No further meaning
(multicast not supported by nMAG)	S=1	N/A
	S=0	No active subscription on MN
S=1 (multicast is supported by nMAG)	S=1	- (S,G) info available: Multicast subscription info is conveyed in the PBA message - (S,G) info not available: (IP addresses set to 0) It has to be requested by using the Subscription Query message.

Figure 8: S flag configuration in PBA messages

5.2.4. Prevention of large delays of the binding acknowledgement for unicast traffic

According to the message sequences described for the reactive handover case, in case the LMA has to request the multicast subscription information from the pMAG, the binding request sent by the nMAG is maintained on-hold till the LMA receives, processes and includes the multicast subscription information into the extended PBA message. As consequence, the unicast traffic may then suffer an extra delay motivated by the multicast-related signaling. During that time, the unicast traffic with destination the MN being registered by the nMAG MUST be buffered or discarded by the LMA.

In order to avoid any potential large delay in the forwarding of unicast traffic arriving at the LMA towards the MN, a mechanism SHOULD be implemented to decouple multicast from unicast traffic reception by the MN.

Figure 9 shows this mechanism:

The sequence of messages is the following:

1. An MN is attached to the pMAG. The MN is a multicast-enabled node, and it is receiving both unicast and multicast traffic simultaneously.
2. Some time later, the MN perceives a better radio link and decides to attach at a new MAG, nMAG, in a handover process (as a reactive case, the pMAG is not aware of the detachment process). Then, the nMAG triggers a registration process by sending a PBU message (with flag S set to 1) to the LMA.
3. Prior to acknowledge the received PBU message, the LMA decides to interrogate the pMAG about if there is any active multicast subscription for the MN, by sending a Subscription Query message. The LMA decision is based on the checking of flag A when the reactive handover manages the multicast activity indication.
4. Immediately after sending the Subscription Query message, the LMA starts the timer "PBA timer", which determines the maximum waiting time before the PBA is sent to avoid any potential large delay in the forwarding of unicast traffic towards the MN.
5. In case the "PBA timer" expires, the LMA acknowledges the PBU message, by sending the PBA message with flag S=1, and the "Active Multicast Subscription" mobility option with the (S,G) IP addresses set to 0. The nMAG then processes the extended PBA message. Such acknowledgement will allow the MN to receive the unicast traffic from that time on. (The bidirectional tunnel is also set up between the nMAG and the LMA if it has not been established before).
6. In parallel, the nMAG sends a Subscription Query message to the LMA requesting the multicast-subscription details yet unknown for the MN.
7. The pMAG answers the Subscription Query message originally sent by the LMA, including the IP addresses of the existing subscriptions (the pair (S,G) in this case).
8. After processing the pMAG answer, the LMA sends a Subscription Response message to the nMAG, including the multicast subscription information within the new TLV-encoded option "Active Multicast Subscription". The nMAG processes the PBA message, and it proceeds to set up the multicast status of the point-to-point link between the nMAG and the MN, and to join the content identified by (S,G) on behalf of the MN in case the nMAG is not receiving already such content. (The bidirectional tunnel

is also set up between the nMAG and the LMA if it has not been established before). At this moment, the multicast content can also be served to the MN.

6. Co-existence with PMIPv6 multicast architectural evolutions

Along this document, it has been considered that the LMA entity is in charge of delivering both unicast and multicast traffic to a certain MN through the bi-directional tunnels connecting to the MAG where the MN is attached, as specified in the base solution defined in [[RFC6224](#)]. However, the solution described in this memo is not only applicable to the base solution, but also it can be applied to other solutions envisioned as possible architectural evolutions to solve the tunnel convergence problem affecting the base solution, as those stated in [[I-D.ietf-multimob-pmipv6-ropt](#)].

The Multicast Tree Mobility Anchor (MTMA) solution in [[I-D.ietf-multimob-pmipv6-ropt](#)] makes use of a separate entity to serve multicast traffic through distinct tunnels connected to the MAGs. The tunnels for multicast traffic could not be set up in advance if they are dynamical in nature.

When the "multicast activity" flag is also present in the MN's policy store, the nMAG knows in advance the multicast activity of the incoming MN. Consequently, the nMAG can trigger the multicast tunnel set up in parallel to the registration process, including the acquisition of the active multicast subscription details (the IP addresses of the source and the content), saving time on serving the multicast flow to the incoming MN. The concrete procedure for multicast tunnel establishment is out of the scope of this document.

7. Benefits of layer-2 triggers for fast handover

As stated before, the global performance of the multicast handover can be improved in the case that layer-2 triggers are supported by the underlying radio technology. In [[RFC5949](#)], a procedure which allows to buffer at the pMAG and forward to the nMAG the traffic with destination the MN during the handover duration is defined. This forwarding can be beneficial for either strict real-time services or for networks with long handover duration. By forwarding the traffic to the MN, the disruption of the multicast traffic reception is reduced.

The solution in [[RFC5949](#)] avoids packet loss during the handover. Even so, using the proposal in this memo is still useful, because reducing the time required to set up multicast traffic delivery in

the nMAG minimizes the buffering needed at the pMAG.

In any case, because the feature in [[RFC5949](#)] is dependent on the capabilities of both the underlying radio technology and the layer-2 triggering functionalities supported by the MN, and that not all the multicast applications could take benefit of it, that functionality could be seen as optional for multicast handover optimization.

8. Security Considerations

TBD.

9. IANA Considerations

This document defines the new following elements which values to be allocated by IANA:

- o Mobility Header types: the Subscription Query and Subscription Response, and the Multicast Activity Indication and Multicast Activity Indication Acknowledge mobility header types.
- o Mobility options: the Active Multicast Subscription mobility option.
- o Flags: the multicast Signaling (S), the multicast Information (I), and the multicast Active (A) flags.

10. Contributors

Dirk Von Hugo (Telekom Innovation Laboratories, Dirk.von-Hugo@telekom.de) has largely contributed to this document.

11. Acknowledgments

The authors would like to thank (in alphabetical order) Hitoshi Asaeda, Marco Liebsch, Behcet Sarikaya, Thomas C. Schmidt and Stig Venaas for their valuable comments and discussions on the Multimob mailing list. The authors are also grateful with Hitoshi Asaeda and Behcet Sarikaya for their review of this document.

The research of Carlos J. Bernardos leading to these results has received funding from the European Community's Seventh Framework Programme (FP7-ICT-2009-5) under grant agreement n. 258053 (MEDIEVAL project), being also partially supported by the Ministry of Science

and Innovation (MICINN) of Spain under the QUARTET project (TIN2009-13992-C02-01).

The research of Ignacio Soto has also received funding from the Spanish MICINN through the I-MOVING project (TEC2010-18907).

12. References

12.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC2710] Deering, S., Fenner, W., and B. Haberman, "Multicast Listener Discovery (MLD) for IPv6", [RFC 2710](#), October 1999.
- [RFC5213] Gundavelli, S., Leung, K., Devarapalli, V., Chowdhury, K., and B. Patil, "Proxy Mobile IPv6", [RFC 5213](#), August 2008.
- [RFC6275] Perkins, C., Johnson, D., and J. Arkko, "Mobility Support in IPv6", [RFC 6275](#), July 2011.

12.2. Informative References

- [I-D.ietf-multimob-pmipv6-ropt]
Zuniga, J., Contreras, L., Bernardos, C., Jeon, S., and Y. Kim, "Multicast Mobility Routing Optimizations for Proxy Mobile IPv6", [draft-ietf-multimob-pmipv6-ropt-00](#) (work in progress), March 2012.
- [I-D.von-hugo-multimob-future-work]
Hugo, D., Asaeda, H., Sarikaya, B., and P. Seite, "Evaluation of further issues on Multicast Mobility: Potential future work for WG MultiMob", [draft-von-hugo-multimob-future-work-02](#) (work in progress), June 2010.
- [RFC3810] Vida, R. and L. Costa, "Multicast Listener Discovery Version 2 (MLDv2) for IPv6", [RFC 3810](#), June 2004.
- [RFC5949] Yokota, H., Chowdhury, K., Koodli, R., Patil, B., and F. Xia, "Fast Handovers for Proxy Mobile IPv6", [RFC 5949](#), September 2010.
- [RFC6224] Schmidt, T., Waehlich, M., and S. Krishnan, "Base Deployment for Multicast Listener Support in Proxy Mobile

IPv6 (PMIPv6) Domains", [RFC 6224](#), April 2011.

[RFC6636] Asaeda, H., Liu, H., and Q. Wu, "Tuning the Behavior of the Internet Group Management Protocol (IGMP) and Multicast Listener Discovery (MLD) for Routers in Mobile and Wireless Networks", [RFC 6636](#), May 2012.

[Appendix A](#). Change Log

The following changes has been made from -00 version.

1. Multicast Address Record format defined in [[RFC3810](#)] has been adopted for transferring multicast subscription information in the Active Multicast Subscription mobility option.

Authors' Addresses

Luis M. Contreras
Telefonica I+D
Don Ramon de la Cruz, 82-84
Madrid 28006
Spain

Email: lmcm@tid.es

Carlos J. Bernardos
Universidad Carlos III de Madrid
Av. Universidad, 30
Leganes, Madrid 28911
Spain

Phone: +34 91624 6236

Email: cjbc@it.uc3m.es

URI: <http://www.it.uc3m.es/cjbc/>

Ignacio Soto
Universidad Politecnica de Madrid

Email: isoto@dit.upm.es

