

MULTIMOB Group  
Internet-Draft  
Intended status: BCP  
Expires: December 2, 2010

T C. Schmidt  
HAW Hamburg  
M. Waehlich  
link-lab & FU Berlin  
S. Krishnan  
Ericsson  
May 31, 2010

Base Deployment for Multicast Listener Support in PMIPv6 Domains  
draft-ietf-multimob-pmipv6-base-solution-02

## Abstract

This document describes deployment options for activating multicast listener functions in Proxy Mobile IPv6 domains without modifying mobility and multicast protocol standards. Similar to Home Agents in Mobile IPv6, Local Mobility Anchors of Proxy Mobile IPv6 serve as multicast subscription anchor points, while Mobile Access Gateways provide MLD proxy functions. In this scenario, Mobile Nodes remain agnostic of multicast mobility operations.

## Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

## Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on December 2, 2010.

## Copyright Notice

Copyright (c) 2010 IETF Trust and the persons identified as the

Internet-Draft

Multicast Listeners in PMIPv6

May 2010

document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	Introduction . . . . .	<a href="#">3</a>
<a href="#">2.</a>	Terminology . . . . .	<a href="#">3</a>
<a href="#">3.</a>	Overview . . . . .	<a href="#">4</a>
<a href="#">4.</a>	Deployment Details . . . . .	<a href="#">8</a>
<a href="#">4.1.</a>	Operations of the Mobile Node . . . . .	<a href="#">8</a>
<a href="#">4.2.</a>	Operations of the Mobile Access Gateway . . . . .	<a href="#">8</a>
<a href="#">4.3.</a>	Operations of the Local Mobility Anchor . . . . .	<a href="#">10</a>
<a href="#">4.4.</a>	IPv4 Support . . . . .	<a href="#">10</a>
<a href="#">4.5.</a>	Multihoming Support . . . . .	<a href="#">11</a>
<a href="#">4.6.</a>	Multicast Availability throughout the Access Network . . . . .	<a href="#">11</a>
<a href="#">4.7.</a>	A Note on Explicit Tracking . . . . .	<a href="#">12</a>
<a href="#">5.</a>	Message Source and Destination Address . . . . .	<a href="#">12</a>
<a href="#">5.1.</a>	Query . . . . .	<a href="#">12</a>
<a href="#">5.2.</a>	Report/Done . . . . .	<a href="#">13</a>
<a href="#">6.</a>	IANA Considerations . . . . .	<a href="#">13</a>
<a href="#">7.</a>	Security Considerations . . . . .	<a href="#">13</a>
<a href="#">8.</a>	Acknowledgements . . . . .	<a href="#">13</a>
<a href="#">9.</a>	References . . . . .	<a href="#">14</a>
<a href="#">9.1.</a>	Normative References . . . . .	<a href="#">14</a>
<a href="#">9.2.</a>	Informative References . . . . .	<a href="#">14</a>
<a href="#">Appendix A.</a>	Initial MLD Queries on Upcoming Links . . . . .	<a href="#">15</a>
<a href="#">Appendix B.</a>	State of IGMP/MLD Proxy Implementations . . . . .	<a href="#">15</a>
<a href="#">Appendix C.</a>	Comparative Evaluation of Different Approaches . . . . .	<a href="#">16</a>
<a href="#">Appendix D.</a>	Change Log . . . . .	<a href="#">18</a>
	Authors' Addresses . . . . .	<a href="#">19</a>

## 1. Introduction

Proxy Mobile IPv6 (PMIPv6) [[RFC5213](#)] extends Mobile IPv6 [[RFC3775](#)] by network-based management functions that enable IP mobility for a host without requiring its participation in any mobility-related signaling. Additional network entities called the Local Mobility Anchor (LMA), and Mobile Access Gateways (MAGs), are responsible for managing IP mobility on behalf of the mobile node (MN).

With these entities in place, the mobile node loses transparent end-to-end connectivity to the static Internet, and in the particular case of multicast communication, group membership management as signaled by the Multicast Listener Discovery protocol [[RFC3810](#)], [[RFC2710](#)] requires dedicated treatment at the network side, see [[I-D.deng-multimob-pmip6-requirement](#)].

Multicast routing functions need to be placed carefully within the PMIPv6 domain to augment unicast transmission with group communication services. [[RFC5213](#)] does not explicitly address multicast communication and thus relies on the minimal multicast support provided by MIPv6. But unfortunately, bi-directional home tunneling, the minimal multicast support arranged by MIPv6, cannot be applied in network-based management scenarios, since a mobility-unaware node will not initiate such a tunnel after movement. Consequently, even a minimal multicast listener support in PMIPv6 domains requires an explicit deployment of additional functions, as is the subject of this document.

This document describes options for deploying multicast listener functions in Proxy Mobile IPv6 domains without modifying mobility and multicast protocol standards. Similar to Home Agents in Mobile IPv6, PMIPv6 Local Mobility Anchors serve as multicast subscription anchor points, while Mobile Access Gateways provide MLD proxy functions. Mobile Nodes in this scenario remain agnostic of multicast mobility operations. This document does not address specific optimizations and efficiency improvements of multicast routing for network-based


mobility discussed in [RFC5757], as such solutions would require changes to the base PMIPv6 protocol [RFC5213].

## 2. Terminology

This document uses the terminology as defined for the mobility protocols [RFC3775], [RFC5213] and [RFC5844], as well as the multicast edge related protocols [RFC3376], [RFC3810] and [RFC4605].

## 3. Overview

The reference scenario for multicast deployment in Proxy Mobile IPv6 domains is illustrated in Figure 1.

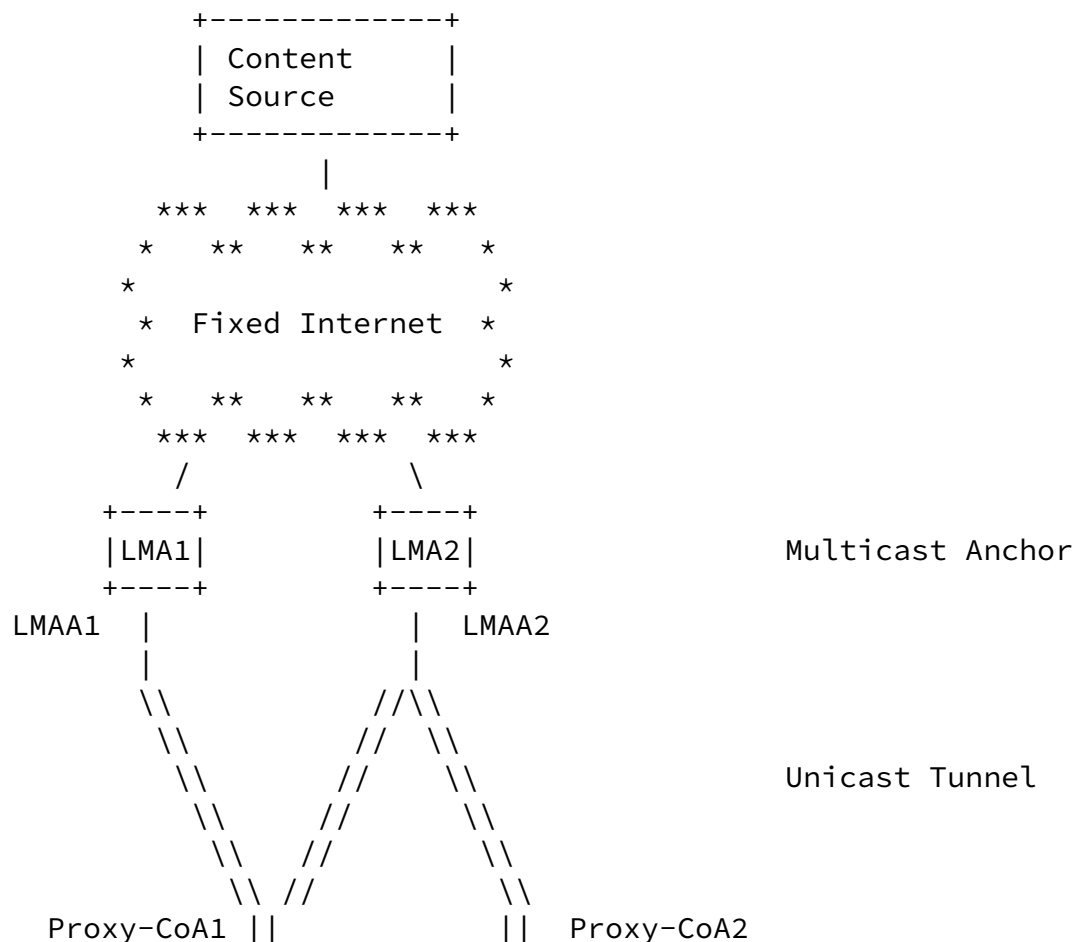

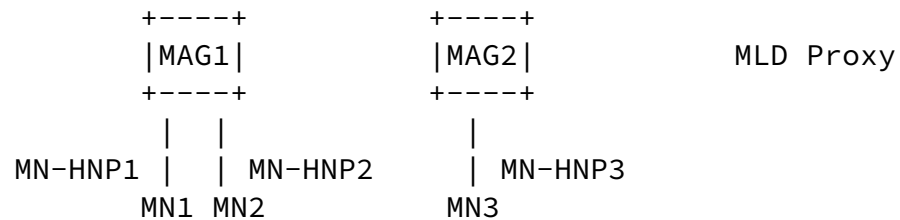


Figure 1: Reference Network for Multicast Deployment in PMIPv6

An MN in a PMIPv6 domain will decide on multicast group membership management completely independent of its current mobility conditions. It will submit MLD Report and Done messages, based on application triggers, using its link-local source address and multicast destination addresses according to [RFC3810], or [RFC2710]. These link-local signaling messages will arrive at the currently active MAG via one of its downstream local (wireless) links. A multicast unaware MAG would simply discard these MLD messages.

To facilitate multicast in a PMIPv6 domain, an MLD proxy function

[RFC4605] needs to be deployed on the MAG that selects the tunnel interface corresponding to the MN's LMA for its upstream interface (cf., [section 6 of \[RFC5213\]](#)). Thereby, each MAG-to-LMA tunnel interface defines an MLD proxy domain at the MAG, and it contains all downstream links to MNs that share this specific LMA. According to standard proxy operations, MLD Report messages will be forwarded under aggregation up the tunnel interface to its corresponding LMA.

Serving as the designated multicast router or an additional MLD proxy, the LMA will transpose any MLD message from a MAG into the multicast routing infrastructure. Correspondingly, the LMA will create appropriate multicast forwarding states at its tunnel interface. Traffic arriving for subscribed groups will arrive at the LMA, and the LMA will forward this traffic according to its group/source states. In addition, the LMA will act as an MLD querier, seeing its downstream tunnel interfaces as multicast enabled links.

At the MAG, MLD queries and multicast data will arrive on the (tunnel) interface that is assigned to a group of access links as identified by its Binding Update List (cf., [section 6 of \[RFC5213\]](#)). As specified for MLD proxies, the MAG will forward multicast traffic and initiate related signaling down the appropriate access links to

the MNs. Hence all multicast-related signaling and the data traffic will transparently flow from the LMA to the MN on an LMA-specific tree, which is shared among the multicast sources.


In case of a handover, the MN (unaware of IP mobility) will not send unsolicited MLD reports. Instead, the MAG is required to maintain group memberships in the following way. On observing a new MN on a downstream access link, the MAG sends a General MLD Query. Based on its outcome and the multicast group states previously maintained at the MAG, a corresponding Report will be sent to the LMA aggregating group membership states according to the proxy function. Additional Reports can be omitted when the previously established multicast forwarding states at the new MAG already cover the subscriptions of the MN.

In summary, the following steps are executed on handover:

1. The MAG-MN link comes up and the MAG discovers the new MN.
2. Unicast address configuration and PMIPv6 binding are performed after the MAG determines the corresponding LMA.
3. Following IPv6 address configuration, the MAG SHOULD send an (early) MLD General Query to the new downstream link as part of its standard multicast-enabled router operations.

4. The MAG SHOULD determine whether the MN is admissible to multicast services, and stop here otherwise.
5. The MAG adds the new downstream link to the MLD proxy instance with up-link to the corresponding LMA.
6. The corresponding Proxy instance triggers an MLD General Query on the new downstream link.
7. The MN Membership Reports arrive at the MAG, either in response to the early Query or to that of the Proxy instance.
8. The Proxy processes the MLD Report, updates states and reports upstream if necessary.

After Re-Binding, the LMA is not required to issue a General MLD Query on the tunnel link to refresh forwarding states. Multicast state updates SHOULD be triggered by the MAG, which aggregates subscriptions of all its MNs (see the call flow in Figure 2).

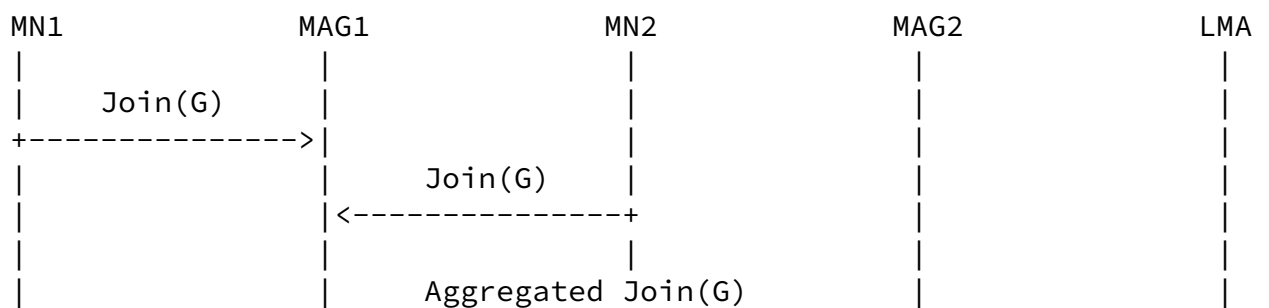

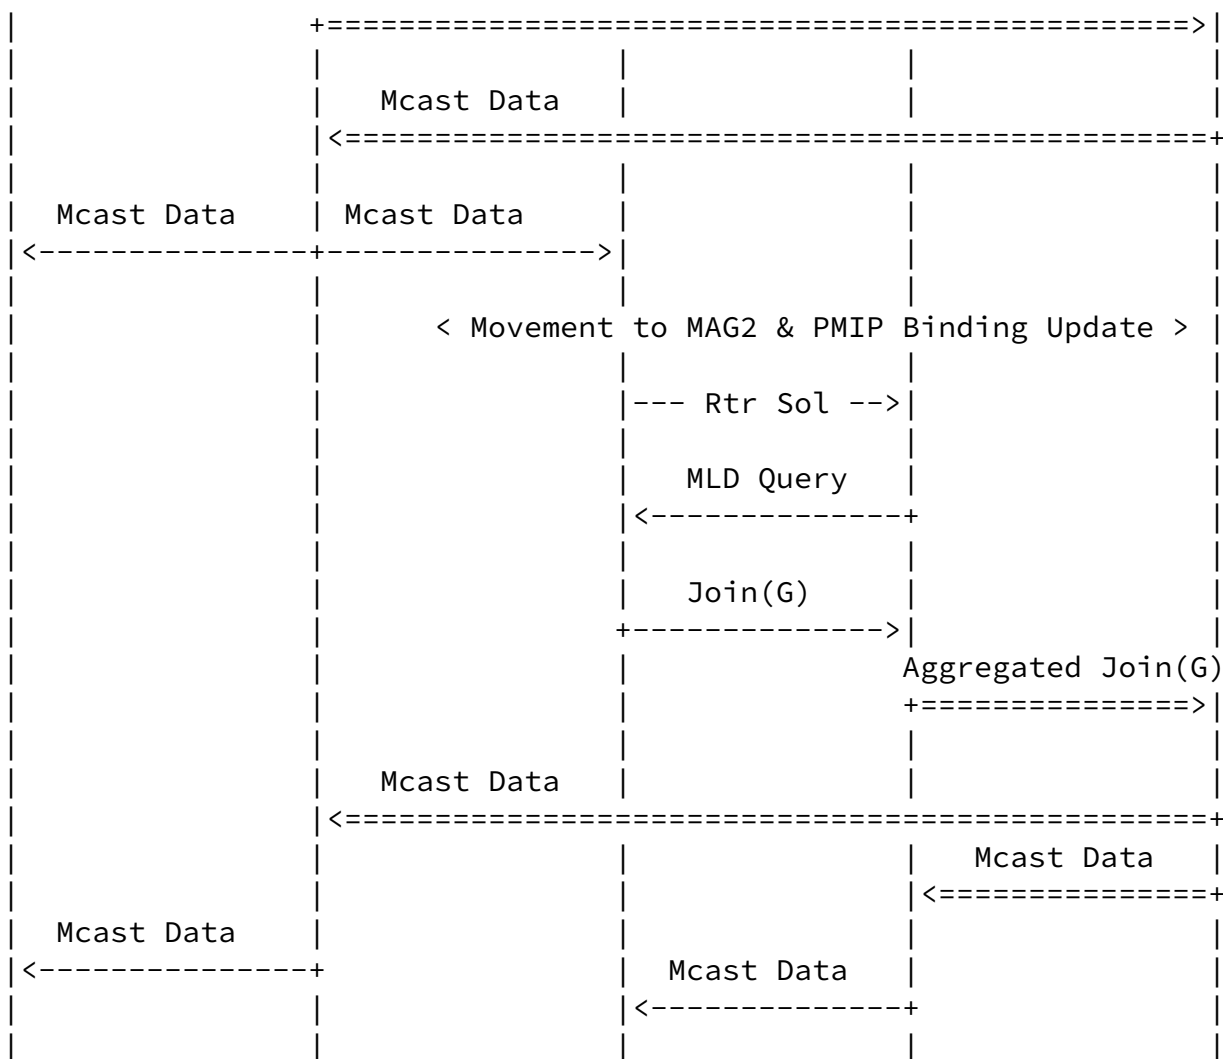


Figure 2: Call Flow of Multicast-enabled PMIP with "MLD Membership Report" abbreviated by "Join"

These multicast deployment considerations likewise apply for mobile nodes that operate with their IPv4 stack enabled in a PMIPv6 domain. PMIPv6 can provide IPv4 home address mobility support [RFC5844]. Such mobile nodes will use IGMP [RFC2236],[RFC3376] signaling for multicast, which is handled by an IGMP proxy function at the MAG in an analogous way.

Following these deployment steps, multicast management transparently

inter-operates with PMIPv6. It is worth noting that MNs - while



being attached to the same MAG, but associated with different LMAs – can subscribe to the same multicast group. Thereby data could be distributed redundantly in the network and duplicate traffic could arrive at a MAG. Additionally in a point-to-point wireless link model, an MAG might be forced to transmit the same data over one wireless domain to different MNs. However, multicast traffic to one MN will always remain unique, i.e., the mobile multicast distribution system will never cause duplicate packets arriving at an MN (see [Appendix C](#) for further considerations).

#### 4. Deployment Details

Multicast activation in a PMIPv6 domain requires to deploy general multicast functions at PMIPv6 routers and to define its interaction with the PMIPv6 protocol in the following way:

##### 4.1. Operations of the Mobile Node

A Mobile Node willing to manage multicast traffic will join, maintain and leave groups as if located in the fixed Internet. No specific mobility actions nor implementations are required at the MN.

##### 4.2. Operations of the Mobile Access Gateway

A Mobile Access Gateway is required to assist in MLD signaling and data forwarding between the MNs which it serves, and the corresponding LMAs associated to each MN. It therefore needs to implement an instance of the MLD proxy function [[RFC4605](#)] for each upstream tunnel interface that has been established with an LMA. The MAG decides on the mapping of downstream links to a proxy instance (and hence an upstream link to an LMA) based on the regular Binding Update List as maintained by PMIPv6 standard operations (cf., [section 6.1 of \[RFC5213\]](#)). As links connecting MNs and MAGs change under mobility, MLD proxies at MAGs MUST be able to dynamically add and remove downstream interfaces in its configuration.

On the reception of MLD reports from an MN, the MAG MUST identify the corresponding proxy instance from the incoming interface and perform regular MLD proxy operations: it will insert/update/remove multicast forwarding state on the incoming interface, and will merge state updates into the MLD proxy membership database. It will then send an aggregated Report to the upstream tunnel to the LMA when the membership database (cf., [section 4.1 of \[RFC4605\]](#)) changes. Conversely, on the reception of MLD Queries, the MAG proxy instance will answer the Queries on behalf of all active downstream receivers maintained in its membership database. Queries sent by the LMA do

---

not force the MAG to trigger corresponding messages immediately towards MNs. Multicast traffic arriving at the MAG on an upstream interface will be forwarded according to the group/source-specific forwarding states as acquired for each downstream interface within the MLD proxy instance. At this stage, it is important to note that IGMP/MLD proxy implementations capable of multiple instances are expected to closely follow the specifications of [section 4.2 in \[RFC4605\]](#), i.e., treat proxy instances in isolation of each other while forwarding.

After a handover, the MAG will continue to manage upstream tunnels and downstream interfaces as specified in the PMIPv6 specification. It MUST dynamically associate new access links to proxy instances that include the upstream connection to the corresponding LMA. The MAG detects the arrival of a new MN by receiving a router solicitation message and by an upcoming link. To learn about multicast groups subscribed by a newly attaching MN, the MAG SHOULD send a General Query to the MN's link. Querying an upcoming interface is a standard operation of MLD queriers (see [Appendix A](#)) and is performed immediately after address configuration. In addition, an MLD query SHOULD be initiated by the proxy instance, as soon as a new interface has been configured for downstream. In case, the access link between MN and MAG goes down, interface-specific multicast states change. Both cases may alter the composition of the membership database and this will trigger corresponding Reports towards the LMA. Note that the actual observable state depends on the access link model in use.

An MN may be unable to answer MAG multicast membership queries due to handover procedures, or its report may arrive before the MAG has configured its link as proxy downstream interface. Such occurrences are equivalent to a General Query loss. To prevent erroneous query timeouts at the MAG, MLD parameters SHOULD be carefully adjusted to the mobility regime. In particular, MLD timers and the Robustness Variable (see [section 9 of \[RFC3810\]](#)) MUST be chosen to be compliant with the time scale of handover operations and proxy configurations in the PMIPv6 domain.

In proceeding this way, the MAG is able to aggregate multicast subscriptions for each of its MLD proxy instances. However, this deployment approach does not prevent multiple identical streams arriving from different LMA upstream interfaces. Furthermore, a multipoint channel forwarding into the wireless domain is prevented by the point-to-point link model in use.

### [4.3.](#) Operations of the Local Mobility Anchor

For any MN, the Local Mobility Anchor acts as the persistent Home Agent and at the same time as the default multicast querier for the corresponding MAG. It implements the function of the designated multicast router or a further MLD proxy. According to MLD reports received from a MAG (on behalf of the MNs), it establishes/maintains/removes group/source-specific multicast forwarding states at its corresponding downstream tunnel interfaces. At the same time, it procures for aggregated multicast membership maintenance at its upstream interface. Based on the multicast-transparent operations of the MAGs, the LMA treats its tunnel interfaces as multicast enabled downstream links, serving zero to many listening nodes. Multicast traffic arriving at the LMA is transparently forwarded according to its multicast forwarding information base.

After a handover, the LMA will receive Binding De-Registrations and Binding Lifetime Extensions that will cause a re-mapping of home network prefix(es) to a new Proxy-CoA in its Binding Cache (see [section 5.3 of \[RFC5213\]](#)). The multicast forwarding states require updating, as well, if the MN within an MLD proxy domain is the only receiver of a multicast group. Two different cases need to be considered:

1. The mobile node is the only receiver of a group behind the interface at which a De-Registration was received: The membership database of the MAG changes, which will trigger a Report/Done sent via the MAG-to-LMA interface to remove this group. The LMA thus terminates multicast forwarding.
2. The mobile node is the only receiver of a group behind the interface at which a Lifetime Extension was received: The membership database of the MAG changes, which will trigger a Report sent via the MAG-to-LMA interface to add this group. The LMA thus starts multicast distribution.

In proceeding this way, each LMA will provide transparent multicast support for the group of MNs it serves. It will perform traffic aggregation at the MN-group level and will assure that multicast data

streams are uniquely forwarded per individual LMA-to-MAG tunnel.

#### [4.4.](#) IPv4 Support

An MN in a PMIPv6 domain may use an IPv4 address transparently for communication as specified in [[RFC5844](#)]. For this purpose, LMAs can register IPv4-Proxy-CoAs in its Binding Caches and MAGs can provide IPv4 support in access networks. Correspondingly, multicast membership management will be performed by the MN using IGMP. For

multicast support on the network side, an IGMP proxy function needs to be deployed at MAGs in exactly the same way as for IPv6. [[RFC4605](#)] defines IGMP proxy behaviour in full agreement with IPv6/MLD. Thus IPv4 support can be transparently provided following the obvious deployment analogy.

For a dual-stack IPv4/IPv6 access network, the MAG proxy instances SHOULD choose multicast signaling according to address configurations on the link, but MAY submit IGMP and MLD queries in parallel, if needed. It should further be noted that the infrastructure cannot identify two data streams as identical when distributed via an IPv4 and IPv6 multicast group. Thus duplicate data may be forwarded on a heterogeneous network layer.

#### [4.5.](#) Multihoming Support

An MN can connect to a PMIPv6 domain through multiple interfaces and experience transparent unicast handovers at all interfaces (cf., [section 5.4 of \[RFC5213\]](#)). In such simultaneous access scenario, it can autonomously assign multicast channel subscriptions to individual interfaces. While doing so, multicast mobility operations described in this document will transparently preserve the association of channels to interfaces in the following way.

Multicast listener states are kept per interface in the MLD state table. An MN will answer to an MLD General Query received on a specific (re-attaching) interface according to the specific interface's state table. Thereafter, multicast forwarding is resumed for channels identical to those under subscription prior to handover. Consequently, an MN in a PMIPv6 domain MAY use multiple interfaces to facilitate load balancing or redundancy, but cannot follow a 'make-before-break' approach to service continuation on handovers.

#### [4.6.](#) Multicast Availability throughout the Access Network

There may be deployment scenarios, where multicast services are available throughout the access network independent of the PMIPv6 infrastructure. Direct multicast access at MAGs may be supported through native multicast routing within a flat access network that includes a multicast router, via dedicated (tunnel or VPN) links between MAGs and designated multicast routers, or by deploying AMT [[I-D.ietf-mboned-auto-multicast](#)].

Multicast deployment can be simplified in these scenarios. A single proxy instance at MAGs with up-link into the multicast cloud, for instance, could serve group communication purposes. MAGs could operate as general multicast routers or AMT gateways, as well.

Schmidt, et al.

Expires December 2, 2010

[Page 11]

---

Internet-Draft

Multicast Listeners in PMIPv6

May 2010

Common to these solutions is that mobility management is covered by the dynamics of multicast routing, as initially foreseen in the Remote Subscription approach sketched in [[RFC3775](#)]. Care must be taken to avoid avalanche problems or service disruptions due to tardy multicast routing operations, and to adapt to different link-layer technologies [[RFC5757](#)]. The different possible approaches should be carefully investigated beyond the initial sketch in [Appendix C](#). Such work is beyond the scope of this document.

#### [4.7.](#) A Note on Explicit Tracking

IGMPv3/MLDv2 [[RFC3376](#)], [[RFC3810](#)] may operate in combination with explicit tracking, which allows routers to monitor each multicast receiver. This mechanism is not standardized yet, but widely implemented by vendors as it supports faster leave latencies and reduced signaling.

Enabling explicit tracking on downstream interfaces of the LMA and MAG would track a single MAG and MN respectively per interface. It may be used to preserve bandwidth on the MAG-MN link.

### [5.](#) Message Source and Destination Address

This section describes source and destination addresses of MLD

messages. The interface identifier A-B denotes an interface on node A, which is connected to node B. This includes tunnel interfaces.

### 5.1. Query

Interface	Source Address	Destination Address	Header
LMA-MAG	LMAA	Proxy-CoA	outer
	LMA-link-local	[RFC2710], [RFC3810]	inner
MAG-MN	MAG-link-local	[RFC2710], [RFC3810]	--

### 5.2. Report/Done

Interface	Source Address	Destination Address	Header
MN-MAG	MN-link-local	[RFC2710], [RFC3810]	--
MAG-LMA	Proxy-CoA	LMAA	outer
	MAG-link-local	[RFC2710], [RFC3810]	inner

## 6. IANA Considerations

This document makes no request of IANA.

Note to RFC Editor: this section may be removed on publication as an RFC.

## [7.](#) Security Considerations

This draft does not introduce additional messages or novel protocol operations. Consequently, no new threats are introduced by this document in addition to those identified as security concerns of [\[RFC3810\]](#), [\[RFC4605\]](#), [\[RFC5213\]](#), and [\[RFC5844\]](#).

However, particular attention should be paid to implications of combining multicast and mobility management at network entities. As this specification allows mobile nodes to initiate the creation of multicast forwarding states at MAGs and LMAs while changing attachments, threats of resource exhaustion at PMIP routers and access networks arrive from rapid state changes, as well as from high volume data streams routed into access networks of limited capacities. In addition to proper authorization checks of MNs, rate controls at replicators MAY be required to protect the agents and the downstream networks. In particular, MLD proxy implementations at MAGs SHOULD carefully procure for automatic multicast state extinction on the departure of MNs, as mobile multicast listeners in the PMIPv6 domain will not actively terminate group membership prior to departure.

## [8.](#) Acknowledgements

This memo is the outcome of extensive previous discussions and a follow-up of several initial drafts on the subject. The authors would like to thank (in alphabetical order) Luis Contreras, Greg

Schmidt, et al.

Expires December 2, 2010

[Page 13]

---

Internet-Draft

Multicast Listeners in PMIPv6

May 2010

Daley, Gorry Fairhurst, Dirk von Hugo, Seil Jeon, Jouni Korhonen, Guang Lu, Sebastian Meiling, Liu Hui, Imed Romdhani, Behcet Sarikaya, Stig Venaas, and Juan Carlos Zuniga for advice, help and reviews of the document. Funding by the German Federal Ministry of Education and Research within the G-LAB Initiative is gratefully acknowledged.

## [9.](#) References

### [9.1.](#) Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC2710] Deering, S., Fenner, W., and B. Haberman, "Multicast Listener Discovery (MLD) for IPv6", [RFC 2710](#), October 1999.
- [RFC3376] Cain, B., Deering, S., Kouvelas, I., Fenner, B., and A. Thyagarajan, "Internet Group Management Protocol, Version 3", [RFC 3376](#), October 2002.
- [RFC3775] Johnson, D., Perkins, C., and J. Arkko, "Mobility Support in IPv6", [RFC 3775](#), June 2004.
- [RFC3810] Vida, R. and L. Costa, "Multicast Listener Discovery Version 2 (MLDv2) for IPv6", [RFC 3810](#), June 2004.
- [RFC4605] Fenner, B., He, H., Haberman, B., and H. Sandick, "Internet Group Management Protocol (IGMP) / Multicast Listener Discovery (MLD)-Based Multicast Forwarding ("IGMP/MLD Proxying")", [RFC 4605](#), August 2006.
- [RFC5213] Gundavelli, S., Leung, K., Devarapalli, V., Chowdhury, K., and B. Patil, "Proxy Mobile IPv6", [RFC 5213](#), August 2008.
- [RFC5844] Wakikawa, R. and S. Gundavelli, "IPv4 Support for Proxy Mobile IPv6", [RFC 5844](#), May 2010.

## [9.2.](#) Informative References

[I-D.deng-multimob-pmip6-requirement]  
 Deng, H., Chen, G., Schmidt, T., Seite, P., and P. Yang, "Multicast Support Requirements for Proxy Mobile IPv6", [draft-deng-multimob-pmip6-requirement-02](#) (work in progress), July 2009.

[I-D.ietf-mboned-auto-multicast]

Schmidt, et al. Expires December 2, 2010 [Page 14]

---

Internet-Draft Multicast Listeners in PMIPv6 May 2010

Thaler, D., Talwar, M., Aggarwal, A., Vicisano, L., and T. Pusateri, "Automatic IP Multicast Without Explicit Tunnels (AMT)", [draft-ietf-mboned-auto-multicast-10](#) (work in progress), March 2010.



[I-D.zuniga-multimob-smspmip]

Zuniga, J., Lu, G., and A. Rahman, "Support Multicast Services Using Proxy Mobile IPv6", [draft-zuniga-multimob-smspmip-02](#) (work in progress), February 2010.

[RFC2236] Fenner, W., "Internet Group Management Protocol, Version 2", [RFC 2236](#), November 1997.

[RFC5757] Schmidt, T., Waehlich, M., and G. Fairhurst, "Multicast Mobility in Mobile IP Version 6 (MIPv6): Problem Statement and Brief Survey", [RFC 5757](#), February 2010.

#### [Appendix A](#). Initial MLD Queries on Upcoming Links

According to [\[RFC3810\]](#) and [\[RFC2710\]](#) when an IGMP/MLD-enabled multicast router starts operating on a subnet, by default it considers itself as Querier and sends several General Queries. Such initial query should be sent by the router immediately, but could be delayed by a (tunable) Startup Query Interval (see Sections [7.6.2](#) and 9.6. of [\[RFC3810\]](#)).

Experimental tests on Linux and Cisco systems have revealed immediate IGMP Queries following a link trigger event (within a fraction of 1 ms), while MLD Queries immediately followed the autoconfiguration of IPv6 link-local addresses at the corresponding interface.

#### [Appendix B](#). State of IGMP/MLD Proxy Implementations

The deployment scenario defined in this document requires certain proxy functionalities at the MAGs that implementations of [\[RFC4605\]](#) need to contribute. In particular, a simultaneous support of IGMP and MLD is needed, as well as a configurable list of downstream interfaces that may be altered during runtime, and the deployment of multiple proxy instances at a single router that can operate independently on separated interfaces.

A brief experimental trial undertaken in February 2010 revealed the following divergent status of selected IGMP/MLD proxy implementations.

Cisco Edge Router Software-based commodity edge routers (test device from the 26xx-Series) implement IGMPv2/v3 proxy functions only in combination with PIM-SM. There is no support of MLD Proxy. Interfaces are dynamically configurable at runtime via the CLI, but multiple proxy instances are not supported.

Linux igmpproxy IGMPv2 Proxy implementation that permits a static configuration of downstream interfaces (simple bug fix required). Multiple instances are prevented by a lock (corresponding code re-used from a previous DVMRP implementation). IPv6/MLD is unsupported. Project page: <http://sourceforge.net/projects/igmpproxy/>.

Linux gproxy IGMPv3 Proxy implementation that permits configuration of the upstream interface, only. Downstream interfaces are collected at startup without dynamic extension of this list. No support of multiple instances or MLD. Project page: <http://potiron.loria.fr/projects/madynes/internals/perso/lahmadi/igmpv3proxy/>.

Linux ecmh MLDv1/2 Proxy implementation without IGMP support that inspects IPv4 tunnels and detects encapsulated MLD messages. Allows for dynamic addition of interfaces at runtime and multiple instances. However, downstream interfaces cannot be configured. Project page: <http://sourceforge.net/projects/ecmh/>

## [Appendix C](#). Comparative Evaluation of Different Approaches

In this section, we briefly evaluate two basic PMIP concepts for multicast traffic organization at LMAs: In scenario A, multicast is provided by combined unicast/multicast LMAs as described in this document. Scenario B directs traffic via a dedicated multicast LMA as proposed in [[I-D.zuniga-multimob-smspmip](#)], for example.

Both approaches do not establish native multicast distribution between the LMA and MAG, but use tunneling mechanisms. In scenario A, a MAG is connected to different multicast-enabled LMAs, and can receive the same multicast stream via multiple paths depending on the group subscriptions of MNs and their associated LMAs. This problem, a.k.a. tunnel convergence problem, may lead to redundant traffic at the MAGs. Scenario B in contrast configures MAGs to establish a tunnel to a single, dedicated multicast LMA for all attached MNs and relocates overhead costs to the multicast anchor. This eliminates redundant traffic, but may result in an avalanche problem at the LMA.

We quantify the costs of both approaches based on two metrics: The

streams at LMAs. Realistic values depend on the topology and the group subscription model. To explore scalability in a large PMIP domain of 1,000,000 MNs, we consider the following two extremal multicast settings.

1. All MNs participate in distinct multicast groups.
2. All MNs join the same multicast groups.

A typical PMIP deployment approximately allows for 5,000 MNs attached to one MAG, while 50 MAGs can be served by one LMA. Hence 1,000,000 MNs require approx. 200 MAGs backed by 4 LMAs for unicast transmission. In scenario A, these LMAs also forward multicast streams, while in scenario B one additional dedicated LMA (LMA-M) serves multicast. In the following, we calculate the metrics described above. In addition, we display the number of packet streams that cross the interconnecting (wired) network within a PMIPv6 domain.

Setting 1:

PMIP multicast scheme	# of redund. streams at MAG	# of simul. streams at LMA/LMA-M	# of total streams in the network
Combined Unicast/Multicast LMA	0	250,000	1,000,000
Dedicated Multicast LMA	0	1,000,000	1,000,000

1,000,000 MNs are subscribed to distinct multicast groups

## Setting 2:

PMIP multicast scheme	# of redund. streams at MAG	# of simul. streams at LMA/LMA-M	# of total streams in the network
Combined Unicast/Multicast LMA	3	200	800
Dedicated Multicast LMA	0	200	200

1,000,000 MNs are subscribed to the same multicast group

These considerations of extremal settings show that tunnel convergence, i.e., duplicate data arriving at a MAG, does cause much smaller problems in scalability than the stream replication at LMAs (avalanche problem). For scenario A it should be also noted that the high stream replication requirements at LMAs in setting 1 can be attenuated by deploying additional LMAs in a PMIP domain, while scenario B does not allow for distributing the LMA-M, as no handover management is available at LMA-M.

#### [Appendix D.](#) Change Log

The following changes have been made from version [draft-ietf-multimob-pmipv6-base-solution-01](#).

1. Editorial improvements in response to WG feedback.

The following changes have been made from version

[draft-ietf-multimob-pmipv6-base-solution-00](#).

1. Added section on multihoming.
2. Updated security section.
3. Several editorial improvements and minor extensions.

The following changes have been made from the previous individual version [draft-schmidt-multimob-pmipv6-mcast-deployment-04](#).

1. Updated references.
2. Corrected typos.

Schmidt, et al.

Expires December 2, 2010

[Page 18]

---

Internet-Draft

Multicast Listeners in PMIPv6

May 2010

3. Adjusted title & document name.

The following changes have been made from [draft-schmidt-multimob-pmipv6-mcast-deployment-03](#).

1. Detailed outline of multicast reconfiguration steps on handovers added in protocol overview ([section 3](#)).
2. Clarified the details of proxy operations at the MAG along with the expected features of IGMP/MLD Proxy implementations ([section 4.2](#)).
3. Clarified querying in dual-stack scenarios ([section 4.4](#)).
4. Subsection added on the special case, where multicast is available throughout the access network ([section 4.5](#)).
5. Appendix on IGMP/MLD behaviour added with test reports on current Proxy implementations.

The following changes have been made from [draft-schmidt-multimob-pmipv6-mcast-deployment-02](#).

1. Many editorial improvements, in particular as response to draft reviews.

2. Section on IPv4 support added.
3. Added clarifications on initial IGMP/MLD Queries and supplementary information in appendix.
4. Appendix added an comparative performance evaluation regarding mixed/dedicated deployment of multicast at LMAs.

#### Authors' Addresses

Thomas C. Schmidt  
HAW Hamburg  
Berliner Tor 7  
Hamburg 20099  
Germany

Email: [schmidt@informatik.haw-hamburg.de](mailto:schmidt@informatik.haw-hamburg.de)  
URI: <http://inet.cpt.haw-hamburg.de/members/schmidt>

Schmidt, et al.

Expires December 2, 2010

[Page 19]

---

Internet-Draft

Multicast Listeners in PMIPv6

May 2010

Matthias Waehlich  
link-lab & FU Berlin  
Hoenower Str. 35  
Berlin 10318  
Germany

Email: [mw@link-lab.net](mailto:mw@link-lab.net)

Suresh Krishnan  
Ericsson  
8400 Decarie Blvd.  
Town of Mount Royal, QC  
Canada

Email: [suresh.krishnan@ericsson.com](mailto:suresh.krishnan@ericsson.com)

