

**NETCONF Call Home and RESTCONF Call Home
draft-ietf-netconf-call-home-17**

Abstract

This RFC presents NETCONF Call Home and RESTCONF Call Home, which enable a NETCONF or RESTCONF server to initiate a secure connection to a NETCONF or RESTCONF client respectively.

Editorial Note (To be removed by RFC Editor)

This draft contains many placeholder values that need to be replaced with finalized values at the time of publication. This note summarizes all of the substitutions that are needed. Please note that no other RFC Editor instructions are specified anywhere else in this document.

Artwork in this document contains placeholder references for this draft. Please apply the following replacement:

- o "XXXX" --> the assigned RFC value for this draft

This document contains references to another draft in progress, both in the Normative References section, as well as in body text throughout. Please update the following reference to reflect its final RFC assignment:

- o [draft-ietf-netconf-restconf](#)

Artwork in this document contains placeholder values for ports pending IANA assignment from "[draft-ietf-netconf-call-home](#)". Please apply the following replacements:

- o "PORT-X" --> the assigned port value for "netconf-ch-ssh"
- o "PORT-Y" --> the assigned port value for "netconf-ch-tls"
- o "PORT-Z" --> the assigned port value for "restconf-ch-tls"

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on June 24, 2016.

Copyright Notice

Copyright (c) 2015 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

- [1.](#) Introduction [3](#)
- [1.1.](#) Motivation [4](#)
- [1.2.](#) Requirements Terminology [4](#)
- [1.3.](#) Applicability Statement [4](#)
- [1.4.](#) Relation to [RFC 4253](#) [5](#)
- [1.5.](#) The NETCONF/RESTCONF Convention [5](#)
- [2.](#) Solution Overview [5](#)
- [3.](#) The NETCONF or RESTCONF Client [6](#)
- [3.1.](#) Protocol Operation [6](#)
- [3.2.](#) Configuration Data Model [8](#)
- [4.](#) The NETCONF or RESTCONF Server [8](#)
- [4.1.](#) Protocol Operation [8](#)
- [4.2.](#) Configuration Data Model [9](#)
- [5.](#) Security Considerations [9](#)

Watsen

Expires June 24, 2016

[Page 2]

- [6.](#) IANA Considerations [11](#)
- [7.](#) Acknowledgements [11](#)
- [8.](#) References [12](#)
 - [8.1.](#) Normative References [12](#)
 - [8.2.](#) Informative References [13](#)
- Author's Address [14](#)

1. Introduction

This RFC presents NETCONF Call Home and RESTCONF Call Home, which enable a NETCONF or RESTCONF server to initiate a secure connection to a NETCONF or RESTCONF client respectively.

NETCONF Call Home supports both of the secure transports used by the NETCONF protocol [[RFC6241](#)], SSH and TLS. The NETCONF protocol's binding to SSH is defined in [[RFC6242](#)]. The NETCONF protocol's binding to TLS is defined in [[RFC7589](#)].

RESTCONF Call Home only supports TLS, the same as the RESTCONF protocol [[draft-ietf-netconf-restconf](#)]. The RESTCONF protocol's binding to TLS is defined in [[draft-ietf-netconf-restconf](#)].

The SSH protocol is defined in [[RFC4253](#)]. The TLS protocol is defined in [[RFC5246](#)]. Both the SSH and TLS protocols are layered on top of the TCP protocol, which is defined in [[RFC793](#)].

Both NETCONF Call Home and RESTCONF Call Home preserve all but one of the client/server roles in their respective protocol stacks, as compared to client initiated NETCONF and RESTCONF connections. The one and only role reversal that occurs is at the TCP layer; that is, which peer is the TCP-client and which is the TCP-server.

For example, a network element is traditionally the TCP-server. However, when calling home, the network element becomes the TCP-client. The network element's secure transport layer roles (SSH-server, TLS-server) and its application layer roles (NETCONF-server, RESTCONF-server) both remain the same.

Having consistency in both the secure transport layer (SSH, TLS) and application layer (NETCONF, RESTCONF) roles conveniently enables deployed network management infrastructure to support call home also. For instance, existing certificate chains and user authentication mechanisms are unaffected by call home.

1.1. Motivation

Call home is generally useful for both the initial deployment and on-going management of networking elements. Here are some scenarios enabled by call home:

- o The network element may proactively call home after being powered on for the first time in order to register itself with its management system.
- o The network element may access the network in a way that dynamically assigns it an IP address, but does not register its assigned IP address to a mapping service (e.g., dynamic DNS).
- o The network element may be deployed behind a firewall that implements network address translation (NAT) for all internal network IP addresses.
- o The network element may be deployed behind a firewall that doesn't allow any management access to the internal network.
- o The network element may be configured in "stealth mode" and thus doesn't have any open ports for the management system to connect to.
- o The operator may prefer to have network elements initiate management connections, believing it is easier to secure one open port in the data center than to have an open port on each network element in the network.

1.2. Requirements Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

1.3. Applicability Statement

The techniques described in this document are suitable for network management scenarios such as the ones described in [Section 1.1](#). However, these techniques are only defined for NETCONF Call Home and RESTCONF Call Home, as described in this document.

The reason for this restriction is that different protocols have different security assumptions. The NETCONF and RESTCONF protocols require clients and servers to verify the identity of the other party. This requirement is specified for the NETCONF protocol in

Watsen

Expires June 24, 2016

[Page 4]

[Section 2.2 of \[RFC6241\]](#), and is specified for the RESTCONF protocol in Sections [2.4](#) and [2.5](#) of [[draft-ietf-netconf-restconf](#)]).

This contrasts with the base SSH and TLS protocols, which do not require programmatic verification of the other party ([section 9.3.4 of \[RFC4251\]](#), [section 4 of \[RFC4252\]](#), and [section 7.3 of \[RFC5246\]](#)). In such circumstances, allowing the SSH/TLS server to contact the SSH/TLS client would open new vulnerabilities. Any use of call home with SSH/TLS for purposes other than NETCONF or RESTCONF will need a thorough contextual risk assessment. A risk assessment for this RFC is in the Security Considerations section ([Section 5](#)).

[1.4. Relation to RFC 4253](#)


This document uses the SSH Transport Layer Protocol [[RFC4253](#)] with the exception that the statement "The client initiates the connection" made in [Section 4](#) (Connection Setup) does not apply. Assuming the reference to client means "SSH client" and the reference to connection means "TCP connection", this statement doesn't hold true in call home, where the network element is the SSH server and yet still initiates the TCP connection. Security implications related to this change are discussed in Security Considerations ([Section 5](#)).

[1.5. The NETCONF/RESTCONF Convention](#)

Throughout the remainder of this document, the term "NETCONF/RESTCONF" is used as an abbreviation in place of the text "the NETCONF or the RESTCONF". The NETCONF/RESTCONF abbreviation is not intended to require or to imply that a client or server must implement both the NETCONF standard and the RESTCONF standard.

[2. Solution Overview](#)

The diagram below illustrates call home from a protocol layering perspective:

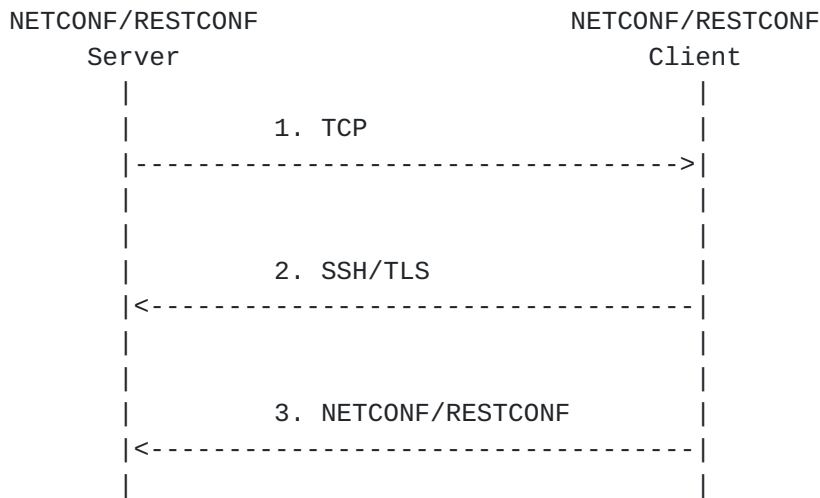

Note: arrows point from the "client" to the "server" at each protocol layer

This diagram makes the following points:

1. The NETCONF/RESTCONF server begins by initiating a TCP connection to the NETCONF/RESTCONF client.
2. Using this TCP connection, the NETCONF/RESTCONF client initiates a SSH/TLS session to the NETCONF/RESTCONF server.
3. Using this SSH/TLS session, the NETCONF/RESTCONF client initiates a NETCONF/RESTCONF session to the NETCONF/RESTCONF server.

3. The NETCONF or RESTCONF Client

The term "client" is defined in [\[RFC6241\], Section 1.1](#) "client". In the context of network management, the NETCONF/RESTCONF client might be a network management system.

3.1. Protocol Operation

- C1 The NETCONF/RESTCONF client listens for TCP connection requests from NETCONF/RESTCONF servers. The client MUST support accepting TCP connections on the IANA-assigned ports defined in [Section 6](#), but MAY be configured to listen to a different port.
- C2 The NETCONF/RESTCONF client accepts an incoming TCP connection request and a TCP connection is established.

Watsen

Expires June 24, 2016

[Page 6]

- C3 Using this TCP connection, the NETCONF/RESTCONF client starts either the SSH-client [[RFC4253](#)] or the TLS-client [[RFC5246](#)] protocol. For example, assuming the use of the IANA-assigned ports, the SSH-client protocol is started when the connection is accepted on port PORT-X and the TLS-client protocol is started when the connection is accepted on either port PORT-Y or PORT-Z.
- C4 If using TLS, the NETCONF/RESTCONF client MUST advertise "peer_allowed_to_send", as defined by [[RFC6520](#)]. This is required so NETCONF/RESTCONF servers can depend on it being there for call home connections, when keep-alives are needed the most.
- C5 As part of establishing an SSH or TLS connection, the NETCONF/RESTCONF client MUST validate the server's presented host key or certificate. This validation MAY be accomplished by certificate path validation or by comparing the host key or certificate to a previously trusted or "pinned" value. If a certificate is presented and it contains revocation checking information, the NETCONF/RESTCONF client SHOULD check the revocation status of the certificate. If it is determined that a certificate has been revoked, the client MUST immediately close the connection.
- C6 If certificate path validation is used, the NETCONF/RESTCONF client MUST ensure that the presented certificate has a valid chain of trust to a preconfigured issuer certificate, and that the presented certificate encodes an "identifier" [[RFC6125](#)] that the client had awareness of prior to the connection attempt. How identifiers are encoded in certificates MAY be determined by a policy associated with the certificate's issuer. For instance, a given issuer may be known to only sign IDevID certificates [[Std-802.1AR-2009](#)] having a unique identifier (e.g., serial number) in the X.509 certificate's "CommonName" field.
- C7 After the server's host key or certificate is validated, the SSH or TLS protocol proceeds as normal to establish a SSH or TLS connection. When performing client authentication with the NETCONF/RESTCONF server, the NETCONF/RESTCONF client MUST ensure to only use credentials that it had previously associated for the NETCONF/RESTCONF server's presented host key or server certificate.
- C8 Once the SSH or TLS connection is established, the NETCONF/RESTCONF client starts either the NETCONF-client [[RFC6241](#)] or RESTCONF-client [[draft-ietf-netconf-restconf](#)] protocol. Assuming the use of the IANA-assigned ports, the NETCONF-client protocol is started when the connection is accepted on either port PORT-X or PORT-Y and the RESTCONF-client protocol is started when the connection is accepted on port PORT-Z.

Watsen

Expires June 24, 2016

[Page 7]

[3.2.](#) Configuration Data Model

How a NETCONF or RESTCONF client is configured is outside the scope of this document. For instance, such configuration might be used to enable listening for call home connections, configuring trusted certificate issuers, or configuring identifiers for expected connections.

4. The NETCONF or RESTCONF Server

The term "server" is defined in [\[RFC6241\], Section 1.1](#) "server". In the context of network management, the NETCONF/RESTCONF server might be a network element or a device.

[4.1.](#) Protocol Operation

- S1 The NETCONF/RESTCONF server initiates a TCP connection request to the NETCONF/RESTCONF client. The server MUST support connecting to one of the IANA-assigned ports defined in [Section 6](#), but MAY be configured to connect to a different port. Using the IANA-assigned ports, the server connects to port PORT-X for NETCONF over SSH, port PORT-Y for NETCONF over TLS, and port PORT-Z for RESTCONF over TLS.
- S2 The TCP connection request is accepted and a TCP connection is established.
- S3 Using this TCP connection, the NETCONF/RESTCONF server starts either the SSH-server [\[RFC4253\]](#) or the TLS-server [\[RFC5246\]](#) protocol, depending on how it is configured. For example, assuming the use of the IANA-assigned ports, the SSH-server protocol is used after connecting to the remote port PORT-X and the TLS-server protocol is used after connecting to one of the remote ports PORT-Y or PORT-Z.
- S4 As part of establishing the SSH or TLS connection, the NETCONF/RESTCONF server will send its host key or certificate to the client. If a certificate is sent, the server MUST also send all intermediate certificates leading up to a well known and trusted issuer. How to send a list of certificates is defined for SSH in [\[RFC6187\] Section 2.1](#), and for TLS in [\[RFC5246\] Section 7.4.2](#).
- S5 Establishing an SSH or TLS session requires server authentication of client credentials in all cases except with RESTCONF, where some client authentication schemes occur after the secure transport connection (TLS) has been established. If transport

(SSH or TLS) level client authentication is required, and the client is unable to successfully authenticate itself to the server in an amount of time defined by local policy, the server MUST close the connection.

- S6 Once the SSH or TLS connection is established, the NETCONF/RESTCONF server starts either the NETCONF-server [[RFC6241](#)] or RESTCONF-server [[draft-ietf-netconf-restconf](#)] protocol, depending on how it is configured. Assuming the use of the IANA-assigned ports, the NETCONF-server protocol is used after connecting to remote port PORT-X or PORT-Y, and the RESTCONF-server protocol is used after connecting to remote port PORT-Z.
- S7 If a persistent connection is desired, the NETCONF/RESTCONF server, as the connection initiator, SHOULD actively test the aliveness of the connection using a keep-alive mechanism. For TLS based connections, the NETCONF/RESTCONF server SHOULD send HeartbeatRequest messages, as defined by [[RFC6520](#)]. For SSH based connections, per [Section 4 of \[RFC4254\]](#), the NETCONF/RESTCONF server SHOULD send a SSH_MSG_GLOBAL_REQUEST message with a purposely nonexistent "request name" value (e.g., keepalive@ietf.org) and the "want reply" value set to '1'.

[4.2. Configuration Data Model](#)

How a NETCONF or RESTCONF server is configured is outside the scope of this document. This includes configuration that might be used to specify hostnames, IP addresses, ports, algorithms, or other relevant parameters. That said, a YANG [[RFC6020](#)] model for configuring NETCONF and RESTCONF servers, including call home, is provided in [[draft-ietf-netconf-server-model](#)].

[5. Security Considerations](#)

The security considerations described in [[RFC6242](#)] and [[RFC7589](#)], and by extension [[RFC4253](#)], [[RFC5246](#)], and [[draft-ietf-netconf-restconf](#)] apply here as well.

This RFC deviates from standard SSH and TLS usage by having the SSH/TLS server initiate the underlying TCP connection. This reversal is incongruous with [[RFC4253](#)], which says "the client initiates the connection" and also [[RFC6125](#)], which says "the client MUST construct a list of acceptable reference identifiers, and MUST do so independently of the identifiers presented by the service."

Risks associated with these variances are centered around server authentication and the inability for clients to compare an independently constructed reference identifier to one presented by

the server. To mitigate these risks, this RFC requires that the NETCONF/RESTCONF client validate the server's SSH host key or certificate, by certificate path validation to a preconfigured issuer certificate, or by comparing the host key or certificate to a previously trusted or "pinned" value. Furthermore, when a certificate is used, this RFC requires that the client be able to match an identifier encoded in the presented certificate with an identifier the client was preconfigured to expect (e.g., serial number).

For cases when the NETCONF/RESTCONF server presents an X.509 certificate, NETCONF/RESTCONF clients should ensure that the preconfigured issuer certificate used for certificate path validation is unique to the manufacturer of the server. That is, the certificate should not belong to a 3rd-party certificate authority that might issue certificates for more than one manufacturer. This is especially important when a client authentication mechanism passing a shared secret (e.g., a password) to the server is used. Not doing so could otherwise lead to a case where the client sends the shared secret to another server that happens to have the same identity (e.g., serial number) as the server the client was configured to expect.

Considerations not associated with server authentication follow next.

Internet facing hosts running NETCONF or RESTCONF call home will be fingerprinted via scanning tools such as `zmap` [[zmap](#)]. Both SSH and TLS provide many ways in which a host can be fingerprinted. SSH and TLS servers are fairly mature and able to withstand attacks, but SSH and TLS clients may not be as robust. Implementers and deployments need to ensure that software update mechanisms are provided so that vulnerabilities can be fixed in a timely fashion.

An attacker could launch a denial of service (DoS) attack on the NETCONF/RESTCONF client by having it perform computationally expensive operations, before deducing that the attacker doesn't possess a valid key. For instance, in TLS 1.3 [[draft-ietf-tls-tls13](#)], the ClientHello message contains a Key Share value based on an expensive asymmetric key operation. Common precautions mitigating DoS attacks are recommended, such as temporarily blacklisting the source address after a set number of unsuccessful login attempts.

When using call home with the RESTCONF protocol, special care is required when using some HTTP authentication schemes, especially the Basic [[RFC7617](#)] and Digest [[RFC7616](#)] schemes, which convey a shared secret (e.g., a password). Implementations and deployments should be

Watsen

Expires June 24, 2016

[Page 10]

sure to review the Security Considerations section in the RFC for any HTTP client authentication scheme used.

6. IANA Considerations

This RFC requests that IANA assigns three TCP port numbers in the "Registered Port Numbers" range with the service names "netconf-ch-ssh", "netconf-ch-tls", and "restconf-ch-tls". These ports will be the default ports for NETCONF Call Home and RESTCONF Call Home protocols. Below is the registration template following the rules in [[RFC6335](#)].

Service Name: netconf-ch-ssh
Transport Protocol(s): TCP
Assignee: IESG <iesg@ietf.org>
Contact: IETF Chair <chair@ietf.org>
Description: NETCONF Call Home (SSH)
Reference: RFC XXXX
Port Number: PORT-X

Service Name: netconf-ch-tls
Transport Protocol(s): TCP
Assignee: IESG <iesg@ietf.org>
Contact: IETF Chair <chair@ietf.org>
Description: NETCONF Call Home (TLS)
Reference: RFC XXXX
Port Number: PORT-Y

Service Name: restconf-ch-tls
Transport Protocol(s): TCP
Assignee: IESG <iesg@ietf.org>
Contact: IETF Chair <chair@ietf.org>
Description: RESTCONF Call Home (TLS)
Reference: RFC XXXX
Port Number: PORT-Z

7. Acknowledgements

The author would like to thank the following for lively discussions on list and in the halls (ordered by last name): Jari Arkko, Andy Bierman, Martin Bjorklund, Ben Campbell, Spencer Dawkins, Mehmet Ersue, Stephen Farrell, Wes Hardaker, Stephen Hanna, David Harrington, Jeffrey Hutzelman, Simon Josefsson, Radek Krejci, Suresh Krishnan, Barry Leiba, Alan Luchuk, Kathleen Moriarty, Mouse, Russ Mundy, Tom Petch, Peter Saint-Andre, Joseph Salowey, Juergen Schoenwaelder, Martin Stiemerling, Joe Touch, Hannes Tschofenig, Sean Turner, and Bert Wijnen.

Watsen

Expires June 24, 2016

[Page 11]

8. References

8.1. Normative References

- [[draft-ietf-netconf-restconf](#)]
Bierman, A., Bjorklund, M., and K. Watsen, "RESTCONF Protocol", [draft-ietf-netconf-restconf-04](#) (work in progress), 2014, <<https://tools.ietf.org/html/draft-ietf-netconf-restconf>>.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<http://www.rfc-editor.org/info/rfc2119>>.
- [RFC4251] Ylonen, T. and C. Lonvick, Ed., "The Secure Shell (SSH) Protocol Architecture", [RFC 4251](#), DOI 10.17487/RFC4251, January 2006, <<http://www.rfc-editor.org/info/rfc4251>>.
- [RFC4252] Ylonen, T. and C. Lonvick, Ed., "The Secure Shell (SSH) Authentication Protocol", [RFC 4252](#), DOI 10.17487/RFC4252, January 2006, <<http://www.rfc-editor.org/info/rfc4252>>.
- [RFC4253] Ylonen, T. and C. Lonvick, Ed., "The Secure Shell (SSH) Transport Layer Protocol", [RFC 4253](#), DOI 10.17487/RFC4253, January 2006, <<http://www.rfc-editor.org/info/rfc4253>>.
- [RFC4254] Ylonen, T. and C. Lonvick, Ed., "The Secure Shell (SSH) Connection Protocol", [RFC 4254](#), DOI 10.17487/RFC4254, January 2006, <<http://www.rfc-editor.org/info/rfc4254>>.
- [RFC5246] Dierks, T. and E. Rescorla, "The Transport Layer Security (TLS) Protocol Version 1.2", [RFC 5246](#), DOI 10.17487/RFC5246, August 2008, <<http://www.rfc-editor.org/info/rfc5246>>.
- [RFC6125] Saint-Andre, P. and J. Hodges, "Representation and Verification of Domain-Based Application Service Identity within Internet Public Key Infrastructure Using X.509 (PKIX) Certificates in the Context of Transport Layer Security (TLS)", [RFC 6125](#), DOI 10.17487/RFC6125, March 2011, <<http://www.rfc-editor.org/info/rfc6125>>.
- [RFC6187] Igoe, K. and D. Stebila, "X.509v3 Certificates for Secure Shell Authentication", [RFC 6187](#), DOI 10.17487/RFC6187, March 2011, <<http://www.rfc-editor.org/info/rfc6187>>.

- [RFC6241] Enns, R., Ed., Bjorklund, M., Ed., Schoenwaelder, J., Ed., and A. Bierman, Ed., "Network Configuration Protocol (NETCONF)", [RFC 6241](#), DOI 10.17487/RFC6241, June 2011, <<http://www.rfc-editor.org/info/rfc6241>>.
- [RFC6242] Wasserman, M., "Using the NETCONF Protocol over Secure Shell (SSH)", [RFC 6242](#), DOI 10.17487/RFC6242, June 2011, <<http://www.rfc-editor.org/info/rfc6242>>.
- [RFC6335] Cotton, M., Eggert, L., Touch, J., Westerlund, M., and S. Cheshire, "Internet Assigned Numbers Authority (IANA) Procedures for the Management of the Service Name and Transport Protocol Port Number Registry", [BCP 165](#), [RFC 6335](#), DOI 10.17487/RFC6335, August 2011, <<http://www.rfc-editor.org/info/rfc6335>>.
- [RFC6520] Seggelmann, R., Tuexen, M., and M. Williams, "Transport Layer Security (TLS) and Datagram Transport Layer Security (DTLS) Heartbeat Extension", [RFC 6520](#), DOI 10.17487/RFC6520, February 2012, <<http://www.rfc-editor.org/info/rfc6520>>.
- [RFC7589] Badra, M., Luchuk, A., and J. Schoenwaelder, "Using the NETCONF Protocol over Transport Layer Security (TLS) with Mutual X.509 Authentication", [RFC 7589](#), DOI 10.17487/RFC7589, June 2015, <<http://www.rfc-editor.org/info/rfc7589>>.
- [RFC793] Postel, J., "TRANSMISSION CONTROL PROTOCOL", STD 7, September 1981, <<https://www.ietf.org/rfc/rfc793.txt>>.

8.2. Informative References

- [[draft-ietf-netconf-server-model](#)]
Watsen, K. and J. Schoenwaelder, "NETCONF Server Configuration Model", 2014, <<http://tools.ietf.org/html/draft-ietf-netconf-server-model>>.
- [[draft-ietf-tls-tls13](#)]
Rescorla, E., "The Transport Layer Security (TLS) Protocol Version 1.3", 2015, <<http://tools.ietf.org/html/draft-ietf-tls-tls13>>.
- [RFC6020] Bjorklund, M., Ed., "YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF)", [RFC 6020](#), DOI 10.17487/RFC6020, October 2010, <<http://www.rfc-editor.org/info/rfc6020>>.

[RFC7616] Shekh-Yusef, R., Ed., Ahrens, D., and S. Bremer, "HTTP Digest Access Authentication", [RFC 7616](#), DOI 10.17487/RFC7616, September 2015, <<http://www.rfc-editor.org/info/rfc7616>>.

[RFC7617] Reschke, J., "The 'Basic' HTTP Authentication Scheme", [RFC 7617](#), DOI 10.17487/RFC7617, September 2015, <<http://www.rfc-editor.org/info/rfc7617>>.

[Std-802.1AR-2009]

IEEE SA-Standards Board, "IEEE Standard for Local and metropolitan area networks - Secure Device Identity", December 2009, <<http://standards.ieee.org/findstds/standard/802.1AR-2009.html>>.

[zmap] Durumeric, Z., Wustrow, E., and J. Halderman, "ZMap: Fast Internet-Wide Scanning and its Security Applications", 2013, <<https://zmap.io/paper.html>>.

In proceedings of the 22nd USENIX Security Symposium

Author's Address

Kent Watsen
Juniper Networks

EEmail: kwatsen@juniper.net

