

Internet Engineering Task Force  
Internet-Draft  
Intended status: Informational  
Expires: August 25, 2021

A. Malhotra  
Boston University  
A. Langley  
Google  
W. Ladd  
Cloudflare  
M. Dansarie  
February 21, 2021

Roughtime  
draft-ietf-ntp-roughtime-04

## Abstract

This document specifies Roughtime - a protocol that aims to achieve rough time synchronization while detecting servers that provide inaccurate time and providing cryptographic proof of their malfeasance.

## Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on August 25, 2021.

## Copyright Notice

Copyright (c) 2021 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must

Internet-Draft

Roughtime

February 2021

include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	Introduction . . . . .	<a href="#">2</a>
<a href="#">2.</a>	Requirements Language . . . . .	<a href="#">4</a>
<a href="#">3.</a>	Protocol Overview . . . . .	<a href="#">4</a>
<a href="#">4.</a>	The Guarantee . . . . .	<a href="#">5</a>
<a href="#">5.</a>	Message Format . . . . .	<a href="#">5</a>
<a href="#">5.1.</a>	Data Types . . . . .	<a href="#">6</a>
<a href="#">5.1.1.</a>	int32 . . . . .	<a href="#">6</a>
<a href="#">5.1.2.</a>	uint32 . . . . .	<a href="#">6</a>
<a href="#">5.1.3.</a>	uint64 . . . . .	<a href="#">6</a>
<a href="#">5.1.4.</a>	Tag . . . . .	<a href="#">6</a>
<a href="#">5.1.5.</a>	Timestamp . . . . .	<a href="#">6</a>
<a href="#">5.2.</a>	Header . . . . .	<a href="#">7</a>
<a href="#">6.</a>	Protocol . . . . .	<a href="#">7</a>
<a href="#">6.1.</a>	Requests . . . . .	<a href="#">8</a>
<a href="#">6.2.</a>	Responses . . . . .	<a href="#">9</a>
<a href="#">6.3.</a>	The Merkle Tree . . . . .	<a href="#">11</a>
<a href="#">6.3.1.</a>	Root Value Validity Check Algorithm . . . . .	<a href="#">11</a>
<a href="#">6.4.</a>	Validity of Response . . . . .	<a href="#">12</a>
<a href="#">7.</a>	Integration into NTP . . . . .	<a href="#">12</a>
<a href="#">8.</a>	Grease . . . . .	<a href="#">12</a>
<a href="#">9.</a>	Roughtime Servers . . . . .	<a href="#">13</a>
<a href="#">10.</a>	Acknowledgements . . . . .	<a href="#">13</a>
<a href="#">11.</a>	IANA Considerations . . . . .	<a href="#">13</a>
<a href="#">11.1.</a>	Service Name and Transport Protocol Port Number Registry	<a href="#">13</a>
<a href="#">11.2.</a>	Roughtime Version Registry . . . . .	<a href="#">14</a>
<a href="#">11.3.</a>	Roughtime Tag Registry . . . . .	<a href="#">14</a>
<a href="#">12.</a>	Security Considerations . . . . .	<a href="#">15</a>
<a href="#">13.</a>	Privacy Considerations . . . . .	<a href="#">16</a>
<a href="#">14.</a>	References . . . . .	<a href="#">16</a>
<a href="#">14.1.</a>	Normative References . . . . .	<a href="#">16</a>
<a href="#">14.2.</a>	Informative References . . . . .	<a href="#">17</a>
<a href="#">Appendix A.</a>	Terms and Abbreviations . . . . .	<a href="#">18</a>
	Authors' Addresses . . . . .	<a href="#">19</a>

## [1.](#) Introduction

Time synchronization is essential to Internet security as many

security protocols and other applications require synchronization [RFC7384] [MCBG]. Unfortunately widely deployed protocols such as the Network Time Protocol (NTP) [RFC5905] lack essential security features, and even newer protocols like Network Time Security (NTS) [RFC8915] lack mechanisms to ensure that the servers behave

correctly. Authenticating time servers prevents network adversaries from modifying time packets, but an authenticated time server still has full control over the contents of the time packet and may go rogue. The RoughTime protocol provides cryptographic proof of malfeasance, enabling clients to detect and prove to a third party a server's attempts to influence the time a client computes.

Protocol	Authenticated Server	Server Malfeasance Evidence
NTP, Chronos	N	N
NTP-MD5	Y*	N
NTP-Autokey	Y**	N
NTS	Y	N
RoughTime	Y	Y

Security Properties of current protocols

Table 1

Y\* For security issues with symmetric-key based NTP-MD5 authentication, please refer to [RFC 8573](#) [RFC8573].

Y\*\* For security issues with Autokey Public Key Authentication, refer to [Autokey](#).

- o If a server's timestamps do not fit into the time context of other servers' responses, then a RoughTime client can cryptographically prove this misbehavior to third parties. This helps detect "bad" servers.
- o A RoughTime client can roughly detect (with no absolute guarantee) a delay attack [DelayAttacks](#) but can not cryptographically prove this to a third party. However, the absence of proof of malfeasance should not be considered a proof of absence of

malfeasance. So Roughtime should not be used as a witness that a server is overall "good".

- o Note that delay attacks cannot be detected/stopped by any protocol. Delay attacks can not, however, undermine the security guarantees provided by Roughtime.
- o Although delay attacks cannot be prevented, they can be limited to a predetermined upper bound. This can be done by defining a maximal tolerable Round Trip Time (RTT) value, MAX-RTT, that a Roughtime client is willing to accept. A Roughtime client can measure the RTT of every request-response handshake and compare it

to MAX-RTT. If the RTT exceeds MAX-RTT, the corresponding server is assumed to be a falseticker. When this approach is used the maximal time error that can be caused by a delay attack is MAX-RTT/2. It should be noted that this approach assumes that the nature of the system is known to the client, including reasonable upper bounds on the RTT value.

## [2.](#) Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#) [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

## [3.](#) Protocol Overview

Roughtime is a protocol for rough time synchronization that enables clients to provide cryptographic proof of server malfeasance. It does so by having responses from servers include a signature with a certificate rooted in a long-term public/private key pair over a value derived from a nonce provided by the client in its request. This provides cryptographic proof that the timestamp was issued after the server received the client's request. The derived value included in the server's response is the root of a Merkle tree which includes the hash of the client's nonce as the value of one of its leaf nodes. This enables the server to amortize the relatively costly signing operation over a number of client requests.

Single server mode: At its most basic level, Roughtime is a one round protocol in which a completely fresh client requests the current time and the server sends a signed response. The response includes a timestamp and a radius used to indicate the server's certainty about the reported time. For example, a radius of 1,000,000 microseconds means the server is absolutely confident that the true time is within one second of the reported time.

The server proves freshness of its response as follows: The client's request contains a nonce. The server incorporates the nonce into its signed response so that the client can verify the server's signatures covering the nonce issued by the client. Provided that the nonce has sufficient entropy, this proves that the signed response could only have been generated after the nonce.

#### [4.](#) The Guarantee

A Roughtime server guarantees that a response to a query sent at  $t_1$ , received at  $t_2$ , and with timestamp  $t_3$  has been created between the transmission of the query and its reception. If  $t_3$  is not within that interval, a server inconsistency may be detected and used to impeach the server. The propagation of such a guarantee and its use of type synchronization is discussed in [Section 7](#). No delay attacker may affect this: they may only expand the interval between  $t_1$  and  $t_2$ , or of course stop the measurement in the first place.

#### [5.](#) Message Format

Roughtime messages are maps consisting of one or more (tag, value) pairs. They start with a header, which contains the number of pairs, the tags, and value offsets. The header is followed by a message values section which contains the values associated with the tags in the header. Messages MUST be formatted according to Figure 1 as described in the following sections.

Messages may be recursive, i.e. the value of a tag can itself be a Roughtime message.

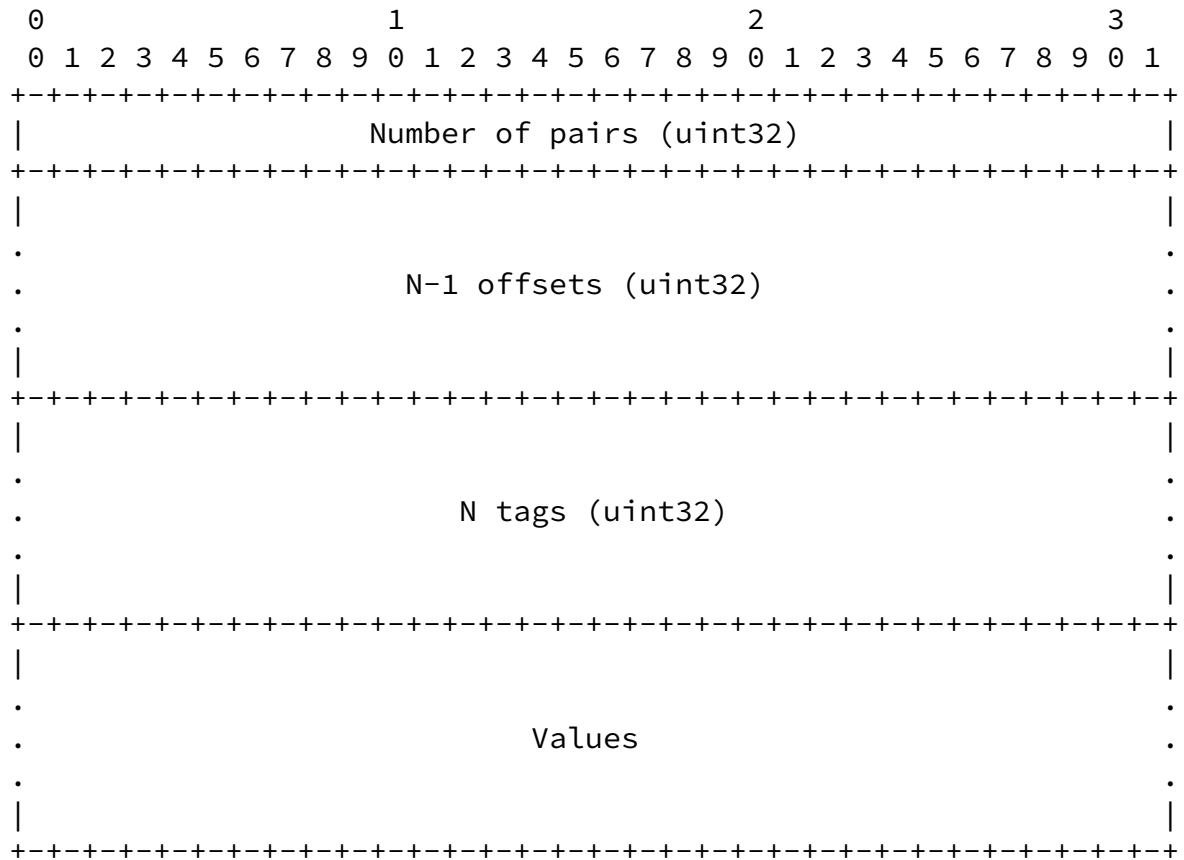


Figure 1: Roughtime Message Format

## [5.1.](#) Data Types

### [5.1.1.](#) int32

An int32 is a 32 bit signed integer. It is serialized in sign-magnitude representation with the sign bit in the most significant bit. It is serialized least significant byte first. The negative zero value (0x80000000) MUST NOT be used.

### [5.1.2.](#) uint32

A uint32 is a 32 bit unsigned integer. It is serialized with the least significant byte first.

### [5.1.3.](#) uint64

A uint64 is a 64 bit unsigned integer. It is serialized with the least significant byte first.

#### [5.1.4.](#) Tag

Tags are used to identify values in Roughtime messages. A tag is a uint32 but may also be listed as a sequence of up to four ASCII characters [[RFC0020](#)]. ASCII strings shorter than four characters can be unambiguously converted to tags by padding them with zero bytes. For example, the ASCII string "NONC" would correspond to the tag 0x434e4f4e and "PAD" would correspond to 0x00444150.

#### [5.1.5.](#) Timestamp

A timestamp is a uint64 interpreted in the following way. The most significant 3 bytes contain the integer part of a Modified Julian Date (MJD). The least significant 5 bytes is a count of the number of Coordinated Universal Time (UTC) microseconds [[ITU-R TF.460-6](#)] since midnight on that day.

The MJD is the number of UTC days since 17 November 1858 [[ITU-R TF.457-2](#)]. It is useful to note that 1 January 1970 is 40,587 days after 17 November 1858.

Note that, unlike NTP, this representation does not use the full number of bits in the fractional part and that days with leap seconds will have more or fewer than the nominal 86,400,000,000 microseconds.

#### [5.2.](#) Header

All Roughtime messages start with a header. The first four bytes of the header is the uint32 number of tags N, and hence of (tag, value) pairs. The following 4\*(N-1) bytes are offsets, each a uint32. The last 4\*N bytes in the header are tags.

Offsets refer to the positions of the values in the message values

section. All offsets MUST be multiples of four and placed in increasing order. The first post-header byte is at offset 0. The offset array is considered to have a not explicitly encoded value of 0 as its zeroth entry. The value associated with the *i*th tag begins at `offset[i]` and ends at `offset[i+1]-1`, with the exception of the last value which ends at the end of the message. Values may have zero length.

Tags MUST be listed in the same order as the offsets of their values. A tag MUST NOT appear more than once in a header. Tags MUST also be sorted in ascending order by numeric value.

## [6.](#) Protocol

As described in [Section 3](#), clients initiate time synchronization by sending requests containing a nonce to servers who send signed time responses in return. Roughtime packets can be sent between clients and servers either as UDP datagrams or via TCP streams. Servers SHOULD support the UDP transport mode, while TCP transport is OPTIONAL.

A Roughtime packet MUST be formatted according to Figure 2 and as described here. The first field is a uint64 with the value 0x4d49544847554f52 ("ROUGHTIM" in ASCII). The second field is a uint32 and contains the length of the third field. The third and last field contains a Roughtime message as specified in [Section 5.1](#).



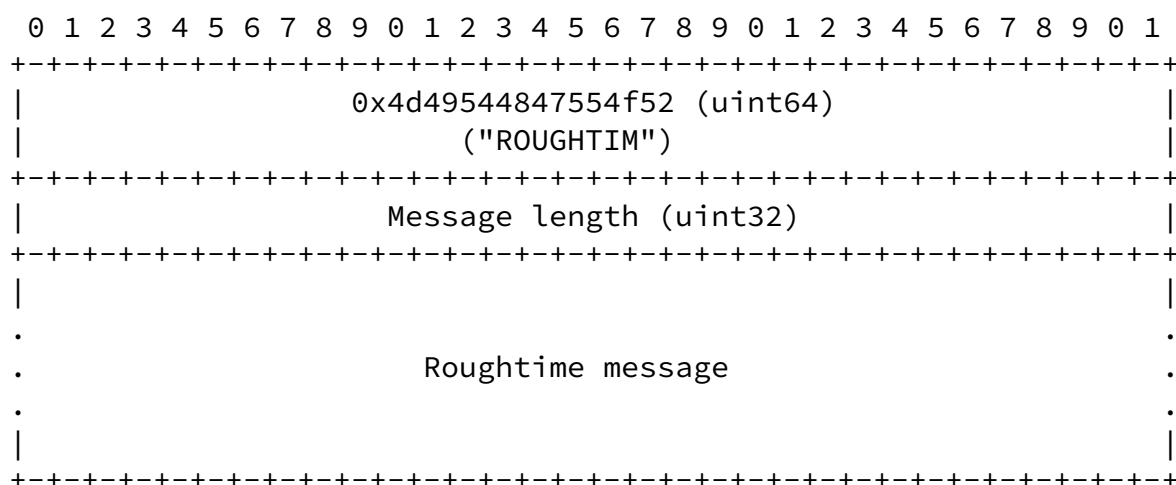


Figure 2: RoughTime Packet Format

RoughTime request and response packets MUST be transmitted in a single datagram when the UDP transport mode is used. Setting the packet's don't fragment bit [[RFC0791](#)] is OPTIONAL in IPv4 networks.

Multiple requests and responses can be exchanged over an established TCP connection. Clients MAY send multiple requests at once and servers MAY send responses out of order. The connection SHOULD be closed by the client when it has no more requests to send and has received all expected responses. Either side SHOULD close the connection in response to synchronization, format, implementation-defined timeouts, or other errors.

All requests and responses MUST contain the VER tag. It contains a list of one or more uint32 version numbers. The version of RoughTime specified by this memo has version number 1.

For testing drafts of this memo, a version number of 0x80000000 plus the draft number is used.

## 6.1. Requests

A request MUST contain the tags NONC and VER.

The value of the NONC tag is a 64 byte nonce. It SHOULD be generated in a manner indistinguishable from random.

In a request, the VER tag contains a list of versions. The VER tag MUST include at least one RoughTime version supported by the client. The client MUST ensure that the version numbers and tags included in the request are not incompatible with each other or the packet contents.

Tags other than NONC and VER SHOULD be ignored by the server.

The size of the request message SHOULD be at least 1024 bytes when the UDP transport mode is used. To attain this size the PAD tag SHOULD be added to the message. Its value SHOULD be all zeros. Responding to requests shorter than 1024 bytes is OPTIONAL and servers MUST NOT send responses larger than the requests they are replying to.

## [6.2.](#) Responses

A response MUST contain the tags CERT, INDX, NONC, PATH, SIG, SREP, and VER.

The SIG tag is a signature over the SREP value using the public key contained in CERT, as explained below.

The SREP tag contains a time response. Its value is a RoughTime message with the tags ROOT, MIDP, and RADI. The server MAY include any of the tags DUT1, DTAI and LEAP in the contents of the SREP tag.

The NONC tag contains the nonce of the message being responded to.

The ROOT tag contains a 32 byte value of a Merkle tree root as described in [Section 6.3](#).

The MIDP tag value is a timestamp of the moment of processing.

The RADI tag value is a uint32 representing the server's estimate of the accuracy of MIDP in microseconds. Servers MUST ensure that the true time is within (MIDP-RADI, MIDP+RADI) at the time they compose the response message.

The DUT1 tag value is an int32 indicating the predicted difference between UT1 and UTC (UT1 - UTC) in milliseconds as given by the International Earth Rotation and Reference Systems Service (IERS).

The DTAI tag value is an int32 indicating the current difference between International Atomic Time (TAI) and UTC (TAI - UTC) in milliseconds as published in the International Bureau of Weights and Measures' (BIPM) Circular T.

The LEAP tag contains zero or more int32 values, each representing a past or future leap second event. Positive values represent the addition of a second and negative values represent the removal of a second. The absolute value represents the MJD of the second after

the leap second event, i.e., the first second with a new UTC - TAI difference. The leap second events MUST be sorted in reverse

Internet-Draft

RoughTime

February 2021

chronological order and the first item MUST be the last (past or future) leap second event that the server knows about. A LEAP tag with zero int32 values indicates that the server does not hold any updated leap second information.

The SIG tag value is a 64 byte Ed25519 signature [[RFC8032](#)] over a signature context concatenated with the entire value of a DELE or SREP tag. Signatures of DELE tags MUST use the ASCII string "RoughTime v1 delegation signature--" and signatures of SREP tags MUST use the ASCII string "RoughTime v1 response signature" as signature context. Both strings MUST include a terminating zero byte.

The CERT tag contains a public-key certificate signed with the server's long-term key. Its value is a RoughTime message with the tags DELE and SIG, where SIG is a signature over the DELE value.

The DELE tag contains a delegated public-key certificate used by the server to sign the SREP tag. Its value is a RoughTime message with the tags MINT, MAXT, and PUBK. The purpose of the DELE tag is to enable separation of a long-term public key from keys on devices exposed to the public Internet.

The MINT tag is the minimum timestamp for which the key in PUBK is trusted to sign responses. MIDP MUST be more than or equal to MINT for a response to be considered valid.

The MAXT tag is the maximum timestamp for which the key in PUBK is trusted to sign responses. MIDP MUST be less than or equal to MAXT for a response to be considered valid.

The PUBK tag contains a temporary 32 byte Ed25519 public key which is used to sign the SREP tag.

The INDX tag value is a uint32 determining the position of NONC in the Merkle tree used to generate the ROOT value as described in [Section 6.3](#).

The PATH tag value is a multiple of 32 bytes long and represents a

path of 32 byte hash values in the Merkle tree used to generate the ROOT value as described in [Section 6.3](#). In the case where a response is prepared for a single request and the Merkle tree contains only the root node, the size of PATH is zero.

In a response, the VER tag MUST contain a single version number. It SHOULD be one of the version numbers supplied by the client in its request. The server MUST ensure that the version number corresponds with the rest of the packet contents.

### [6.3](#). The Merkle Tree

A Merkle tree is a binary tree where the value of each non-leaf node is a hash value derived from its two children. The root of the tree is thus dependent on all leaf nodes.

In RoughTime, each leaf node in the Merkle tree represents the nonce of one request that a response message is sent in reply to. Leaf nodes are indexed left to right, beginning with zero.

The values of all nodes are calculated from the leaf nodes and up towards the root node using the first 32 bytes of the output of the SHA-512 hash algorithm [[SHS](#)]. For leaf nodes, the byte 0x00 is prepended to the nonce before applying the hash function. For all other nodes, the byte 0x01 is concatenated with first the left and then the right child node value before applying the hash function.

The value of the Merkle tree's root node is included in the ROOT tag of the response.

The index of a request's nonce node is included in the INDX tag of the response.

The values of all sibling nodes in the path between a request's nonce node and the root node is stored in the PATH tag so that the client can reconstruct and validate the value in the ROOT tag using its nonce.

#### [6.3.1](#). Root Value Validity Check Algorithm

One starts by computing the hash of the NONC value from the request, with 0x00 prepended. Then one walks from the least significant bit

of INDX to the most significant bit, and also walks towards the end of PATH.

If PATH ends then the remaining bits of the INDX MUST be all zero. This indicates the termination of the walk, and the current value MUST equal ROOT if the response is valid.

If the current bit is 0, one hashes 0x01, the current hash, and the value from PATH to derive the next current value.

If the current bit is 1 one hashes 0x01, the value from PATH, and the current hash to derive the next current value.

#### [6.4.](#) Validity of Response

A client MUST check the following properties when it receives a response. We assume the long-term server public key is known to the client through other means.

- o The signature in CERT was made with the long-term key of the server.
- o The DELE timestamps and the MIDP value are consistent.
- o The INDX and PATH values prove NONC was included in the Merkle tree with value ROOT using the algorithm in [Section 6.3.1](#).
- o The signature of SREP in SIG validates with the public key in DELE.

A response that passes these checks is said to be valid. Validity of a response does not prove the time is correct, but merely that the server signed it, and thus guarantees that it began to compute the signature at a time in the interval (MIDP-RADI, MIDP+RADI).

### [7.](#) Integration into NTP

We assume that there is a bound PHI on the frequency error in the

clock on the machine. Given a measurement taken at a local time  $t_1$ , we know the true time is in  $[t_1 - \Delta, t_1 + \Delta]$ . After  $d$  seconds have elapsed we know the true time is within  $[t_1 - \Delta - d\phi, t_1 - \Delta + d\phi]$ . A simple and effective way to mix with NTP or PTP discipline of the clock is to trim the observed intervals in NTP to fit entirely within this window or reject measurements that fall too far outside. This assumes time has not been stepped. If the NTP process decides to step the time, it MUST use RoughTime to ensure the new true time estimate that will be stepped to is consistent with the true time.

Should this window become too large, another RoughTime measurement is called for. The definition of "too large" is implementation defined.

Implementations MAY use other, more sophisticated means of adjusting the clock respecting RoughTime information.

## [8.](#) Grease

Servers MAY send back a fraction of responses that are syntactically invalid or contain invalid signatures as well as incorrect times. Clients MUST properly reject such responses. Servers MUST NOT send

back responses with incorrect times and valid signatures. Either signature MAY be invalid for this application.

## [9.](#) RoughTime Servers

The below list contains a list of servers with their public keys in Base64 format. These servers may implement older versions of this specification.

address:        roughtime.cloudflare.com  
port:           2002  
long-term key: gD63hSj3ScS+wu0eGrubXlq35N1c5Lby/S+T7MNTjxo=

address:        roughtime.int08h.com  
port:           2002  
long-term key: AW5uAoTSTdfG5NfY1bTh08GUn0qlRb+HVhbJ30DJvsE=

address:        roughtime.sandbox.google.com

port: 2002  
long-term key: etPaaIxcBMY1oUeGpwvPMCJMwLRVNxv51KK/tktoJTQ=

address: roughtime.se  
port: 2002  
long-term key: S3AzfZJ5CjSdkJ21ZJGbxqdYP/SoE8fXKY0+aicsehI=

## 10. Acknowledgements

Thomas Peterson corrected multiple nits. Peter Loethberg (Lothberg), Tal Mizrahi, Ragnar Sundblad, Kristof Teichel, and the other members of the NTP working group contributed comments and suggestions.

## 11. IANA Considerations

### 11.1. Service Name and Transport Protocol Port Number Registry

IANA is requested to allocate the following entry in the Service Name and Transport Protocol Port Number Registry [[RFC6335](#)]:

Service Name: Roughtime

Transport Protocol: tcp,udp

Assignee: IESG <iesg@ietf.org>

Contact: IETF Chair <chair@ietf.org>

Description: Roughtime time synchronization

Reference: [[this memo]]

Port Number: [[TBD1]], selected by IANA from the User Port range

### 11.2. Roughtime Version Registry

IANA is requested to create a new registry entitled " Roughtime Version Registry " Entries shall have the following fields:

Version ID (REQUIRED): a 32-bit unsigned integer

Version name (REQUIRED): A short text string naming the version being identified.

Reference (REQUIRED): A reference to a relevant specification document.

The policy for allocation of new entries SHOULD be: IETF Review.

The initial contents of this registry shall be as follows:

Version ID	Version name	Reference
0x0	Reserved	[[this memo]]
0x1	Roughtime version 1	[[this memo]]
0x2-0x7fffffff	Unassigned	
0x80000000-0xffffffff	Reserved for Private or Experimental use	[[this memo]]

### [11.3.](#) Roughtime Tag Registry

IANA is requested to create a new registry entitled "Roughtime Tag Registry". Entries SHALL have the following fields:

Tag (REQUIRED): A 32-bit unsigned integer in hexadecimal format.

ASCII Representation (OPTIONAL): The ASCII representation of the tag in accordance with [Section 5.1.4](#) of this memo, if applicable.

Reference (REQUIRED): A reference to a relevant specification document.

The policy for allocation of new entries in this registry SHOULD be: Specification Required.

The initial contents of this registry SHALL be as follows:

Tag	ASCII Representation	Reference
-----	----------------------	-----------



0x00444150	PAD	[[this memo]]
0x00474953	SIG	[[this memo]]
0x00524556	VER	[[this memo]]
0x31545544	DUT1	[[this memo]]
0x434e4f4e	NONC	[[this memo]]
0x454c4544	DELE	[[this memo]]
0x48544150	PATH	[[this memo]]
0x49415444	DTAI	[[this memo]]
0x49444152	RADI	[[this memo]]
0x4b425550	PUBK	[[this memo]]
0x5041454c	LEAP	[[this memo]]
0x5044494d	MIDP	[[this memo]]
0x50455253	SREP	[[this memo]]
0x544e494d	MINT	[[this memo]]
0x544f4f52	ROOT	[[this memo]]
0x54524543	CERT	[[this memo]]
0x5458414d	MAXT	[[this memo]]
0x58444e49	INDX	[[this memo]]

## 12. Security Considerations

Since the only supported signature scheme, Ed25519, is not quantum resistant, the Roughtime version described in this memo will not survive the advent of quantum computers.

Maintaining a list of trusted servers and adjudicating violations of the rules by servers is not discussed in this document and is essential for security. Roughtime clients **MUST** update their view of which servers are trustworthy in order to benefit from the detection of misbehavior.

Validating timestamps made on different dates requires knowledge of leap seconds in order to calculate time intervals correctly.

Servers carry out a significant amount of computation in response to clients, and thus may experience vulnerability to denial of service attacks.

This protocol does not provide any confidentiality, and given the nature of timestamps such impact is minor.

The compromise of a PUBK's private key, even past MAXT, is a problem as the private key can be used to sign invalid times that are in the range MINT to MAXT, and thus violate the good behavior guarantee of the server.

Servers MUST NOT send response packets larger than the request packets sent by clients, in order to prevent amplification attacks.

### 13. Privacy Considerations

This protocol is designed to obscure all client identifiers. Servers necessarily have persistent long-term identities essential to enforcing correct behavior.

Generating nonces in a nonrandom manner can cause leaks of private data or enable tracking of clients as they move between networks.

### 14. References

#### 14.1. Normative References

[ITU-R\_TF.457-2]

ITU-R, "Use of the Modified Julian Date by the Standard-Frequency and Time-Signal Services", ITU-R Recommendation TF.457-2, October 1997.

[ITU-R\_TF.460-6]

ITU-R, "Standard-Frequency and Time-Signal Emissions", ITU-R Recommendation TF.460-6, February 2002.

[RFC0020] Cerf, V., "ASCII format for network interchange", STD 80, [RFC 20](#), DOI 10.17487/RFC0020, October 1969, <<https://www.rfc-editor.org/info/rfc20>>.

[RFC4648] Josefsson, S., "The Base16, Base32, and Base64 Data Encodings", [RFC 4648](#), DOI 10.17487/RFC4648, October 2006, <<https://www.rfc-editor.org/info/rfc4648>>.

[RFC6335] Cotton, M., Eggert, L., Touch, J., Westerlund, M., and S. Cheshire, "Internet Assigned Numbers Authority (IANA) Procedures for the Management of the Service Name and Transport Protocol Port Number Registry", [BCP 165](#), [RFC 6335](#), DOI 10.17487/RFC6335, August 2011, <<https://www.rfc-editor.org/info/rfc6335>>.

Internet-Draft

RoughTime

February 2021

- [RFC8032] Josefsson, S. and I. Liusvaara, "Edwards-Curve Digital Signature Algorithm (EdDSA)", [RFC 8032](#), DOI 10.17487/RFC8032, January 2017, <<https://www.rfc-editor.org/info/rfc8032>>.
- [RFC8259] Bray, T., Ed., "The JavaScript Object Notation (JSON) Data Interchange Format", STD 90, [RFC 8259](#), DOI 10.17487/RFC8259, December 2017, <<https://www.rfc-editor.org/info/rfc8259>>.
- [SHS] National Institute of Standards and Technology, "Secure Hash Standard", DOI 10.6028/NIST.FIPS.180-4, FIPS 180-4, August 2015.

#### [14.2](#). Informative References

- [Autokey] Rottger, S., "Analysis of the NTP Autokey Procedures", 2012, <[https://zero-entropy.de/autokey\\_analysis.pdf](https://zero-entropy.de/autokey_analysis.pdf)>.
- [DelayAttacks] Mizrahi, T., "A Game Theoretic Analysis of Delay Attacks Against Time Synchronization Protocols", DOI 10.1109/ISPCS.2012.6336612, 2012, <<https://ieeexplore.ieee.org/document/6336612>>.
- [MCBG] Malhotra, A., Cohen, I., Brakke, E., and S. Goldberg, "Attacking the Network Time Protocol", 2015, <<https://eprint.iacr.org/2015/1020>>.
- [RFC0768] Postel, J., "User Datagram Protocol", STD 6, [RFC 768](#), DOI 10.17487/RFC0768, August 1980, <<https://www.rfc-editor.org/info/rfc768>>.
- [RFC0791] Postel, J., "Internet Protocol", STD 5, [RFC 791](#), DOI 10.17487/RFC0791, September 1981, <<https://www.rfc-editor.org/info/rfc791>>.
- [RFC0793] Postel, J., "Transmission Control Protocol", STD 7, [RFC 793](#), DOI 10.17487/RFC0793, September 1981, <<https://www.rfc-editor.org/info/rfc793>>.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.

Malhotra, et al.

Expires August 25, 2021

[Page 17]

---

Internet-Draft

Roughtime

February 2021

- [RFC5905] Mills, D., Martin, J., Ed., Burbank, J., and W. Kasch, "Network Time Protocol Version 4: Protocol and Algorithms Specification", [RFC 5905](#), DOI 10.17487/RFC5905, June 2010, <<https://www.rfc-editor.org/info/rfc5905>>.
- [RFC7384] Mizrahi, T., "Security Requirements of Time Protocols in Packet Switched Networks", [RFC 7384](#), DOI 10.17487/RFC7384, October 2014, <<https://www.rfc-editor.org/info/rfc7384>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.
- [RFC8573] Malhotra, A. and S. Goldberg, "Message Authentication Code for the Network Time Protocol", [RFC 8573](#), DOI 10.17487/RFC8573, June 2019, <<https://www.rfc-editor.org/info/rfc8573>>.
- [RFC8915] Franke, D., Sibold, D., Teichel, K., Dansarie, M., and R. Sundblad, "Network Time Security for the Network Time Protocol", [RFC 8915](#), DOI 10.17487/RFC8915, September 2020, <<https://www.rfc-editor.org/info/rfc8915>>.

## [Appendix A](#). Terms and Abbreviations

ASCII    American Standard Code for Information Interchange

IANA     Internet Assigned Numbers Authority

JSON     JavaScript Object Notation [[RFC8259](#)]

MJD      Modified Julian Date

NTP      Network Time Protocol [[RFC5905](#)]  
NTS      Network Time Security [[RFC8915](#)]  
TAI      International Atomic Time (Temps Atomique International)  
         [[ITU-R TF.460-6](#)]  
TCP      Transmission Control Protocol [[RFC0793](#)]  
UDP      User Datagram Protocol [[RFC0768](#)]  
UT      Universal Time [[ITU-R TF.460-6](#)]  
UTC      Coordinated Universal Time [[ITU-R TF.460-6](#)]

Malhotra, et al.

Expires August 25, 2021

[Page 18]

---

Internet-Draft

RoughTime

February 2021

#### Authors' Addresses

Aanchal Malhotra  
Boston University  
111 Cummington Mall  
Boston 02215  
USA

Email: [aanchal4@bu.edu](mailto:aanchal4@bu.edu)

Adam Langley  
Google

Email: [agl@google.com](mailto:agl@google.com)

Watson Ladd  
Cloudflare  
101 Townsend St  
San Francisco  
USA

Email: [watsonbladd@gmail.com](mailto:watsonbladd@gmail.com)

Marcus Dansarie  
Sweden

Email: [marcus@dansarie.se](mailto:marcus@dansarie.se)

URI: <https://orcid.org/0000-0001-9246-0263>